

# outside-in specs

using BDD & Selenium

carlos villela

@cv

pedro pimentel

@zukunftslick

# ThoughtWorks

`foo = Foo.new`

foo.bar  
= ?

```
a = foo.bar  
print a
```

```
if a == 42
    print "ok"
else
    print "FAIL"
```



```
if a == 42
```

```
    print "ok"
```

```
else
```

```
    print "FAIL"
```

```
if a == 42  
    print "ok"  
else  
    raise Fail
```

```
if a != 42  
    raise Fail
```

```
unless a == 42  
  raise Fail
```

**raise Fail unless a == 42**

```
def assert expr  
    raise Fail unless expr
```


```
assert foo.bar == 42
```

class Asserts  
module Asserts



■ ■ ■

# Test::Unit

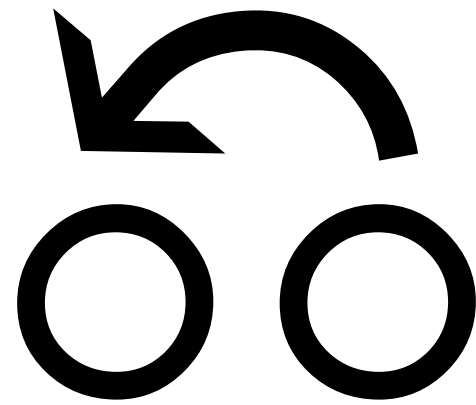

```
assert foo.bar == 42
```

**ensure** foo.bar == 42

**enforce** foo.bar == 42

*verify* foo.bar == 42

**check** foo.bar == 42



foo.bar == 42

input  
processing  
output

input → \_\_\_\_\_  
processing → \_\_\_\_\_  
output → \_\_\_\_\_

input → given  
processing → \_\_\_\_\_  
output → \_\_\_\_\_

input → given  
processing → when  
output → \_\_\_\_\_

input → given  
processing → when  
output → then

given foo  
when bar  
then \_\_\_\_\_ == 42

# open classes & literate programming



foo.bar.           == 42

foo.bar.assert == 42

foo.bar.ensure == 42

foo.bar.must == 42

foo.bar.is == 42

foo.bar.should == 42

foo.bar.should == 42


foo.bar.should be(42)



foo bar should be 42

■ ■ ■

# RSpec

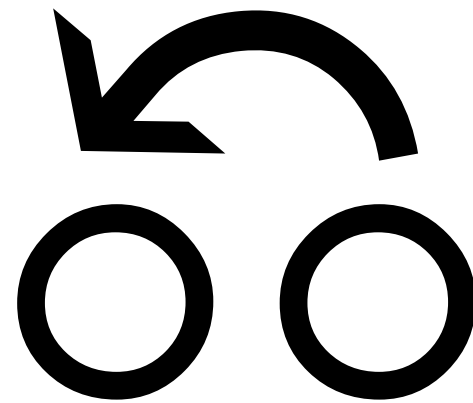

foo bar should be 42

should

MoSCoW


must



should

could

won't

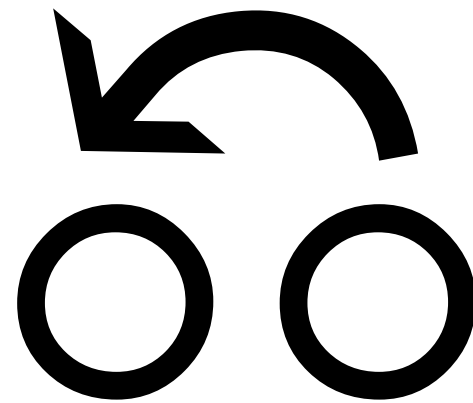

petitio principii

“bar should be 42.”

“should it?”

“bar should be 42.”

“should it? **why?**”

why?



as a \_\_\_\_\_

I want \_\_\_\_\_

so that \_\_\_\_\_

as a \_\_\_\_\_

I want \_\_\_\_\_

so that \_\_\_\_\_

as a hungry kid  
I want to buy cookies  
so that \_\_\_\_\_

as  $a \rightarrow$  given  
I want  $\rightarrow$  when  
so that  $\rightarrow$  then

given hungry kid  
when she buys cookies  
then \_\_\_\_\_

...

# Cucumber

```
k = hungry_kid  
b = k.buy_cookies  
b.should _____
```



web

customer → browser

browser?

go to url

click  
type  
check  
select

find

id

name

class

link text

xpath

google search



given an open browser  
and I go to 'google.com'

when I find 'q'  
and type 'qcon'


and I find 'btnG'  
and click it

then the **title** should  
be 'qcon — Results'

go to 'google.com'  
find 'q', type 'qcon'  
find 'btnG', click it  
title should be 'Results'


```
go_to 'google.com'  
find('q').type 'qcon'  
find('btnG').click  
title.should be('Results')
```

```
go_to 'google.com'  
find('q').type 'qcon'  
find('btnG').click  
title.should be('Results')
```

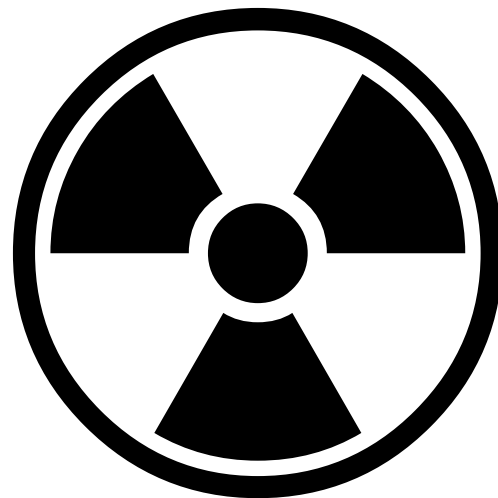




# Selenium

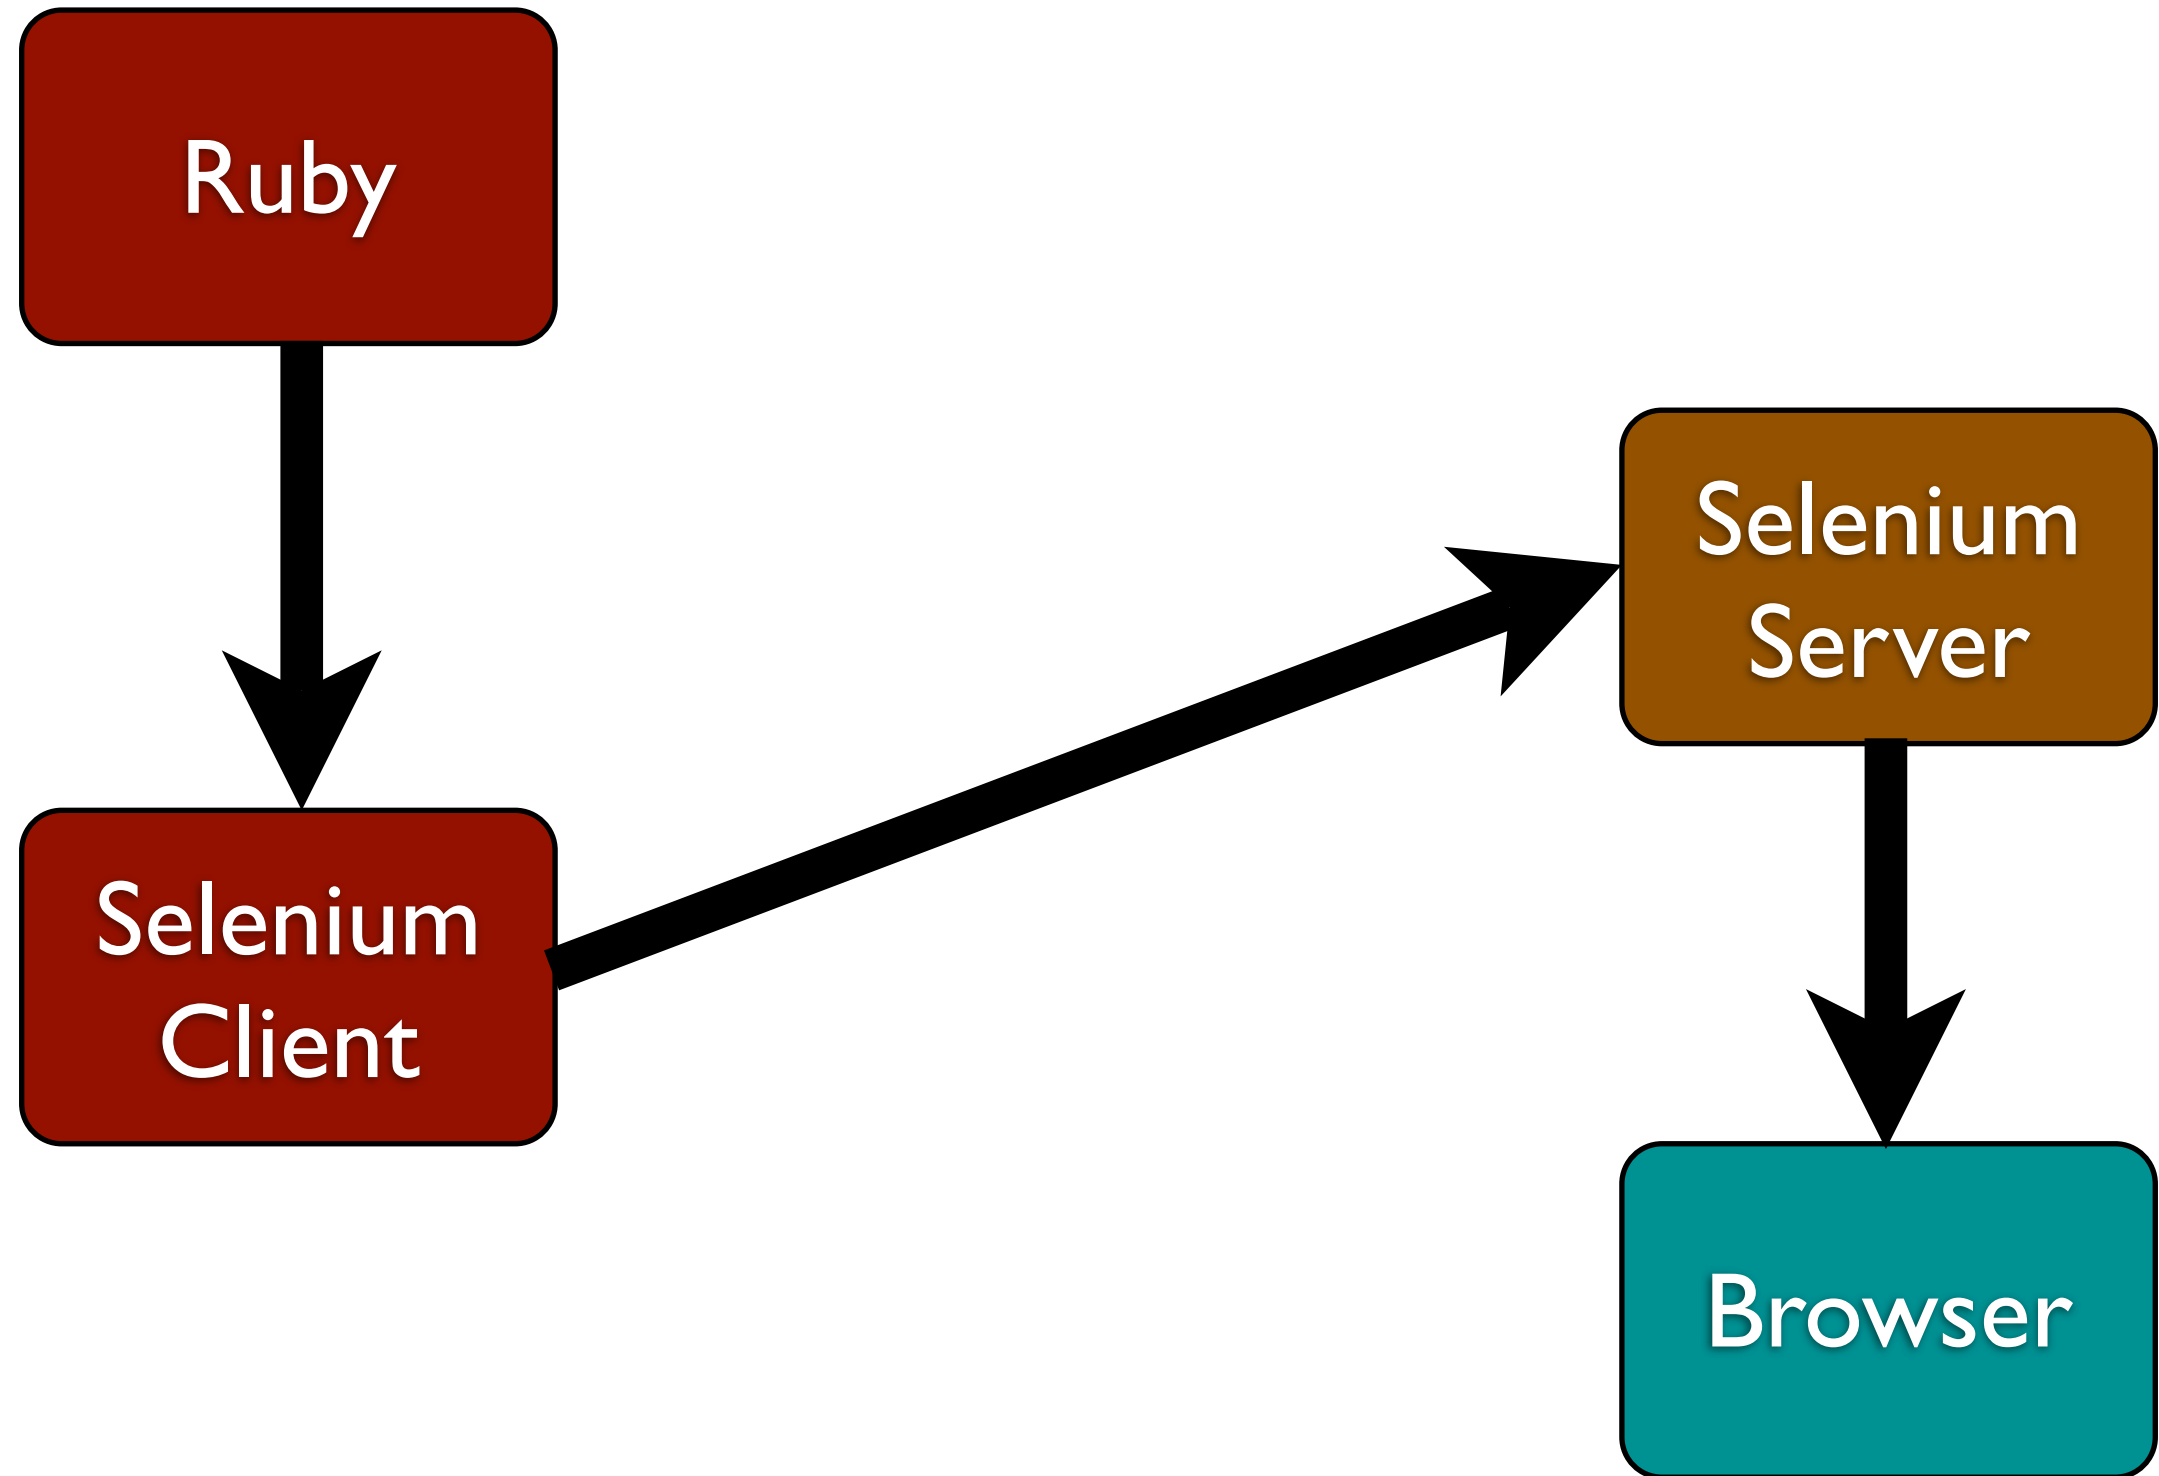

speed

safety

speed vs safety

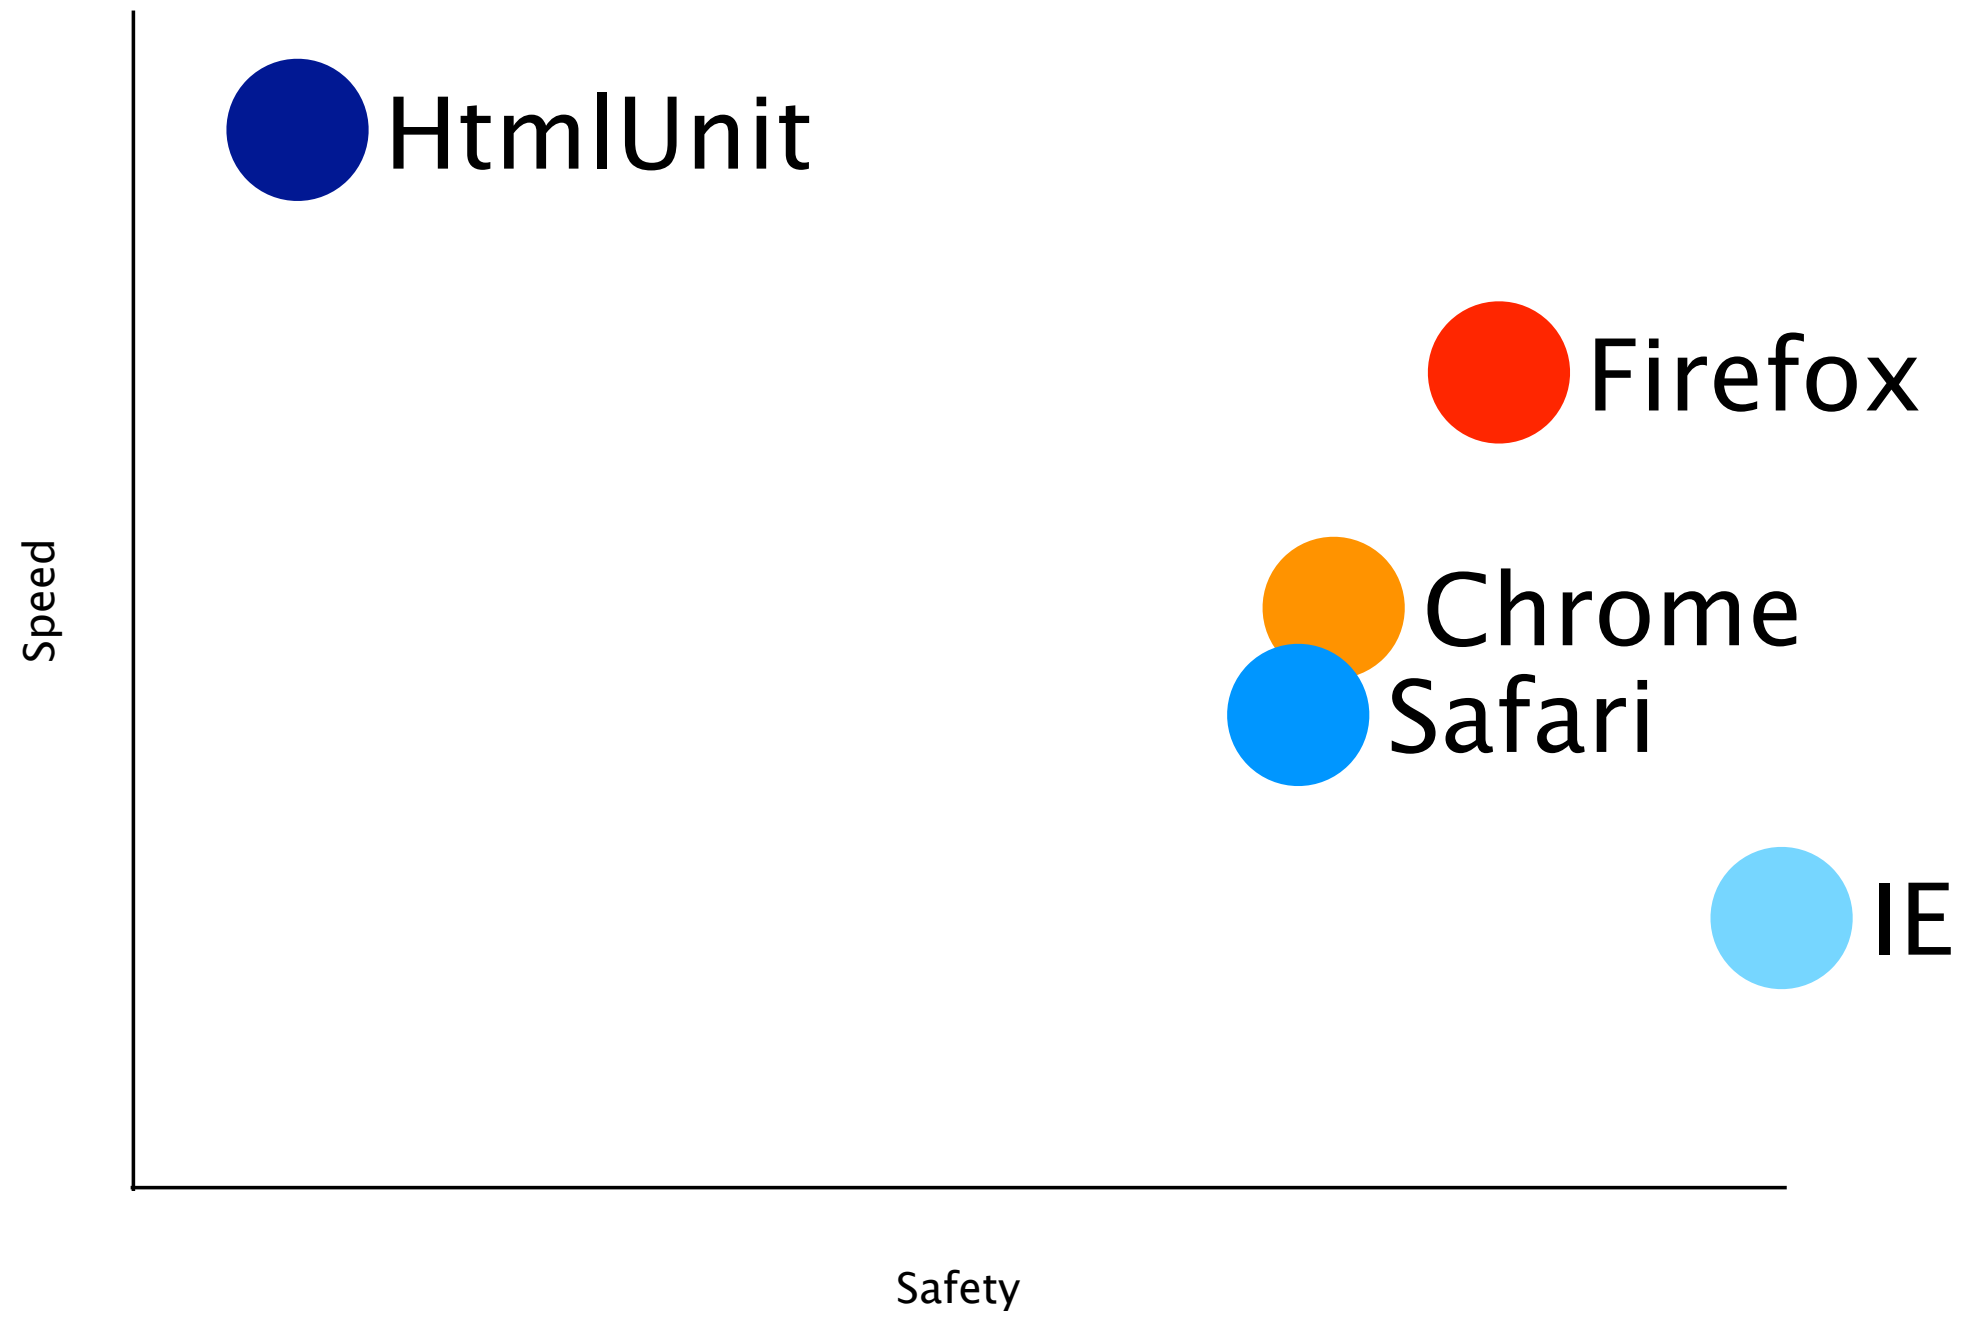

evolution

script



```
go_to 'google.com'  
find('q').type 'qcon'  
find('btnG').click  
title.should be('Results')
```

10 GO TO 'Google'  
20 TYPE 'q', 'qcon'  
30 CLICK 'btnG'  
40 TITLE? 'Results'

procedural



objects

page objects

```
class MyApp::Page
  def menu
  def search_form
  def ...
```

```
module Google  
  class Home < Page
```




```
g = Google::Home.new  
r = g.search_for 'qcon'  
r.title.should be...
```

```
g = Google::Home.new  
r = g.search_for 'qcon'  
r.title.should be...
```

```
def search_for term
  find('q').type term
  find('btnG').click
  Results.new ...
end
```

```
class Results < ...  
  def initialize  
    title.should ...
```

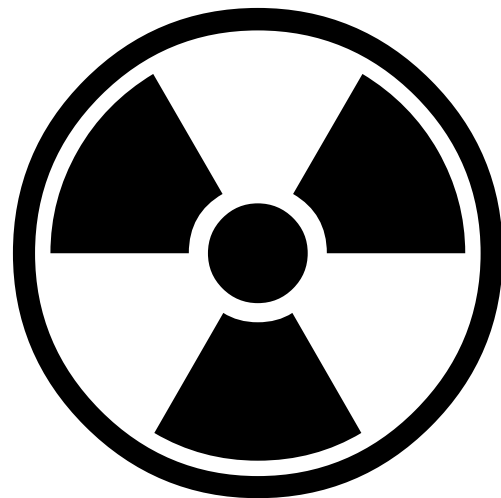

test code

test code

code



**solution**

test code

understanding





@cv

@zukunftsalick