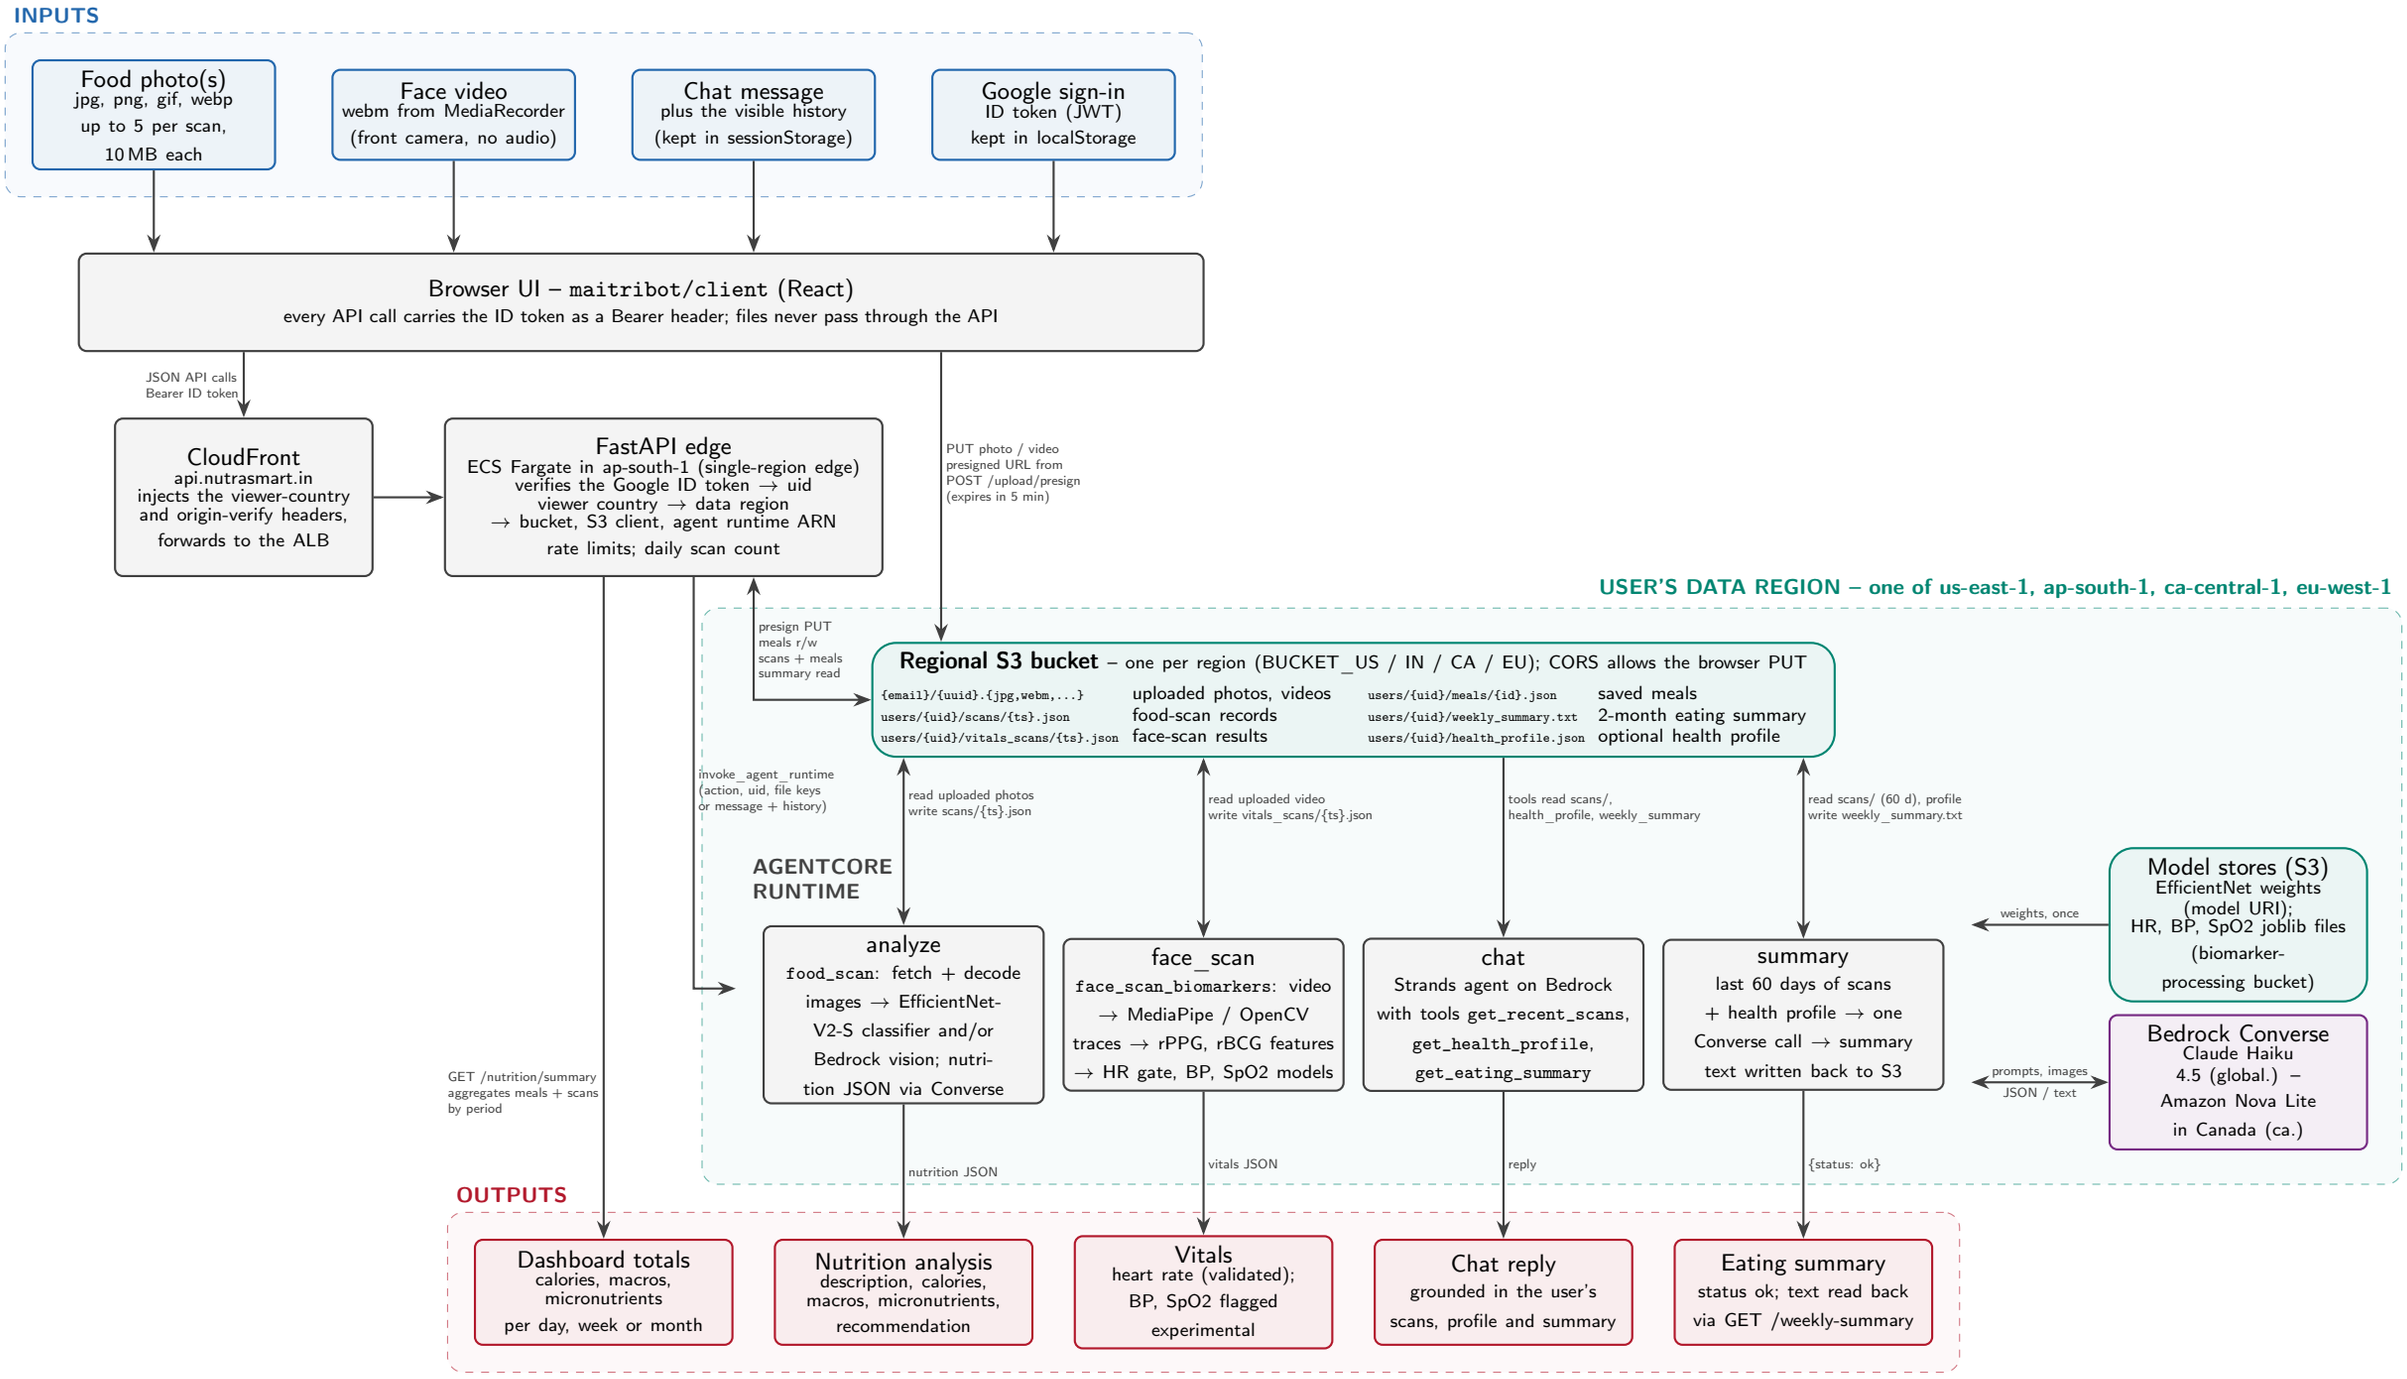


Every response returns along its request path (agent → edge → CloudFront → browser); the AgentCore runtime routes on the payload's `action` and keeps one container per user session. uid = Google e-mail with @ → _at_ and . → _; ts = UTC timestamp. The data region comes from the CloudFront-Viewer-Country header (X-User-Country as a manual override), falling back to us-east-1, so direct-to-ALB traffic always lands in the default region. Image bytes are re-encoded to JPEG before Bedrock; the classifier is only used when FOOD_CLASSIFIER_ENABLED is set.