

# Concept and preliminary design of a hospital system \*

Alberto Paoluzzi

January 20, 2015

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Model planning</b>	<b>2</b>
2.1	Data sources . . . . .	2
2.2	Reference grid . . . . .	2
2.3	Architecture of modeling process . . . . .	6
<b>3</b>	<b>Building units planning</b>	<b>6</b>
3.1	Wire-frame input . . . . .	6
3.1.1	Ground floor . . . . .	7
3.1.2	Mezzanine floor . . . . .	10
3.1.3	First floor . . . . .	12
3.1.4	Ward sections . . . . .	14
3.1.5	Second floor . . . . .	16
3.1.6	Third floor . . . . .	18
3.1.7	Fourth floor . . . . .	19
3.1.8	Fifth floor . . . . .	20
3.1.9	Storey viewing . . . . .	21
<b>4</b>	<b>Preliminary 2.5D mock-up</b>	<b>22</b>
4.1	Structural frame structure . . . . .	22
4.2	Structural frame . . . . .	25
4.3	Vertical communications . . . . .	25
<b>5</b>	<b>Design review</b>	<b>26</b>
5.1	Integration and cochains computation . . . . .	26

---

\*This document is part of the *Linear Algebraic Representation with CoChains* (LAR-CC) framework [CL13]. January 20, 2015

<b>6 System semantics</b>	<b>28</b>
6.1 Topological requirements . . . . .	28
6.2 Geometrical requirements . . . . .	28
<b>7 Code exporting</b>	<b>28</b>
<b>A Code utilities</b>	<b>28</b>

## Abstract

In this module we develop stepwise the concept and the preliminary building program of a hospital of medium size, using as source the document [AM13] of the World Health Organisation. The main aim of this modelling is to make experiments with “cochain calculus” over a cell decomposition of a quite complex engineering project. It may be useful to exemplify some characters of a model-based engineering approach to the initial, and more important steps of an engineering project.

## 1 Introduction

The development of the geometric model of a general hospital, and some computational experiments of model-based engineering, is the topic and the main aim of this software module.

## 2 Model planning

### 2.1 Data sources

The starting point of the modelling developed here is the paper [AM13], about Hospital Planning and Design, downloadable from [here](#), and in particular the two images shown in Figure 1 and relative to the functional zoning of floors, and providing an axonometric view of the vertical organisation of the hospital.

### 2.2 Reference grid

Looking at the images of Figure 1, it is easy to notice the presence of a very regular structural frame, providing in the following a reference grid for the numeric input of the geometry of the departments and floors of the hospital model. Some images with evidenced (in blue) the structural frame grid are shown in Figure ??.

It may be useful to underline that the grid step in the  $y$  direction (from top to bottom of the drawings) is constant and equal to  $8.4m$ , whereas the grid in the  $x$  direction (from left to right of the drawings) alternates the  $[7.5, 9.5, 7.5]m$  pattern with the step-size used in the other direction ( $8.4m$ ).

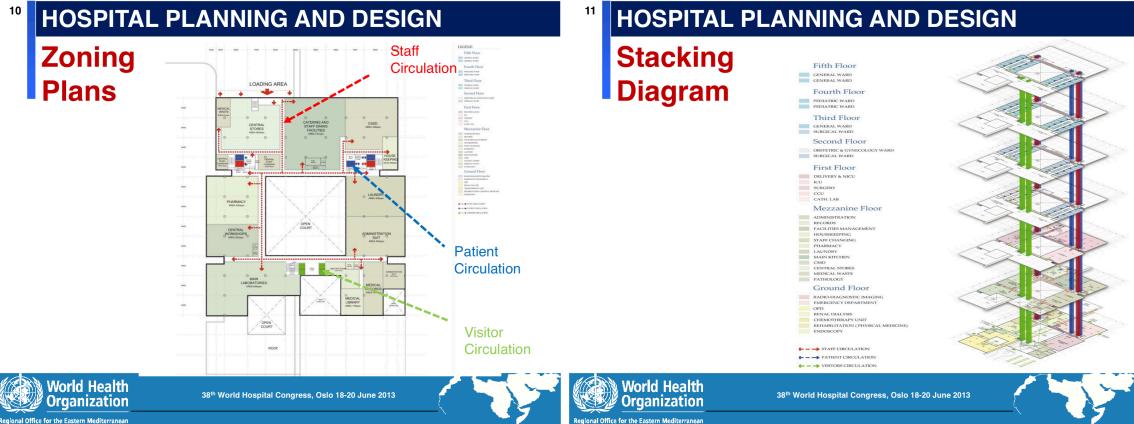


Figure 1: Two images of the example model for hospital planning and design used in this module: (a) functional zoning of the mezzanine floor; (b) axonometric view of the vertical design organisation.

Notice also that both grid directions, and of course the structural frame of the building, are aligned with the *inpatient wards*, that supply one the main ideas of the design concept as a whole.

**Reference grid** The reference grid is defined as `structuralGrid` in the script below, where `PROD` is the `pyplasm` primitive for Cartesian product of geometric values. The global variable `YMAX` is used in this module to compute (in the `metric` function) a proper coordinate transformation of the model from the reference frame used in the 2D hospital drawings (origin at top-left point,  $y$  pointing downwards—see Figure 2) to the standard righthand reference frame (origin at bottom-left point,  $y$  pointing upwards—see Figure 3).

`(Reference grid 2) ≡`

```
""" Reference grid """
X = [0]+[7.5,9.5,7.5]+4*[8.4]+[7.5,9.5,7.5]+[0]
Y = [0]+14*[8.4]+[0]
xgrid = QUOTE(X[1:-1])
ygrid = QUOTE(Y[1:-1])
structuralGrid = PROD([xgrid,ygrid])
YMAX = SUM(Y)
◊
```

Macro referenced in 28a.

**From array indices to grid coordinates** The reference grid, as the Cartesian product of two subsets of adjacent integers, will be used both to strongly simplify the input of data,

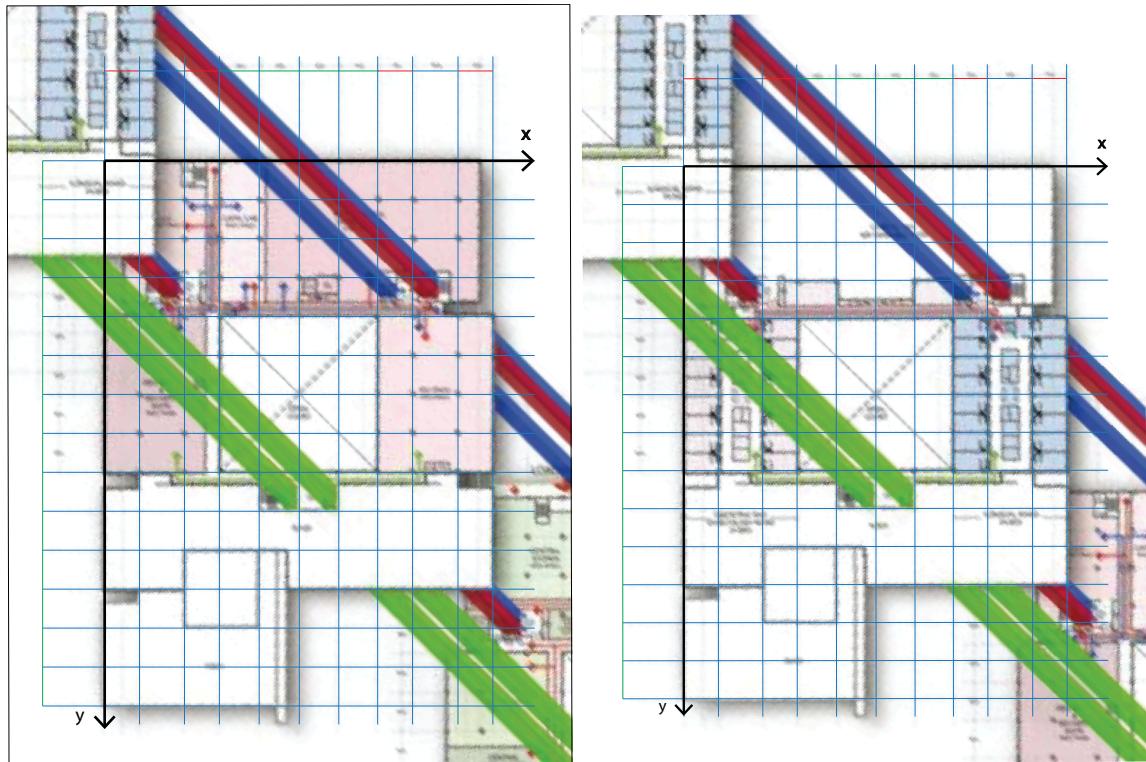


Figure 2: The zooming of two floor plans, with evidenced the structural grid (in blue):  
(a) first floor; (b) second floor.

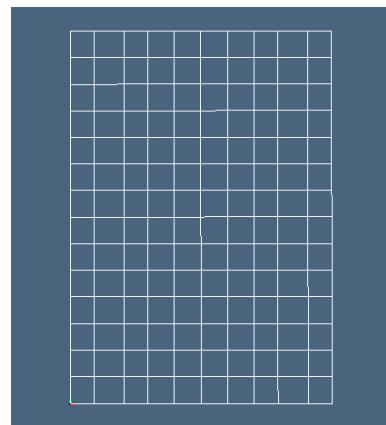


Figure 3: The reference grid used in the model construction. The intersections of grid lines have integer coordinates.

and to assign to such coordinate numbers a more interesting meaning. For example the open space in the middle of the building will so defined as the 2D box with extreme points of integer coordinates (3, 4) and (7, 11). Therefore the whole building will be contained in the 2D interval  $[0, 10] \times [0, 14]$  in “*grid coordinates*”.

```
<From array indices to grid coordinates 4> ≡
    """ From array indices to grid coordinates """
    def index2coords(theArray):
        return CONS(AA(T([1,2]))(CAT((theArray).tolist())))
    ◇
```

Macro referenced in [28a](#).

**From grid to metric coordinates** The actual transformation of vertices of geometric data is executed by applying the (partial) function `metric` to a list of 2D points, as shown by the example below.

```
<From grid to metric coordinates 5> ≡
    """ From grid to metric coordinates """
    def grid2coords(X,Y):
        xMeasures = list(cumsum(X))
        yMeasures = list(cumsum(Y))
        def grid2coords0(point):
            x,y = point[0:2]
            xint,yint = int(x), int(y)
            xdec,ydec = float(x-xint), float(y-yint)
            xcoord = xMeasures[xint] + xdec*X[xint+1]
            ycoord = yMeasures[yint] + ydec*Y[yint+1]
            if len(point)==2: return [xcoord, ycoord]
            else: return [xcoord, ycoord, point[2]]
        return grid2coords0

    def coordMaps(YMAX):
        def coordMaps0(polyline):
            polyline = AA(grid2coords(X,Y))(polyline)
            polyline = vmap(YMAX)(polyline)
            return [eval(vcode(point)) for point in polyline]
        return coordMaps0

    metric = coordMaps(YMAX)
    ◇
```

Macro referenced in [28b](#).

**Example** A simple example of transformation from grid to metric coordinates is given here:

```
polyline = metric([[3,4],[3,8],[4,8],[4,7.8],[6,7.8],[6,8],[6.65,8],[6.65,4]])
>>> [[24.5,84.0],[24.5,50.4],[32.9,50.4],[32.9,52.08],[49.7,52.08],[49.7,50.4],
[55.16,50.4],[55.16,84.0]]
```

## 2.3 Architecture of modeling process

A short summary of the modelling process of the whole hospital follows. First we found the schematic plans of the building, and provided them with a reference grid by locating the main design choices about the structural frame. Then we enter floor-wise the 2D geometry of the single storeys, as aggregations of hospital departments and services. The input of data is made carefully, in order to get a snap of coincident vertices of adjacent departments, i.e. of departments sharing some common edges. The input of geometry is done in grid coordinates, giving the boundary sequences of vertices in counterclockwise order. These are then transformed in LAR (Linear Algebraic Representation) data structures [DPS14] and embedded into instances of the `Struct`, the `lar-cc` class for hierarchical structures, in order to append some specific information (like the structure name, the containment box, and so on). At the end of this step the whole building is defined as the `Struct` made by his storeys. An embedding in 3D of such 2D geometric data provided a 2.5-dimensional mock-up of the building.

# 3 Building units planning

## 3.1 Wire-frame input

As already said, the data input for this project was made by hand. Of course, an interactive user-interface is underway. I would like to notice that to enter apart the coordinates of the vertices of cells, as two (or three) adjacent arrays, is much faster and lesser in danger of getting errors than to enter an array of points as pairs of coordinates.

The several building units contained in this storey are given in the below script, each associated to a single ordered polyline, transposed on coordinates. Let us notice the used of a capitalised variable for storage, in order to distinguish from the corresponding `Struct` object with the same name.

```
<Storey input 6> ≡
    """ Storey input """
    <Ground floor 7>
    <Mezzanine floor 9c>
    <First floor 12>
    <Second floor 16a>
    <Third floor 18a>
```

```

⟨Fourth floor 19a⟩
⟨Fifth floor 20a⟩

""" Building unit structure """
⟨Ground floor structure 9a⟩
⟨Mezzanine floor structure 11b⟩
⟨First floor structure 13b⟩
⟨Second floor structure 17⟩
⟨Third floor structure 18c⟩
⟨Fourth floor structure 19c⟩
⟨Fifth floor structure 20c⟩
◊

```

Macro referenced in 28a.

### 3.1.1 Ground floor

The first set of definitions concerns the several departments of the hospital's ground floor, given in the script below. Just notice that most the various counterclockwise ordered sets of points are obtained by transposing (see the TRANS primitive) the two arrays of  $x$  and  $y$  coordinates. An exception is the Corridor0 array of 2D points.

#### Ground floor input

```

⟨Ground floor 7⟩ ≡
    """ Ground floor """
    OpenCourt10 = TRANS([[3,3,4,4,6,6,6.65,6.65],[4,8,8,7.8,7.8,8,8,4]])
    RadioDiagnosticImaging = TRANS([[7,7,9,10,10,8.7],[4,8,8,8,4,4]])
    ServiceCore10 = TRANS([[1.15, 1.15, 1.3,2.55, 2.55,2], [2.85, 3.7,3.7,3.7,
        2.85,2.85]])
    ServiceCore20 = TRANS([[7,7,8.7,8.8,8.8],[2.8,3.7,3.7,3.7,2.8]])
    EmergencyDepartment = TRANS([[4.7,4.7,7,7,8.8,8.8,9.65,9.65],[0,3.7,3.7,
        2.8,2.8,3.7,3.7,0]])
    Endoscopy = TRANS([[3,3,3,4.4,4.4],[0,2.5,3.7,3.7,0]])
    OutPatientDepartment10 = TRANS([[4./7.5, 4./7.5,1.15,1.15,2,2,3,3],
        [0,3.7,3.7,2.85,2.85,2.5,2.5,0]])
    OutPatientDepartment20 = TRANS([[0,0,2.65,2.65,1.3],[4,5.85,5.85,4,4]])
    RenalDialysis = TRANS([[0,0,1,2.65,2.65],[5.85,8,8,8,5.85]])
    OpenCourt20 = TRANS([[2,2,2,2,4,4,4,4],[10,11,11.35,12,12,11.35,11,10]])
    ChemotherapyUnit = TRANS([[0,0,4.5,4.5,4,4,2,2,1],
        [11.35,14,14,11.35,11.35,12,12,11.35,11.35,]])
    Service = TRANS([[0,0,1,1,2,2,2,1],[8.35,10,10,9,9,8.5, 8.35,8.35]])
    PhysicalMedicineDept = TRANS([[2,2,1,1,0,0, 1,2,2,4,4,4.5,4.5,4,4],
        [8.5,9,9,10,10,11,11,10,11,11,9,9,8.5]])
    MainEntrance = TRANS([[4,4,4,4.5,4.75,4.75,6.65,6.65,6,6],
        [8.4,8.5,9,9,9,11,11, 9,9,8.4]])

```

```

Unknown = TRANS([[7.25,7.25, 6.65,6.65,6.65,10,10,9,8.2],
[8.35,8.5,8.5,9,11,11,8.35,8.35,8.35]])
#Mortuary = TRANS([],[])
Corridor0 = [[4.4,0],[4.4,3.7],[3,3.7],[3,2.5],[2,2.5],[2,2.85],[2.55,2.85],
[2.55,3.7],[1.3,3.7],[1.3,4],[2.65,4],[2.65,5.85],[2.65,8],[1,8],[1,8.35],
[2,8.35],[2,8.5],[4,8.5],[4,8.4],[6,8.4],[6,9],[6.65,9],[6.65,8.5],[7.25,8.5],
[7.25,8.35],[8.2,8.35],[9,8.35],[9,8],[7,8],[7,4],[8.7,4],[8.7,3.7],
[7,3.7],[4.7,3.7],[4.7,0]]
Corridor0a = TRANS([[1, 1, 2, 2], [11, 11.35, 11.35, 11]])
Corridor0b = TRANS([[4.5, 4.5, 4, 4, 4.5, 4.5, 4.75, 4.75, 4.75],
[9, 11, 11, 11.35, 11.35, 14, 14, 11, 9]])
◊

```

Macro referenced in [6](#).

**Make a struct object from a 2D polyline sequence** The following script gives the `buildingUnit` function, that takes as input a list of pollens (list of points) and a naming string, and returns a `Struct` instance, with the given name.

```

⟨ Make a struct object from a 2D polyline 8a ⟩ ≡
"""
Make a struct object from a 2D sequence of polylines """
isPolyline = ISSEQOF(ISSEQOF(ISNUM))
isPolylineSet = ISSEQOF(ISSEQOF(ISSEQOF(ISNUM)))

def buildingUnit(polyline,string):
    if ISSEQOF(ISSEQOF(ISNUM))(polyline): model = polyline2lar([polyline])
    else: model = polyline2lar(polyline)
    return Struct([model],str(string))
◊

```

Macro defined by [8a](#), [29c](#), [30a](#).

Macro referenced in [28b](#).

**Ground floor's building units** The following script transforms the previous sets of polylines into some equivalent `Struct` instances. Notice the use of the first capital-case letter for the polylines, and the first lower-case letter for the `Struct` objects.

```

⟨ Ground floor's building units 8b ⟩ ≡
"""
Ground floor's building units """
openCourt10 = buildingUnit(OpenCourt10,"OpenCourt10")
radioDiagnosticImaging = buildingUnit(RadioDiagnosticImaging,"RadioDiagnosticImaging")
serviceCore10 = buildingUnit(ServiceCore10,"ServiceCore10")
serviceCore20 = buildingUnit(ServiceCore20,"ServiceCore20")
emergencyDepartment = buildingUnit(EmergencyDepartment,"EmergencyDepartment")
endoscopy = buildingUnit(Endoscopy,"Endoscopy")
outPatientDepartment10 = buildingUnit(OutPatientDepartment10,"OutPatientDepartment10")

```

```

outPatientDepartment20 = buildingUnit(OutPatientDepartment20, "OutPatientDepartment20")
renalDialysis = buildingUnit(RenalDialysis, "RenalDialysis")
openCourt20 = buildingUnit(OpenCourt20, "OpenCourt20")
chemotherapyUnit = buildingUnit(ChemotherapyUnit, "ChemotherapyUnit")
service = buildingUnit(Service, "Service")
physicalMedicineDept = buildingUnit(PhysicalMedicineDept, "PhysicalMedicineDept")
mainEntrance = buildingUnit(MainEntrance, "MainEntrance")
unknown = buildingUnit(Unknown, "Unknown")
#mortuary = buildingUnit(Mortuary, "Mortuary")
corridor0 = buildingUnit(Corridor0, "Corridor0")
corridor0a = buildingUnit(Corridor0a, "Corridor0a")
corridor0b = buildingUnit(Corridor0b, "Corridor0b")
◊

```

Macro referenced in 9a.

**The groundFloor hierarchical object** The hierarchical structure of the lowest floor, denoted as `groundFloor`, is given here. Some images of it, including the names of the component departments, in either grid or metric coordinates, are shown in Figure 4.

```

⟨Ground floor structure 9a⟩ ≡
    """ Ground floor structure """
    ⟨Ground floor's building units 8b⟩

    buildingUnits0 = [openCourt10,radioDiagnosticImaging,serviceCore10,serviceCore20,
                      emergencyDepartment,endoscopy,outPatientDepartment10,outPatientDepartment20,
                      renalDialysis,chemotherapyUnit,service,physicalMedicineDept,
                      mainEntrance,unknown,corridor0,corridor0a,corridor0b]

    groundFloor = Struct(buildingUnits0, "groundFloor")
    ◊

```

Macro referenced in 6.

**Example** A visual image of the `groundFloor` structure is shown in Figure 4. The image in Figure 4b, produced in *grid coordinates*, is generated by the script below. The corresponding plan in actual metric coordinates is shown in Figure 4c. Notice the translation and the scaling, that transform the geometric model in actual measurable quantities and correctly orient it with respect to the input images.

```

"test/py/hospital/test01.py" 9b ≡
    import sys
    sys.path.insert(0, 'lib/py/')
    from hospital import *

```

```

V,FV,EV = struct2lar(groundFloor)
VIEW(STRUCT(MKPOLS((V,EV))))
```

```

V,FV,EV = struct2lar(groundFloor,metric)
VIEW(STRUCT(MKPOLS((V,EV))))
```

◊



Figure 4: `groundFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

### 3.1.2 Mezzanine floor

#### Mezzanine floor input

```

⟨ Mezzanine floor 9c ⟩ ≡
    """ Mezzanine floor """
    MedicalWaste = TRANS([[4./7.5,4./7.5,.8,1.25,1.25],[0,1.5,1.5,1.5,0]])
    CentralStores = TRANS([[1.25,1.25,.8,.8,3.7,3.7,2.55,2.55,2.2,2.2],[0,1.5,1.5,
        2.65,2.65,.35,.35,.65,.65,0]])
    StaffDining = TRANS([[3.95,3.95,6.7,6.7,6.95,6.95],[0,3.7,3.7,2,2,0]])
    CSSD = TRANS([[6.95,6.95,6.95,8.8,8.8,9.65,9.65],[0,2,2.65,2.65,2,2,0]])
    HouseKeeping = TRANS([[8.8,8.8,8.8,8.8,9.65,9.65],[2,2.65,2.8,3.7,3.7,2]])
    CentralStaffChanging11 = TRANS([[4./7.5,4./7.5,1.15,1.15],[2.85,3.7,3.7,2.85]])
    CentralStaffChanging21 = TRANS([[2.55,2.55,3.7,3.7],[2.85,3.7,3.7,2.85]])
    OpenCourt11 = TRANS([[3,3,7,7,7],[4,8,8,6,4]])
    Pharmacy = TRANS([[0,0,2.65,2.65,1.3],[4,6.45,6.45,4,4]])
    CentralWorkshop = TRANS([[0,0,1,2.65,2.65],[6.45,8,8,8,6.45]])
    Laundry = TRANS([[7,7,10,10,8.7],[4,6,6,4,4]])
    AdministrationSuite11 = TRANS([[7,7,9,10,10],[6,8,8,8,6]])
    MainLaboratories = TRANS([[1,1,0,0,2,2,5,5,4,4,4],[8.3,8.4,8.4,11,11,10,10,9,
```

```

9,8.4,8.3]]))
MedicalLibrary = TRANS([[6.7,6.7,8,8,7.75],[9.7,11,11,9.7,9.7]])
MedicalRecords = TRANS([[8,8,8,8.85,8.85,8.85],[8.3,9.7,11,11,9.75,8.3]])
AdministrationSuite21 = TRANS([[8.85,8.85,10,10,9,9],[8.3,9.75,9.75,8.4,8.4,8.3]])
MeetingRooms = TRANS([[6,6,6,6.7,6.7,7.75,7.75,7.45,7,7],[8.3,8.4,9,9,9.7,9.7,
8.7,8.7,8.7,8.3]])
DataCenter = TRANS([[7,7,7.45,7.45],[8.3,8.7,8.7,8.3]])
ServerRoom = TRANS([[7.45,7.45,7.75,7.75],[8.3,8.7,8.7,8.3]])
PublicCore = TRANS([[4,4,5,6,6],[8.4,9,9,9,8.4]])
ServiceCore11 = TRANS([[1.15,1.15,1.3,2.55,2.55],[2.85,3.7,3.7,3.7,2.85]])
ServiceCore21 = TRANS([[7,7,8.7,8.8,8.8],[2.8,3.7,3.7,3.7,2.8]])
Corridor1 = [[2.2,0],[2.2,0.65],[2.55,0.65],[2.55,0.35],[3.7,0.35],[3.7,2.65],
[0.8,2.65],[0.8,1.5],[0.5333,1.5],[0.5333,2.85],[1.15,2.85],[2.55,2.85],[3.7,
2.85],[3.7,3.7],[2.55,3.7],[1.3,3.7],[1.3,4],[2.65,4],[2.65,6.45],[2.65,
8],[1,8],[1,8.3],[4,8.3],[4,8.4],[6,8.4],[6,8.3],[7,8.3],[7.45,8.3],
[7.75,8.3],[7.75,8.7],[7.75,9.7],[8,9.7],[8,8.3],[8.85,8.3],[9,8.3],[9,8],
[7,8],[3,8],[3,4],[7,4],[8.7,4],[8.7,3.7],[7,3.7],[7,2.8],[8.8,2.8],
[8.8,2.65],[6.95,2.65],[6.95,2],[6.7,2],[6.7,3.7],[3.95,3.7],[3.95,0]]
GroundRoof = TRANS([[4,4,2,2,1,1,0,0,4.75,4.75],[10,12,12,11,11,11.35,11.35,14,
14,10]])
◊

```

Macro referenced in 6.

## Mezzanine floor's building units

```

⟨ Mezzanine floor's building units 11a ⟩ ≡
"""
Mezzanine floor's building units """
medicalWaste = buildingUnit(MedicalWaste,"MedicalWaste")
centralStores = buildingUnit(CentralStores,"CentralStores")
staffDining = buildingUnit(StaffDining,"StaffDining")
cSSD = buildingUnit(CSSD,"CSSD")
houseKeeping = buildingUnit(HouseKeeping,"HouseKeeping")
centralStaffChanging11 = buildingUnit(CentralStaffChanging11,"CentralStaffChanging1")
centralStaffChanging21 = buildingUnit(CentralStaffChanging21,"CentralStaffChanging2")
openCourt11 = buildingUnit(OpenCourt11,"OpenCourt11")
pharmacy = buildingUnit(Pharmacy,"Pharmacy")
centralWorkshop = buildingUnit(CentralWorkshop,"CentralWorkshop")
laundry = buildingUnit(Laundry,"Laundry")
administrationSuite11 = buildingUnit(AdministrationSuite11,"AdministrationSuite11")
mainLaboratories = buildingUnit(MainLaboratories,"MainLaboratories")
medicalLibrary = buildingUnit(MedicalLibrary,"MedicalLibrary")
medicalRecords = buildingUnit(MedicalRecords,"MedicalRecords")
administrationSuite21 = buildingUnit(AdministrationSuite21,"AdministrationSuite21")
meetingRooms = buildingUnit(MeetingRooms,"MeetingRooms")
dataCenter = buildingUnit(DataCenter,"DataCenter")
serverRoom = buildingUnit(ServerRoom,"ServerRoom")

```

```

publicCore = buildingUnit(PublicCore,"PublicCore")
serviceCore11 = buildingUnit(ServiceCore11,"ServiceCore11")
serviceCore21 = buildingUnit(ServiceCore21,"ServiceCore21")
corridor1 = buildingUnit(Corridor1,"Corridor1")
groundRoof = buildingUnit(GroundRoof,"GroundRoof")
◊

```

Macro referenced in 11b.

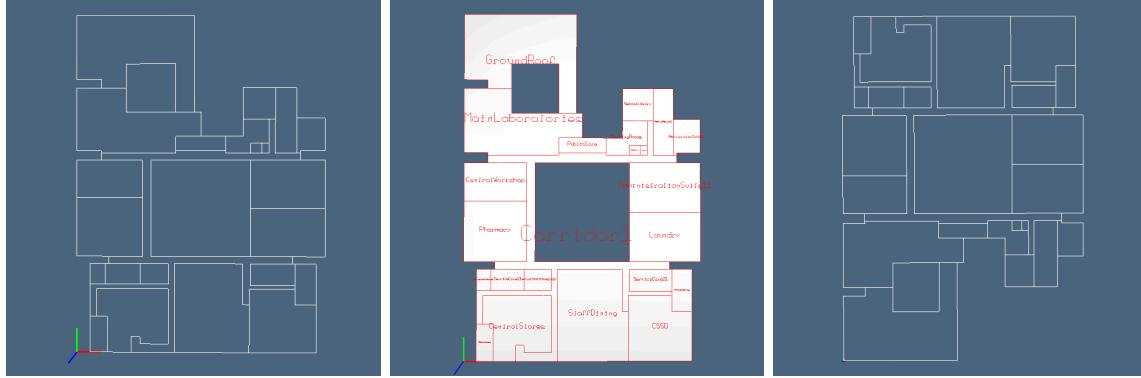


Figure 5: `mezzanineFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

```

⟨ Mezzanine floor structure 11b ⟩ ≡
    """ Mezzanine floor structure """
    ⟨ Mezzanine floor's building units 11a ⟩

    buildingUnits1 = [medicalWaste, centralStores, staffDining, cSSD, houseKeeping,
                      centralStaffChanging11, centralStaffChanging21, pharmacy, centralWorkshop, laundry,
                      administrationSuite11, mainLaboratories, medicalLibrary, medicalRecords,
                      administrationSuite21, meetingRooms, dataCenter, serverRoom, publicCore,
                      serviceCore11, serviceCore21, corridor1, groundRoof]

    mezzanineFloor = Struct(buildingUnits1, "mezzanineFloor")
    ◊

```

Macro referenced in 6.

### 3.1.3 First floor

#### First floor

```

⟨First floor 12⟩ ≡
    """ First floor """
    OpenCourt3 = TRANS([[3.,3.,7.,7.],[4.,8.,8.,4.]])
    Surgery = TRANS([[4.15,4.15,7.,7.,8.8,8.8,9.65,9.65],[0,3.7,3.7, 2.8,2.8, 3.7,3.7,0]])
    CatheterizationLab = TRANS([[3,3,4.15,4.15],[0,3.7,3.7,0]])
    ServiceCore32 = TRANS([[7.,7.,8.7,8.8,8.8],[2.8,3.7,3.7,3.7,2.8]])
    CoronaryCareUnit = TRANS([[7.,7.,8.3,9.,10.,10.,8.7],[4.,8.,8.,8.,4.,4.]])
    DeliveryAndNicu = TRANS([[0,0, 1.7,2.65,2.65,1.3],[4.,8.,8.,8.,4.,4.]])
    ServiceCore31 = TRANS([[1.15, 1.15, 1.3,2.65, 2.65],[2.85, 3.7,3.7, 3.7, 2.85]])
    IntensiveCareUnit = TRANS([[4./7.5, 4./7.5,1.15,1.15,2.65, 2.65,1.95,1.95],
                               [0.,3.7,3.7,2.85,2.85,.6,.6,0.]])
    ServiceCore33 = TRANS([[1.95,1.95,2.65, 2.65],[0,.6,.6,0]])
    PublicCore3 = TRANS([[1.7,1.7,4.,4.,6.,6.,8.3,8.3,7,3,2.65],
                         [8,8.4,8.4,9,9,8.4,8.4,8,8,8]])
    Corridor3 = TRANS([[2.65,2.65,2.65,2.65,1.3,1.3,2.65,2.65,3.0,3.0,7.0,8.7,8.7,
                       7.0,4.15,3.0,3.0],[0.0,0.6,2.85,3.7,3.7,4.0,4.0,8.0,8.0,4.0,4.0,4.0,3.7,
                        3.7,3.7,3.7,0.0]])
    MezzanineRoof = TRANS([[1,1,0,0,2,2,4.75,4.75,10,10,9,9,8.3,8.3, 6,6,4,4 ,1.7,1.7],
                           [8,8.4,8.4,11,11,10,10,11,11,8.4,8.4,8,8,8.4,8.4,9,9,8.4,8.4,8]])
```

◇

Macro referenced in 6.

### First floor's building units

```

⟨First floor's building units 13a⟩ ≡
    """ First floor's building units """
    openCourt3 = buildingUnit(OpenCourt3,"OpenCourt3")
    surgery = buildingUnit(Surgery,"Surgery")
    catheterizationLab = buildingUnit(CatheterizationLab,"CatheterizationLab")
    serviceCore32 = buildingUnit(ServiceCore32,"ServiceCore32")
    coronaryCareUnit = buildingUnit(CoronaryCareUnit,"CoronaryCareUnit")
    deliveryAndNicu = buildingUnit(DeliveryAndNicu,"DeliveryAndNicu")
    serviceCore31 = buildingUnit(ServiceCore31,"ServiceCore31")
    intensiveCareUnit = buildingUnit(IntensiveCareUnit,"IntensiveCareUnit")
    serviceCore33 = buildingUnit(ServiceCore33,"ServiceCore33")
    publicCore3 = buildingUnit(PublicCore3,"PublicCore3")
    corridor3 = buildingUnit(Corridor3,"Corridor3")
    mezzanineRoof = buildingUnit(MezanineRoof,"MezzanineRoof")
```

◇

Macro referenced in 13b.

```

⟨First floor structure 13b⟩ ≡
    """ First floor structure """
```

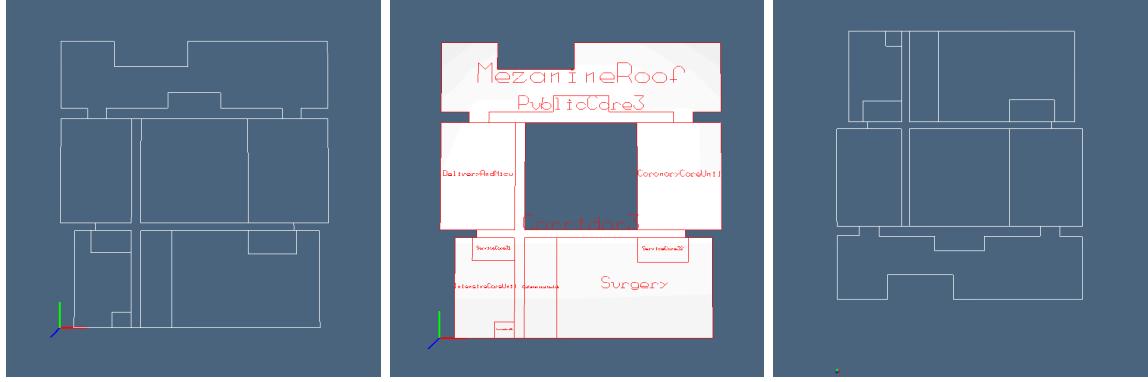


Figure 6: `firstFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

`(First floor's building units 13a)`

```
buildingUnits2 = [surgery,catheterizationLab,serviceCore32,coronaryCareUnit,
                  deliveryAndNicu,serviceCore31,intensiveCareUnit,serviceCore33,publicCore3,
                  corridor3,mezzanineRoof]

firstFloor = Struct(buildingUnits2, "firstFloor")
◊
```

Macro referenced in 6.

### 3.1.4 Ward sections

**Ward sections** Here input by polylines and structure modeling are freely mixed. Just notice that the affine maps included in structures are given in grid coordinates. This fact does not permit an immediate transformation in Cartesian coordinates using the `metric` function.

`(Ward sections 14) ≡`

```
""" Ward sections """
Room = polyline2lar([TRANS([[0,0,1,1,2./3,2./3],[0,0.5,0.5,0.25,0.25,0]])])
RestRoom = polyline2lar([TRANS([[2./3,2./3,1,1],[0,0.25,0.25,0]])])
Nursing1 = polyline2lar([TRANS([[0,0,.2,.2],[0,.4,.4,.0]])])
Nursing2 = polyline2lar([TRANS([[.2,.2,.4,.4],[0,.4,.4,.0]])])
Nursing3 = polyline2lar([TRANS([[0,0,.4,.4,.2],[.4,.8,.8,.4,.4]])])
Nursing4 = polyline2lar([TRANS([[0,0,.4,.4],[.8,1.1,1.1,.8]])])
Nursing5 = polyline2lar([TRANS([[0,0,.4,.4],[1.1,1.4,1.4,1.1]])])

room = Struct([Room],"Room")
```

```

restRoom = Struct([RestRoom],"RestRoom")
nursing1 = Struct([Nursing1],"Nursing1")
nursing2 = Struct([Nursing2],"Nursing2")
nursing3 = Struct([Nursing3],"Nursing3")
nursing4 = Struct([Nursing4],"Nursing4")
nursing5 = Struct([Nursing5],"Nursing5")

service2 = Struct([nursing1,nursing2,nursing3,nursing4,nursing5],"Service2")
service1 = Struct([t(0,1.4),s(1,-1),service2],"Service1")
wardServices = Struct([t(1.3,.3),service1,t(0,2),service2],"WardServices")
hospitalRoom = Struct([room,restRoom],"HospitalRoom")
doubleRoom = Struct([hospitalRoom,t(0,1),s(1,-1),hospitalRoom],"DoubleRoom")
halfWard = Struct(4*[doubleRoom,t(0,1)],"HalfWard")
ward = Struct([halfWard, wardServices, t(3,0),s(-1,1), halfWard],"Ward")
V,FV,EV = struct2lar(ward)
theWard = lar2lines((V,FV))
◊

```

Macro referenced in 16a.

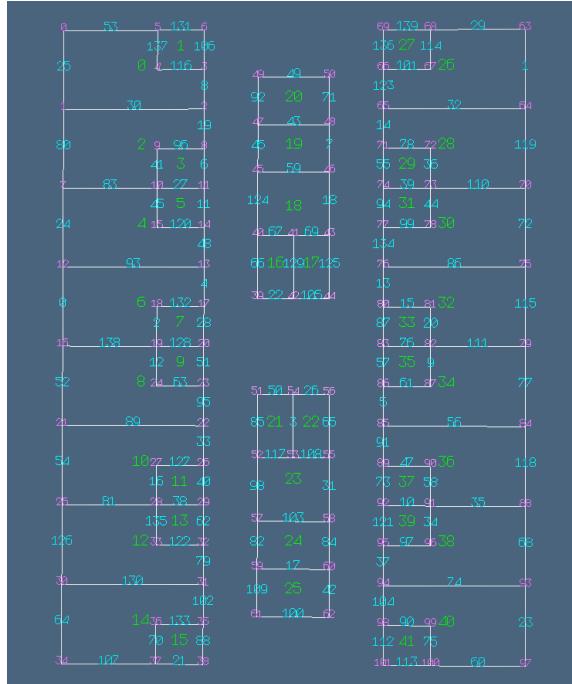


Figure 7: The cellular complex  $(V, FV, EV)$  generated by the `ward` structure.

### 3.1.5 Second floor

## Second floor

⟨ Second floor 16a ⟩ ≡

⟨ Ward sections 14 ⟩

Macro referenced in 6.

## Second floor's building units

$\langle$  Second floor's building units 16b  $\rangle \equiv$

```
    """ Second floor's building units """
    publicCore4 = buildingUnit(PublicCore4,'PublicCore4')
    ward21 = deepcopy(ward)
```

```

ward22 = deepcopy(ward)
obstetricGinecologicWard = Struct([t(0,4),ward21], 'ObstetricGinecologicWard')
surgicalWard1 = Struct([t(7,4),ward22], 'SurgicalWard1')
filter1 = buildingUnit(Filter1, 'Filter1')
filter2 = buildingUnit(Filter2, 'Filter2')
serviceCore14 = buildingUnit(ServiceCore14, 'ServiceCore14')
serviceCore24 = buildingUnit(ServiceCore24, 'ServiceCore24')
firstRoof = buildingUnit(FirstRoof, 'FirstRoof')
serviceCore11 = buildingUnit(ServiceCore11, 'ServiceCore11')
serviceCore21 = buildingUnit(ServiceCore21, 'ServiceCore21')
corridor4a = buildingUnit(Corridor4a, 'Corridor4a')
corridor4b = buildingUnit(Corridor4b, 'Corridor4b')
corridor4b1 = buildingUnit(Corridor4b1, 'Corridor4b1')
corridor4b2 = buildingUnit(Corridor4b2, 'Corridor4b2')
corridor4c = buildingUnit(Corridor4c, 'Corridor4c')
corridor4c1 = buildingUnit(Corridor4c1, 'Corridor4c1')
corridor4c2 = buildingUnit(Corridor4c2, 'Corridor4c2')
◊

```

Macro referenced in 17.

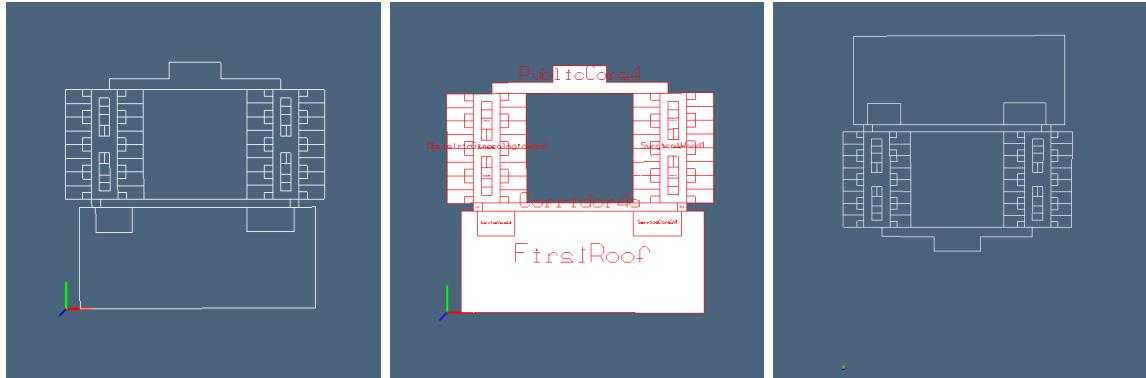


Figure 8: `secondFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

```

⟨Second floor structure 17⟩ ≡
    """ Second floor structure """

```

```

⟨Second floor's building units 16b⟩

```

```

buildingUnits3 = [publicCore4,obstetricGinecologicWard,surgicalWard1,filter1,filter2,
serviceCore14,serviceCore24,firstRoof,corridor4a,

```

```

corridor4b,corridor4b1,corridor4b2,corridor4c,corridor4c1,corridor4c2]

secondFloor = Struct(buildingUnits3, "secondFloor")
◊

```

Macro referenced in 6.

### 3.1.6 Third floor

#### Third floor

```

⟨Third floor 18a⟩ ≡
    """ Third floor
    GeneralWard1 = AA(metric)(AA(larTranslate([0,4]))(theWard))
    SurgicalWard2 = AA(metric)(AA(larTranslate([7,4]))(theWard)) """
    ◊

```

Macro referenced in 6.

#### Third floor's building units

```

⟨Third floor's building units 18b⟩ ≡
    """ Third floor's building units """
    ward31 = deepcopy(ward)
    ward32 = deepcopy(ward)
    generalWard1 = Struct([t(0,4),ward31], 'GeneralWard1')
    surgicalWard2 = Struct([t(7,4),ward32], 'SurgicalWard2')
    ◊

```

Macro referenced in 18c.

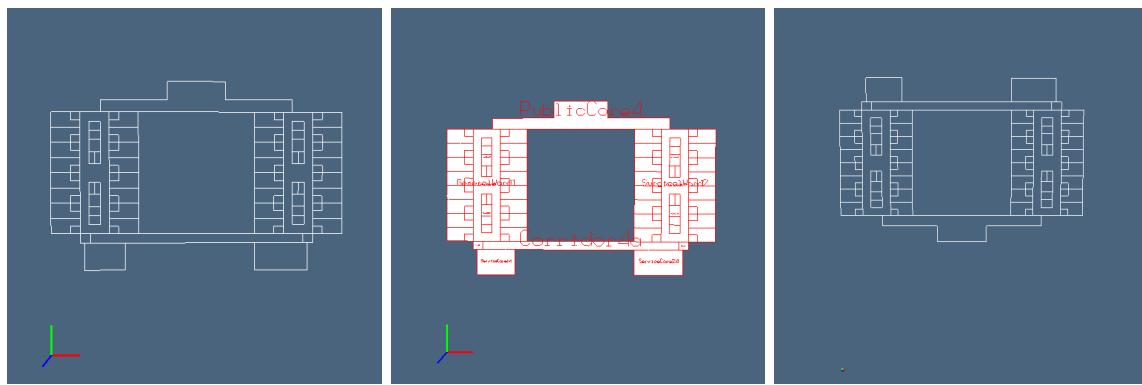


Figure 9: `thirdFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

```

⟨ Third floor structure 18c ⟩ ≡
    """ Third floor structure """

⟨ Third floor's building units 18b ⟩

buildingUnits4 = [generalWard1,surgicalWard2,publicCore4,serviceCore14,serviceCore24,
                  filter1,filter2,corridor4a,corridor4b,corridor4b1,corridor4b2,corridor4c,
                  corridor4c1,corridor4c2]

thirdFloor = Struct(buildingUnits4, "thirdFloor")
◊

```

Macro referenced in 6.

### 3.1.7 Fourth floor

#### Fourth floor

```

⟨ Fourth floor 19a ⟩ ≡
    """ Fourth floor floor
    PediatricWard1 = AA(metric)(AA(larTranslate([0,4]))(theWard))
    PediatricWard2 = AA(metric)(AA(larTranslate([7,4]))(theWard)) """
    ◊

```

Macro referenced in 6.

#### Fourth floor's building units

```

⟨ Fourth floor's building units 19b ⟩ ≡
    """ Fourth floor's building units """
    ward41 = deepcopy(ward)
    ward42 = deepcopy(ward)
    pediatricWard1 = Struct([t(0,4),ward41], 'PediatricWard1')
    pediatricWard2 = Struct([t(7,4),ward42], 'PediatricWard2')
    ◊

```

Macro referenced in 19c.

```

⟨ Fourth floor structure 19c ⟩ ≡
    """ Fourth floor structure """

```

```

⟨ Fourth floor's building units 19b ⟩


```

```

buildingUnits5 = [pediatricWard1,pediatricWard2,publicCore4,serviceCore14,serviceCore24,
                  filter1,filter2,corridor4a,corridor4b,corridor4b1,corridor4b2,corridor4c,
                  corridor4c1,corridor4c2]

fourthFloor = Struct(buildingUnits5, "fourthFloor")
◊

```

Macro referenced in 6.

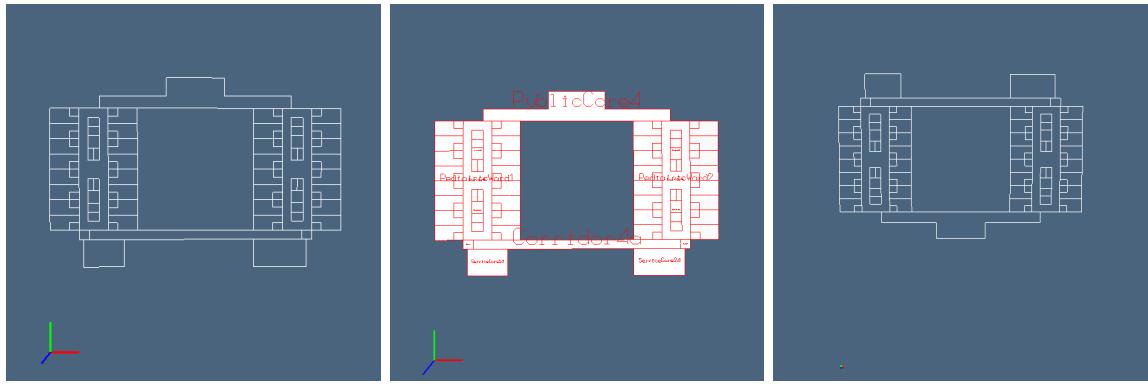


Figure 10: `fourthFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

### 3.1.8 Fifth floor

#### Fifth floor

```
(Fifth floor 20a) ≡
    """ Fifth floor floor
    GeneralWard2 = AA(metric)(AA(larTranslate([0,4]))(theWard))
    GeneralWard3 = AA(metric)(AA(larTranslate([7,4]))(theWard)) """
    ◇
```

Macro referenced in 6.

#### Fifth floor's building units

```
(Fifth floor's building units 20b) ≡
    """ Fifth floor's building units """
    ward51 = deepcopy(ward)
    ward52 = deepcopy(ward)
    generalWard2 = Struct([t(0,4),ward51], 'GeneralWard2')
    generalWard3 = Struct([t(7,4),ward52], 'GeneralWard3')
    ◇
```

Macro referenced in 20c.

```
(Fifth floor structure 20c) ≡
    """ Fifth floor structure """
    (Fifth floor's building units 20b)
```

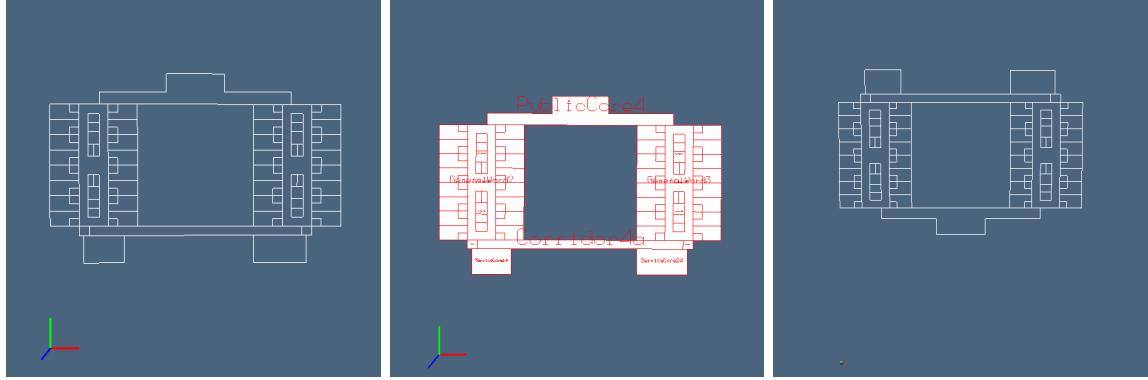


Figure 11: `fifthFloor` images of (a) the 1-skeleton of its LAR representation, in grid coordinates; (b) component substructures; (c) same in metric coordinates. Notice the position and the scale of the reference frames.

```
buildingUnits6 = [generalWard2,generalWard3,publicCore4,serviceCore14,serviceCore24,
                  filter1,filter2,corridor4a,corridor4b,corridor4b1,corridor4b2,
                  corridor4c,corridor4c1,corridor4c2]
```

```
fifthFloor = Struct(buildingUnits6, "fifthFloor")
◊
```

Macro referenced in 6.

### 3.1.9 Storey viewing

#### Storey viewing

```
(Storey generation 21) =
    """ Storey generation """
    def structDraw(color,scaling,metric=ID):
        def structDraw0(obj): return obj.draw(color,scaling,metric)
        return structDraw0

    ground,W,EV = floor(X,Y)(groundFloor,metric)
    ground2D = STRUCT([ground, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                      AA(structDraw(RED,40,metric))(buildingUnits0))
    mezzanine,W,EV = floor(X,Y)(mezzanineFloor,metric)
    mezzanine2D = STRUCT([mezzanine, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                          AA(structDraw(RED,40,metric))(buildingUnits1))
    first,W,EV = floor(X,Y)(firstFloor,metric)
    first2D = STRUCT([first, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                     AA(structDraw(RED,40,metric))(buildingUnits2))
    second,W,EV = floor(X,Y)(secondFloor,metric)
```

```

second2D = STRUCT([second, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                  AA(structDraw(RED,40,metric))(buildingUnits3))
third,W,EV = floor(X,Y)(thirdFloor,metric)
third2D = STRUCT([third, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                  AA(structDraw(RED,40,metric))(buildingUnits4))
fourth,W,EV = floor(X,Y)(fourthFloor,metric)
fourth2D = STRUCT([fourth, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                  AA(structDraw(RED,40,metric))(buildingUnits5))
fifth,W,EV = floor(X,Y)(fifthFloor,metric)
fifth2D = STRUCT([fifth, COLOR(RED)(STRUCT(MKPOLS((W,EV))))] + \
                  AA(structDraw(RED,40,metric))(buildingUnits6))
◊

```

Macro referenced in [28a](#).

```

⟨ Storey viewing 22a ⟩ ≡
    """ Storey viewing """
    VIEW(ground2D)
    VIEW(mezanine2D)
    VIEW(first2D)
    VIEW(second2D)
    VIEW(third2D)
    VIEW(fourth2D)
    VIEW(fifth2D)
    ◊

```

Macro referenced in [28a](#).

## 4 Preliminary 2.5D mock-up

### 4.1 Structural frame structure

#### Column locations on grid

```

⟨ Column locations on grid 22b ⟩ ≡
    """ Column locations on grid """
    SecondPillars = [((4,5),(1,10)),((3,4),(1,4)),((3,4),(7,10)),((4,8),(0,4)),((4,8),
                  (7,11)),((8,9),(0,11)),((9,10),(4,7))]
    FirstPillars = [((0,5),(1,10)),((4,8),(0,4)),((4,8),(7,11)),((8,9),(0,11)),
                  ((9,10),(4,7))]
    FrontPillars = [((8,10),(0,11)),((10,11),(0,6)),((10,11),(7,11)),((11,12),(0,3)),
                  ((11,12),(4,11))]
    MezzaninePillars = FirstPillars + FrontPillars
    BottomPillars = [((12,15),(0,5))]
    ◊

```

Macro referenced in [28a](#).

## Generation of beams and structural chains

```

⟨ Generation of beams and structural chains 23a ⟩ ≡
    """ Generation of beams and structural chains """
    def ManhattanTest(nodes,nDict,i,j):
        hi,ki = nodes[i]
        hj,kj = nodes[j]
        return nDict.setdefault((hi,kj),-1)!=-1 and nDict.setdefault((hj,ki),-1)!=-1

    def structureGrid(loci):
        nodes = AA(tuple)(CAT([CART([range(*I), range(*J)]) for (I,J) in loci]))
        nDict = dict([(node,k) for k,node in enumerate(nodes)])
        arcs = CAT([[[(nDict[(i,j)], nDict.setdefault((i,j+1),-1)),
                      (nDict[(i,j)], nDict.setdefault((i,j-1),-1)),
                      (nDict[(i,j)], nDict.setdefault((i+1,j),-1)),
                      (nDict[(i,j)], nDict.setdefault((i-1,j),-1))] for (i,j) in nodes]])
        arcs1 = list(set(AA(tuple)([sorted(arc) for arc in arcs if arc[1]!=-1])))
        arcs = CAT([[[(nDict[(i,j)], nDict.setdefault((i+1,j+1),-1)),
                      (nDict[(i,j)], nDict.setdefault((i+1,j-1),-1)),
                      (nDict[(i,j)], nDict.setdefault((i-1,j-1),-1)),
                      (nDict[(i,j)], nDict.setdefault((i-1,j+1),-1))] for (i,j) in nodes]])
        arcs2 = list(set(AA(tuple)([sorted(arc) for arc in arcs if arc[1]!=-1])))
        arcs2 = [[i,j] for i,j in arcs2 if ManhattanTest(nodes,nDict,i,j)]
        nodes = metric([[j,i] for i,j in nodes])
        return nodes, arcs1,arcs2
    ◇

```

Macro referenced in 28a.

## Instancing of 3D structure frame

```

⟨ Instancing of 3D structure frame 23b ⟩ ≡
    """ Instancing of 3D structure frame """
    nodes0, arcs10,arcs20 = structureGrid(MezaninePillars+BottomPillars)
    nodes1, arcs11,arcs21 = structureGrid(MezaninePillars)
    nodes2, arcs12,arcs22 = structureGrid(FirstPillars)
    nodes3, arcs13,arcs23 = structureGrid(SecondPillars)
    nodes4, arcs14,arcs24 = structureGrid(SecondPillars)
    nodes5, arcs15,arcs25 = structureGrid(SecondPillars)
    nodes6, arcs16,arcs26 = structureGrid(SecondPillars)
    VIEW(STRUCT(MKPOLs((nodes0, arcs10+arcs20)) ))
    ◇

```

Macro referenced in 28a.

## Assembling 3D structure frame

```
< Assembling 3D structure frame 24a > ≡
    """ Assembling 3D structure frame """
    Nodes0 = AA(lambda v: list(v)+[4-.3])(nodes0)
    Nodes1 = AA(lambda v: list(v)+[8-.3])(nodes1)
    Nodes2 = AA(lambda v: list(v)+[12-.3])(nodes2)
    Nodes3 = AA(lambda v: list(v)+[16-.3])(nodes3)
    Nodes4 = AA(lambda v: list(v)+[20-.3])(nodes4)
    Nodes5 = AA(lambda v: list(v)+[24-.3])(nodes5)
    Nodes6 = AA(lambda v: list(v)+[28-.3])(nodes6)

    Frame0 = STRUCT(MKPOLS((Nodes0, arcs10))+MKPOLS((Nodes1, arcs11))+  

                  MKPOLS((Nodes2, arcs12))+MKPOLS((Nodes3, arcs13))+  

                  MKPOLS((Nodes4, arcs14))+MKPOLS((Nodes5, arcs15))+  

                  MKPOLS((Nodes6, arcs16)) + \  

                  CONS(AA(T([1,2,3]))(Nodes0+Nodes1+Nodes2+Nodes3+Nodes4+Nodes5+Nodes6))(  

                  POLYLINE([[0,0,0],[0,0,-4]])) )

    Frame1 = STRUCT(MKPOLS((Nodes0, arcs20))+MKPOLS((Nodes1, arcs21))+  

                  MKPOLS((Nodes2, arcs22))+MKPOLS((Nodes3, arcs23))+  

                  MKPOLS((Nodes4, arcs24))+MKPOLS((Nodes5, arcs25))+  

                  MKPOLS((Nodes6, arcs26)) )
    SteelFrame = OFFSET([.2,.2,.3])(STRUCT([Frame0,Frame1]))
    """
    ConcreteFrame = OFFSET([.4,.4,.8])(Frame0)
    """
    VIEW(Frame0)
    VIEW(STRUCT([Frame0,Frame1]))
    ◇
```

Macro referenced in [28a](#).

## 2.5D building assembly

```
< 2.5D building assembly 24b > ≡
    """ 2.5D building assembly """
    floors = Struct([groundFloor,mezzanineFloor,firstFloor,
                     secondFloor,thirdFloor,fourthFloor,fifthFloor],"Floors")

    floors3D = embedStruct(1)(floors)
    building = Struct(CAT(DISTR([floors3D.body,t(0,0,4)]),"Building"))
    V,FV,EV = struct2lar(building,metric)
    VIEW(STRUCT(MKPOLS((V,EV))) )

    storeys = STRUCT(CAT(DISTR([[ground,mezzanine,first,second,third,fourth,fifth],T(3)(4)])))
    VIEW(STRUCT([storeys,SteelFrame] + MKPOLS((V,EV)) ) )
    ◇
```

Macro referenced in [28a](#).

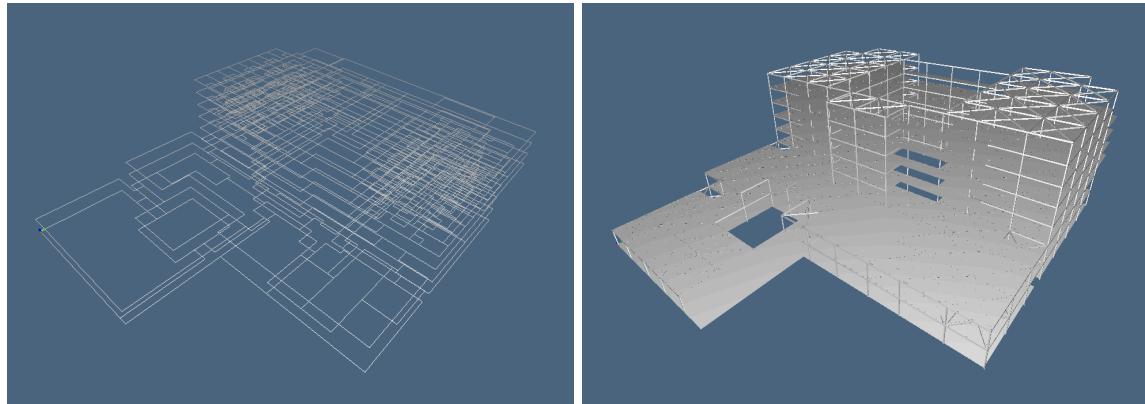


Figure 12: example caption

## 4.2 Structural frame

Complex of columns, and beams, girders, spandrels, and trusses connected to one another and to the columns anchored in a foundation, as well as other components or members necessary for the stability of a structure. Floors and roof panels, not connected to the columns (and called secondary members) are not considered part of the structural frame.

**aaaa**

$\langle \text{aaaa } 25a \rangle \equiv$   
" " " aaaa " "

◊

Macro defined by [25ab](#).  
Macro never referenced.

## 4.3 Vertical communications

**aaaa**

$\langle \text{aaaa } 25b \rangle \equiv$   
" " " aaaa " "

◊

Macro defined by [25ab](#).  
Macro never referenced.

## 5 Design review

### 5.1 Integration and cochains computation

#### Surface integration

$\langle \text{Surface integration 26a} \rangle \equiv$

```
from integr import *
""" Surface integration """
def surfIntegration(model):
    V,FV,EV = model
    V = [v+[0.0] for v in V]
    cochain = []
    for face in FV:
        triangles = AA(C(AL)(face[0]))(TRANS([face[1:-1],face[2:]]))
        P = V,triangles
        area = Surface(P,signed=True)
        cochain += [abs(area)]
    return cochain
◊
```

Macro referenced in [28a](#).

#### Surface cochain computation

$\langle \text{Surface cochain computation 26b} \rangle \equiv$

```
""" Surface cochain computation """
def surfaceCochain(buildingUnit):
    print "\nbuildingUnit.name =",buildingUnit.name
    cochain = AA(int)(surfIntegration(struct2lar(buildingUnit)))
    names = [struct.name for struct in buildingUnit.body]
    return zip(names,cochain)

for floor in floors:
    areas = surfaceCochain(floor)
    print floor.name + " =", areas
    print floor.name + " m^2 =", sum(TRANS(areas)[1])
    print ""
◊
```

Macro referenced in [28a](#).

#### Computing of a surface cochain via Struct instance traversal

$\langle \text{Computing of a surface cochain via Struct instance traversal 26c} \rangle \equiv$

```

""" Computing of a surface cochain via Struct instance traversal """
def structCochain(struct,levels=1):
    cochain = defaultdict(int)
    dim = checkStruct(struct.body)
    CTM, stack = scipy.identity(dim+1), []
    nameStack,cochainMap = structCochainTraversal(CTM, stack, struct, [], [], [])
    for cell,cochainValue in cochainMap:
        nameArray = cell.split(".")
        cochain[".".join(nameArray[:levels])] += cochainValue[0]
    return cochain

def structCochainTraversal(CTM, stack, obj, scene=[], names=[], nameStack=[]):
    repeatedNames = defaultdict(int)

    def map(model):
        V,FV,EV = larApply(CTM)(model)
        return AA(int)(surfIntegration((metric(V),FV,EV)))

    for i in range(len(obj)):
        if isinstance(obj[i],Struct):
            repeatedNames[obj[i].name] += 1
            if repeatedNames[obj[i].name]==1: theName = obj[i].name
            else: theName = obj[i].name + str(repeatedNames[obj[i].name]-1)
            names.append(theName)
            nameStack = nameStack+[names]
            stack.append(CTM)

            structCochainTraversal(CTM, stack, obj[i], scene, names, nameStack)

            CTM = stack.pop()
            theName = names.pop()
        elif isinstance(obj[i],Model):
            scene += [( ".join(names), map(obj[i]) )]
        elif (isinstance(obj[i],tuple) or isinstance(obj[i],list)) and (
            len(obj[i])==2 or len(obj[i])==3):
            scene += [( ".join(names), map(obj[i]) )]
        elif isinstance(obj[i],Mat):
            CTM = scipy.dot(CTM, obj[i])
    return nameStack,scene

if __name__ == "__main__":
    print "\nsurface cochain(ward) =", structCochain(ward,2)
    print "\nsurface cochain(doubleRoom) =", structCochain(doubleRoom,4)
◇

```

Macro referenced in 28a.

## 6 System semantics

### 6.1 Topological requirements

### 6.2 Geometrical requirements

## 7 Code exporting

### The Hospital.py module

```
"lib/py/hospital.py" 28a ≡
    """ The 'Hospital' module """

    from pyplasm import *

    """ import modules from larcc/lib """
    sys.path.insert(0, 'lib/py/')
    from copy import deepcopy
    from architectural import *
    from iot3d import *
    DEBUG = True

    ⟨ Reference grid 2 ⟩
    ⟨ Coding utilities 28b ⟩
    ⟨ From array indices to grid coordinates 4 ⟩
    ⟨ Storey input 6 ⟩
    ⟨ Storey generation 21 ⟩
    ⟨ Storey viewing 22a ⟩
    ⟨ Column locations on grid 22b ⟩
    ⟨ Generation of beams and structural chains 23a ⟩
    ⟨ Instancing of 3D structure frame 23b ⟩
    ⟨ Assembling 3D structure frame 24a ⟩
    ⟨ Structure embedding ? ⟩
    ⟨ 2.5D building assembly 24b ⟩
    ⟨ Surface integration 26a ⟩
    ⟨ Surface cochain computation 26b ⟩
    ⟨ Computing of a surface cochain via Struct instance traversal 26c ⟩
    ◇
```

## A Code utilities

### Coding utilities

```
⟨ Coding utilities 28b ⟩ ≡
    """ Coding utilities """
    ⟨ From grid to metric coordinates 5 ⟩
```

```

⟨ Mapping a grid frame to a Cartesian one 29a ⟩
⟨ Solidify the boundary of polyline-like building units 29b ⟩
⟨ Make a struct object from a 2D polyline 8a, ... ⟩
◊

```

Macro referenced in 28a.

### Mapping the grid frame to a Cartesian right-hand frame

```

⟨ Mapping a grid frame to a Cartesian one 29a ⟩ ≡
    """ Mapping the grid frame to a Cartesian right-hand frame """
    def vmap(YMAX):
        def vmap0(V):
            if len(V[0]) == 3: W = [[x, YMAX-y, z] for x,y,z in V]
            else: W = [[x, YMAX-y] for x,y in V]
            return W
        return vmap0

        def embed(z):
            def embed0(p):
                return p+[z]
            return embed0
        ◊

```

Macro referenced in 28b.

### Solidify the boundary of polyline-like building units

```

⟨ Solidify the boundary of polyline-like building units 29b ⟩ ≡
    """ Solidify the boundary of polyline-like building units """
    def floor(X,Y):
        def floor0(structure2D,metric=ID):
            V,FV,EV = struct2lar(structure2D,metric)
            BE = [EV[e] for e in boundaryCells(FV,EV)]
            theFloor = SOLIDIFY(STRUCT([POLYLINE([V[v],V[w]]) for v,w in BE]))
            return theFloor,V,EV
        return floor0
    ◊

```

Macro referenced in 28b.

### Make a struct object from a 2D polyline

```

⟨ Make a struct object from a 2D polyline 29c ⟩ ≡
    """ Make a struct object from a 2D polyline """
    isPolyline = ISSEQOF(ISSEQOF(ISNUM))
    isPolylineSet = ISSEQOF(ISSEQOF(ISSEQOF(ISNUM)))

```

```

def buildingUnit(polyline,string):
    if ISSEQOF(ISSEQOF(ISNUM))(polyline): model = polyline2lar([polyline])
    else: model = polyline2lar(polyline)
    return Struct([model],str(string))
◊

```

Macro defined by [8a](#), [29c](#), [30a](#).  
Macro referenced in [28b](#).

### Extract 1-cells from the lar of a polylineSet

```

⟨ Make a struct object from a 2D polyline 30a ⟩ ≡
    """ Make a struct object from a 2D polyline """
    def lineSet(polylineSet):
        EV = []
        for polyline in polylineSet:
            EV += [(v,w) if v<w else (w,v) for v,w in zip(polyline,polyline[1:]+[polyline[0]])]
        return AA(list)(EV)
◊

```

Macro defined by [8a](#), [29c](#), [30a](#).  
Macro referenced in [28b](#).

### The 2.5D mock-up

```

"test/py/hospital/mock-up.py" 30b ≡
    """ The 2.5D mock-up of an hospital building """
◊

```

## References

- [AM13] Adham R. Ismail Abdel-Moneim, *Hospital planning and medical equipment design*, Future Healthcare – The opportunities of new technology (Oslo, Norway), 38th World Hospital Congress, 18–20 June 2013.
- [CL13] CVD-Lab, *Linear algebraic representation*, Tech. Report 13-00, Roma Tre University, October 2013.
- [DPS14] Antonio Dicarlo, Alberto Paoluzzi, and Vadim Shapiro, *Linear algebraic representation for topological structures*, Comput. Aided Des. **46** (2014), 269–274.