

SOURCEBOOK

SPSS

DATA ANALYSIS

Abstract: This chapter provides step-by-step instructions on how to obtain basic statistical output using SPSS, both visually with screenshots and via written instructions. Simple examples for most undergraduate-level between-subjects and within-subjects research designs are provided.

Keywords: SPSS, screenshots, directions for use

Original: July 2009

Updated: January 2025

This document is part of an online statistics sourcebook.

A browser-friendly viewing platform for the sourcebook is available:

<https://cwendorf.github.io/Sourcebook>

All data, syntax, and output files are available:

<https://github.com/cwendorf/Sourcebook>


TABLE OF CONTENTS FOR THIS CHAPTER

Frequencies (Frequencies and Descriptives).....	3
Descriptives (Standardized Scores and Transformations).....	5
Explore (Descriptives and Confidence Intervals)	8
Correlations (Bivariate).....	11
T Test (One Sample).....	13
T Test (Paired Samples).....	15
T Test (Independent Samples).....	17
One-Way (OneWay ANOVA)	19
Post Hoc Tests (OneWay ANOVA)	21
General Linear Model (Repeated Measures ANOVA)	23
Univariate Analysis of Variance (Factorial ANOVA)	26

Frequencies (Frequencies and Descriptives)


Steps for Obtaining Frequency-Related Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Descriptive Statistics → Frequencies” option from the main menu.

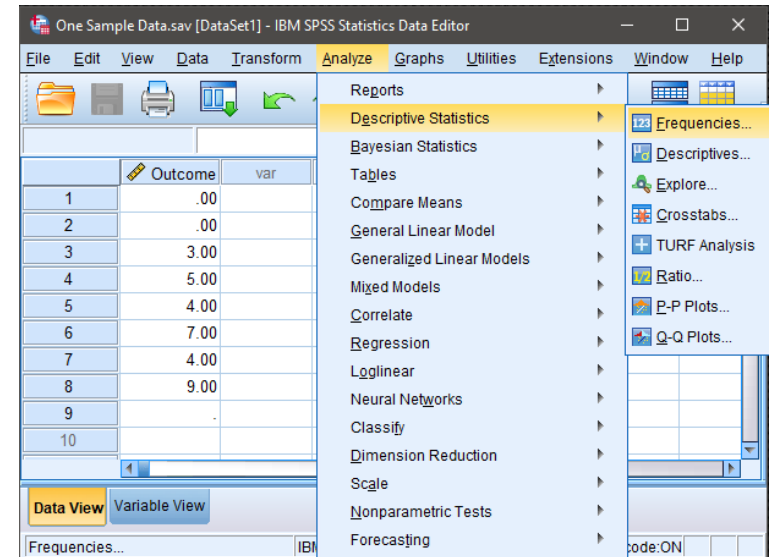


Steps for Obtaining a Frequency Distribution

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on them and then the arrow to move them into the “variables” box.
5. Be sure that “Display frequency tables” is checked. Without this checked, you will not get a frequency distribution.
6. If all you wish is a frequency table (with no histogram or summary statistics), click “OK.” A separate window with the output will appear.

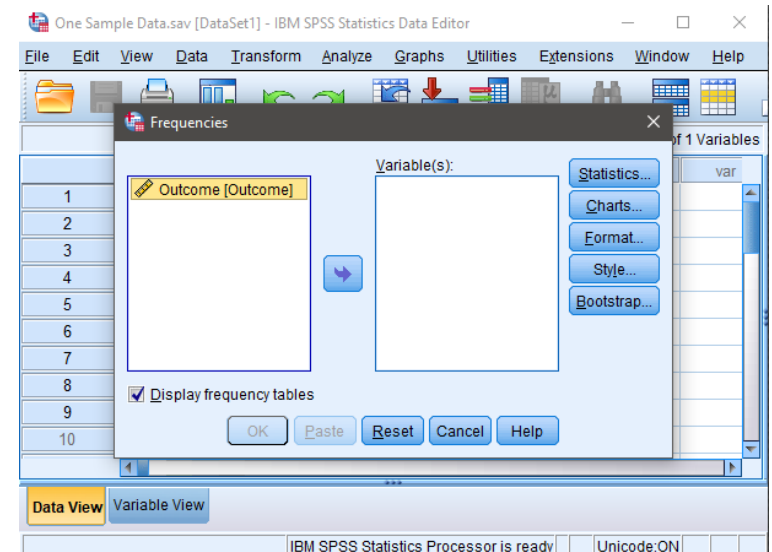


Steps for Obtaining Summary Statistics

7. To obtain summary statistics, select “Statistics.” Another dialogue box will appear.
8. In this box, you can request that SPSS calculate the mean, variance, and standard deviation (or median and quartiles).
9. Once you have selected the desired statistics, click “Continue.” This will return you to the original dialogue box.

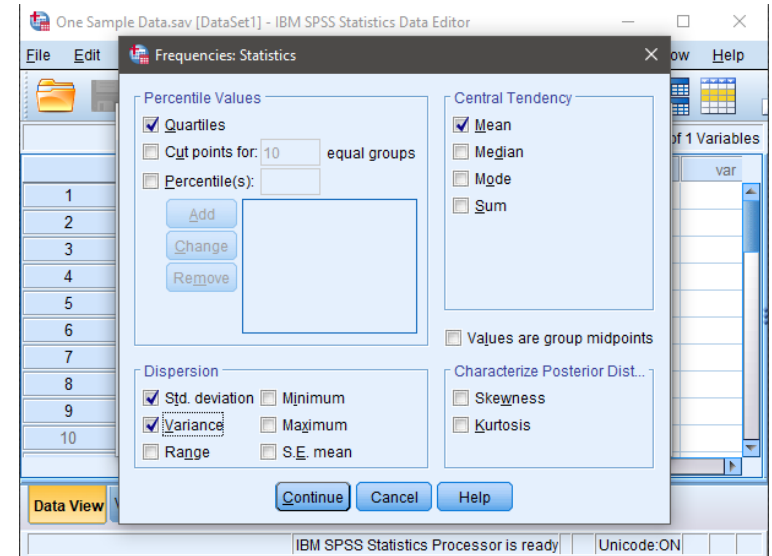

Steps for Obtaining a Histogram

10. To obtain a histogram, click on the “Charts” button. Another dialogue box will appear.
11. In this box, select “Histogram.”
12. Click “Continue.” This will return you to the original dialogue box.
13. After clicking on “OK” in the original dialogue box, a separate window with the output will appear.

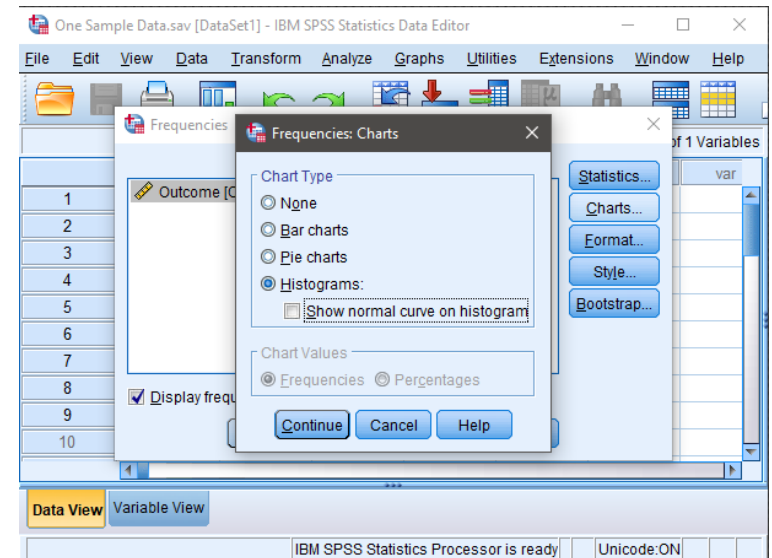


Your data have now been analyzed!

Descriptives (Standardized Scores and Transformations)


Steps for Obtaining Descriptive-Related Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Descriptive Statistics → Descriptives” option from the main menu.

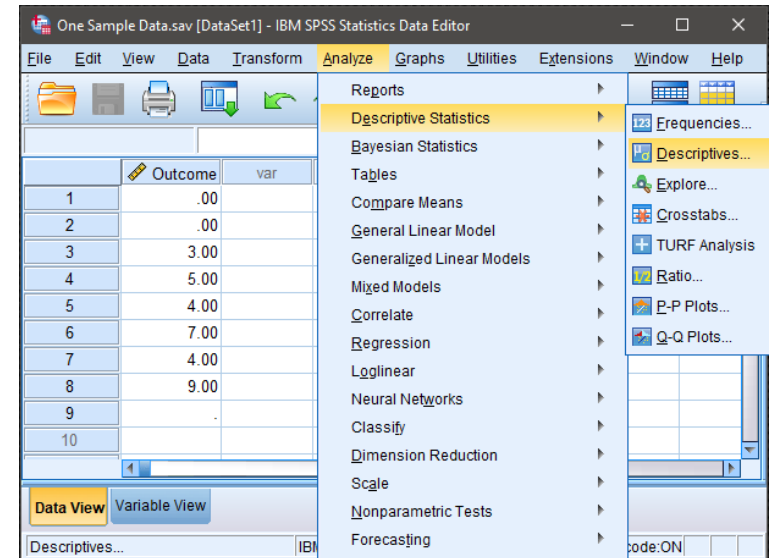


Steps for Obtaining a Standardized (z) Scores

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on them and hitting the arrow to move them into the “variables” box.
5. Be sure that “Save standardized values as variables” is checked. Without this checked, you will not get the standardized scores.
6. If all you wish are the standardized scores (with descriptive summary statistics), click “OK.” A separate window with the output will appear.

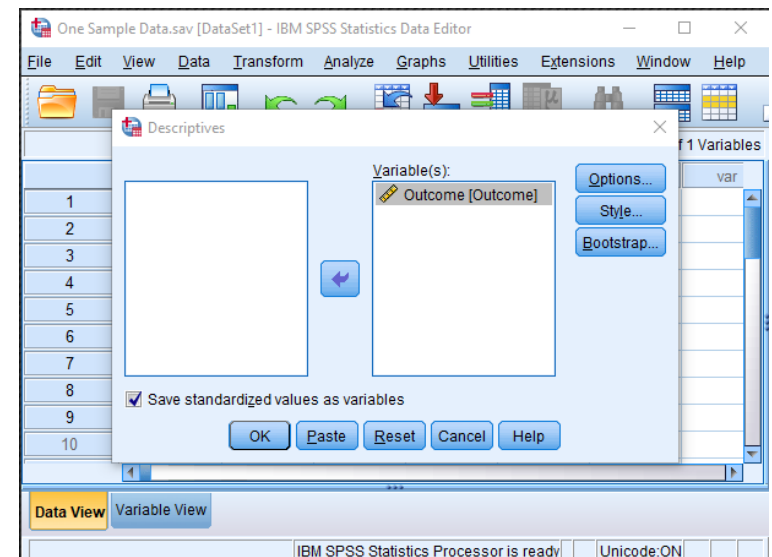

Steps for Obtaining Summary Statistics

7. To obtain summary statistics, select “Options.” Another dialogue box will appear.
8. In this box, you can request that SPSS calculate the mean, variance, and standard deviation (and other statistics).
9. Once you have selected the desired statistics, click “Continue.” This will return you to the original dialogue box.

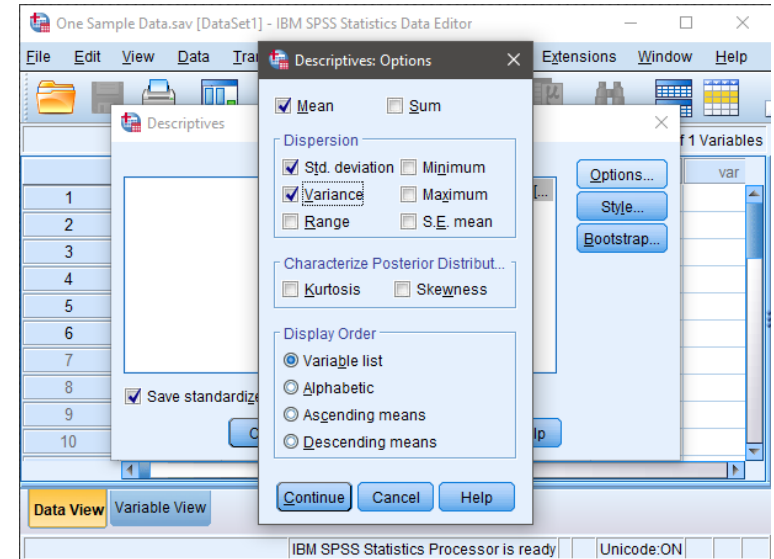

Steps for Viewing the Standardized Scores


10. After clicking on “OK” in the original dialogue box, a separate window with the output will appear.
11. Finally, note that the standardized variables are not included in the output. Rather, they are saved as new variables in the data view window. These variables can be used in subsequent analyses.

The screenshot shows the 'Data View' window in IBM SPSS Statistics. The table displays the 'Outcome' variable and the 'ZOutcome' variable, along with four empty 'var' columns. The data is organized into 10 rows.

	Outcome	ZOutcome	var	var	var	var
1	.00	-1.28338				
2	.00	-1.28338				
3	3.00	-.32084				
4	5.00	.32084				
5	4.00	.00000				
6	7.00	.96253				
7	4.00	.00000				
8	9.00	1.60422				
9	.	.				
10	.	.				


Steps for Obtaining the Compute Menu

12. In addition to (or instead of) calculating standardized scores, you can perform other data transformations. First, enter the data (described elsewhere).
13. After the data are entered, select the “Transform → Compute Variable” option from the main menu.

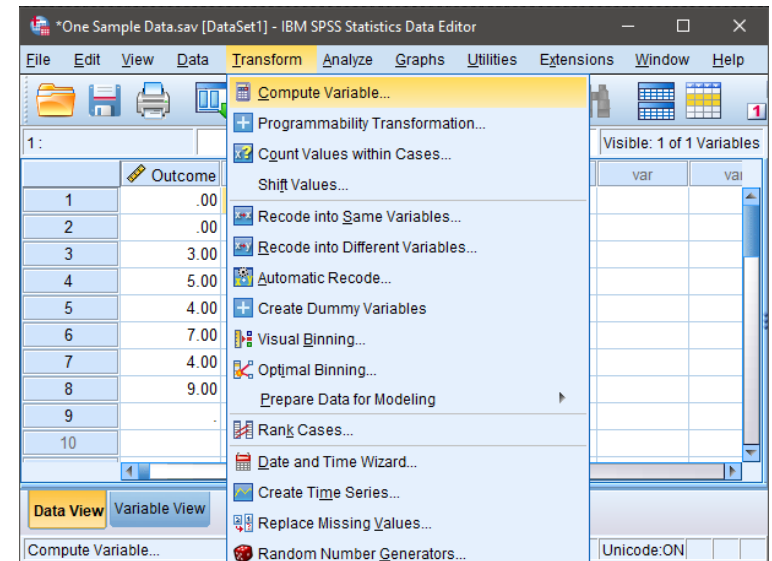

Steps for Calculating Other Transformations

14. A dialogue box will then appear for you to choose the variables of interest to transform.
15. Under “Target Variables,” type the name of the new variable that you are creating. Here “trOutcome” is the name of the new variable.
16. In the “Numeric Expression” box, type the formula that will be used in the transformation. In this example, the “trOutcome” is calculated by taking the original score and adding one.
17. After clicking on “OK” in the original dialogue box, the transformed variables will appear in the data view window. These variables can be used in subsequent analyses.

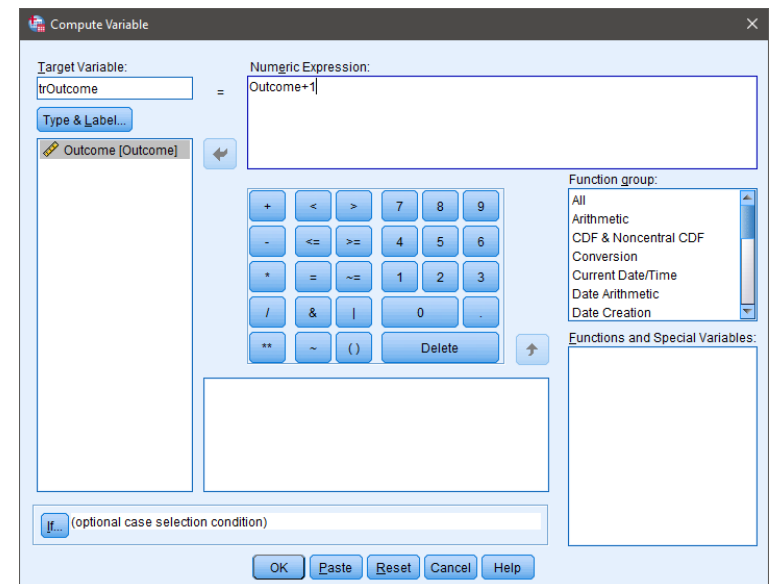


Your data have now been analyzed!

Explore (Descriptives and Confidence Intervals)


Steps for Obtaining Exploratory-Related Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Descriptive Statistics → Explore” option from the main menu.

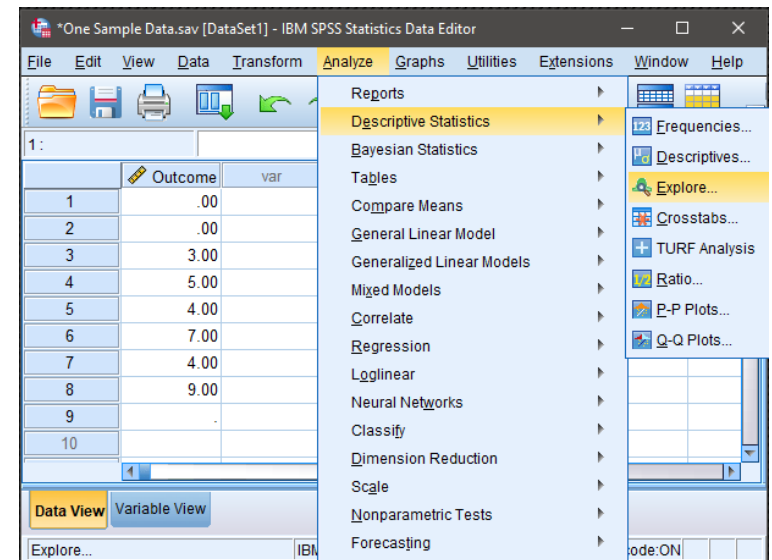


Steps for Obtaining the Exploratory Statistics

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Dependent List” box.
5. Be sure that “Statistics” is checked. This will limit your output to basic descriptive statistics and confidence intervals.
6. If you do not wish to alter the default (95%) confidence level, click “OK.” A separate window with the output will appear.

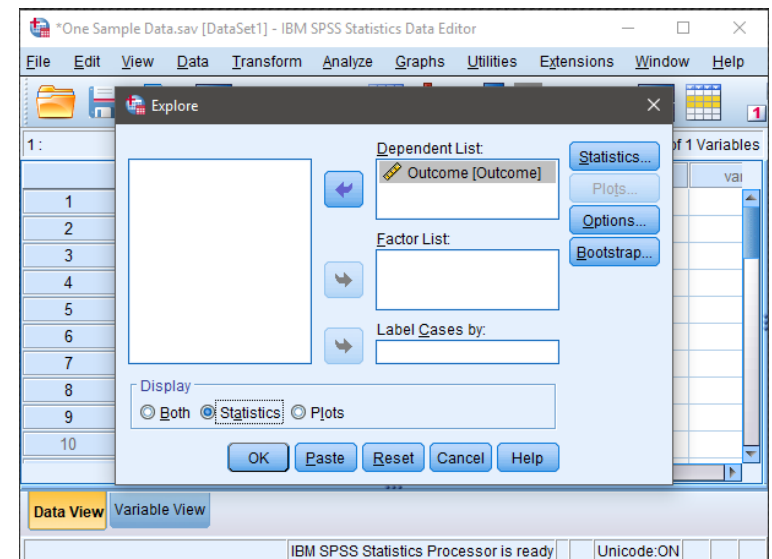


Steps for Altering the Confidence Interval

7. If you wish to alter the width of the confidence interval, select the "Statistics" button.
8. Another dialogue box will appear where you can change the confidence level. When you are done, click "Continue." This will return you to the original dialogue box.
9. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

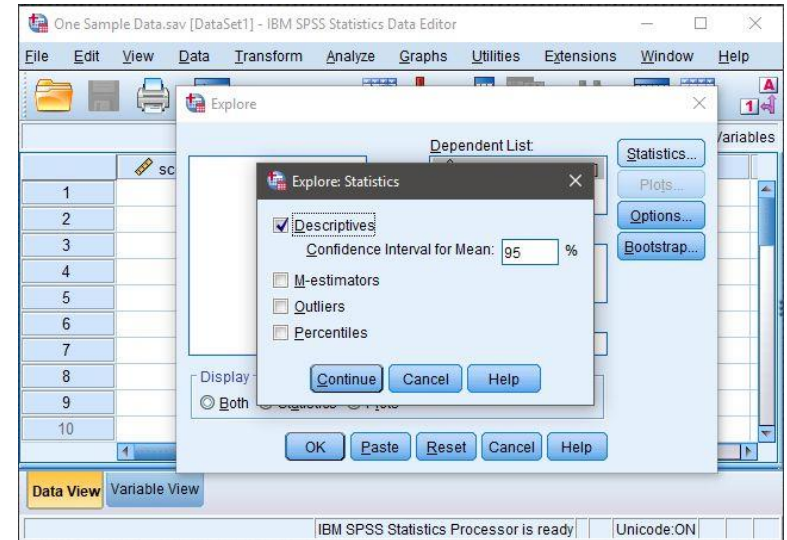


Steps for Obtaining a Graph of the Confidence Intervals

10. First, enter the data (described elsewhere).
11. To obtain a graph, select the "Graphs → Legacy Dialogs → Error Bar" option from the main menu.

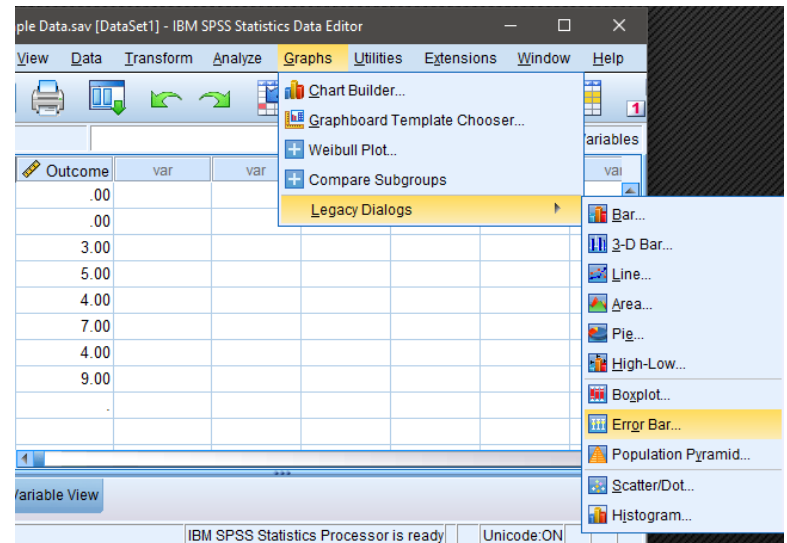


Steps for Choosing the Graph Layout

12. A dialogue box will then appear for you to choose the general graph layout of interest.
13. Click on the box labeled "Simple" (it should then be highlighted).
14. Then click on the option that states that you want "Summaries of separate variables."
15. Click "Define."

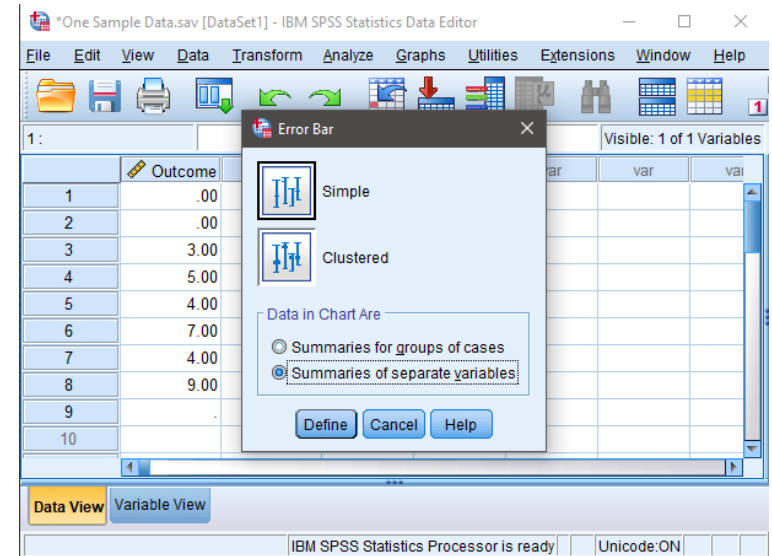

Steps for Obtaining the Confidence Interval Graph

16. A dialogue box will then appear for you to choose the variables of interest to graph.
17. Under "Error Bars," move the name(s) of the variable(s) you want to include in the graph.
18. If you want to change the width of the confidence intervals, type the appropriate percentage in the "Level" box.
19. After clicking on "OK", a separate window with the output will appear.

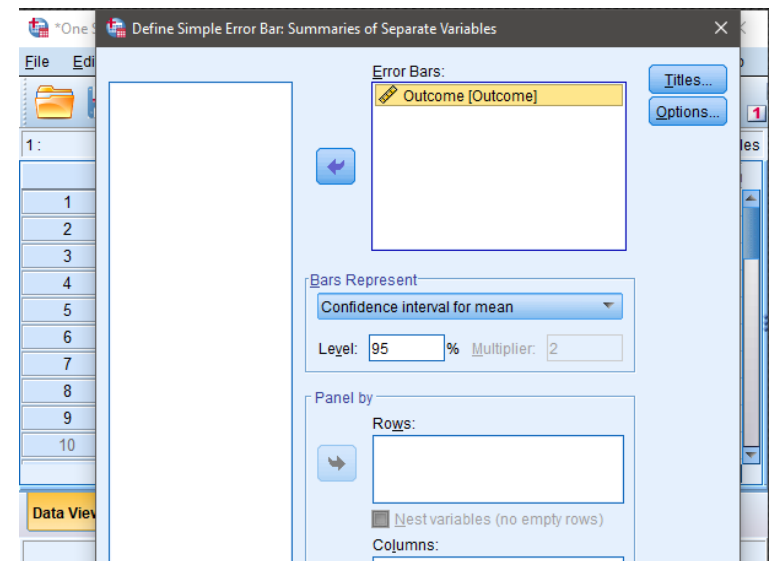


Your data have now been analyzed!

Correlations (Bivariate)


Steps for Obtaining Correlational Statistics

1. First, enter data involving multiple variables. This is described elsewhere.
2. After the data are entered, select the “Analyze → Correlate → Bivariate” option from the main menu.

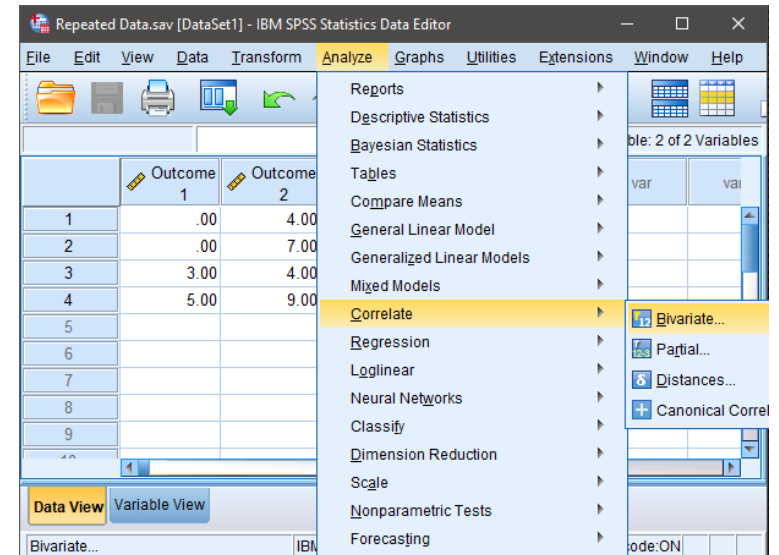


Steps for Obtaining the Correlations (and Significance Tests)

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Variables” box.
5. By default, SPSS will have the “Pearson” box checked. This provides the correlation coefficient we discussed. Similarly, having “two-tailed” and “flag significant correlations” will create and display the significance tests (discussed later in the class).
6. If all you wish is a table of correlations (with no descriptive statistics), click “OK.” A separate window with the output will appear.

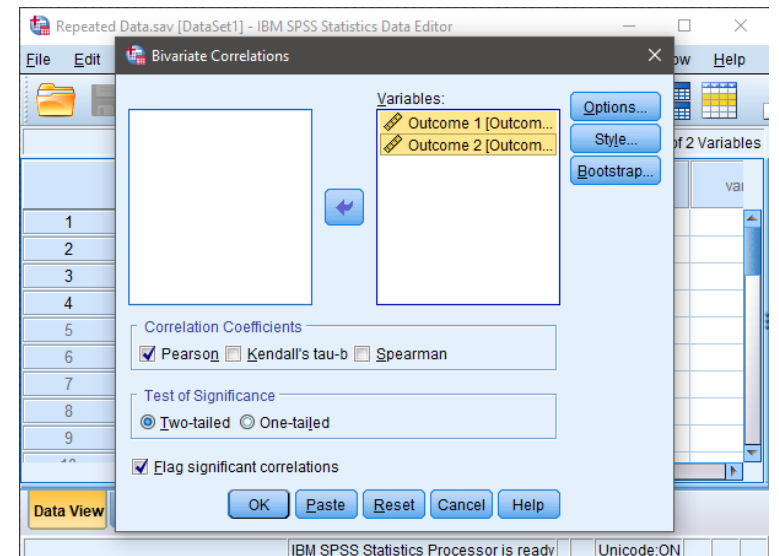

Steps for Obtaining Descriptive Statistics

7. If you wish to get the descriptive statistics as well, select the “Options” button.
8. Another dialogue box will appear where you can choose various statistics. Select “Means and standard deviations” and “cross-product deviations and covariances.”
9. When you are done, click “Continue.” This will return you to the original dialogue box.
10. Now click “OK” in the original dialogue box. A separate window with the output will appear.

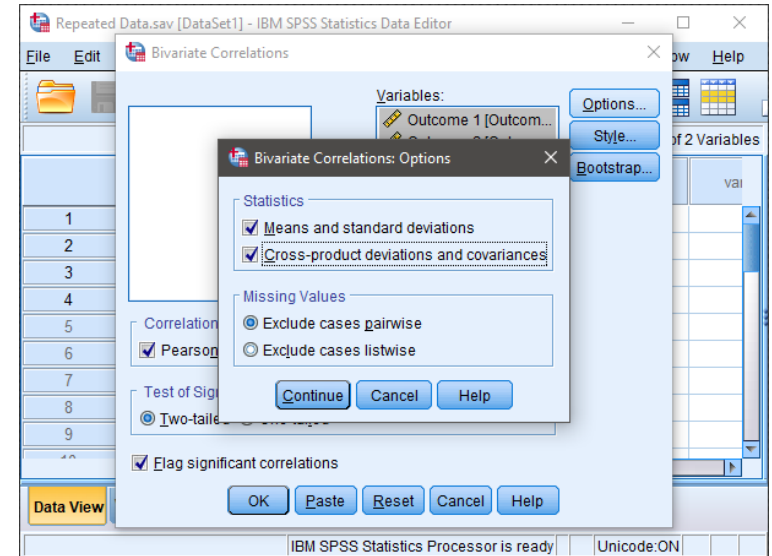


Your data have now been analyzed!

T Test (One Sample)


Steps for Obtaining One-Sample Inferential Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Compare Means → One-Sample T Test” option from the main menu.

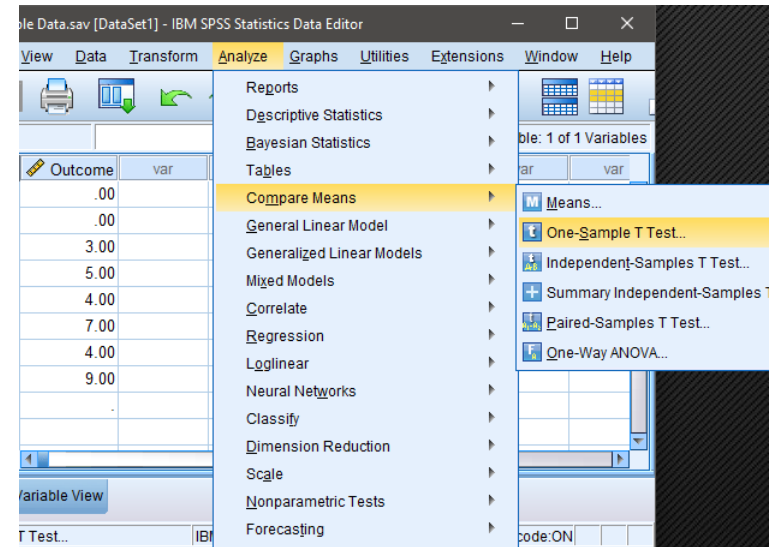


Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Test Variables” box.
5. Be sure to enter a known or hypothesized mean into the “Test Value” field. If you do not enter a value here, SPSS will automatically use zero as the comparison mean.
6. If you do not wish to alter the default (95%) confidence level, click “OK.” A separate window with the output will appear.

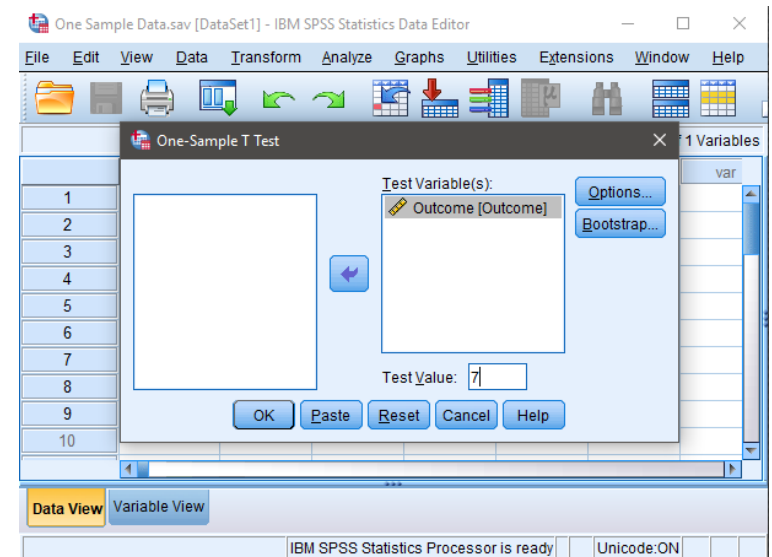

Steps for Altering the Confidence Interval

7. If you wish to alter the width of the confidence interval, select the "Options" button.
8. Another dialogue box will appear where you can change the confidence level. When you are done, click "Continue." This will return you to the original dialogue box.
9. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

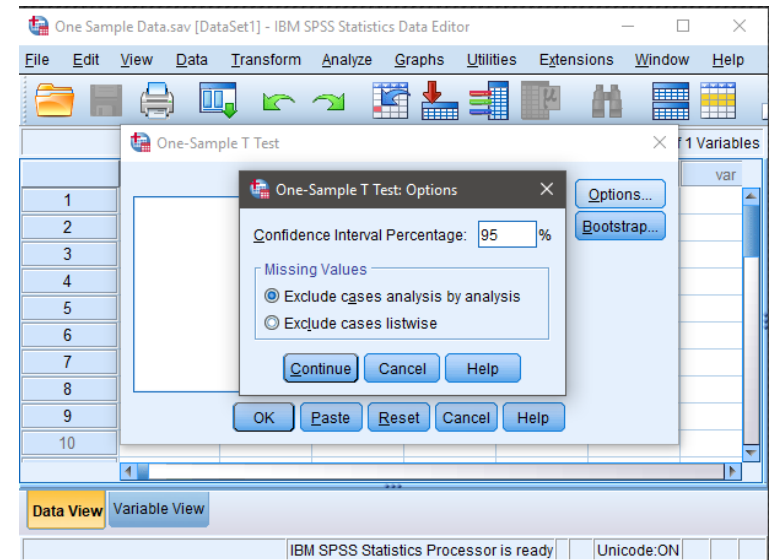


Your data have now been analyzed!

T Test (Paired Samples)


Steps for Obtaining Paired-Sample Inferential Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Compare Means → Paired-Samples T Test” option from the main menu.

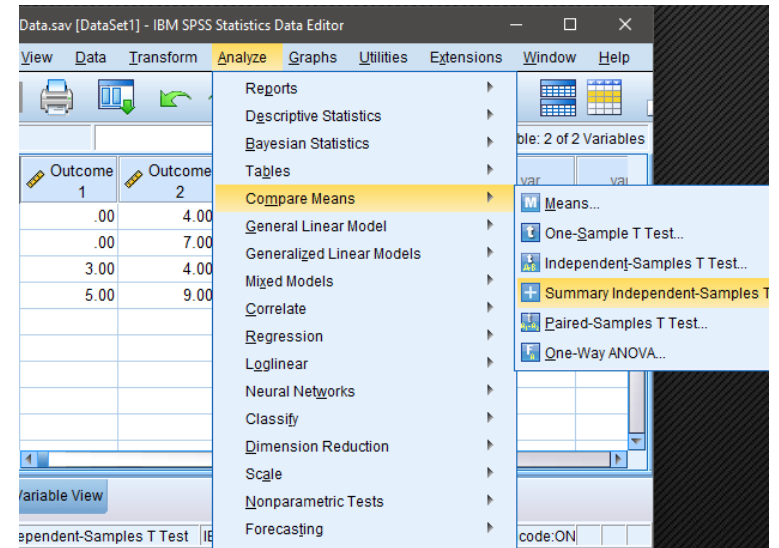


Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the variables you wish to analyze by clicking on both of them while holding down the “CTRL” key. Then click on the arrow to move the pair of variables to the “Paired Variables” box.
5. If you do not wish to alter the default (95%) confidence level, click “OK.” A separate window with the output will appear.

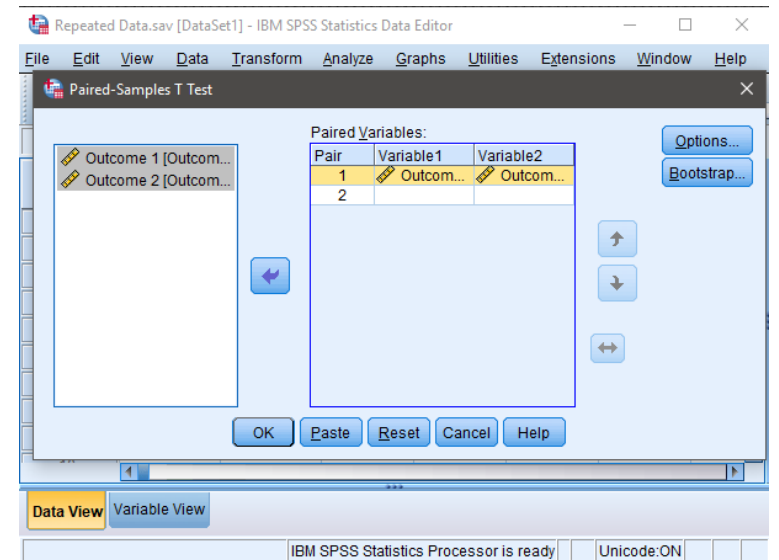

Steps for Altering the Confidence Interval

6. If you wish to alter the width of the confidence interval, select the "Options" button.
7. Another dialogue box will appear where you can change the confidence level. When you are done, click "Continue." This will return you to the original dialogue box.
8. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

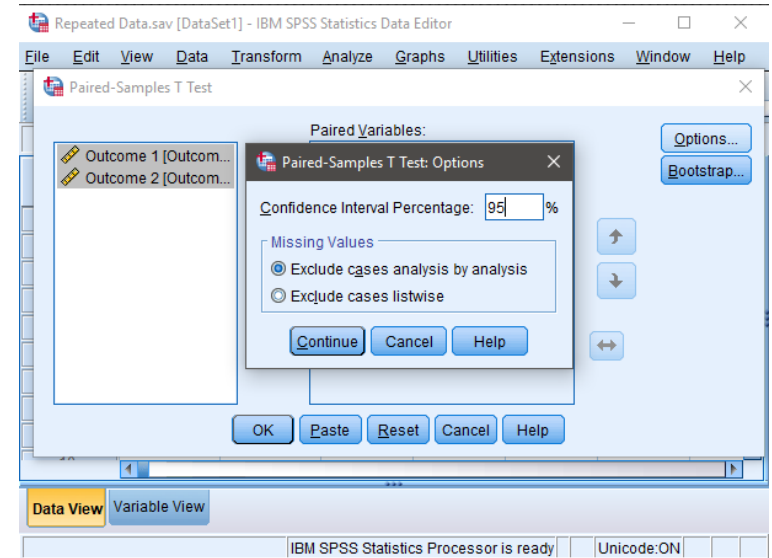


Your data have now been analyzed!

T Test (Independent Samples)


Steps for Obtaining Two-Sample Inferential Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → Compare Means → Independent-Samples T Test” option from the main menu.

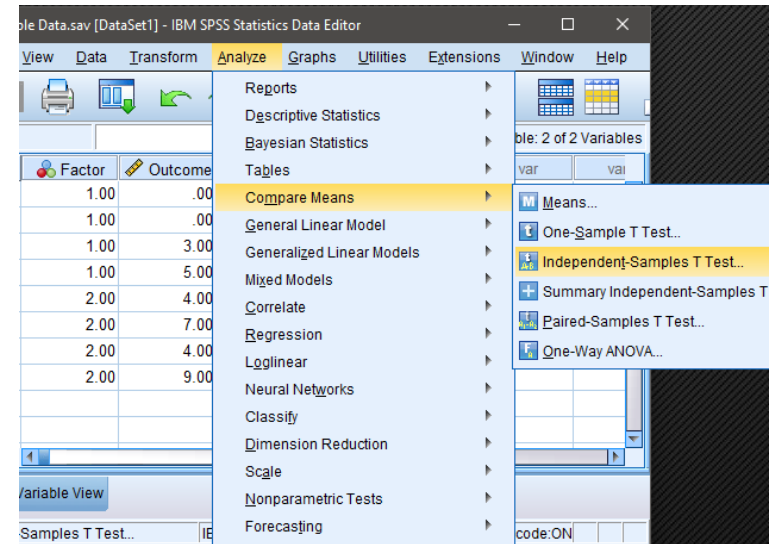


Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the outcome variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Test Variables” box.
5. Move the variable that defines the different groups to the “Grouping Variable” box. Note that question marks will appear here and that you will need to follow the next set of steps in order to run the analyses.

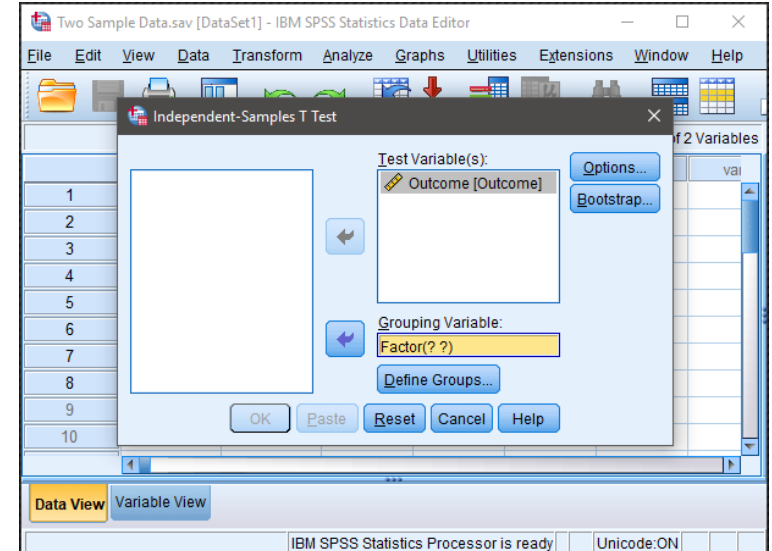


Steps for Defining the Groups to be Analyzed

6. In order to tell SPSS which two groups you wish to compare, click on the “Define Groups” box.
7. A new dialog box will appear. Here you will need to indicate the numeric values you used in setting up the data file to refer to the groups. In this example, a value of 1 for the variable “group” referred to Group 1 and a value of 2 for the variable “group” referred to Group 2.
8. When you are done, click “Continue.” This will return you to the original dialogue box.
9. If you do not wish to alter the default (95%) confidence level, click “OK.” A separate window with the output will appear.

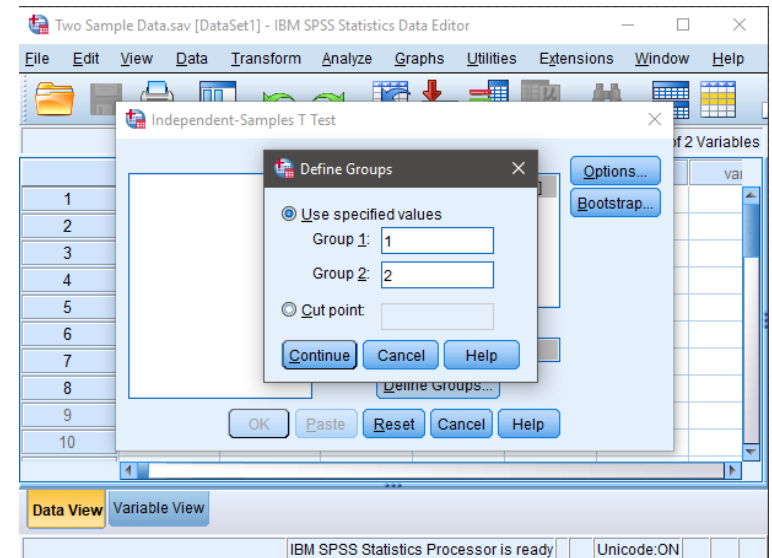

Steps for Altering the Confidence Interval

10. If you wish to alter the width of the confidence interval, select the “Options” button.
11. Another dialogue box will appear where you can change the confidence level. When you are done, click “Continue.” This will return you to the original dialogue box.
12. After clicking on “OK” in the original dialogue box, a separate window with the output will appear.

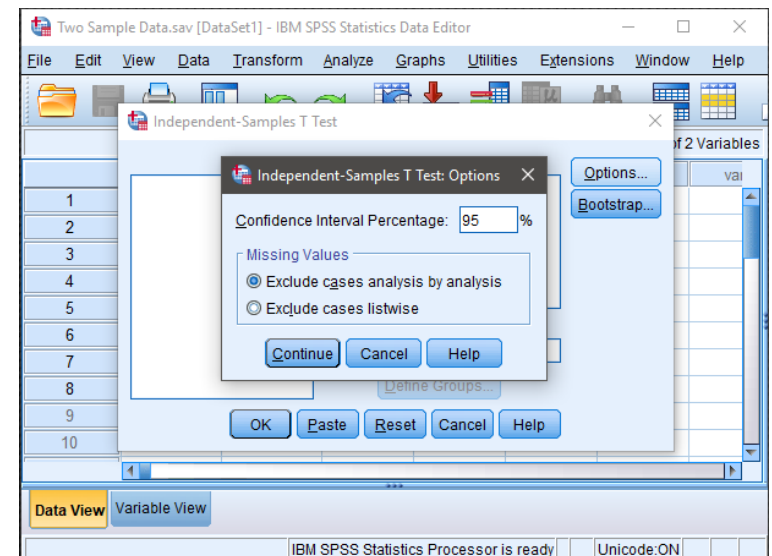


Your data have now been analyzed!

One-Way (OneWay ANOVA)


Steps for Obtaining Multiple-Sample Inferential Statistics

1. First, enter the data. This is done in the same manner as entering two sample data (described elsewhere) but with additional groups.
2. After the data are entered, select the “Analyze → Compare Means → One-Way ANOVA” option from the main menu.

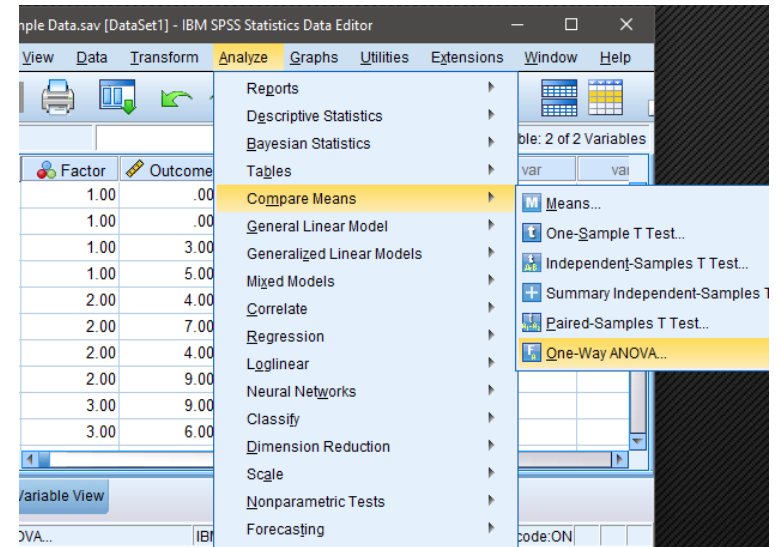


Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the outcome variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Dependent List” box.
5. Move the variable that defines the different groups to the “Factor” box. SPSS will not ask you to define the groups you wish to compare; it simply will compare all groups defined by the factor.
6. If all you wish is an ANOVA source table (with no descriptive statistics or post hoc tests), click “OK.” A separate window with the output will appear.

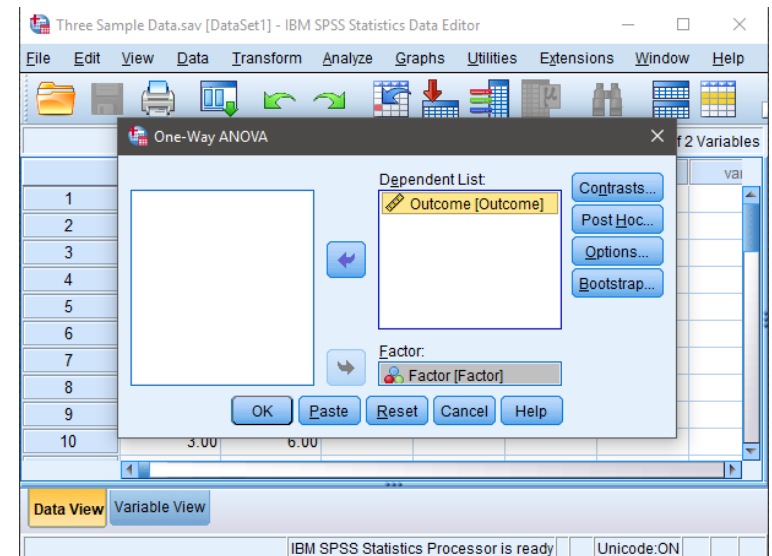

Steps for Obtaining Descriptive Statistics

7. If you wish to get the means, standard deviations, standard errors, and 95% confidence intervals for each group, select the "Options" button.
8. Another dialogue box will appear where you can choose various statistics. Select "Descriptive." When you are done, click "Continue." This will return you to the original dialogue box.
9. If all you wish is an ANOVA with the descriptive statistics (and no post hoc tests), click "OK." A separate window with the output will appear.

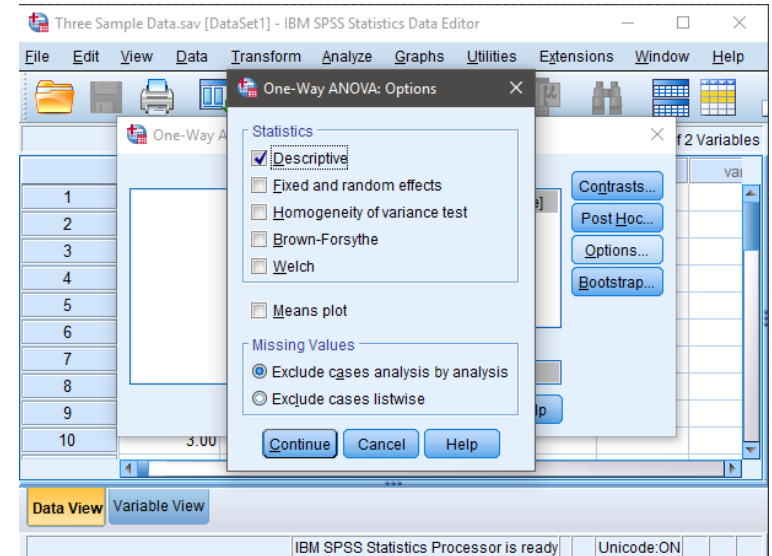


Your data have now been analyzed!

Post Hoc Tests (OneWay ANOVA)


Steps for Obtaining Multiple-Sample Inferential Statistics

1. First, enter the data. This is done in the same manner as entering two sample data (described elsewhere) but with additional groups.
2. After the data are entered, select the “Analyze → Compare Means → One-Way ANOVA” option from the main menu.

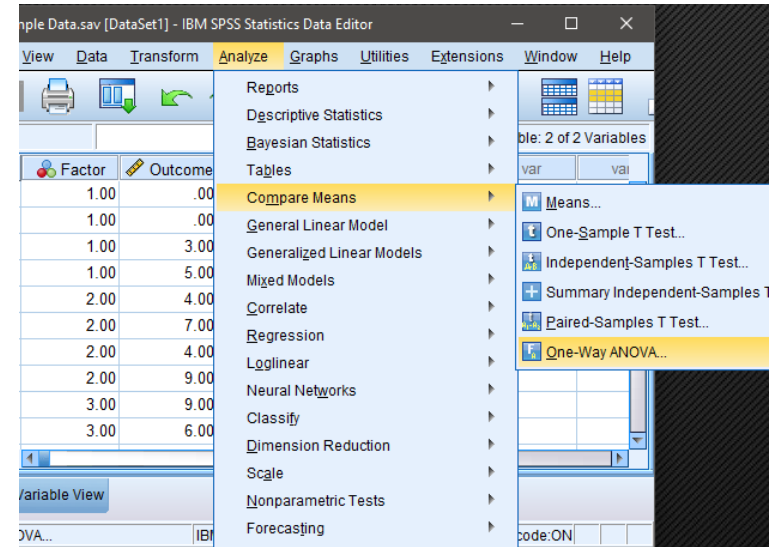


Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the outcome variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Dependent List” box.
5. Move the variable that defines the different groups to the “Factor” box. SPSS will not ask you to define the groups you wish to compare; it simply will compare all groups defined by the factor.
6. If all you wish is an ANOVA source table (with no descriptive statistics or post hoc tests), click “OK.” A separate window with the output will appear.

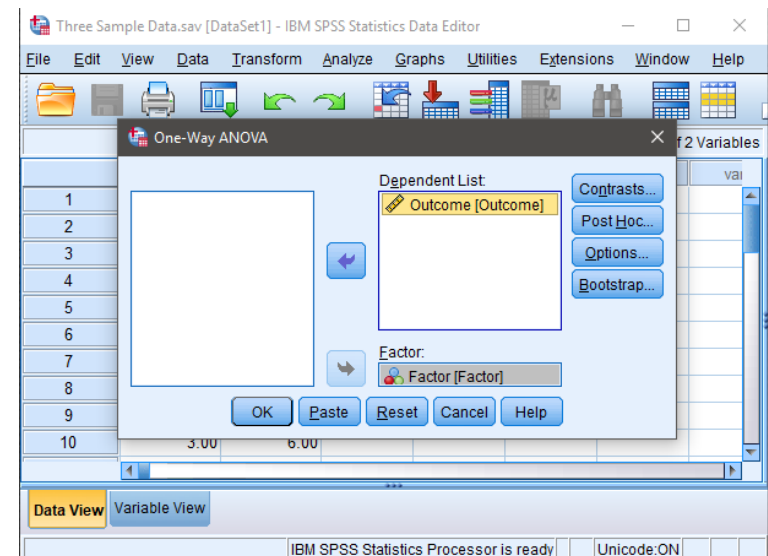


Steps for Obtaining Descriptive Statistics

7. If you wish to get the means, standard deviations, standard errors, and 95% confidence intervals for each group, select the “Options” button.
8. Another dialogue box will appear where you can choose various statistics. Select “Descriptive.” When you are done, click “Continue.” This will return you to the original dialogue box.
9. If all you wish is an ANOVA with the descriptive statistics (and no post hoc tests), click “OK.” A separate window with the output will appear.

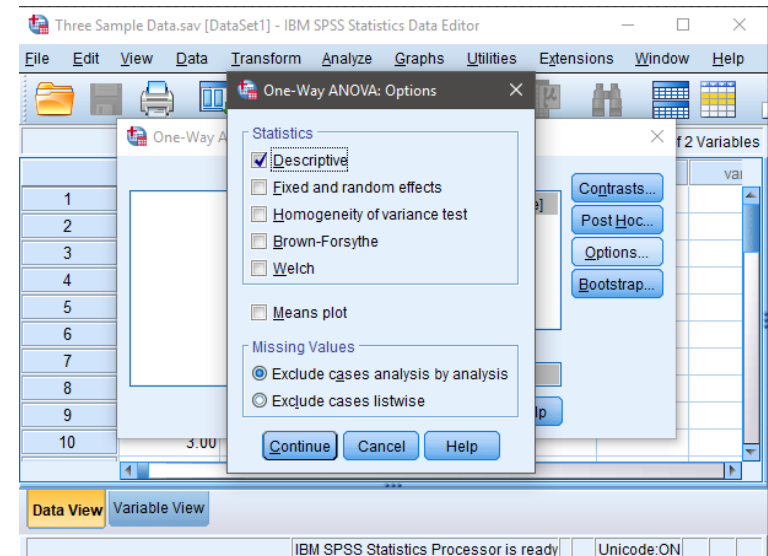

Steps for Obtaining Post Hoc Tests

10. If you wish to obtain post hoc tests for the purpose of making comparisons between groups, click the “Post Hoc” button.
11. Another dialogue box will appear where you can choose which post hoc tests you wish. Select “Tukey” to get Tukey HSD post hoc tests. When you are done, click “Continue.”
12. After clicking on “OK” in the original dialogue box, a separate window with the output will appear.

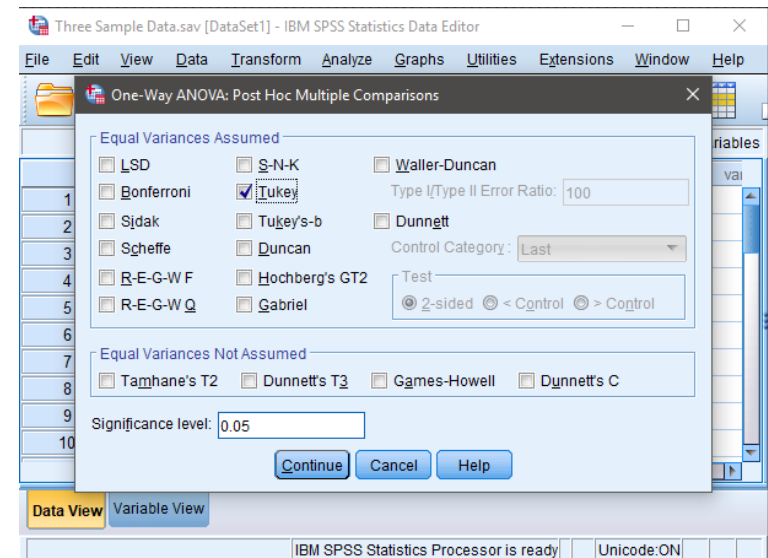


Your data have now been analyzed!

General Linear Model (Repeated Measures ANOVA)


Steps for Obtaining Repeated Measures Inferential Statistics

1. First, enter the repeated measures data. This is described elsewhere.
2. After the data are entered, select the “Analyze → General Linear Model → Repeated Measures” option from the main menu.

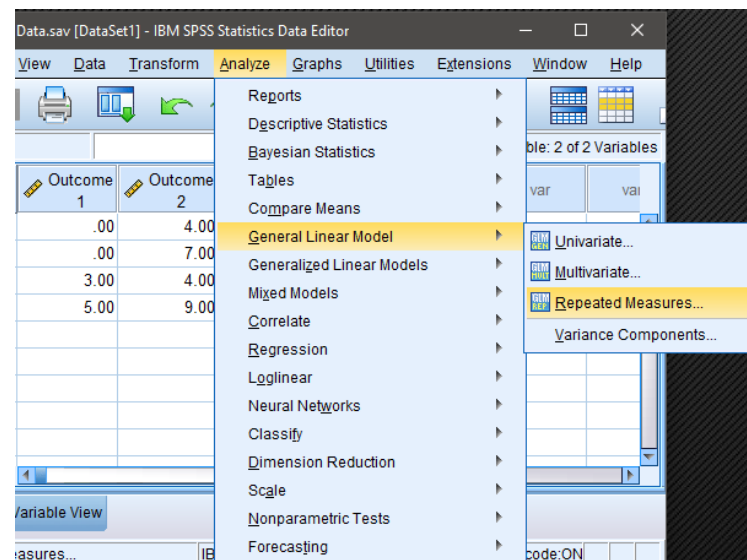


Steps for Labeling the Within-Subjects Variable/Factor

3. A dialogue box will then appear for you to create the repeated measures factor. This box is necessary because SPSS does not yet know which columns you wish to identify as repeated measurements of the same underlying factor.
4. In the “Within-Subject Factor Name” box, type in the name you wish to give to the repeated measures factor. In this example, since the measurements/columns reflect quizzes at two different times, “Time” is used as the name.
5. In the “Number of Levels” box, indicate the number of levels of the within-subjects factor. In this example, the quiz was given twice, so there were 2 levels of the factor.

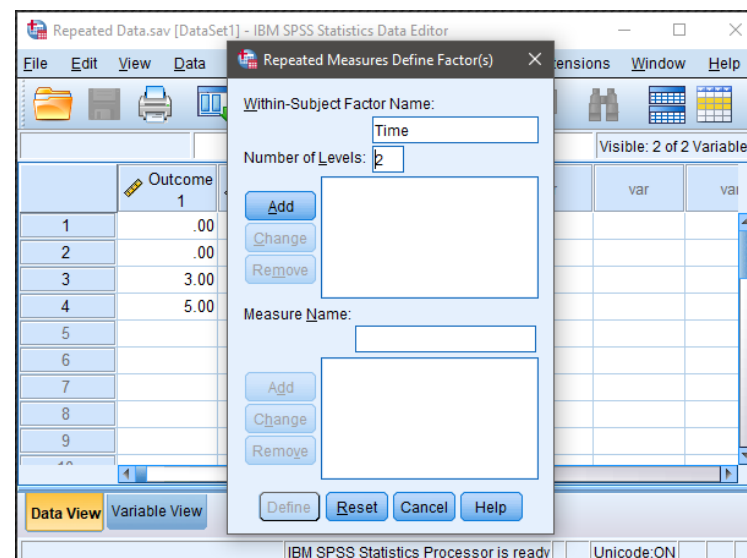


Steps for Creating the Within-Subjects Factor

6. It is then important that you finalize the creation of the within-subjects factor by clicking on the “Add” button. This officially declares the new factor in SPSS.
7. Note that this factor only exists in the computer’s memory. For examples, nowhere in the data set will you see a variable called “Time.”
8. When you have done this, click on “Define.” This will take you to the next step in setting up the analysis.

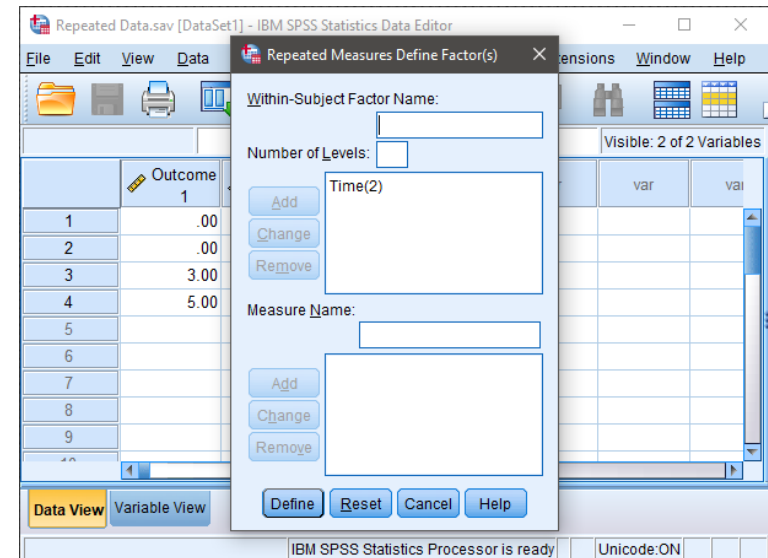


Steps for Obtaining the Significance Test

9. A dialogue box will then appear for you to define which columns/variables reflect the levels of the within-subjects factor.
10. Select the outcome variables you wish to analyze by clicking on them and hitting the arrow to move them into the “Within-Subjects Variable” box. In this example, “Outcome1” reflects the first level of the factor and “Outcome2” reflects the second level of the factor.
11. If all you wish is are ANOVA source tables (with no descriptive statistics or comparisons), click “OK.” A separate window with the output will appear.

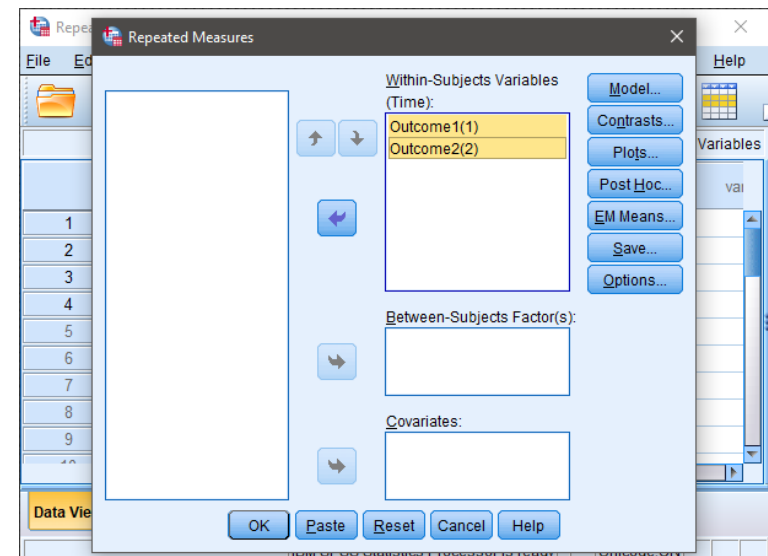


Steps for Obtaining Descriptive Statistics

12. If you wish to get the means, standard deviations, standard errors, and 95% confidence intervals for each group, select the "Options" button.
13. Another dialogue box will appear where you can choose various statistics. For means and standard deviations, select "Descriptive." When you are done, click "Continue." This will return you to the original dialogue box.
14. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

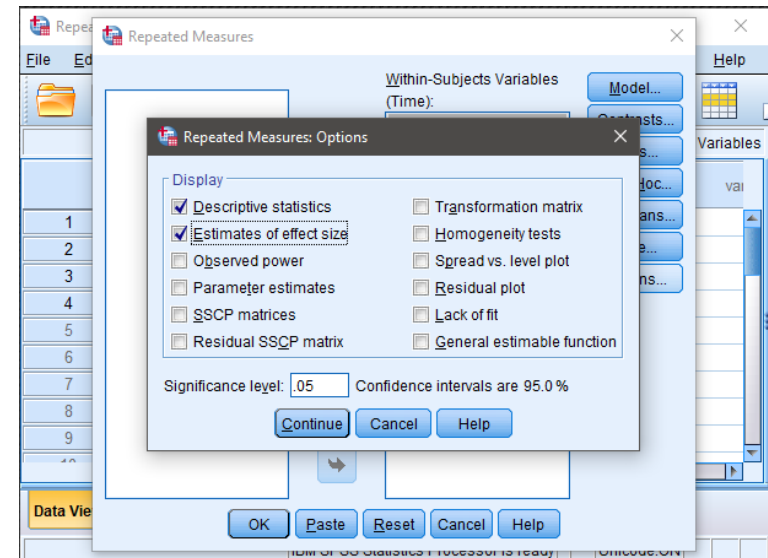

Steps for Obtaining Confidence Intervals

15. If you wish to get the confidence intervals for each mean, select the "EM Means" button.
16. Another dialogue box will appear where you can specify the Factor. Move the relevant term to the "Display Means" box.
17. When you are done, click "Continue." This will return you to the original dialogue box.
18. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

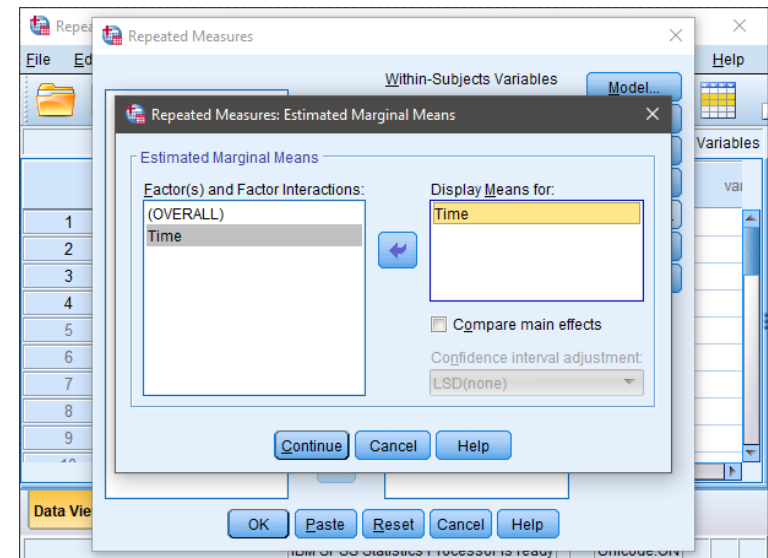


Your data have now been analyzed!

Univariate Analysis of Variance (Factorial ANOVA)


Steps for Obtaining Factorial Inferential Statistics

1. First, enter the data (described elsewhere).
2. After the data are entered, select the “Analyze → General Linear Model → Univariate” option from the main menu.

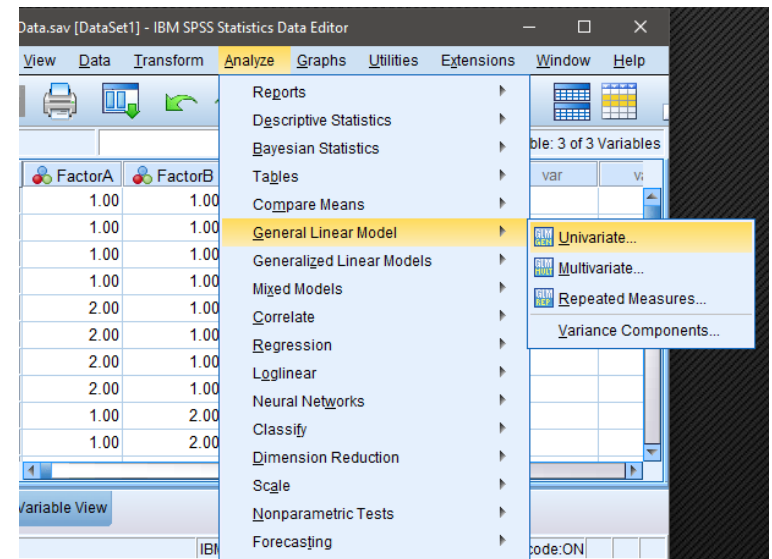

Steps for Obtaining the Significance Test

3. A dialogue box will then appear for you to choose the variables of interest.
4. Select the outcome variable you wish to analyze by clicking on it and hitting the arrow to move them into the “Dependent Variable” box.
5. Move the variable(s) that defines the different groups to the “Fixed Factor(s)” box. Note that SPSS will not require you to enter anything for the interaction if there are multiple factors; it will automatically create the interactions defined by the factor(s).
6. If all you wish is an ANOVA source table (with no descriptive statistics), click “OK.” A separate window with the output will appear.


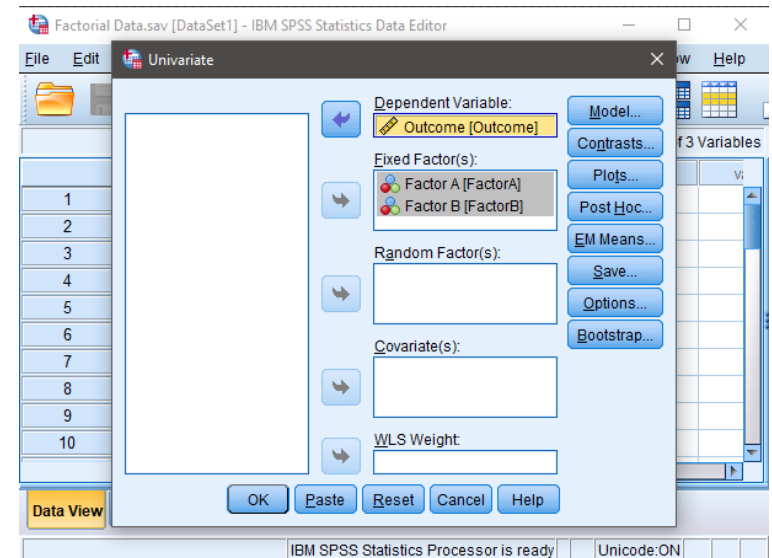


Steps for Obtaining Descriptive Statistics

7. If you wish to get the means and standard deviations for each group, select the "Options" button.
8. Another dialogue box will appear where you can choose various statistics. Select "Descriptive statistics."
9. If you wish to get eta-squared measures for each factor (and the interaction), click on "Estimates of effect size."
10. When you are done, click "Continue." This will return you to the original dialogue box.
11. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

Steps for Obtaining Confidence Intervals

12. If you wish to get the confidence intervals for each mean, select the "EM Means" button.
13. Another dialogue box will appear where you can specify which effects (main effects and interactions) to analyze. Move the relevant terms to the "Display Means" box.
14. When you are done, click "Continue." This will return you to the original dialogue box.
15. After clicking on "OK" in the original dialogue box, a separate window with the output will appear.

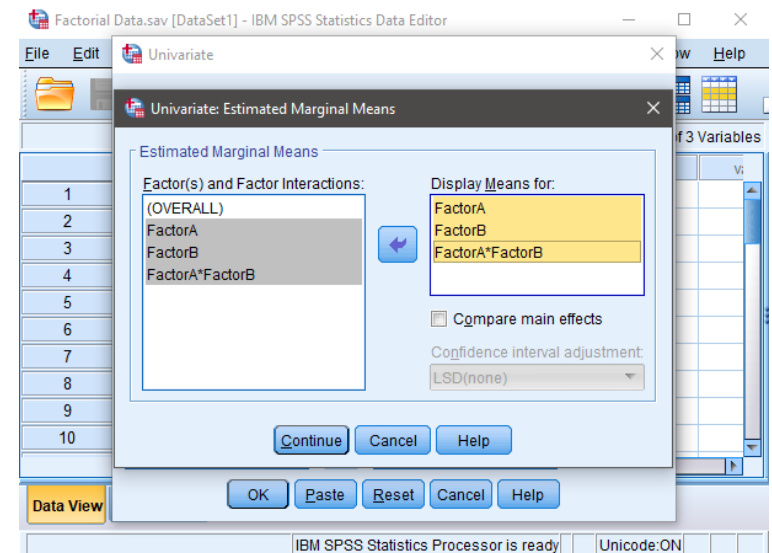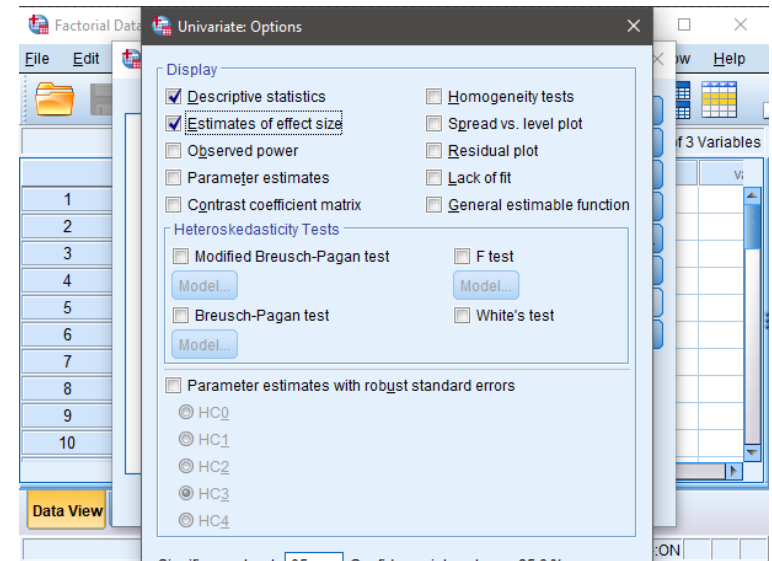

Your data have now been analyzed!