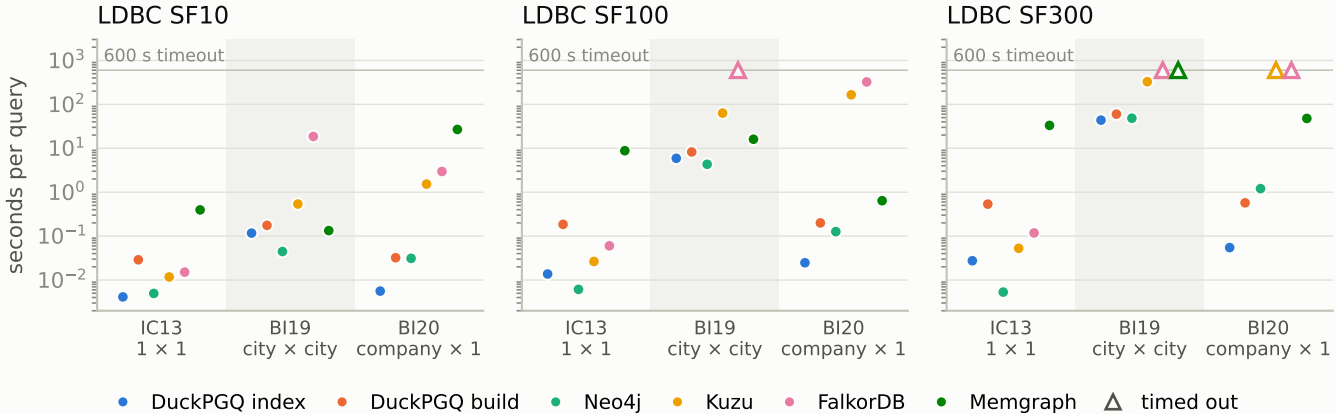LDBC queries as hop-count shortest paths on undirected knows, mean over 5 parameter sets; baselines on