


**1. Client CONNECTS
GET user1**

2. The "Flood" (`handler.forward()`)

Message hops from peer to peer, incrementing *m.hops* until it hits a node with the key.

Local Store:
user1 -> "Alice"

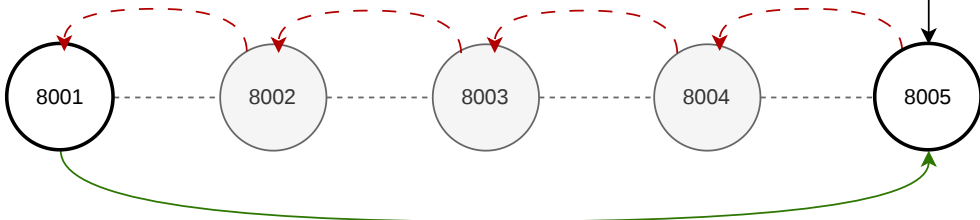

3. Direct REPLY

Node 8001 has it! It uses *m.origin* to send a direct TCP response back to Node 8005.