Sports Radar | System overview

Level 1: workflow boundaries. Each arrow names the data passed between components.

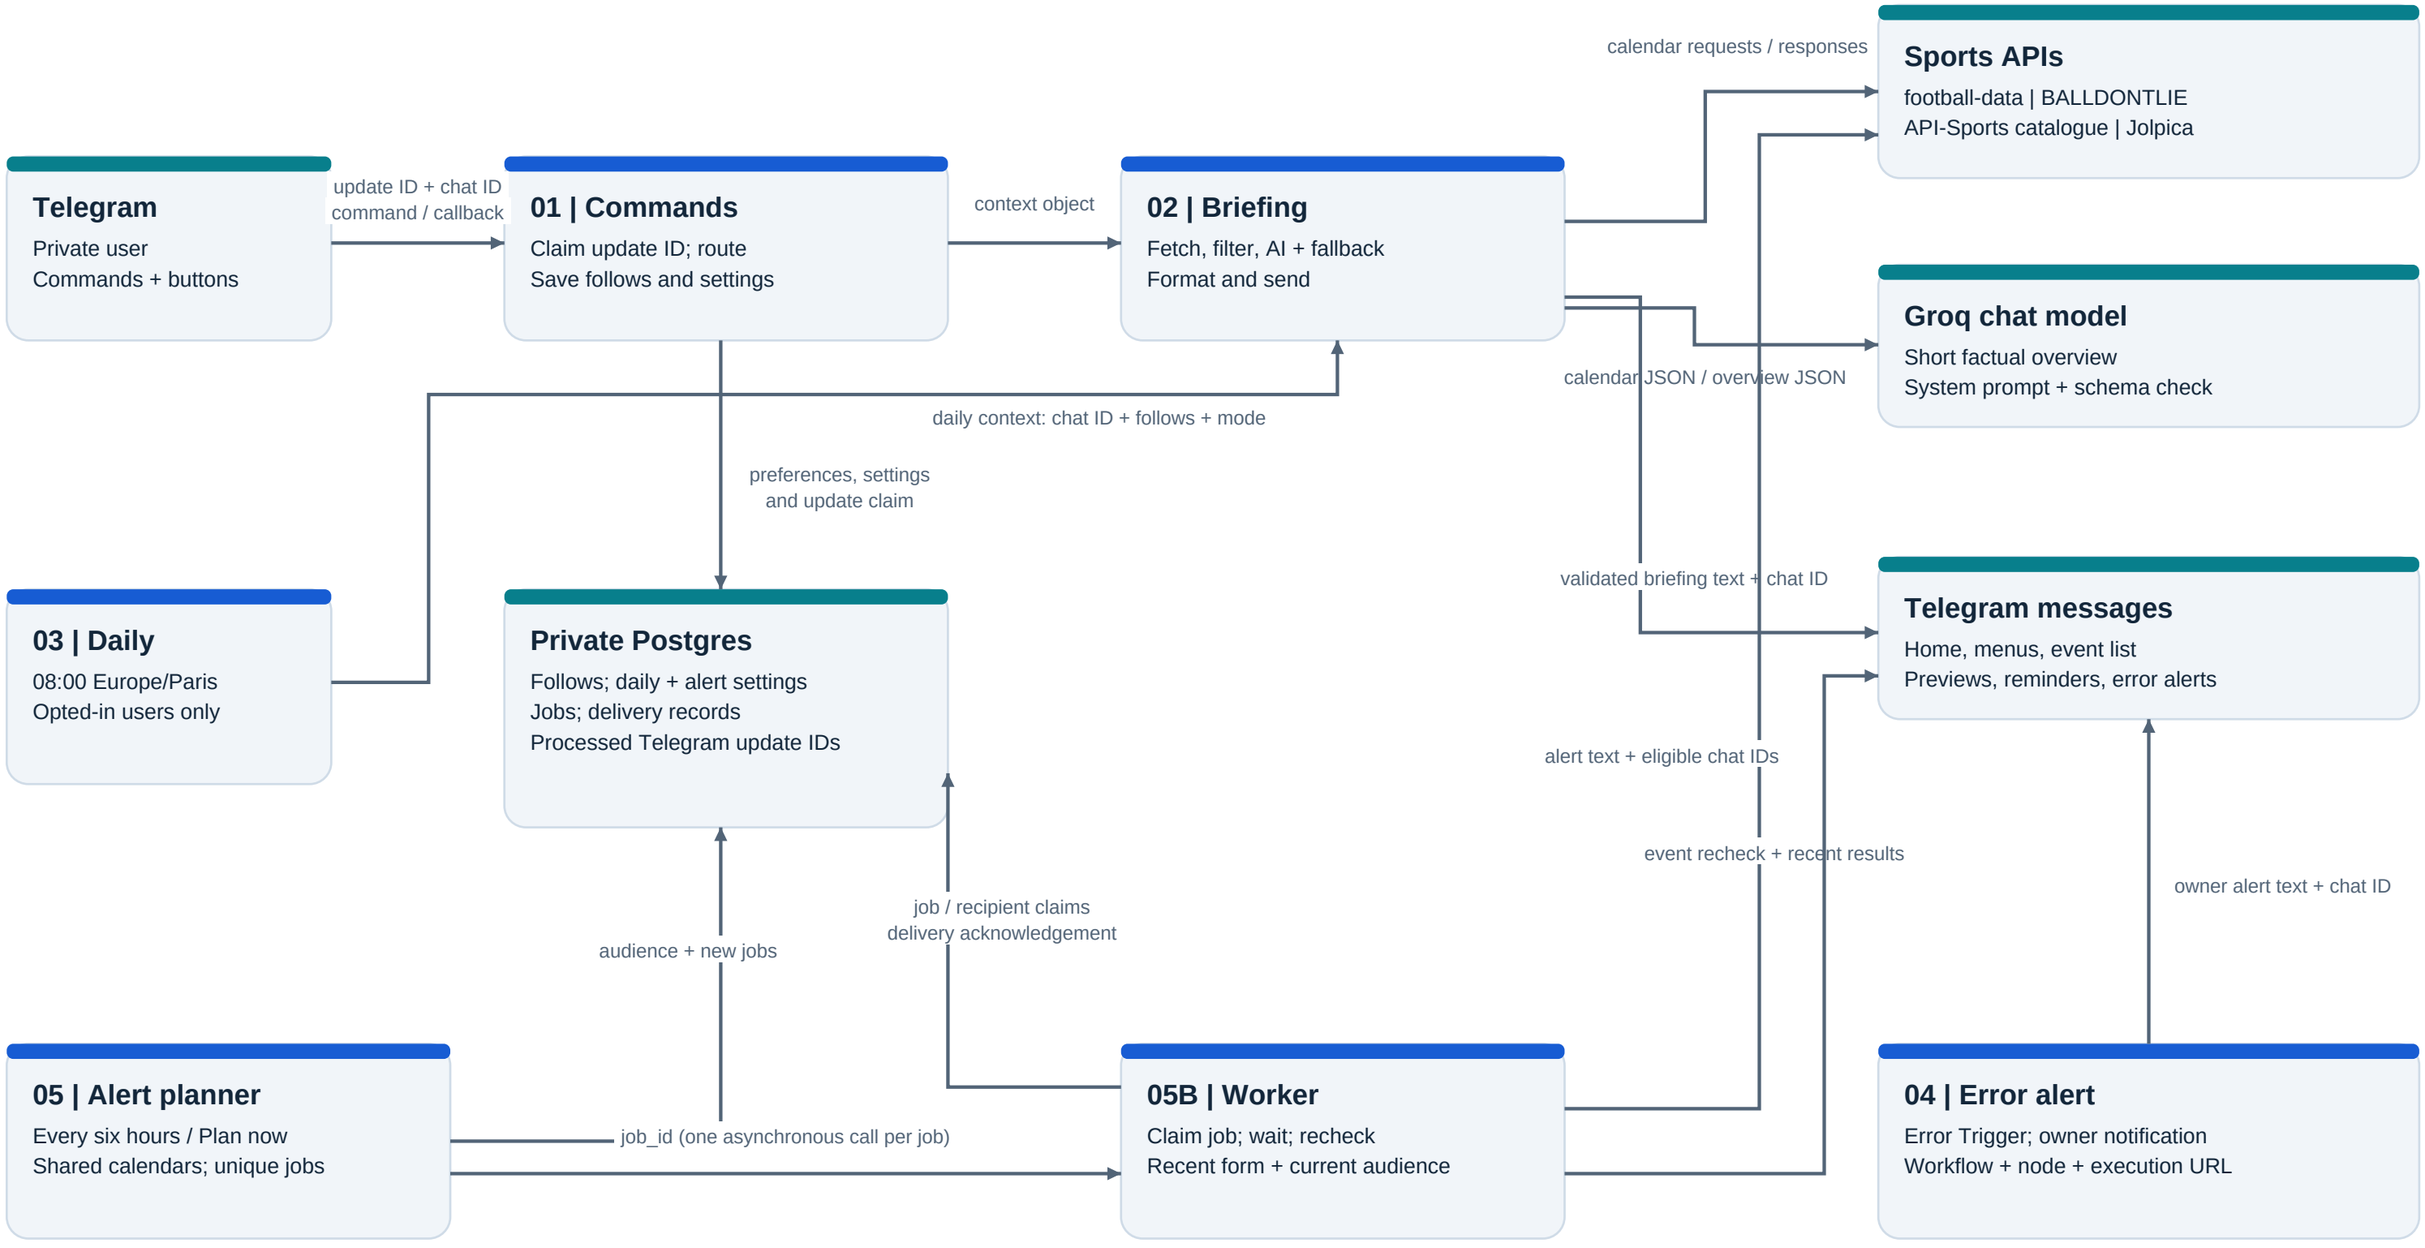

Error settings on 01, 02, 03, 05 and 05B route unhandled execution errors to 04 (error payload includes workflow and execution).

Scope: schedules + recent form. Cut line: no verified lineups, injuries, predictions or live-start confirmation. Level 2 details follow.

Sports Radar | Briefing and AI safety

Level 2: workflow 02. Reused by manual requests in 01 and daily requests in 03.

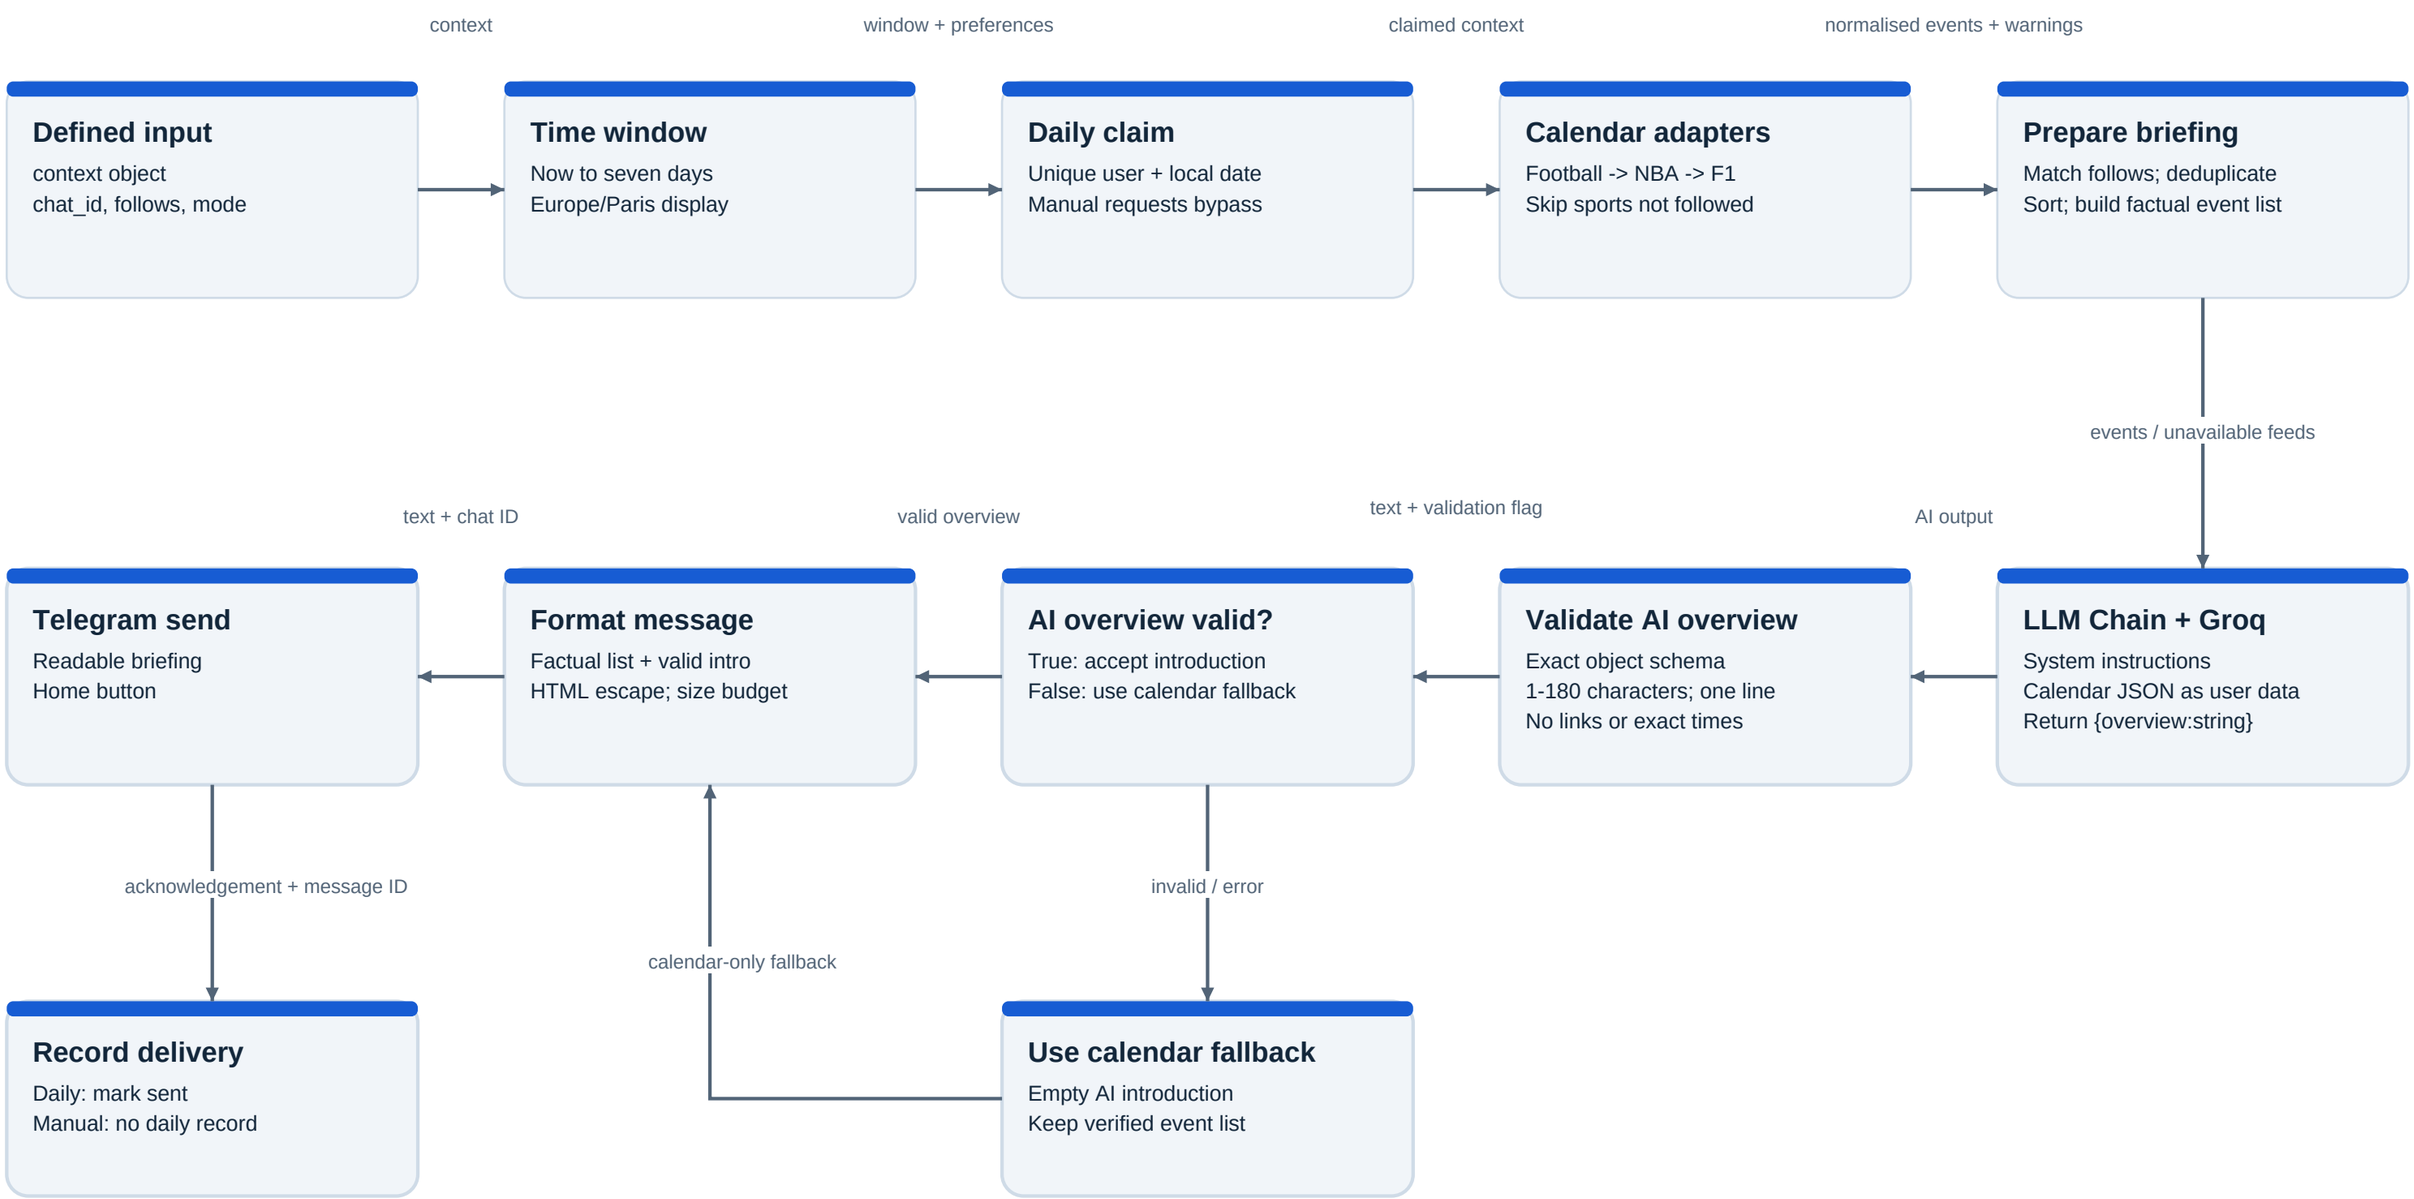

Retries: two bounded attempts on HTTP, database and AI-chain calls. Provider failures retain warnings; unhandled failures invoke 04.

Validation checks structure, not truth. The AI cannot modify the factual event list, which is formatted from provider data.

Sports Radar | Timed alerts and persistence

Level 2: planner 05 and worker 05B. The database is the boundary between scheduling and delivery.

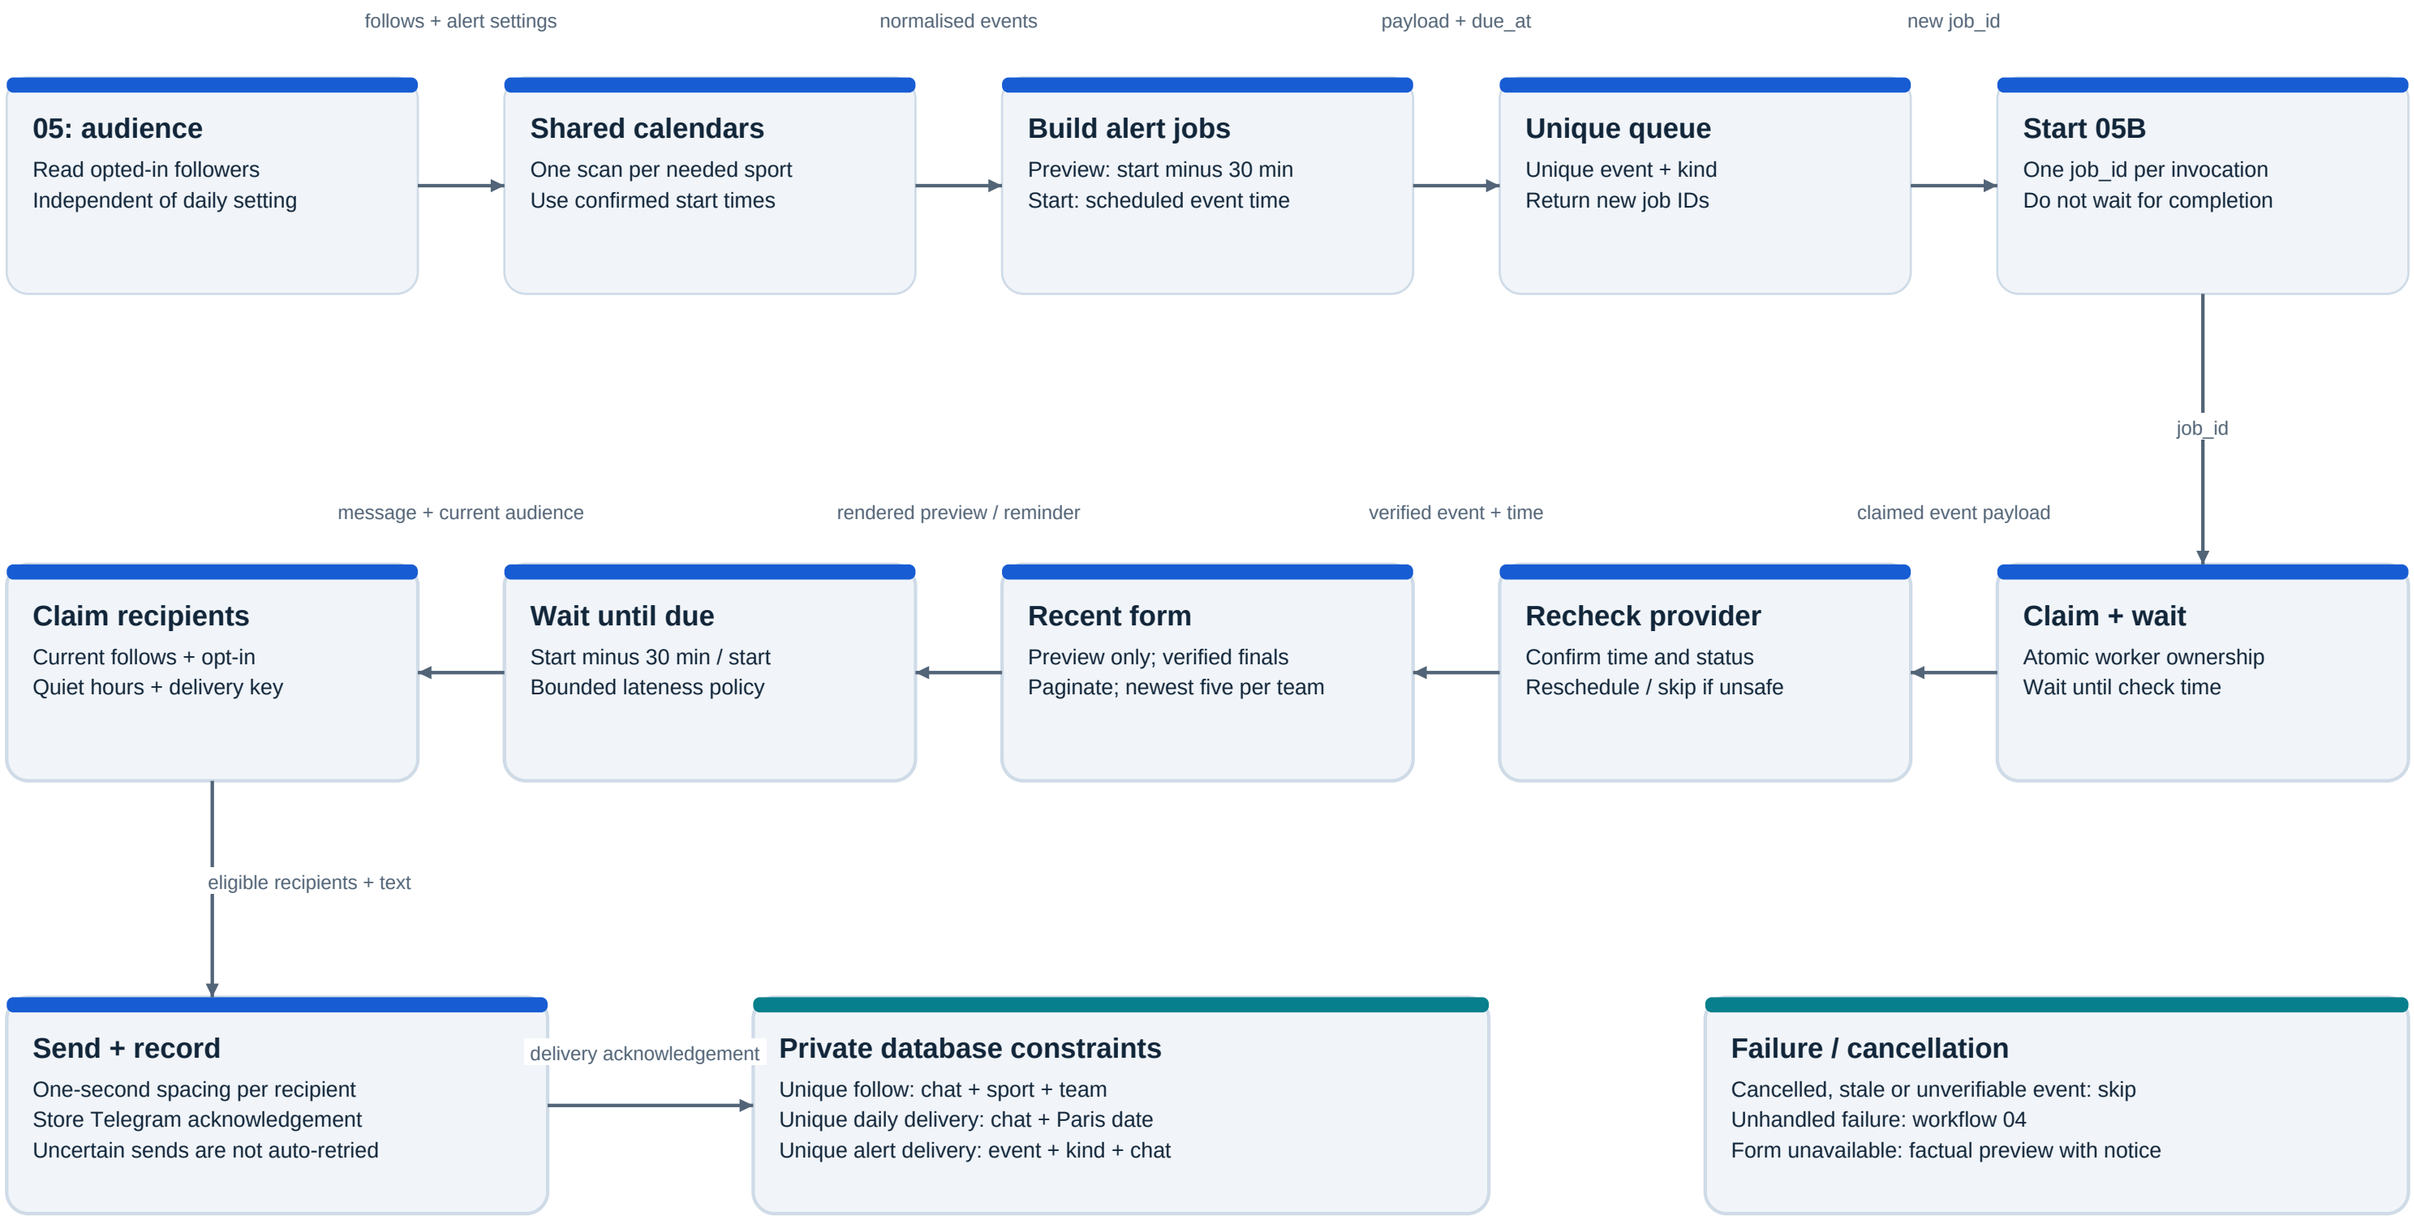

Polling tradeoff: six-hour scans reduce execution/API usage but can miss newly announced or earlier-rescheduled events between scans.

See NODE_GUIDE.md for the complete node-to-purpose inventory and README.md for deployment, credentials and test commands.