Flocking and inverse design

these slides:

Craig Reynolds — Game AI — UCSC — August 5, 2025

Background

I am particularly interested in procedural models of complex natural systems.

- **MIT**: CS, procedural animation (BS 1975, MS 1978)
- **triple-I**: *Juggler*, *Looker*, *TRON*
- **Symbolics**: digital content creation tools, boids, *Breaking the Ice*
- **Electronic Arts**: “non-player characters” for games, steering behaviors
- **SGI Silicon Studio**: DCC tools for games, steering behaviors
- **PlayStation US R&D**: PScrowd, evolution of camouflage
- **UC Santa Cruz** (Playable Media): human behaviors for “serious games”
- **RightHook**: vehicle/pedestrian behaviors for virtual testing of self-driving
- “**unaffiliated researcher**” retired since 2020

This talk will be a whirlwind tour of a mish-mash of research topics

chronological order:

classic “boids”

coevolution of camouflage

inverse design of boid flocks

This talk will be a whirlwind tour of a mish-mash of research topics

presentation order:

background

coevolution of camouflage

classic boids

inverse design of boid flocks

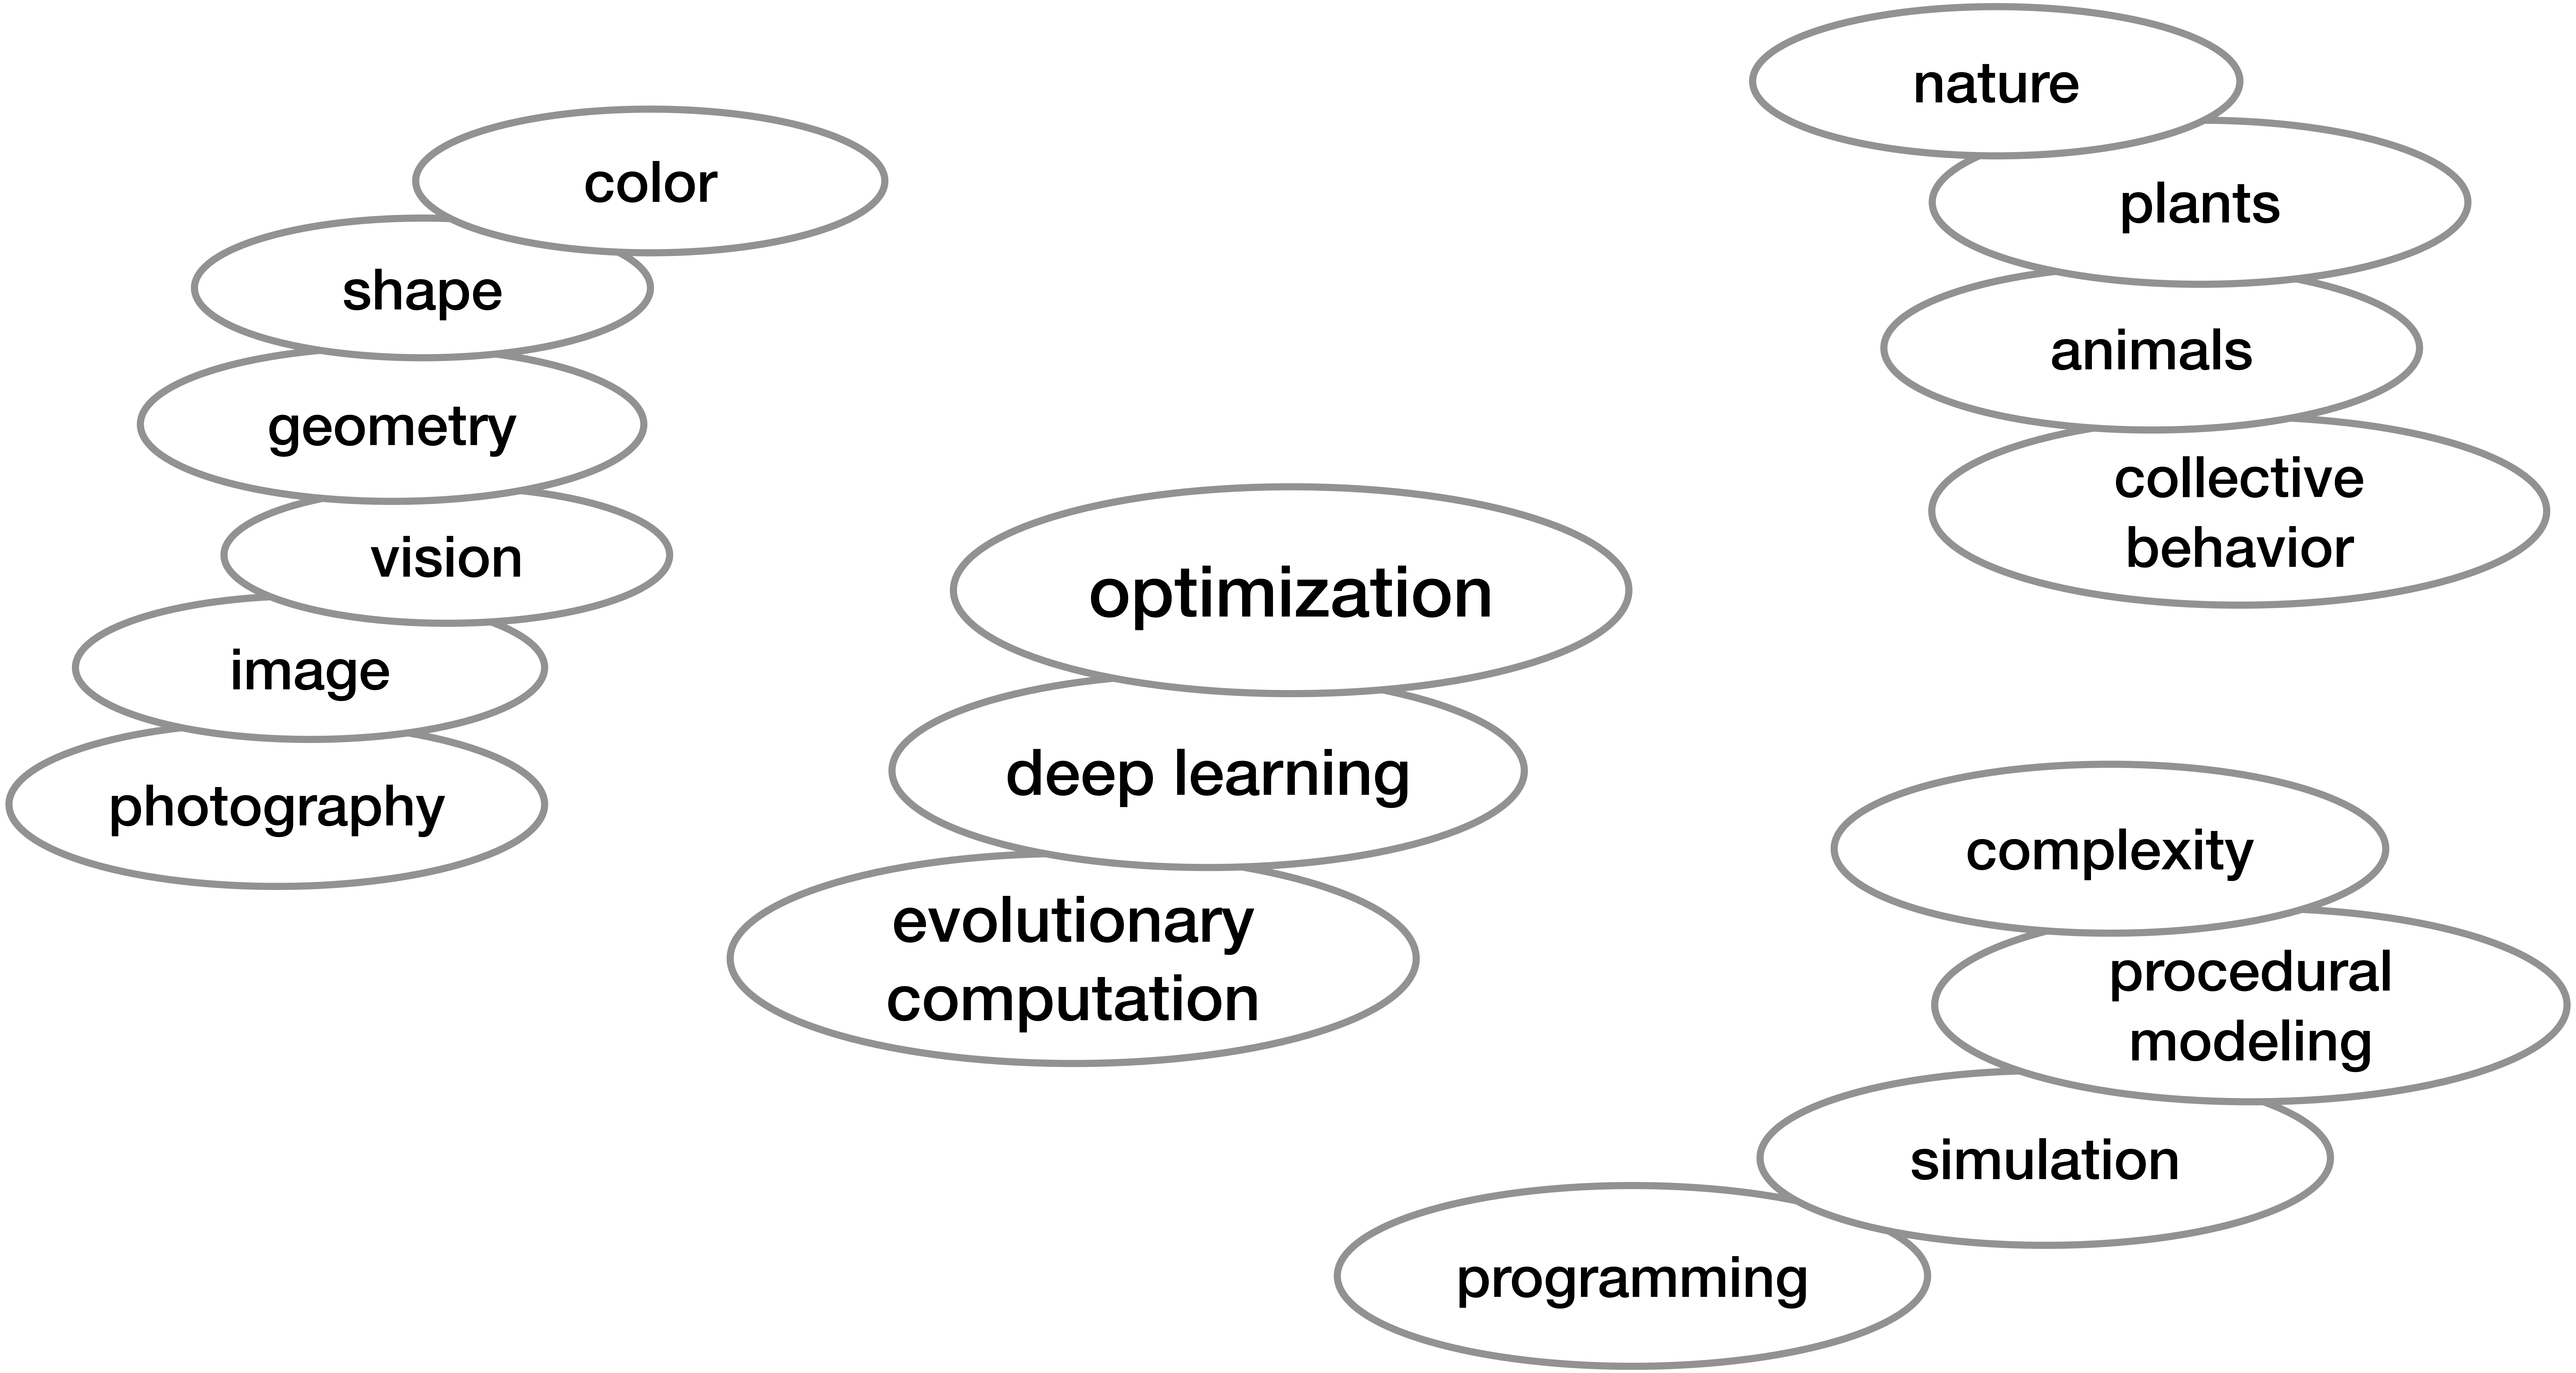
color
shape
geometry
vision
image
photography
nature
plants
animals
collective behavior
optimization
deep learning
evolutionary computation
complexity
procedural modeling
simulation
programming

A childhood fascination with natural complexity

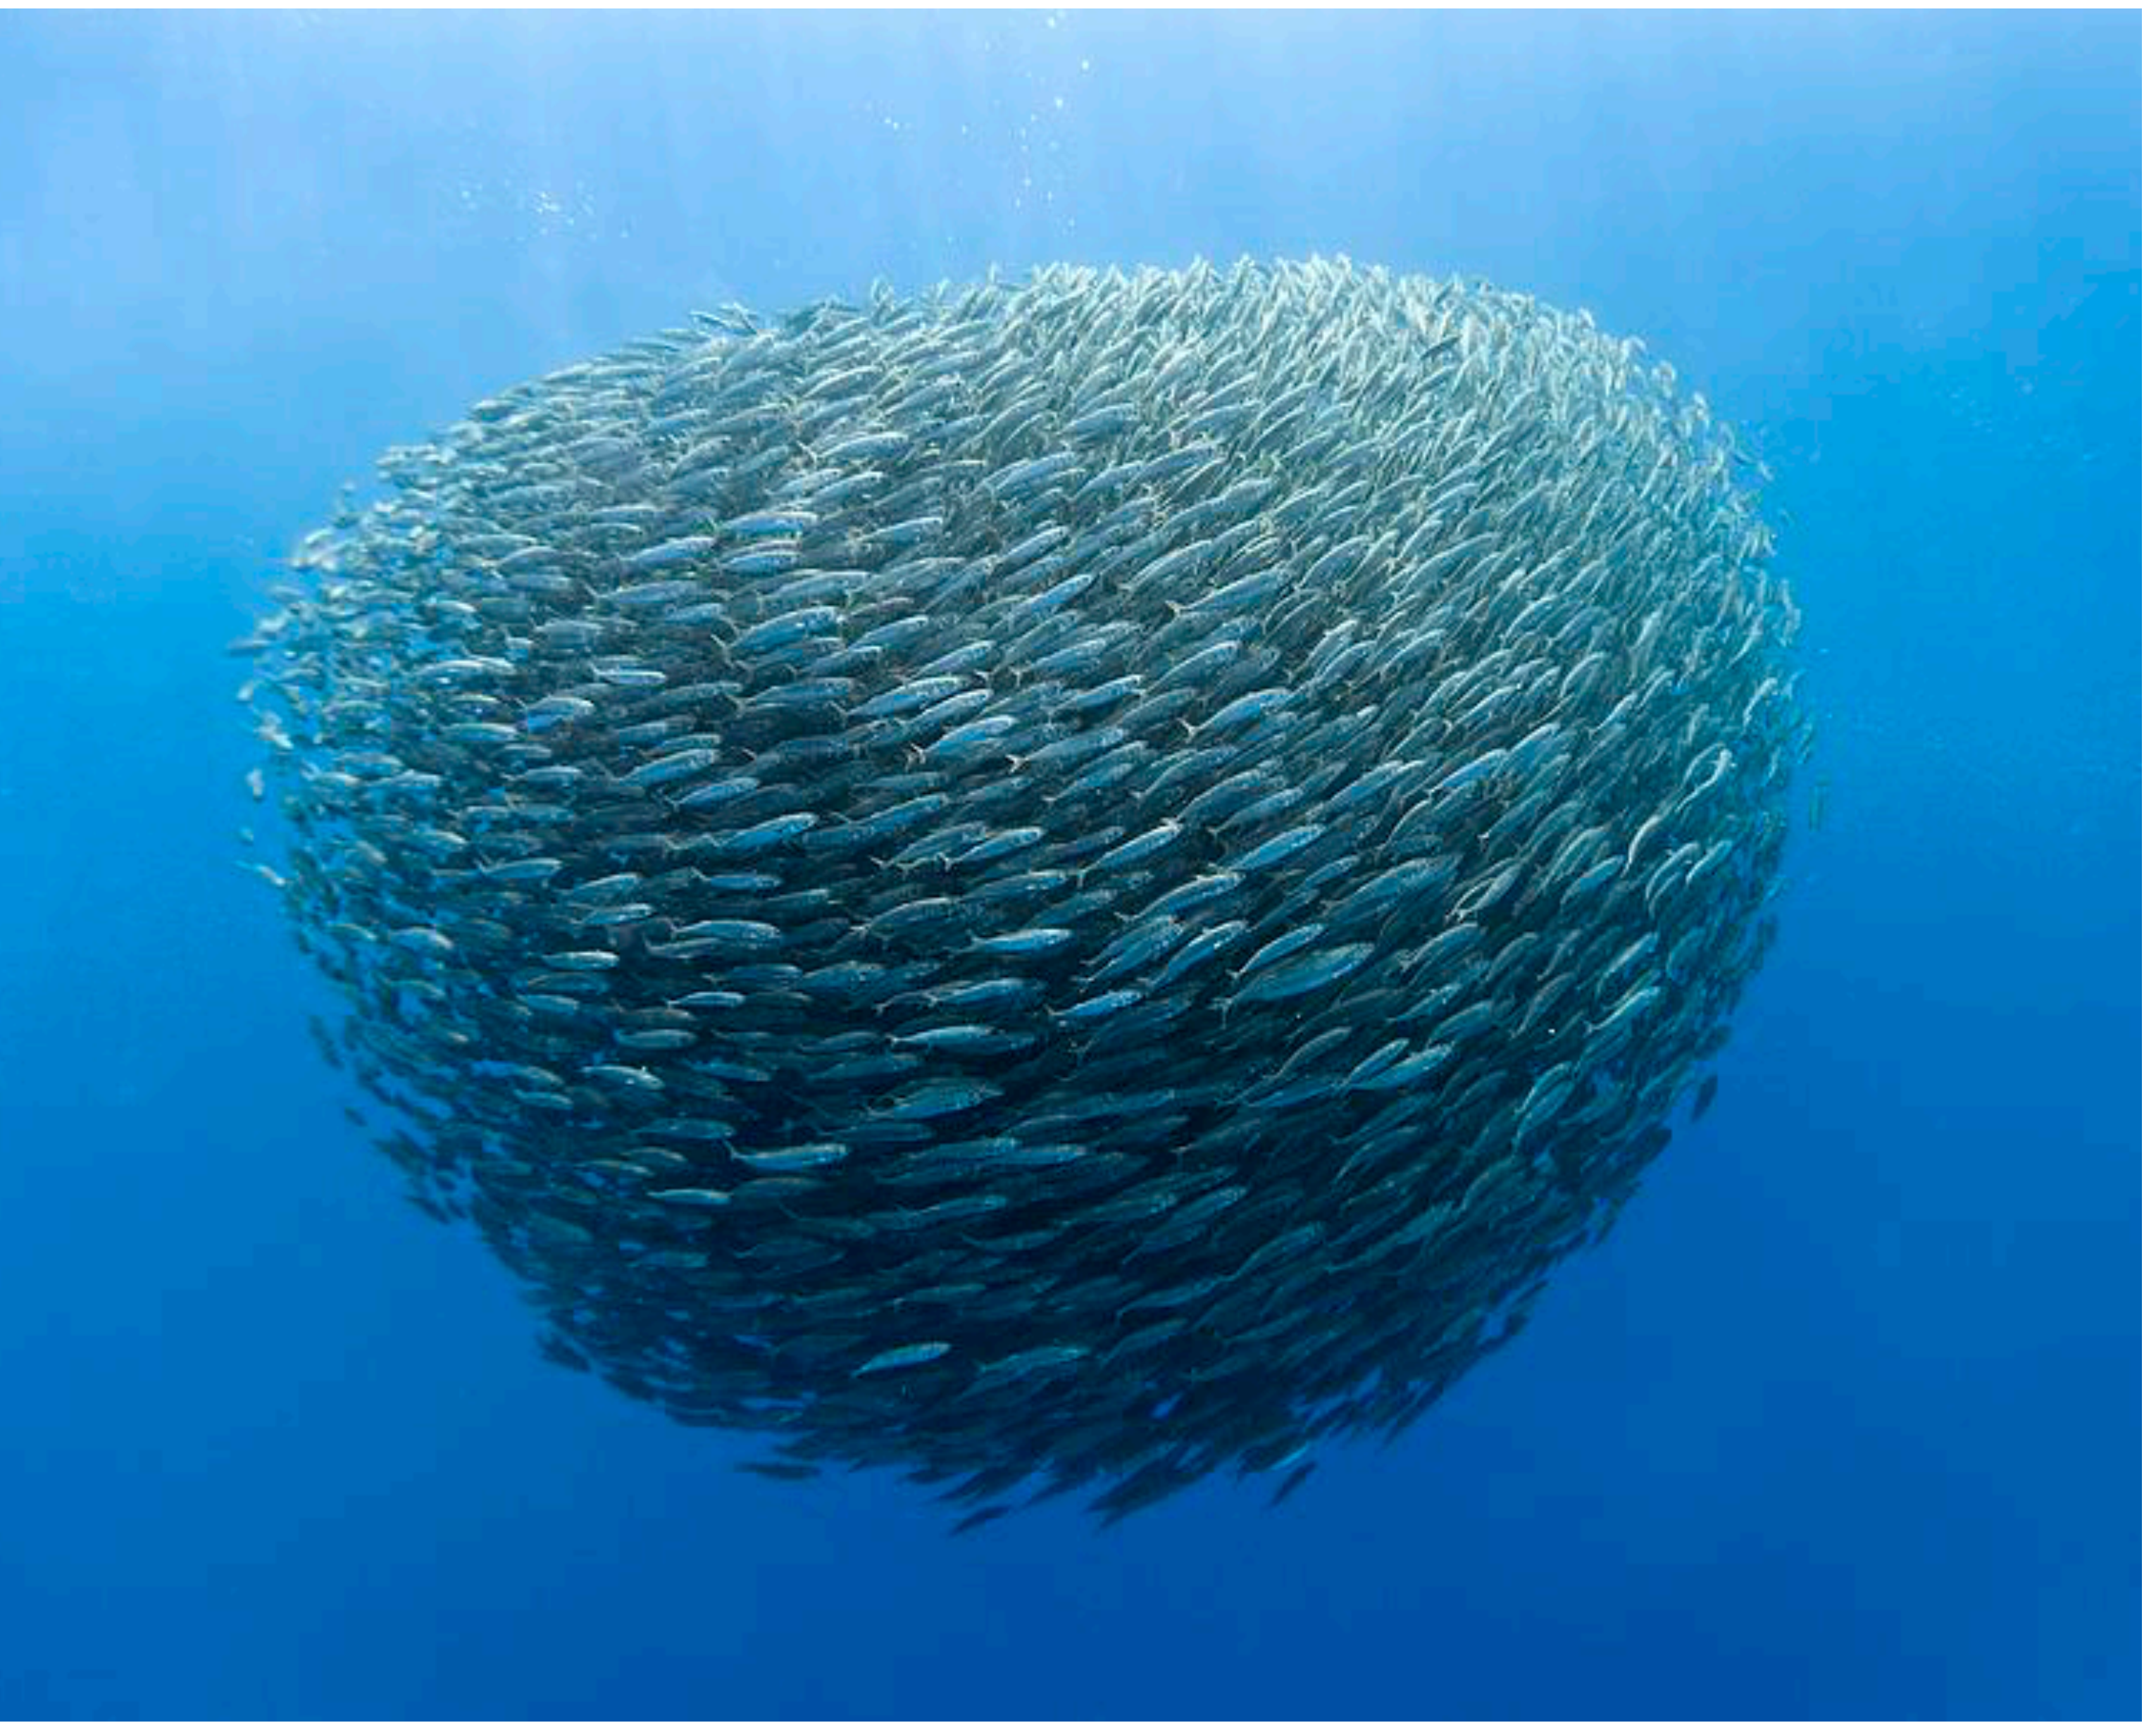

bird shaped flock on YouTube

Early boids
1986-1987

What is it like to be a bird in a flock?

Key idea: a shift in perspective
from an external view of a complex system
to an internal local view of a few neighbors.

Could the behavior of flocking birds
be simulated in software?

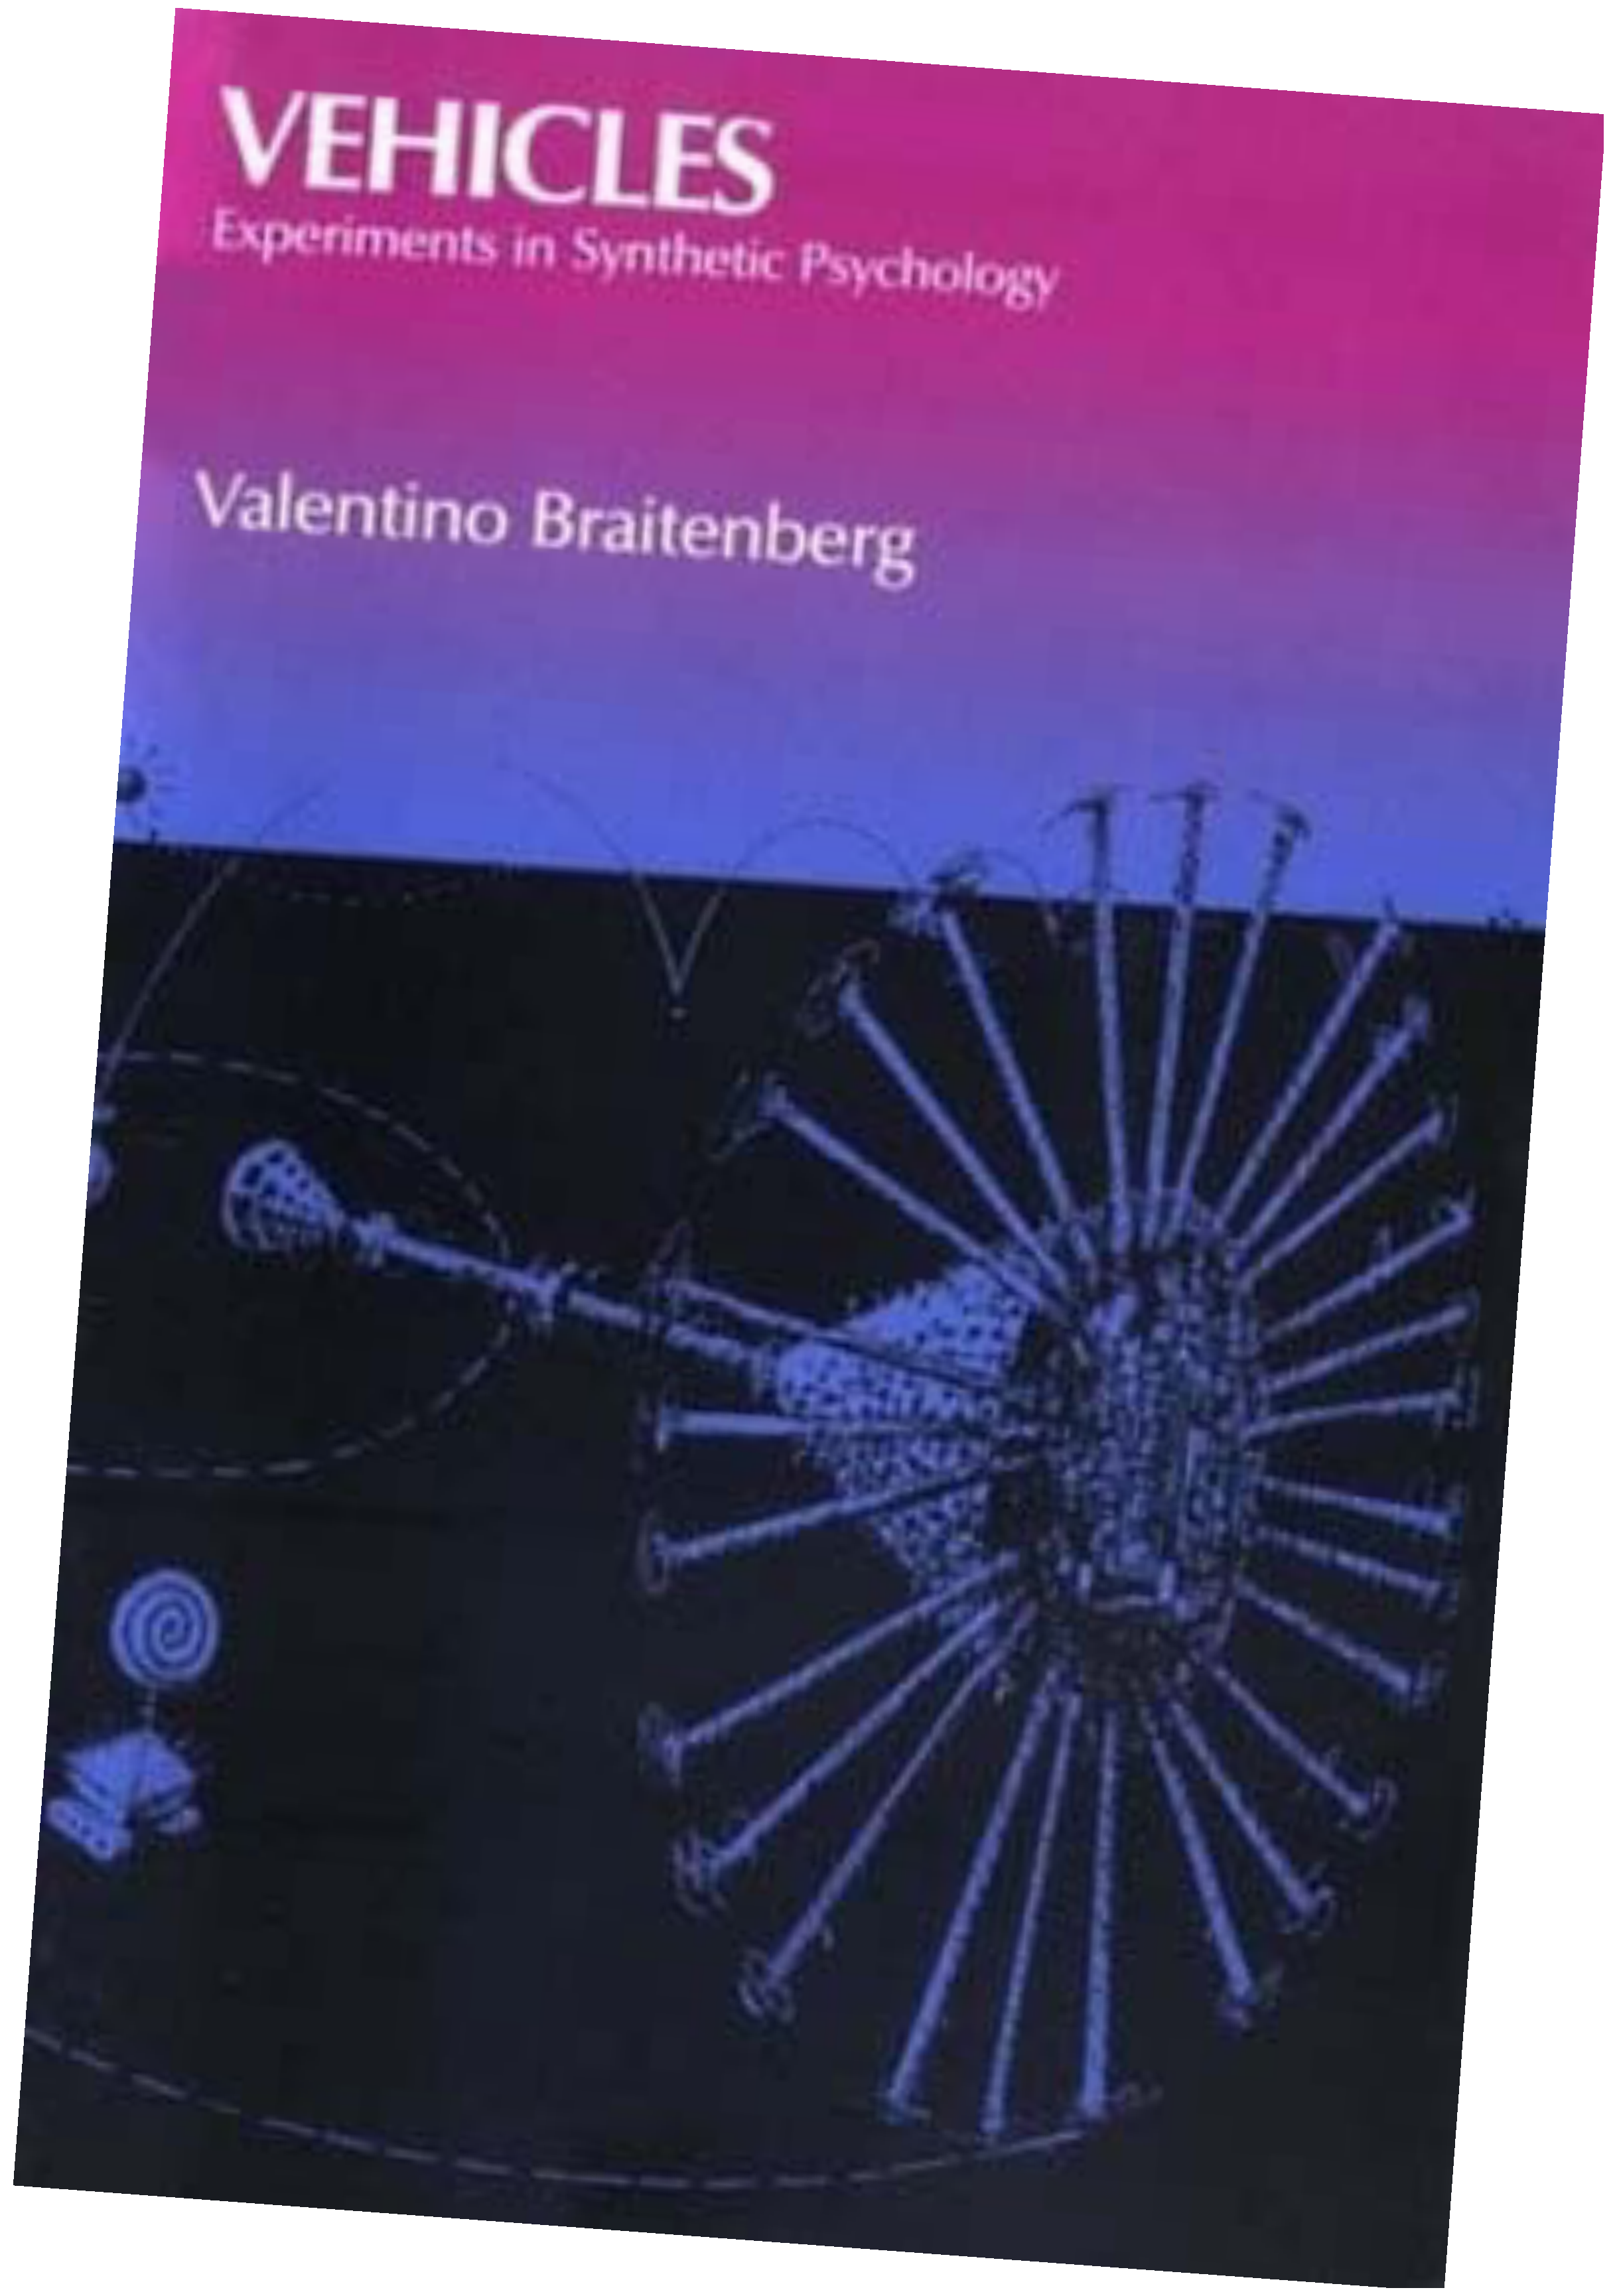
VEHICLES
Experiments in Synthetic Psychology
Valentino Braitenberg

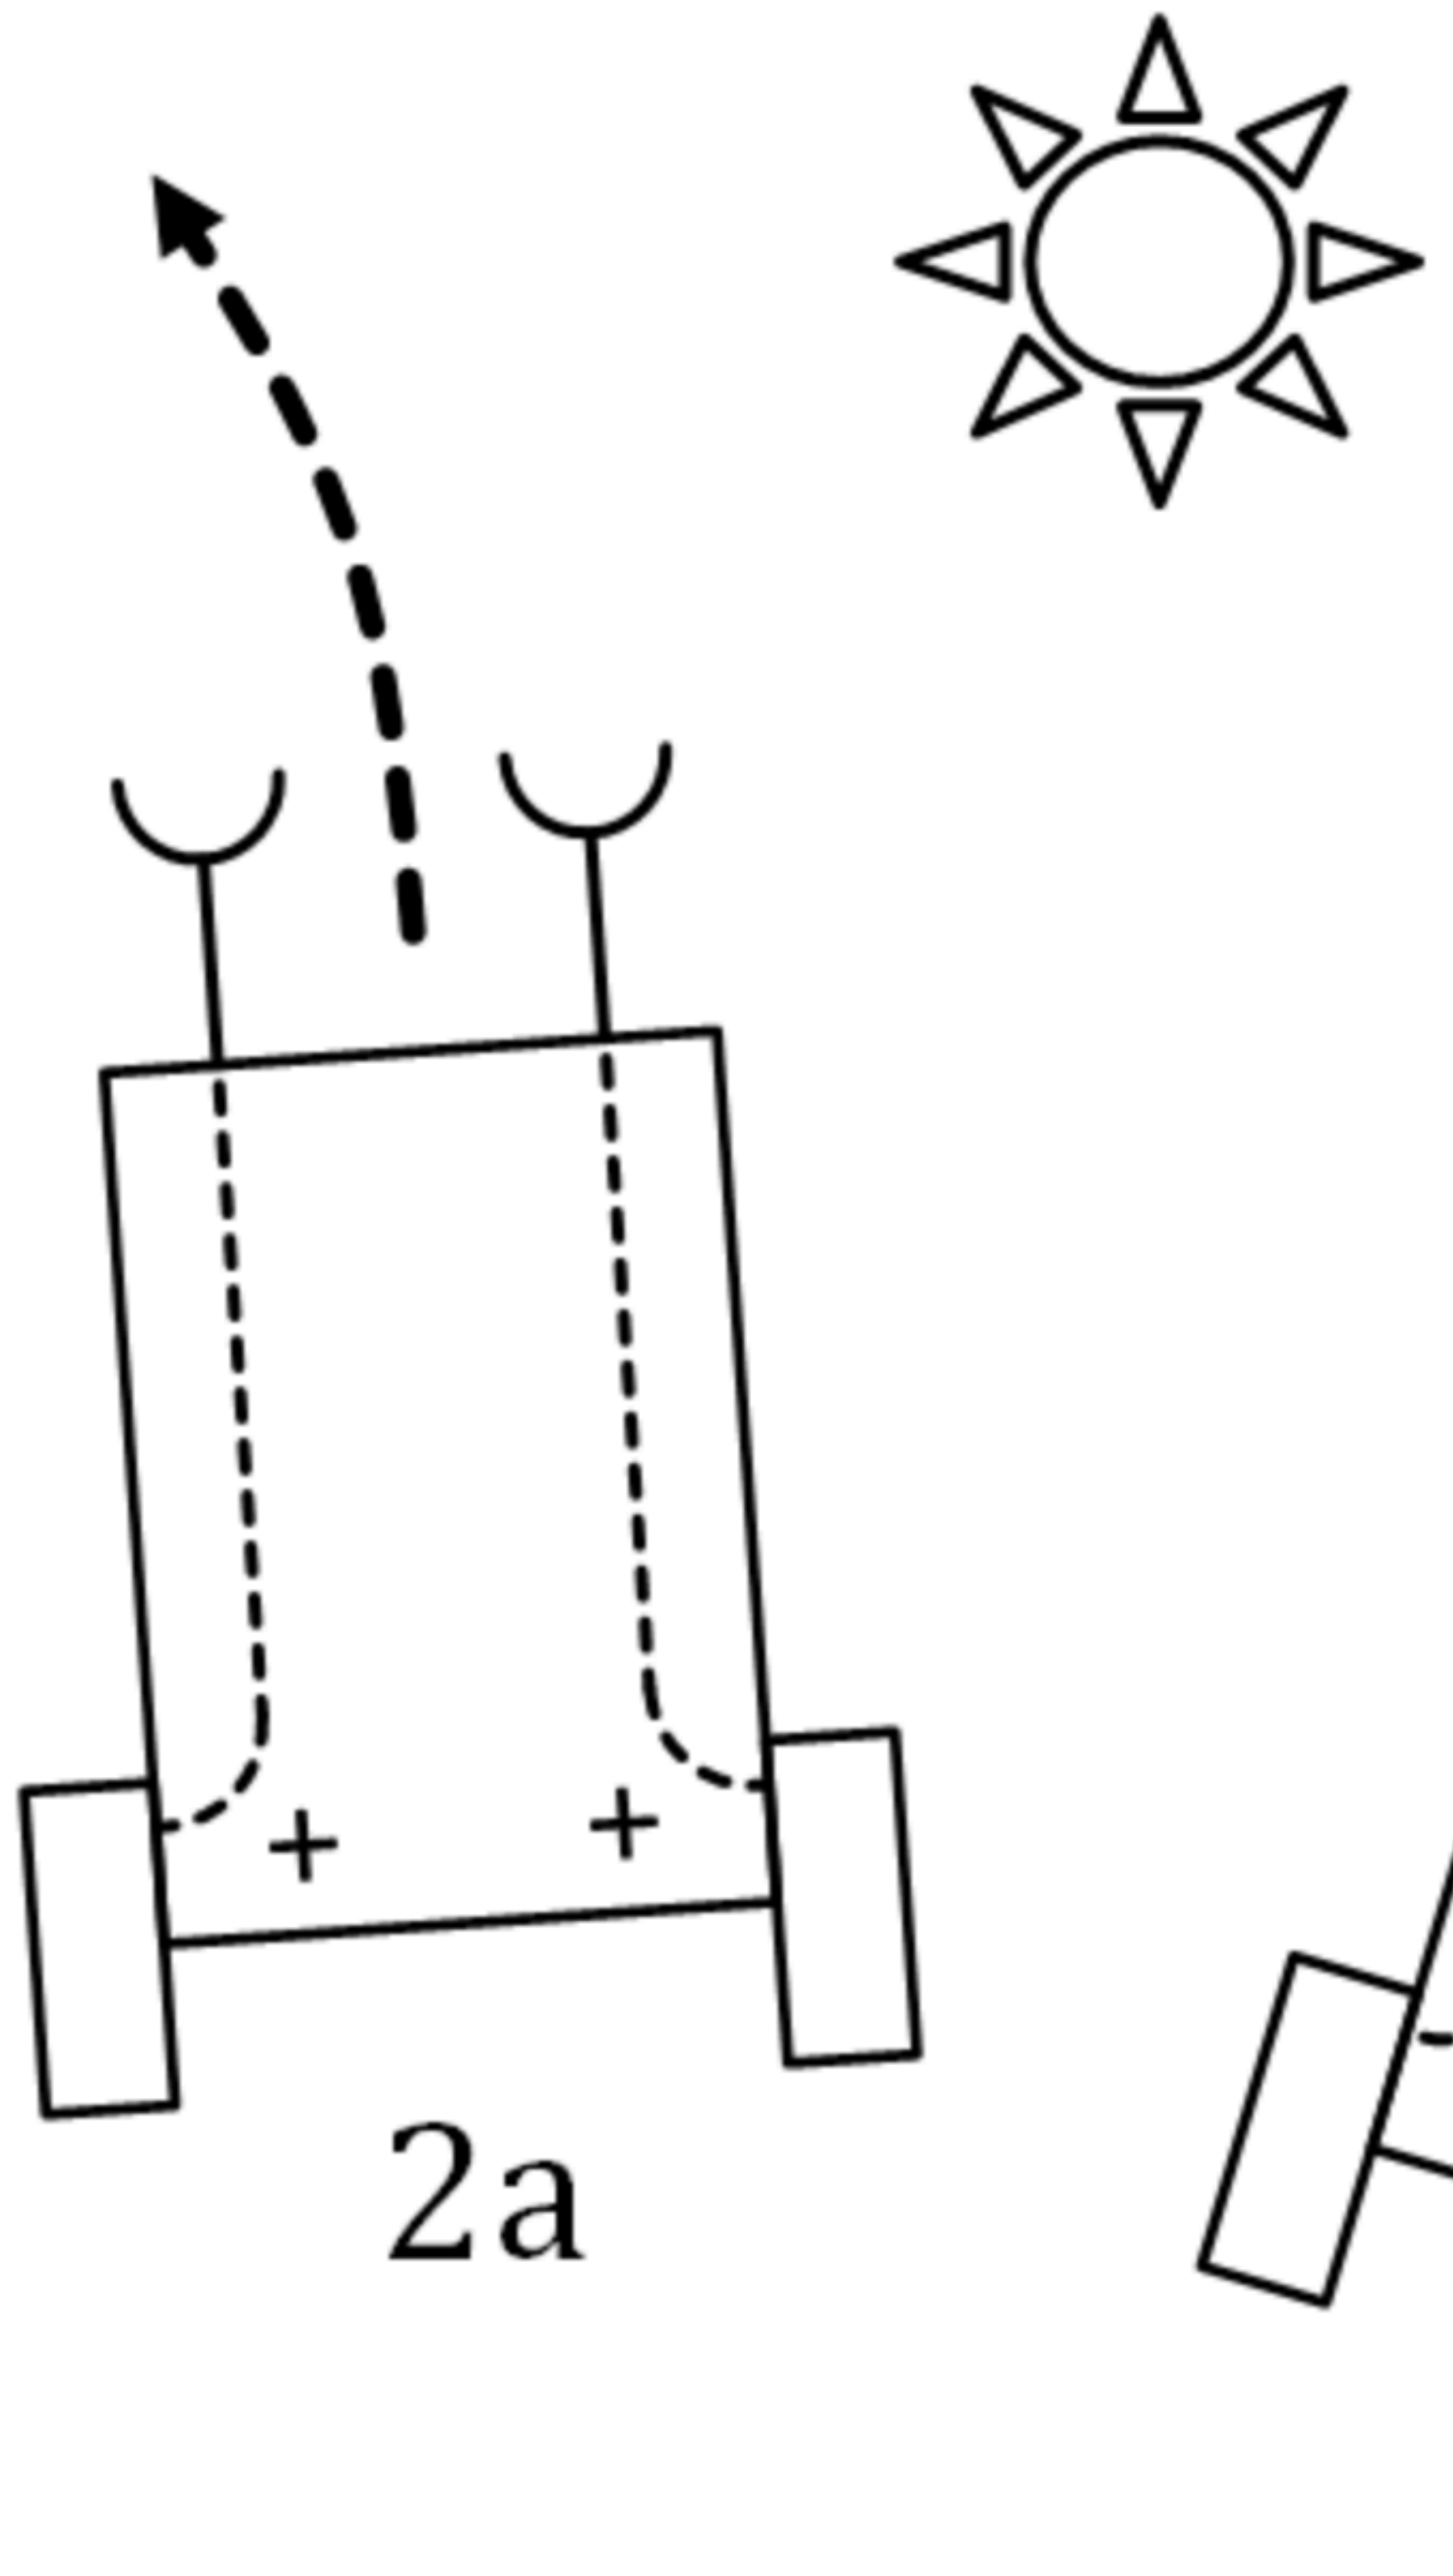
+
+
2a
+
+
2b

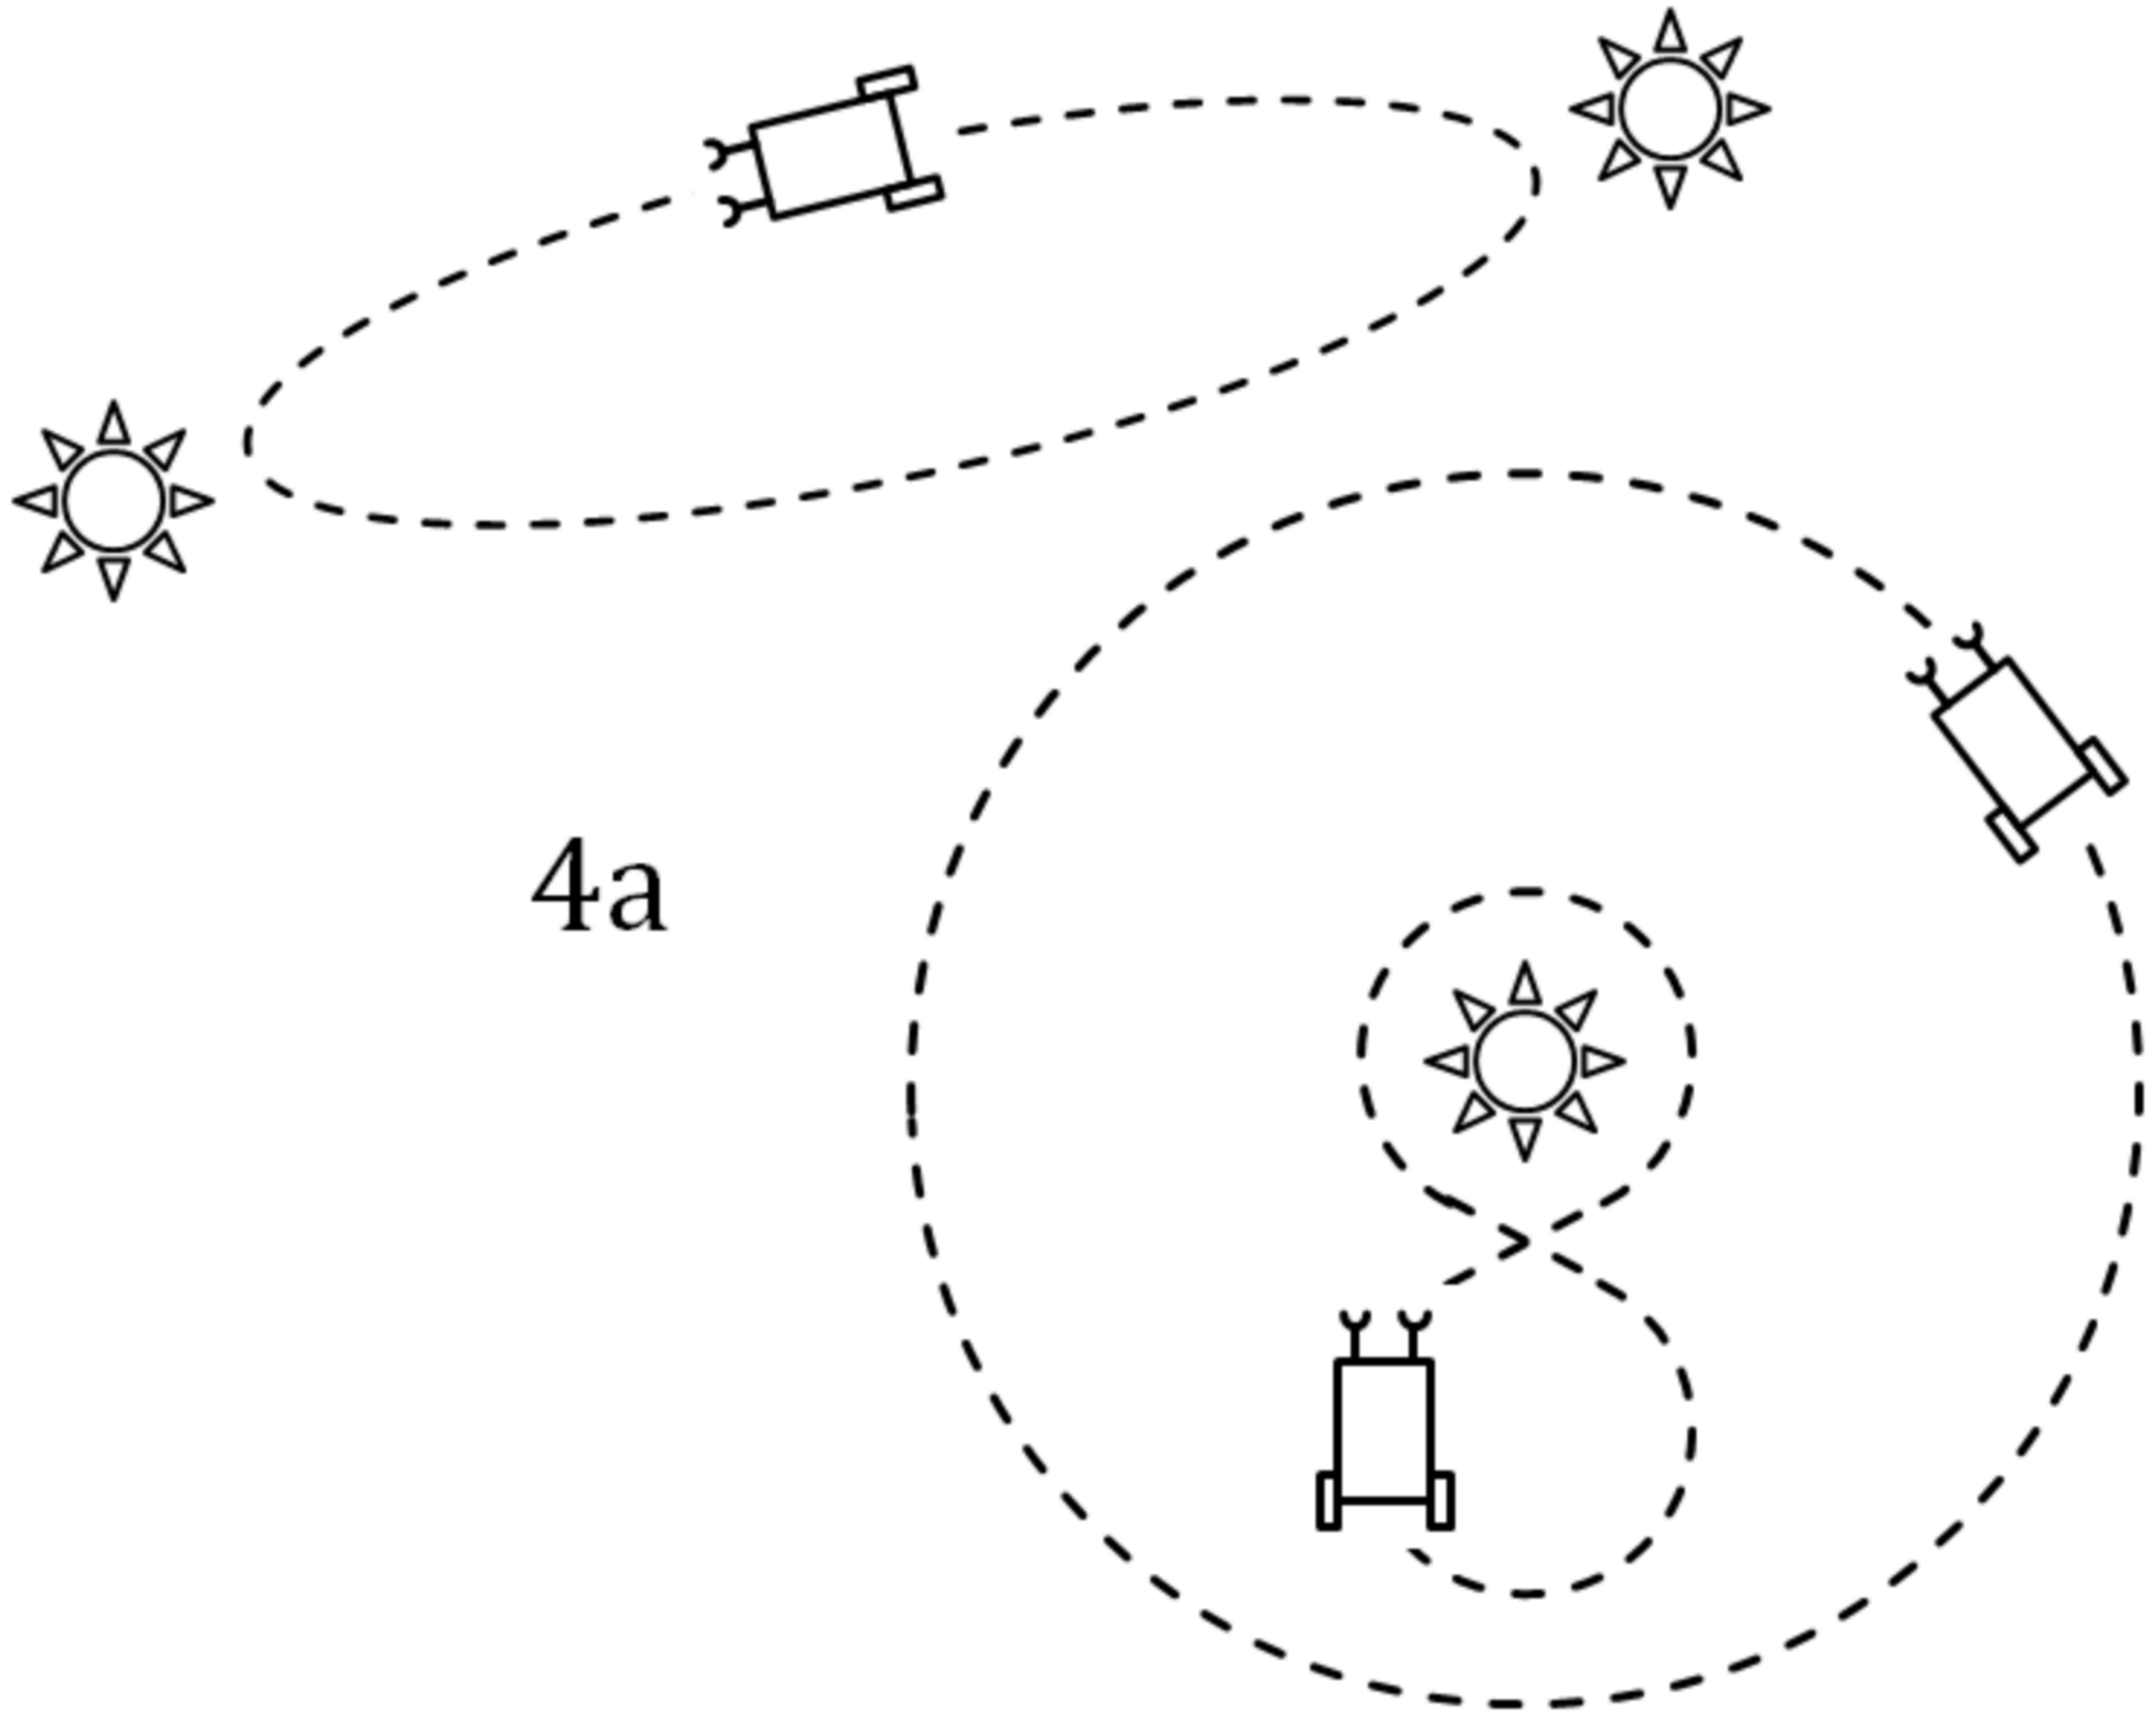
4a

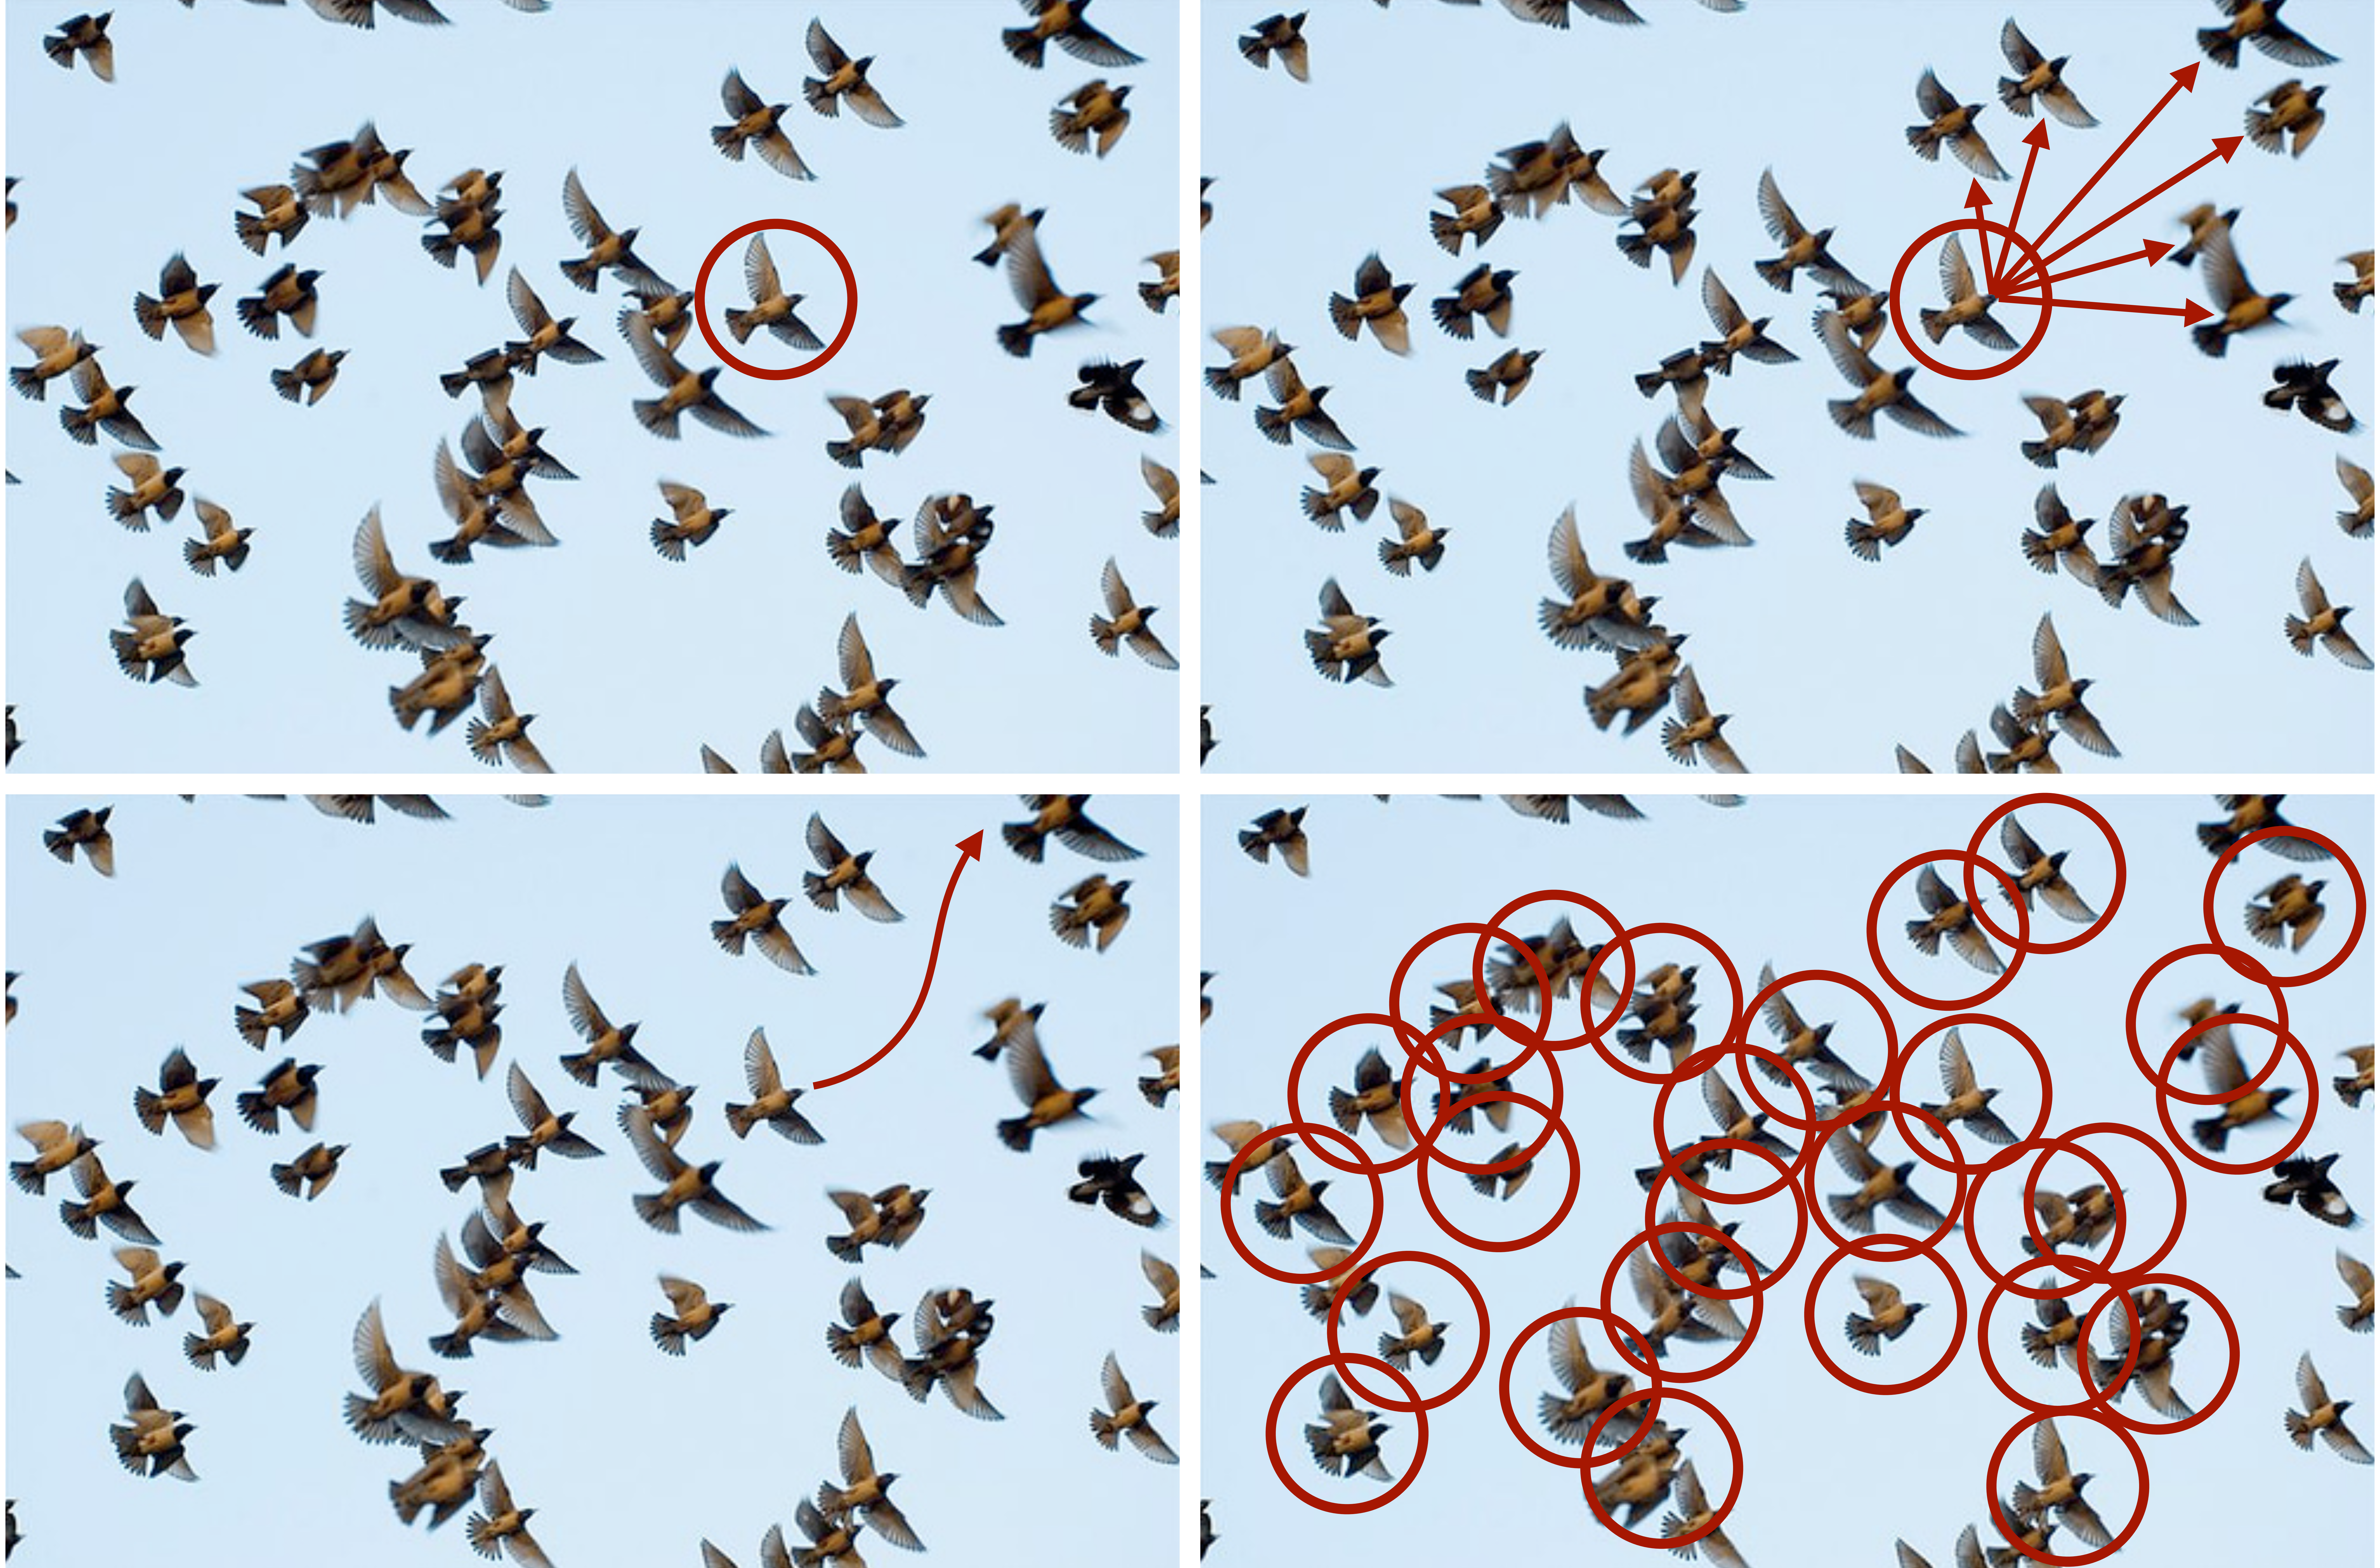

Three components of flocking

Seemed necessary, but were they sufficient?

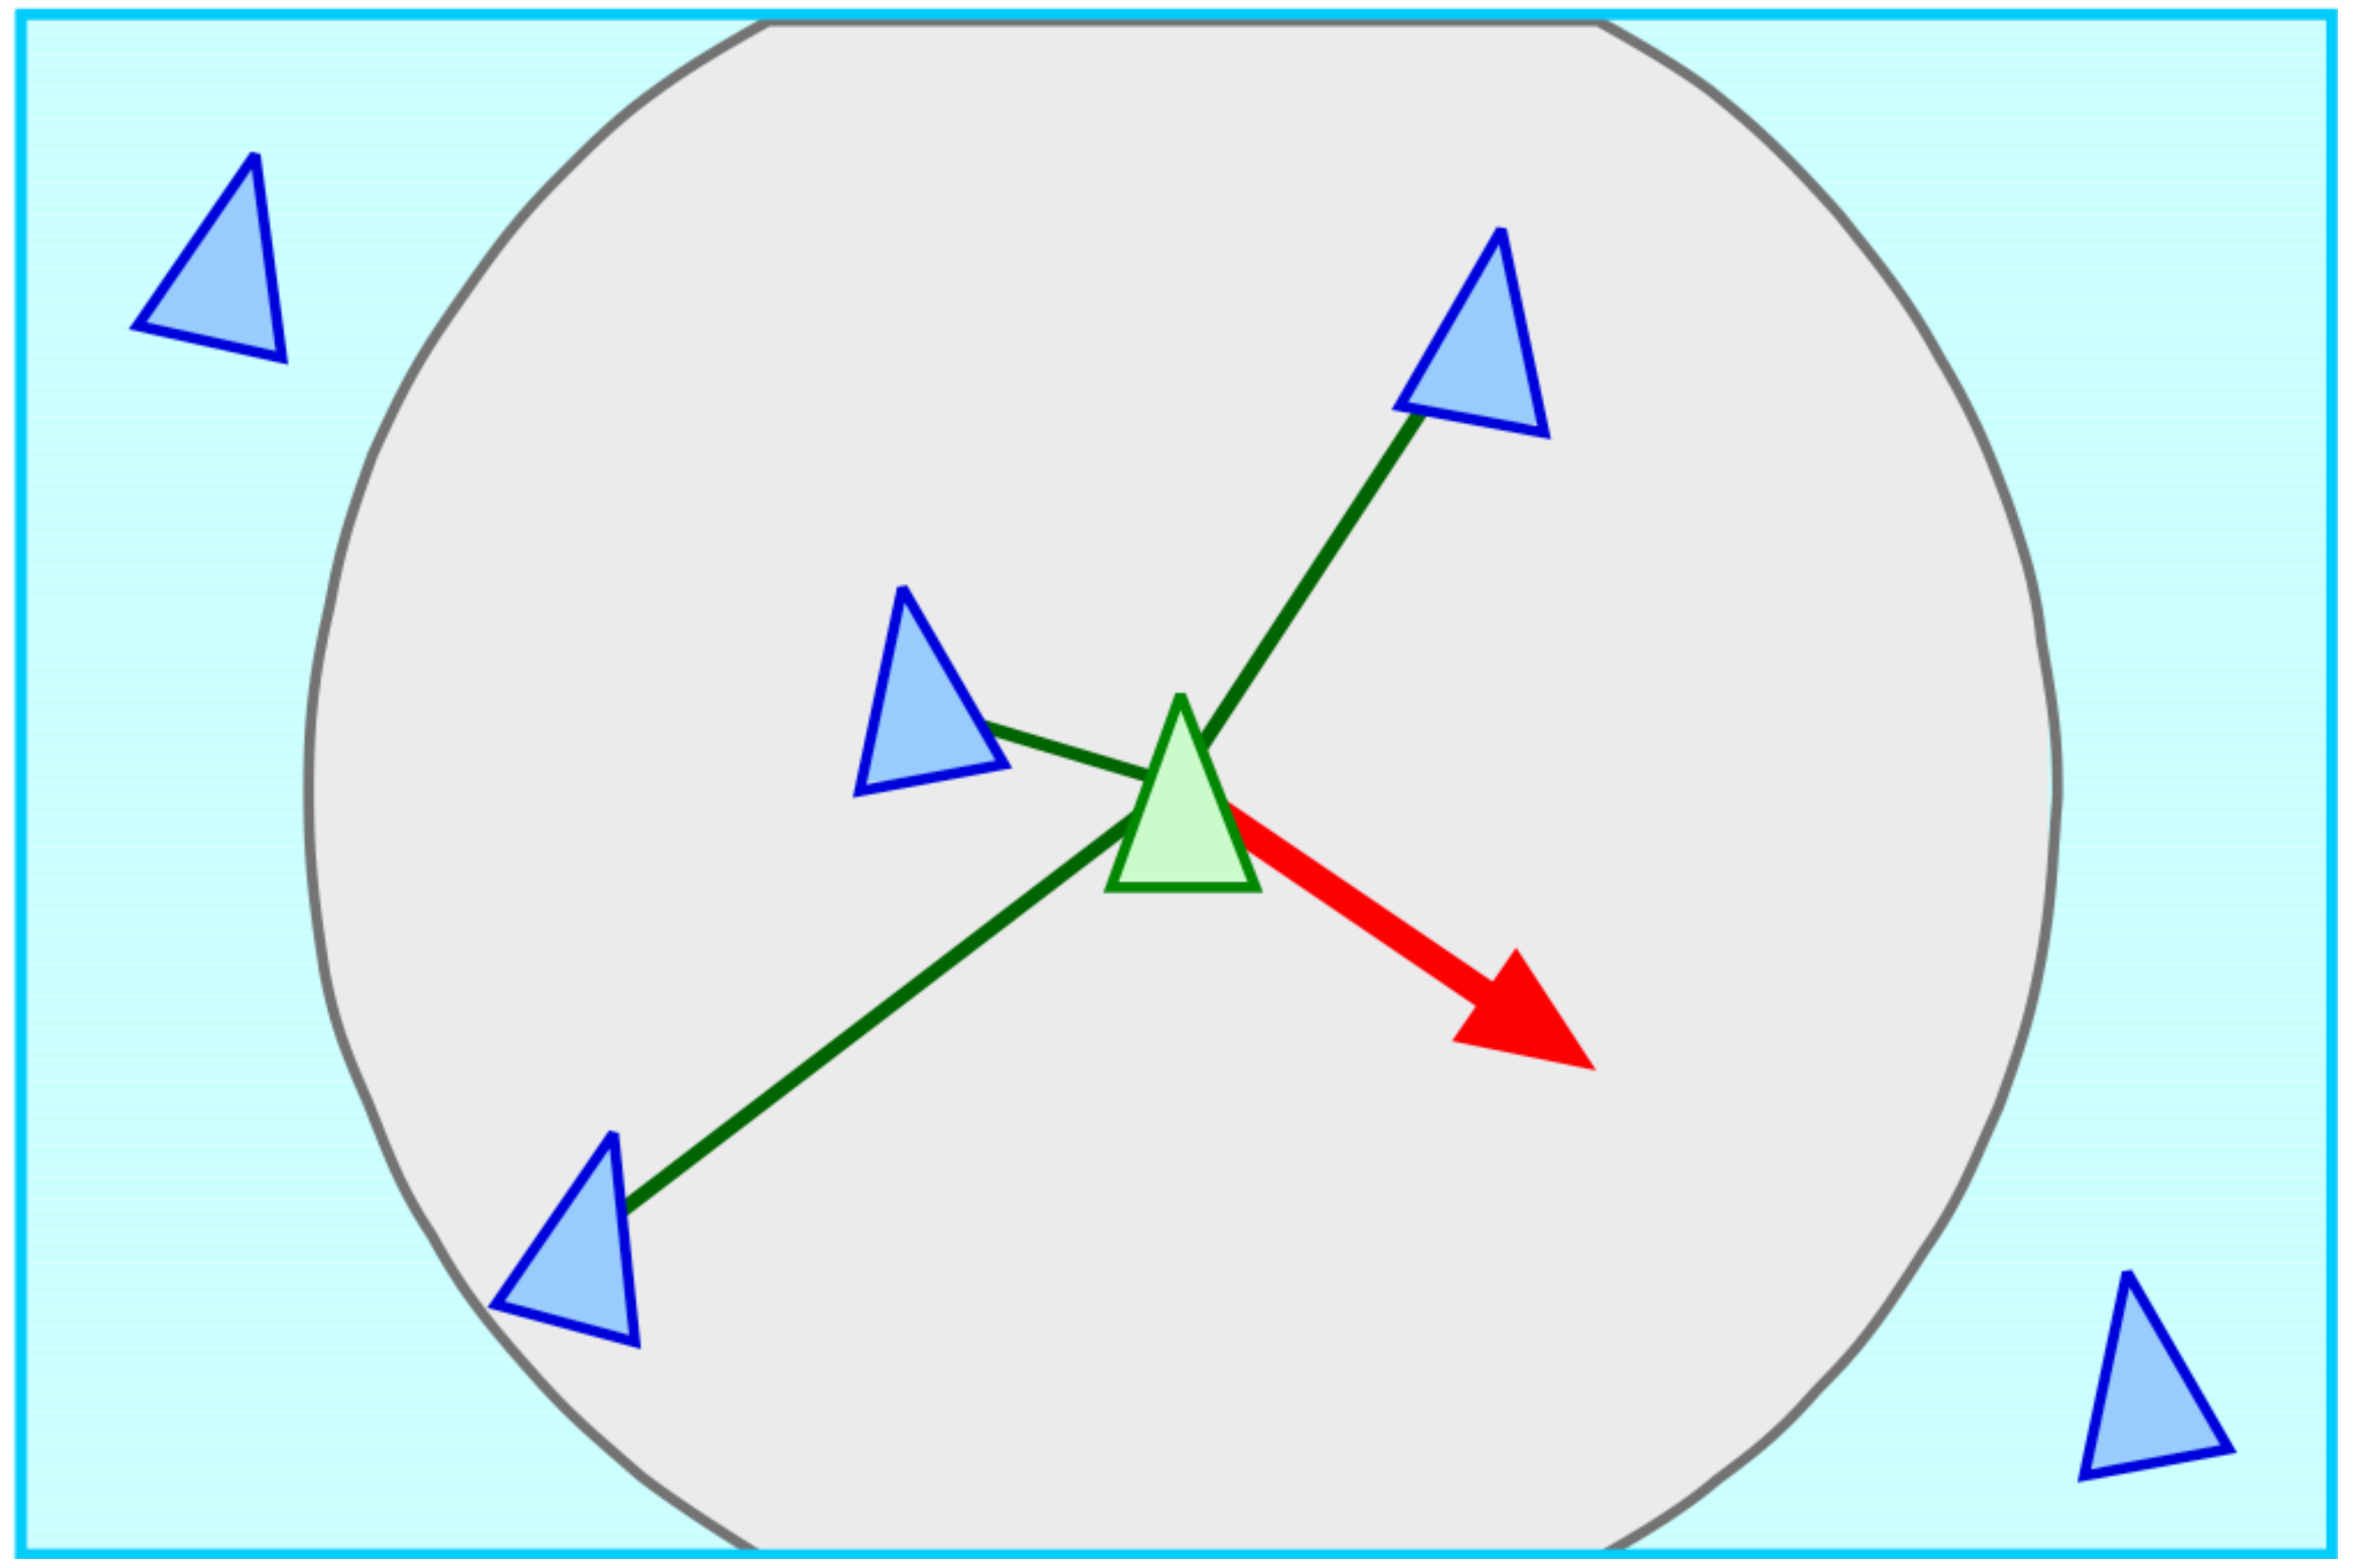

Separation

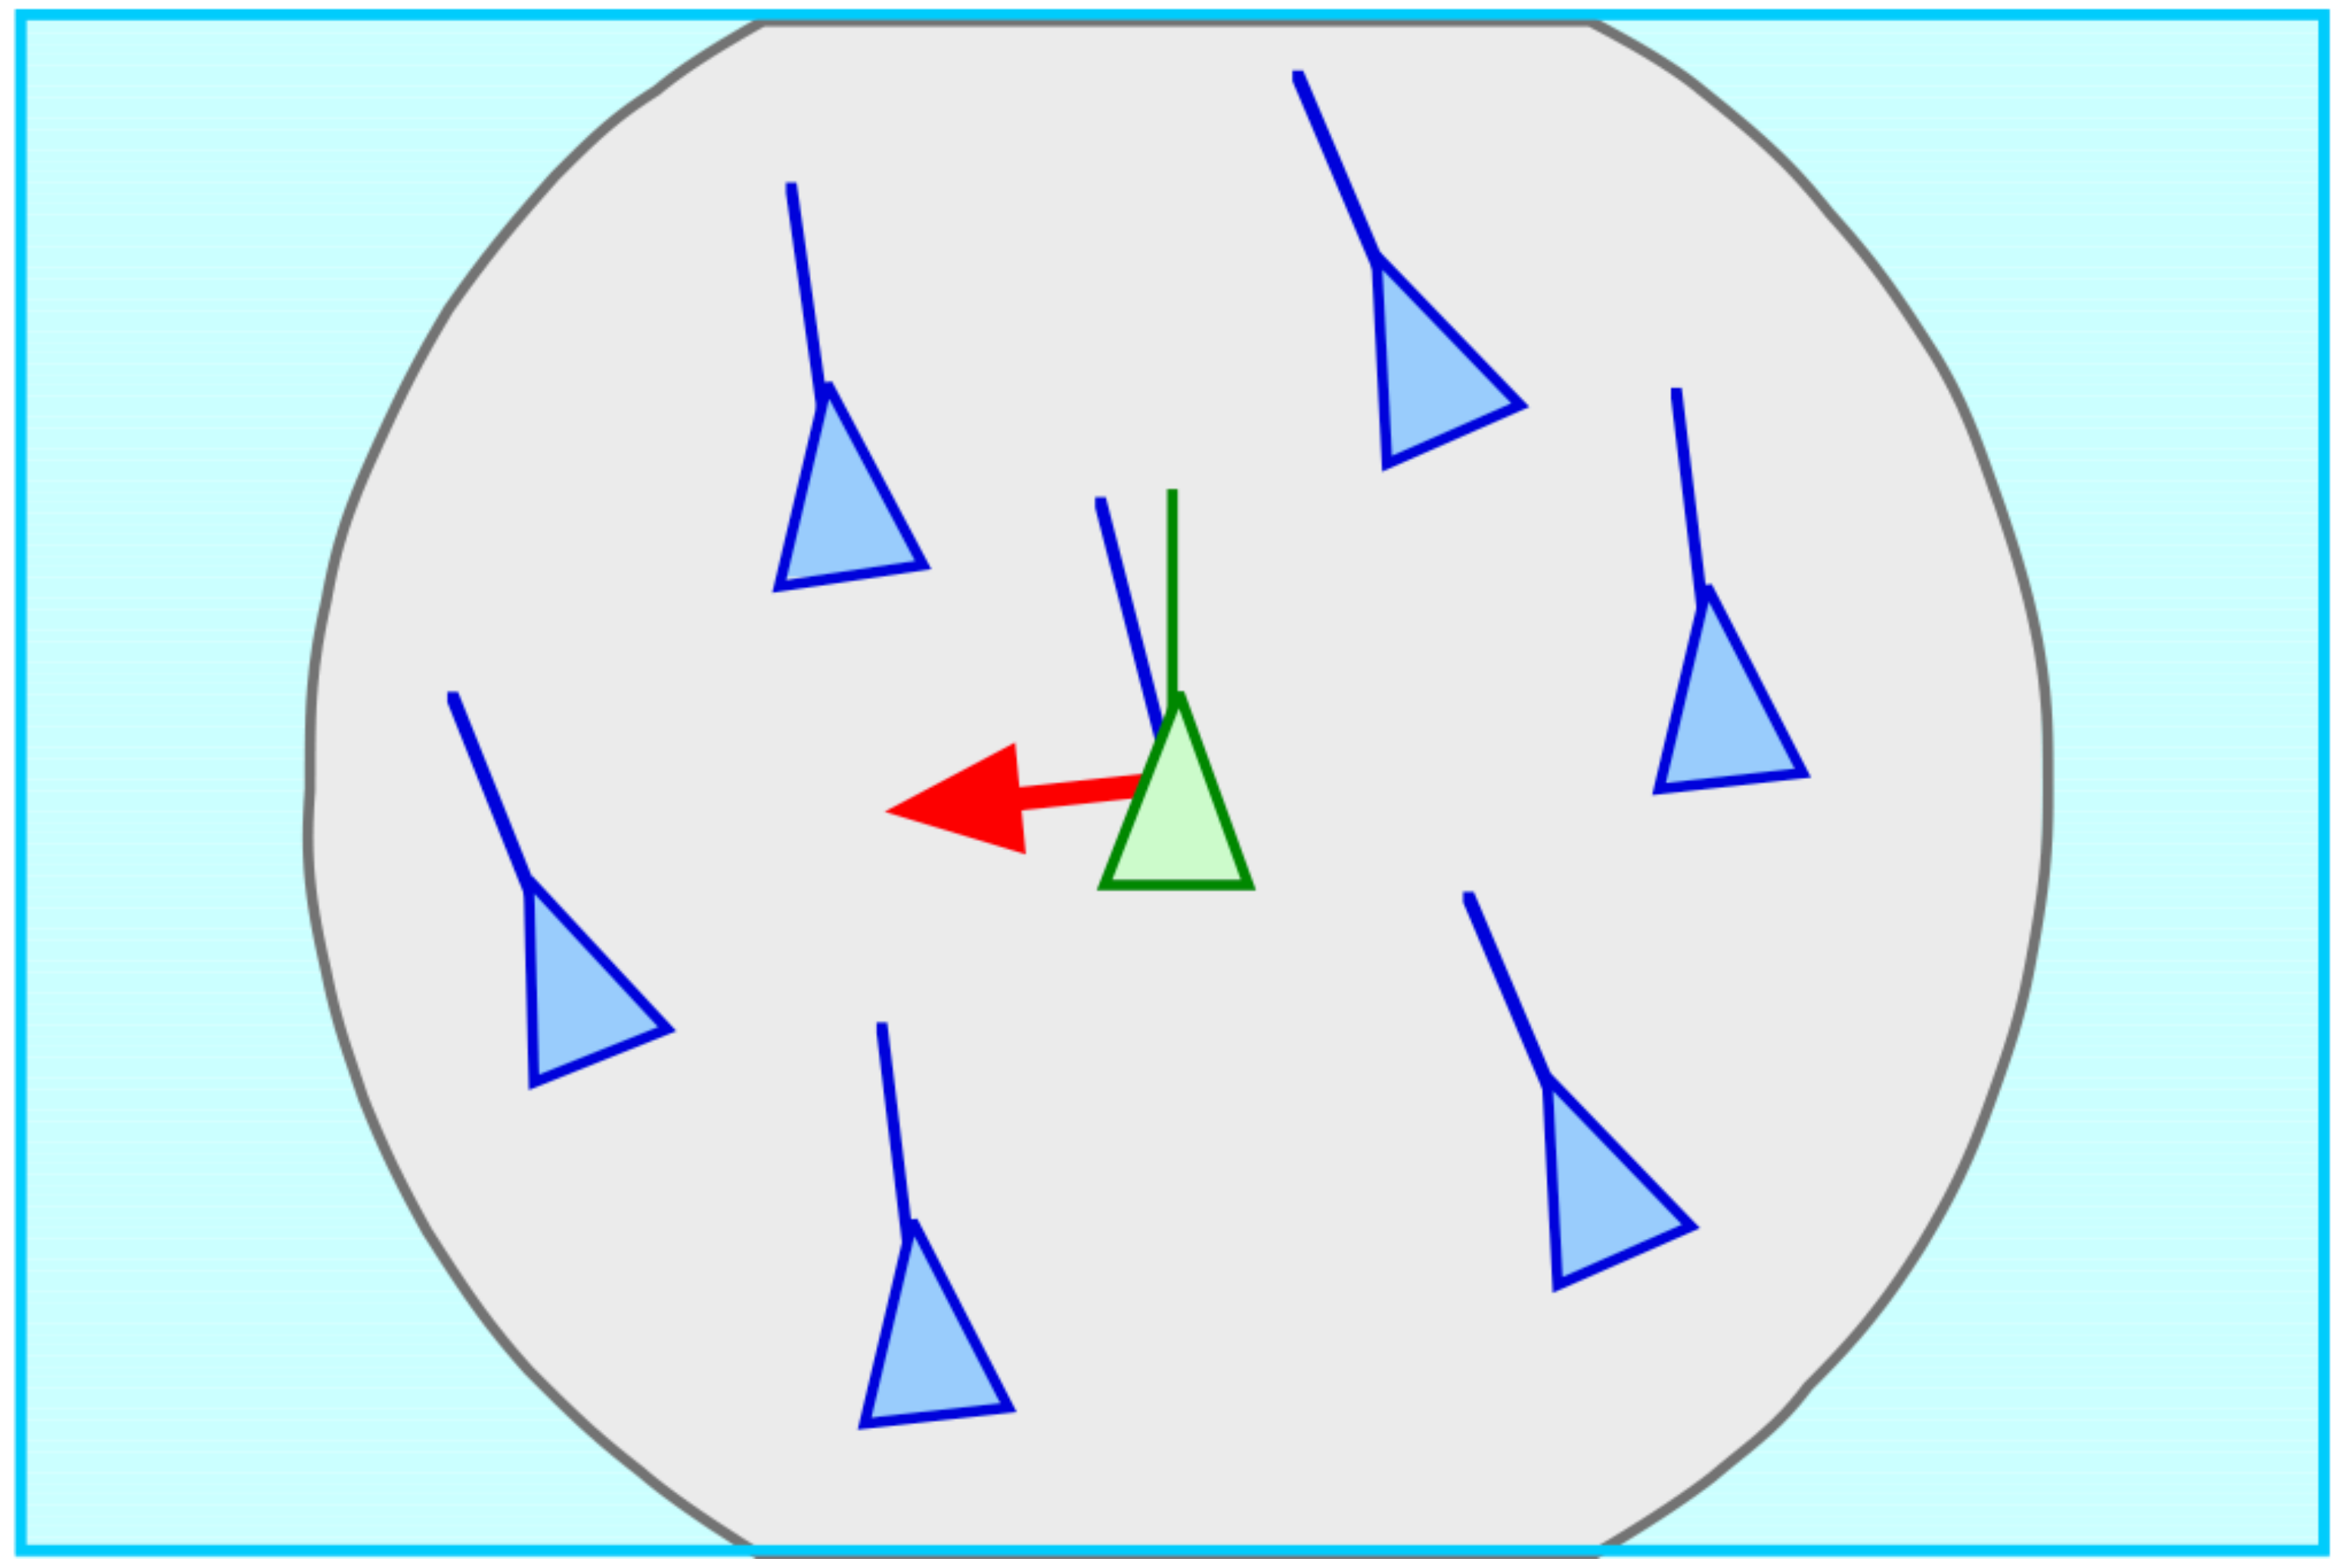

Alignment

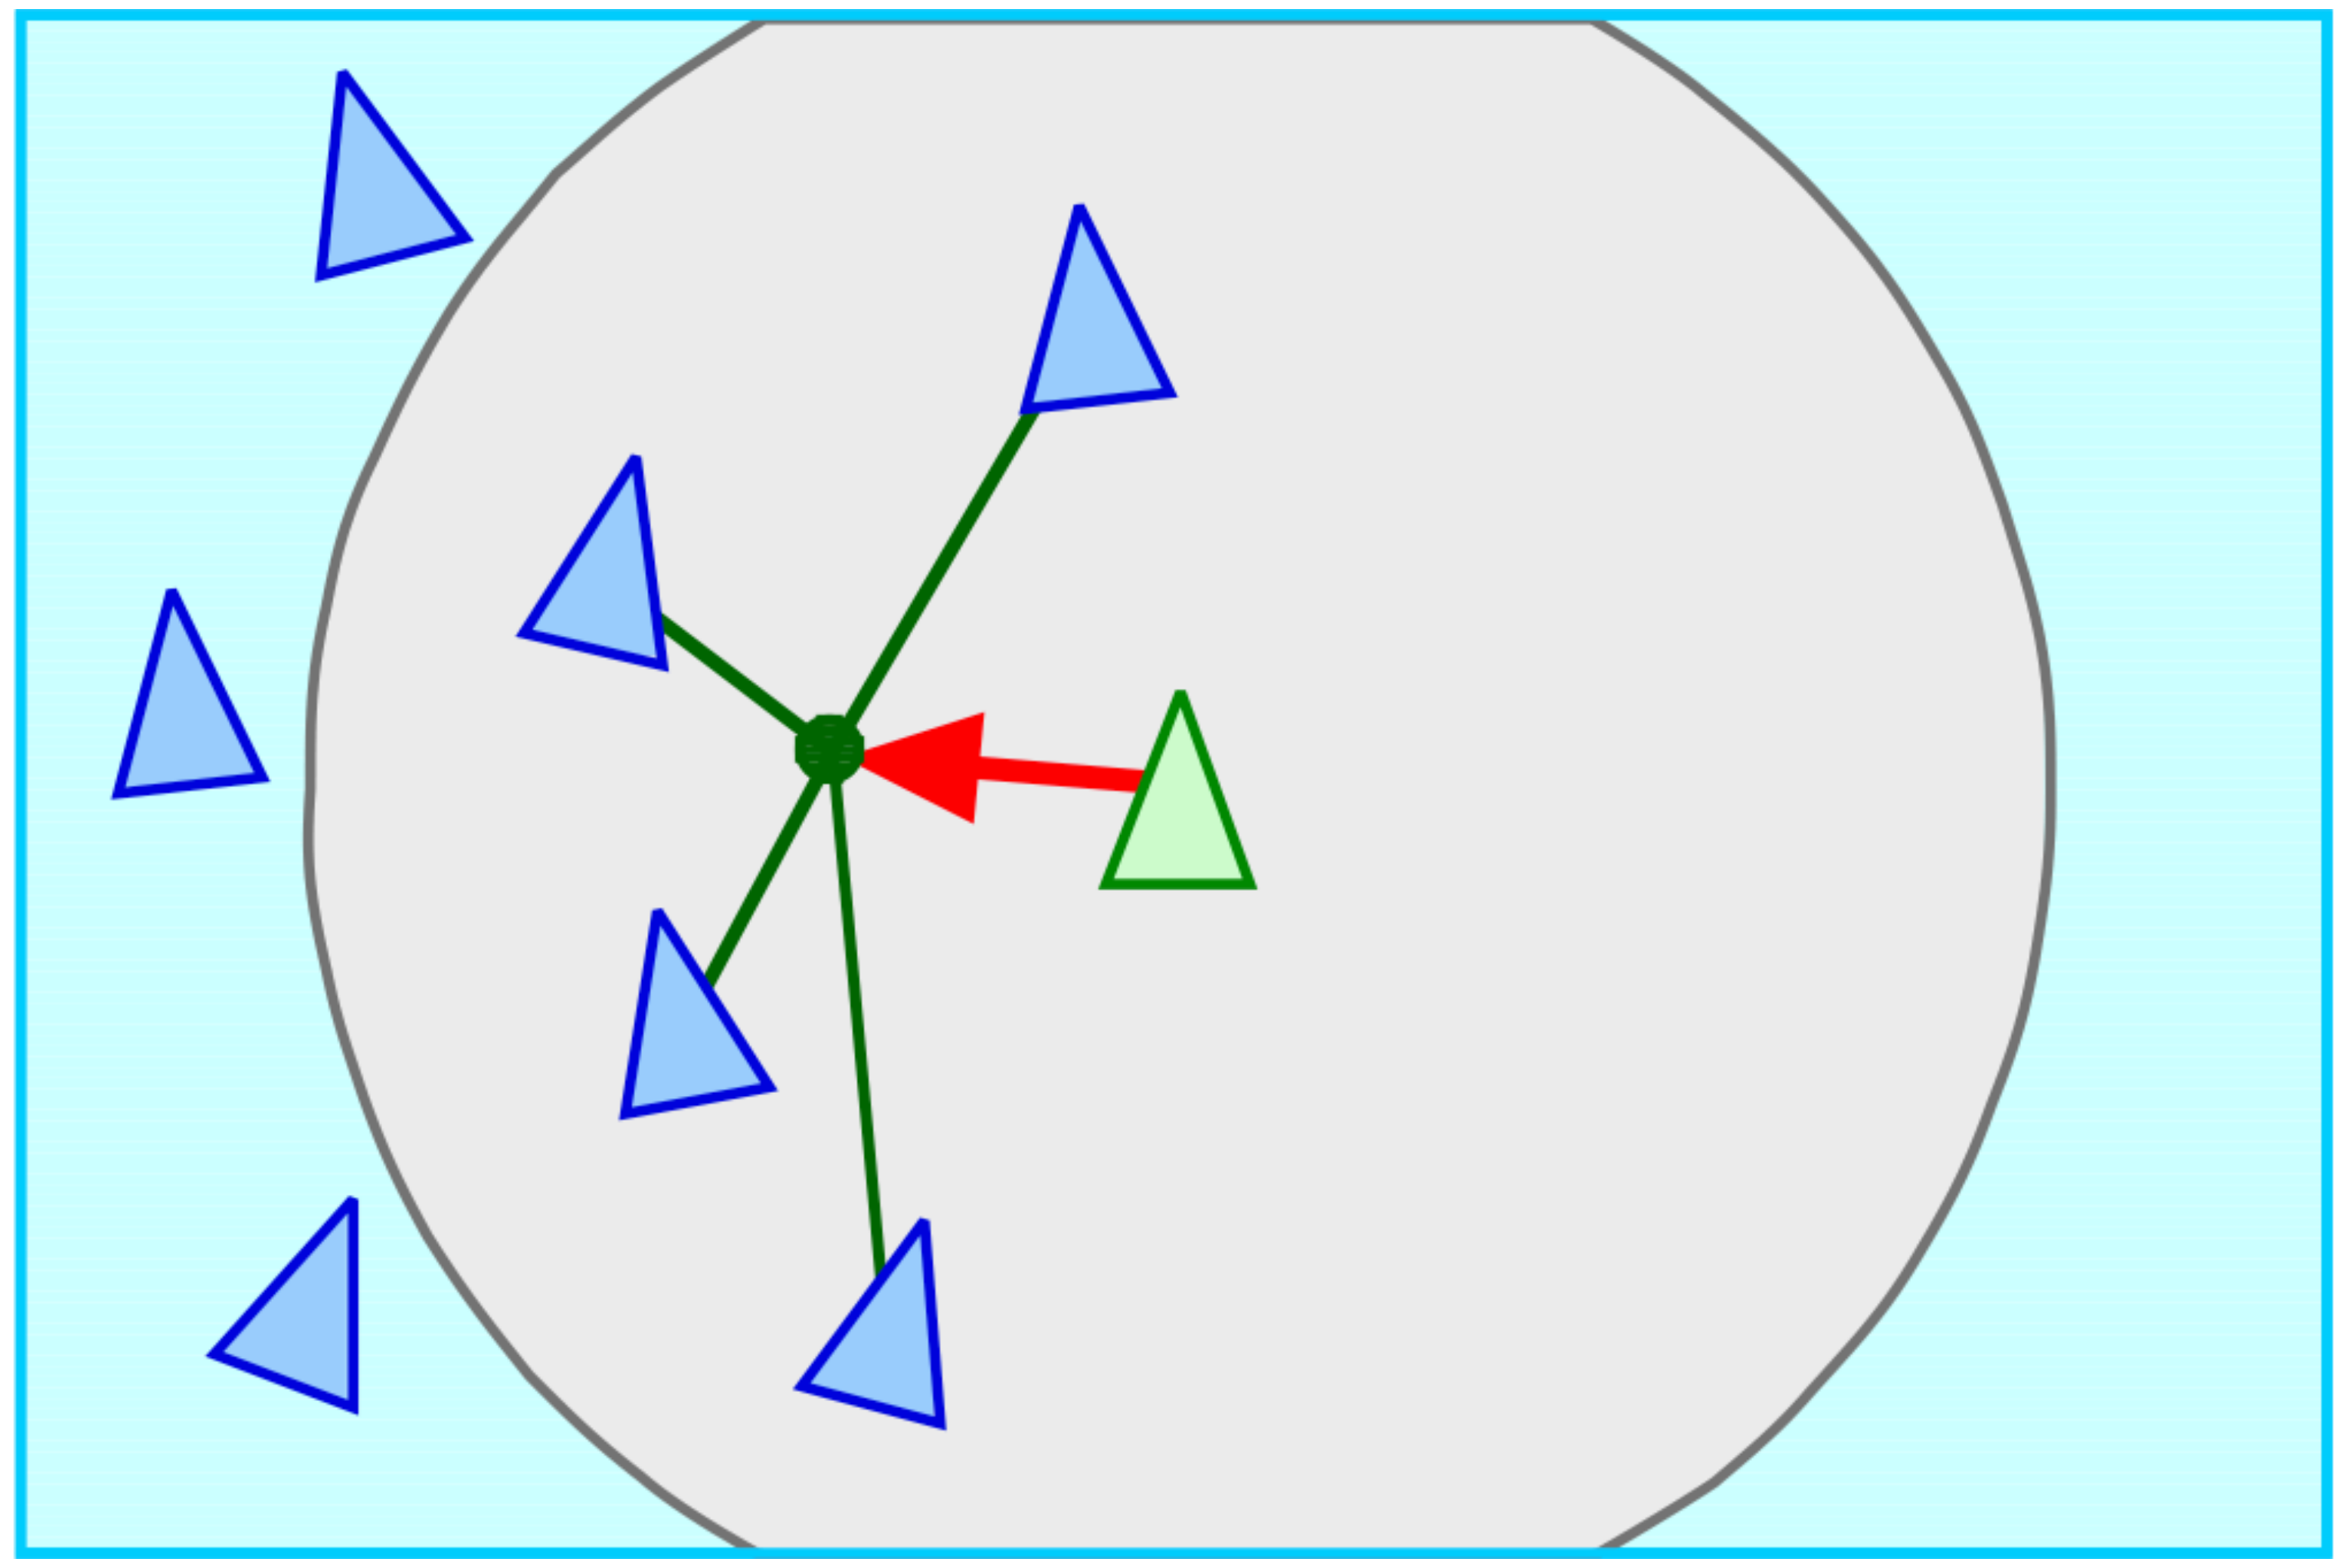

Cohesion

SIGGRAPH 1986:

writing tutorial notes:

“…it would be easy…”

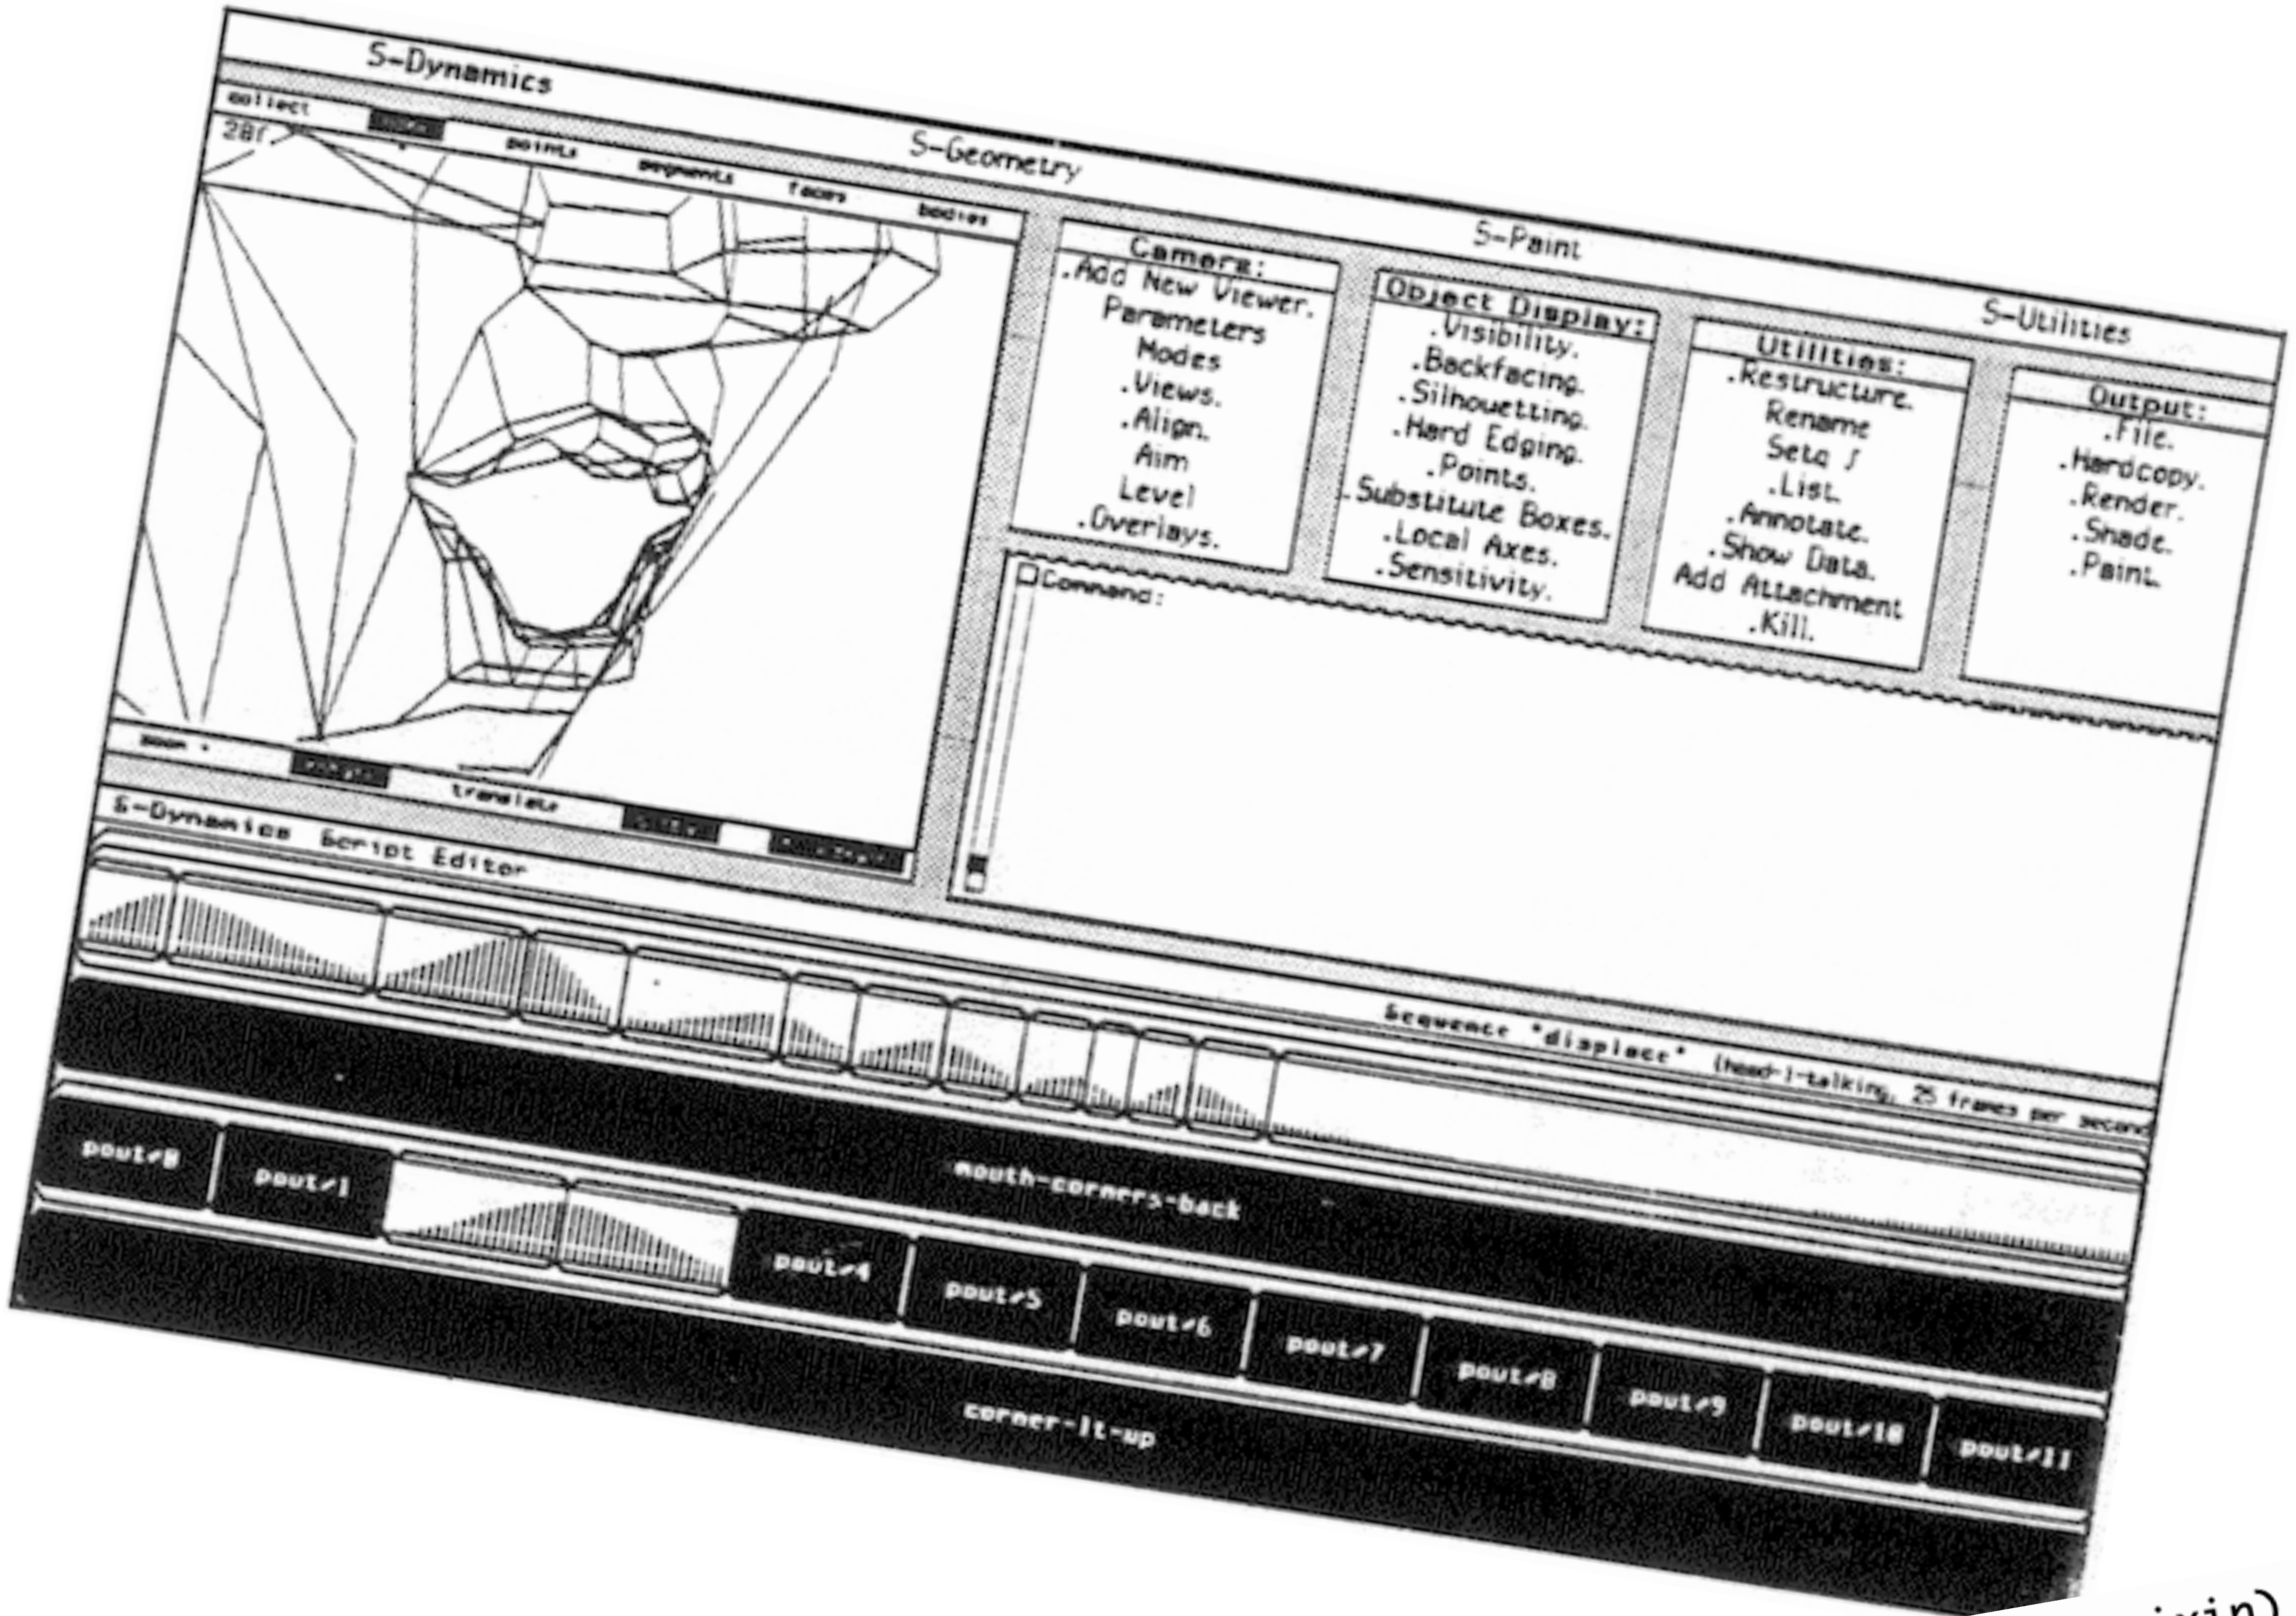


```
(defmethod (:steer flight-mixin) (old-velocity new-velocity)
  (vlet* ((new-adjusted-velocity (send self :constrain-steering new-velocity))
          (new-adj-acceleration (3d-vector-sub new-adjusted-velocity old-velocity))
          (actual-steering-acceleration (truncate-magnitude new-adj-acceleration
                                                            (send self :max-acceleration)))

          (actual-new-velocity (3d-vector-add old-velocity actual-steering-acceleration)))
    (when (plusp (magnitude-squared actual-new-velocity))
      ;; PITCH and YAW the object (local X and Y rotations) to align with the new local velocity.
      (send self :align-to-local actual-new-velocity)
      ;; Adjust the roll for a "coordinated turn".
      (send self :bank actual-steering-acceleration))))
```

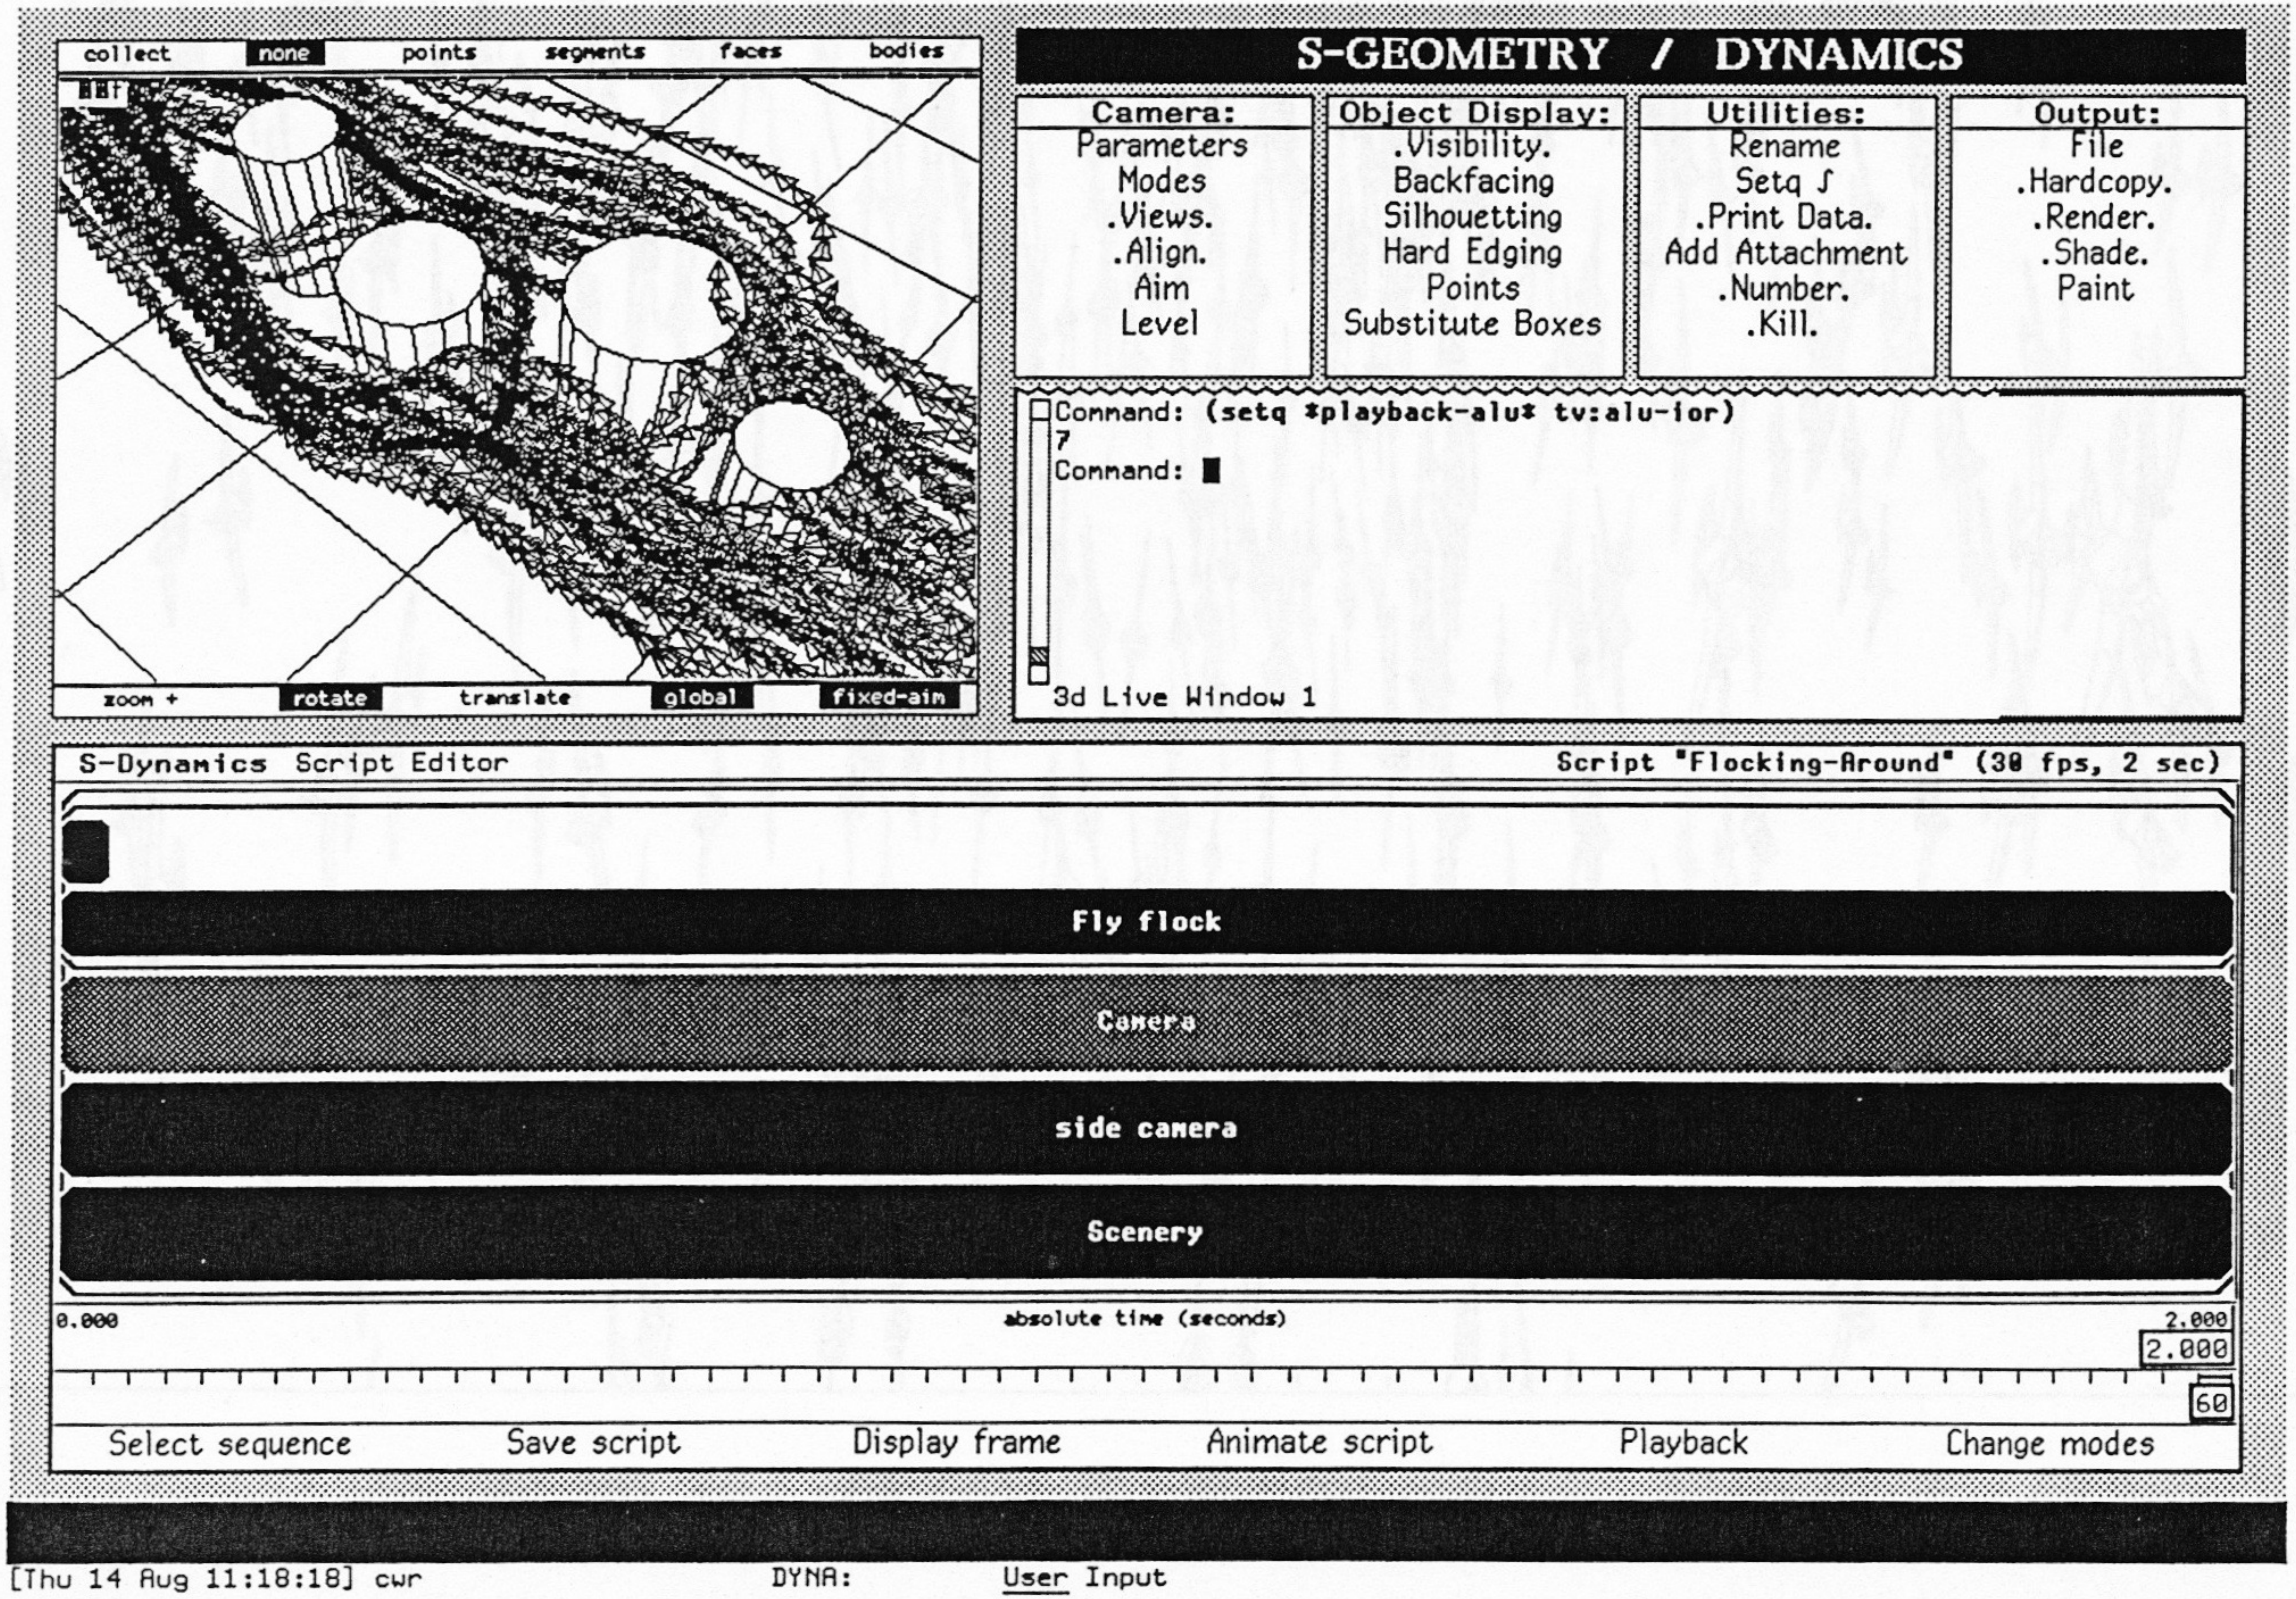

collect none points segments faces bodies
zoom + rotate translate global fixed-aim
S-GEOMETRY / DYNAMICS
Camera:
Parameters
Modes
.Views.
.Align.
Aim
Level
Object Display:
.Visibility.
Backfacing
Silhouetting
Hard Edging
Points
Substitute Boxes
Utilities:
Rename
Setq ∫
.Print Data.
Add Attachment
.Number.
.Kill.
Output:
File
.Hardcopy.
.Render.
.Shade.
Paint
Command: (setq *playback-alu* tv:alu-ior)
7
Command:
3d Live Window 1
S-Dynamics Script Editor
Script "Flocking-Around" (30 fps, 2 sec)
Fly flock
Camera
side camera
Scenery
0.000
absolute time (seconds)
2.000
2.000
60
Select sequence
Save script
Display frame
Animate script
Playback
Change modes
[Thu 14 Aug 11:18:18] cwr
DYNA:
User Input

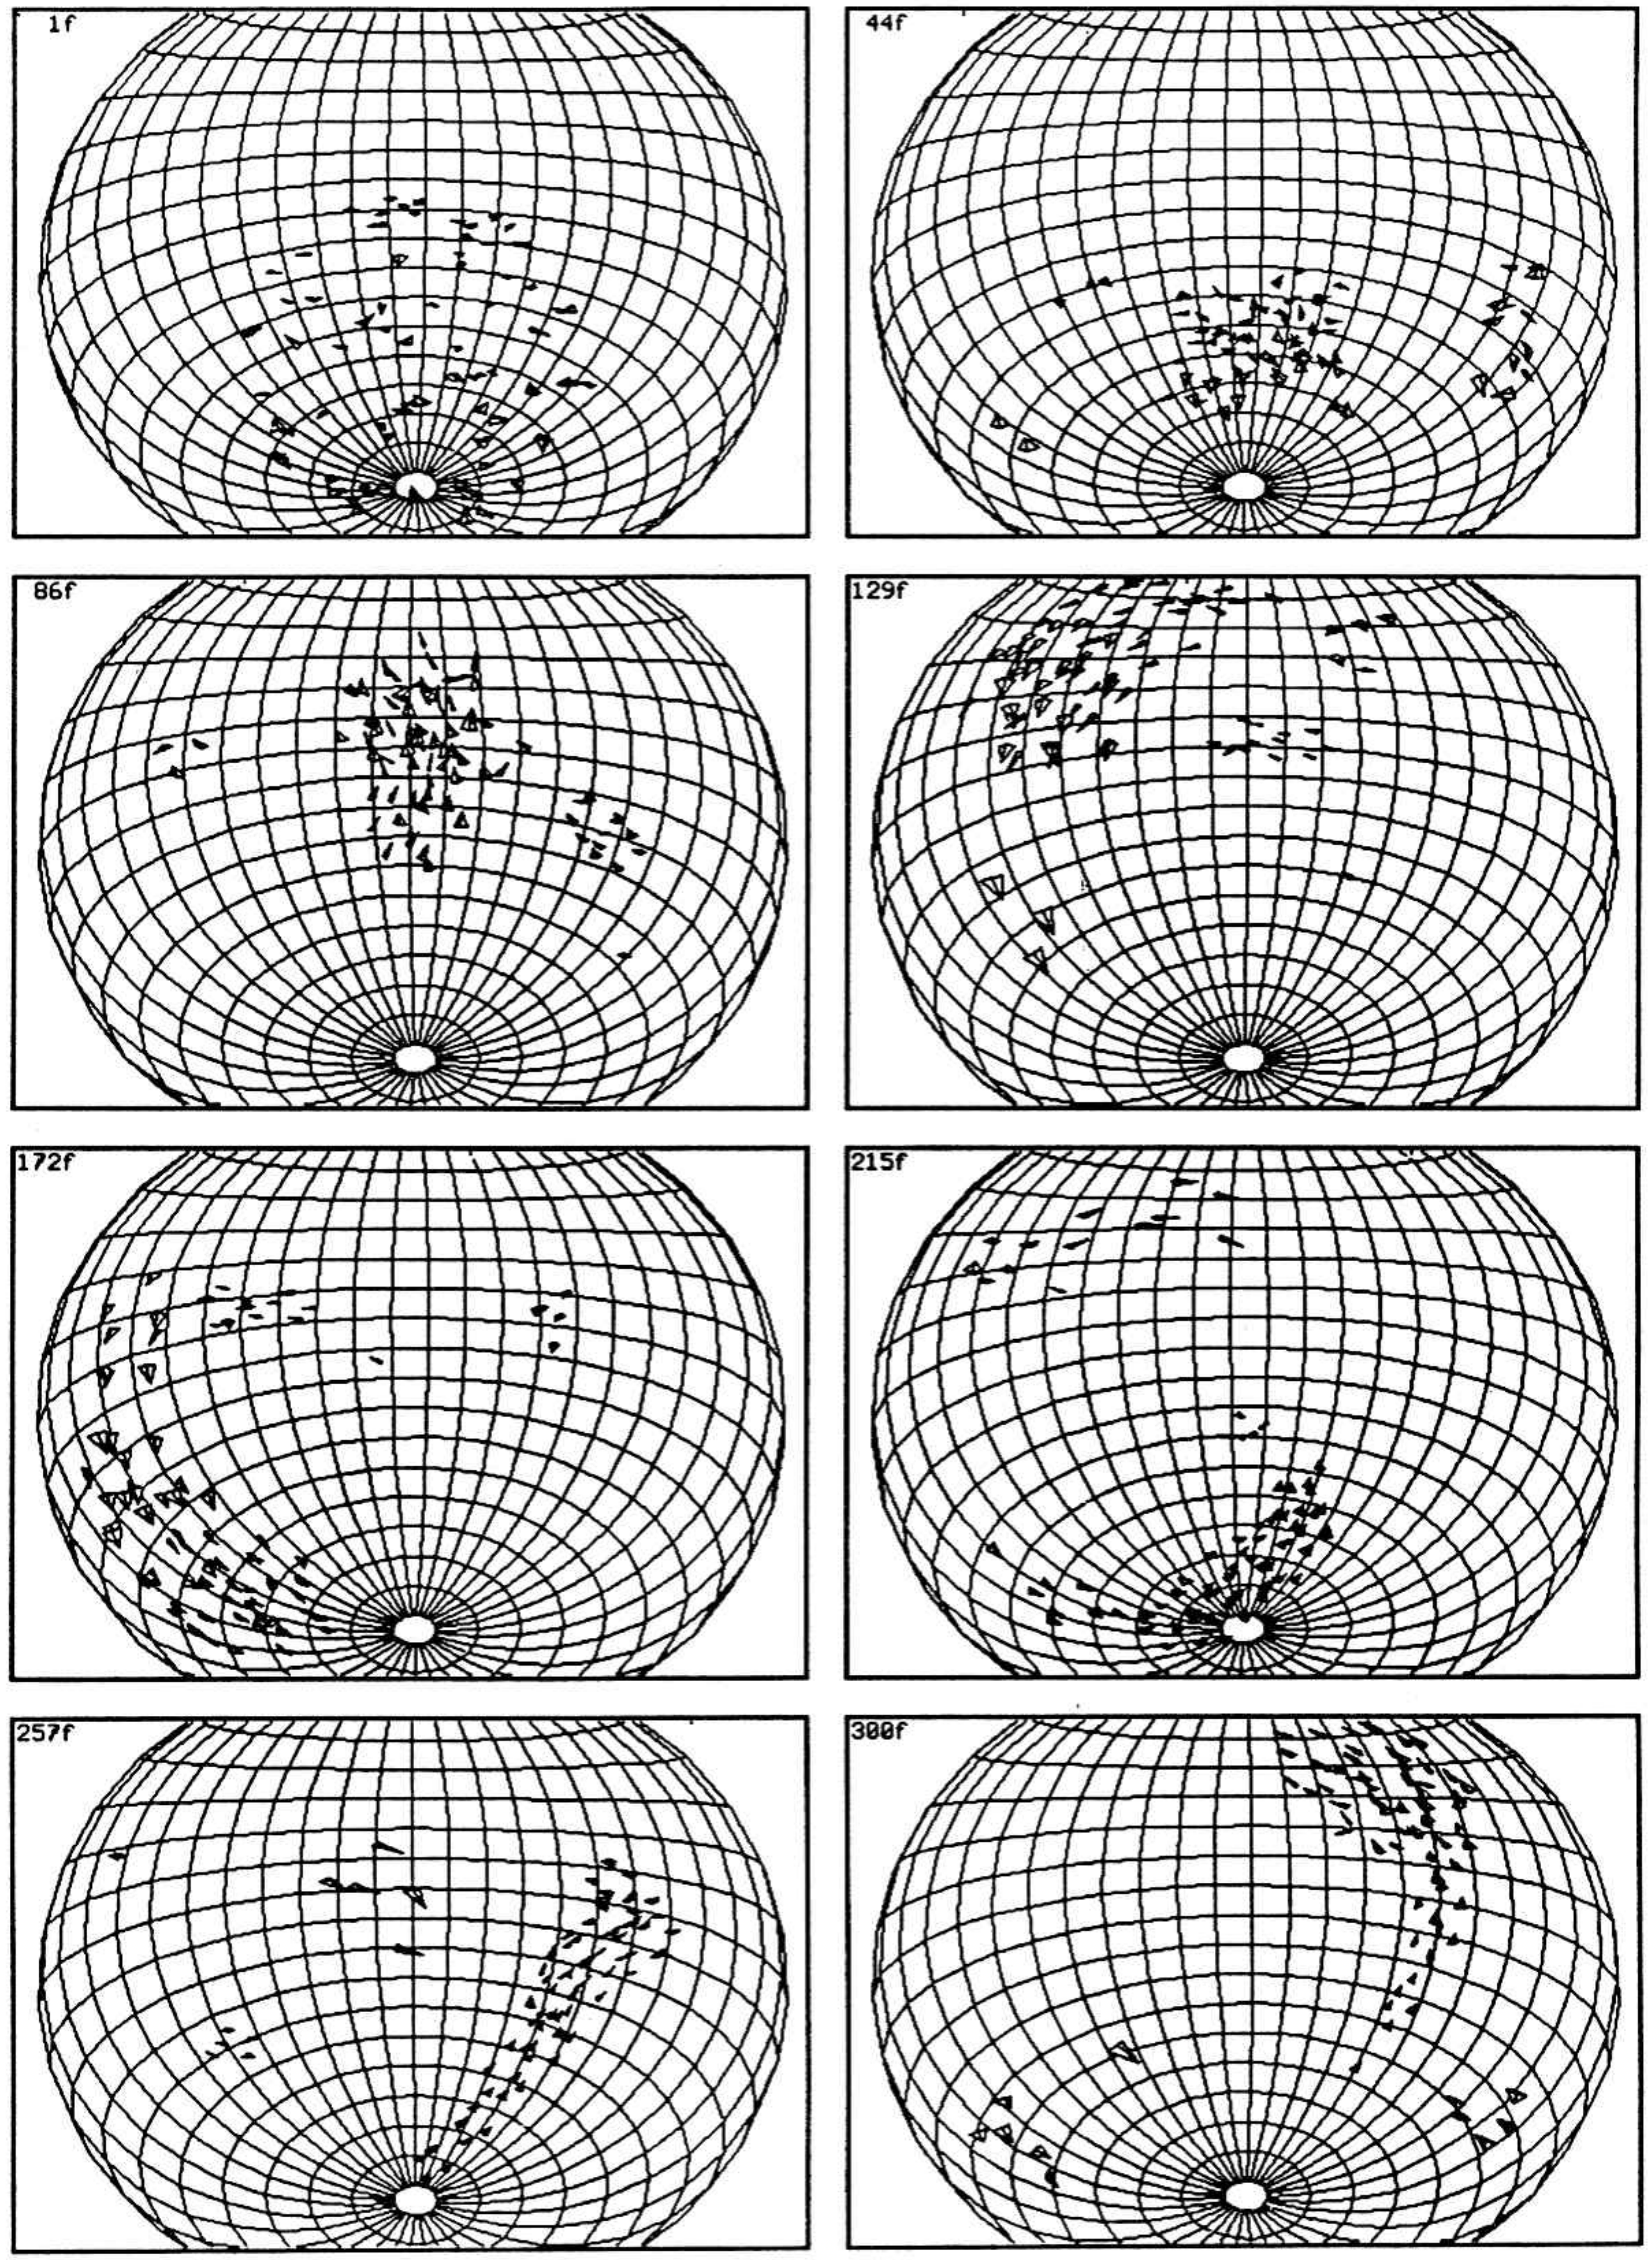
1f
44f
86f
129f
172f
215f
257f
300f

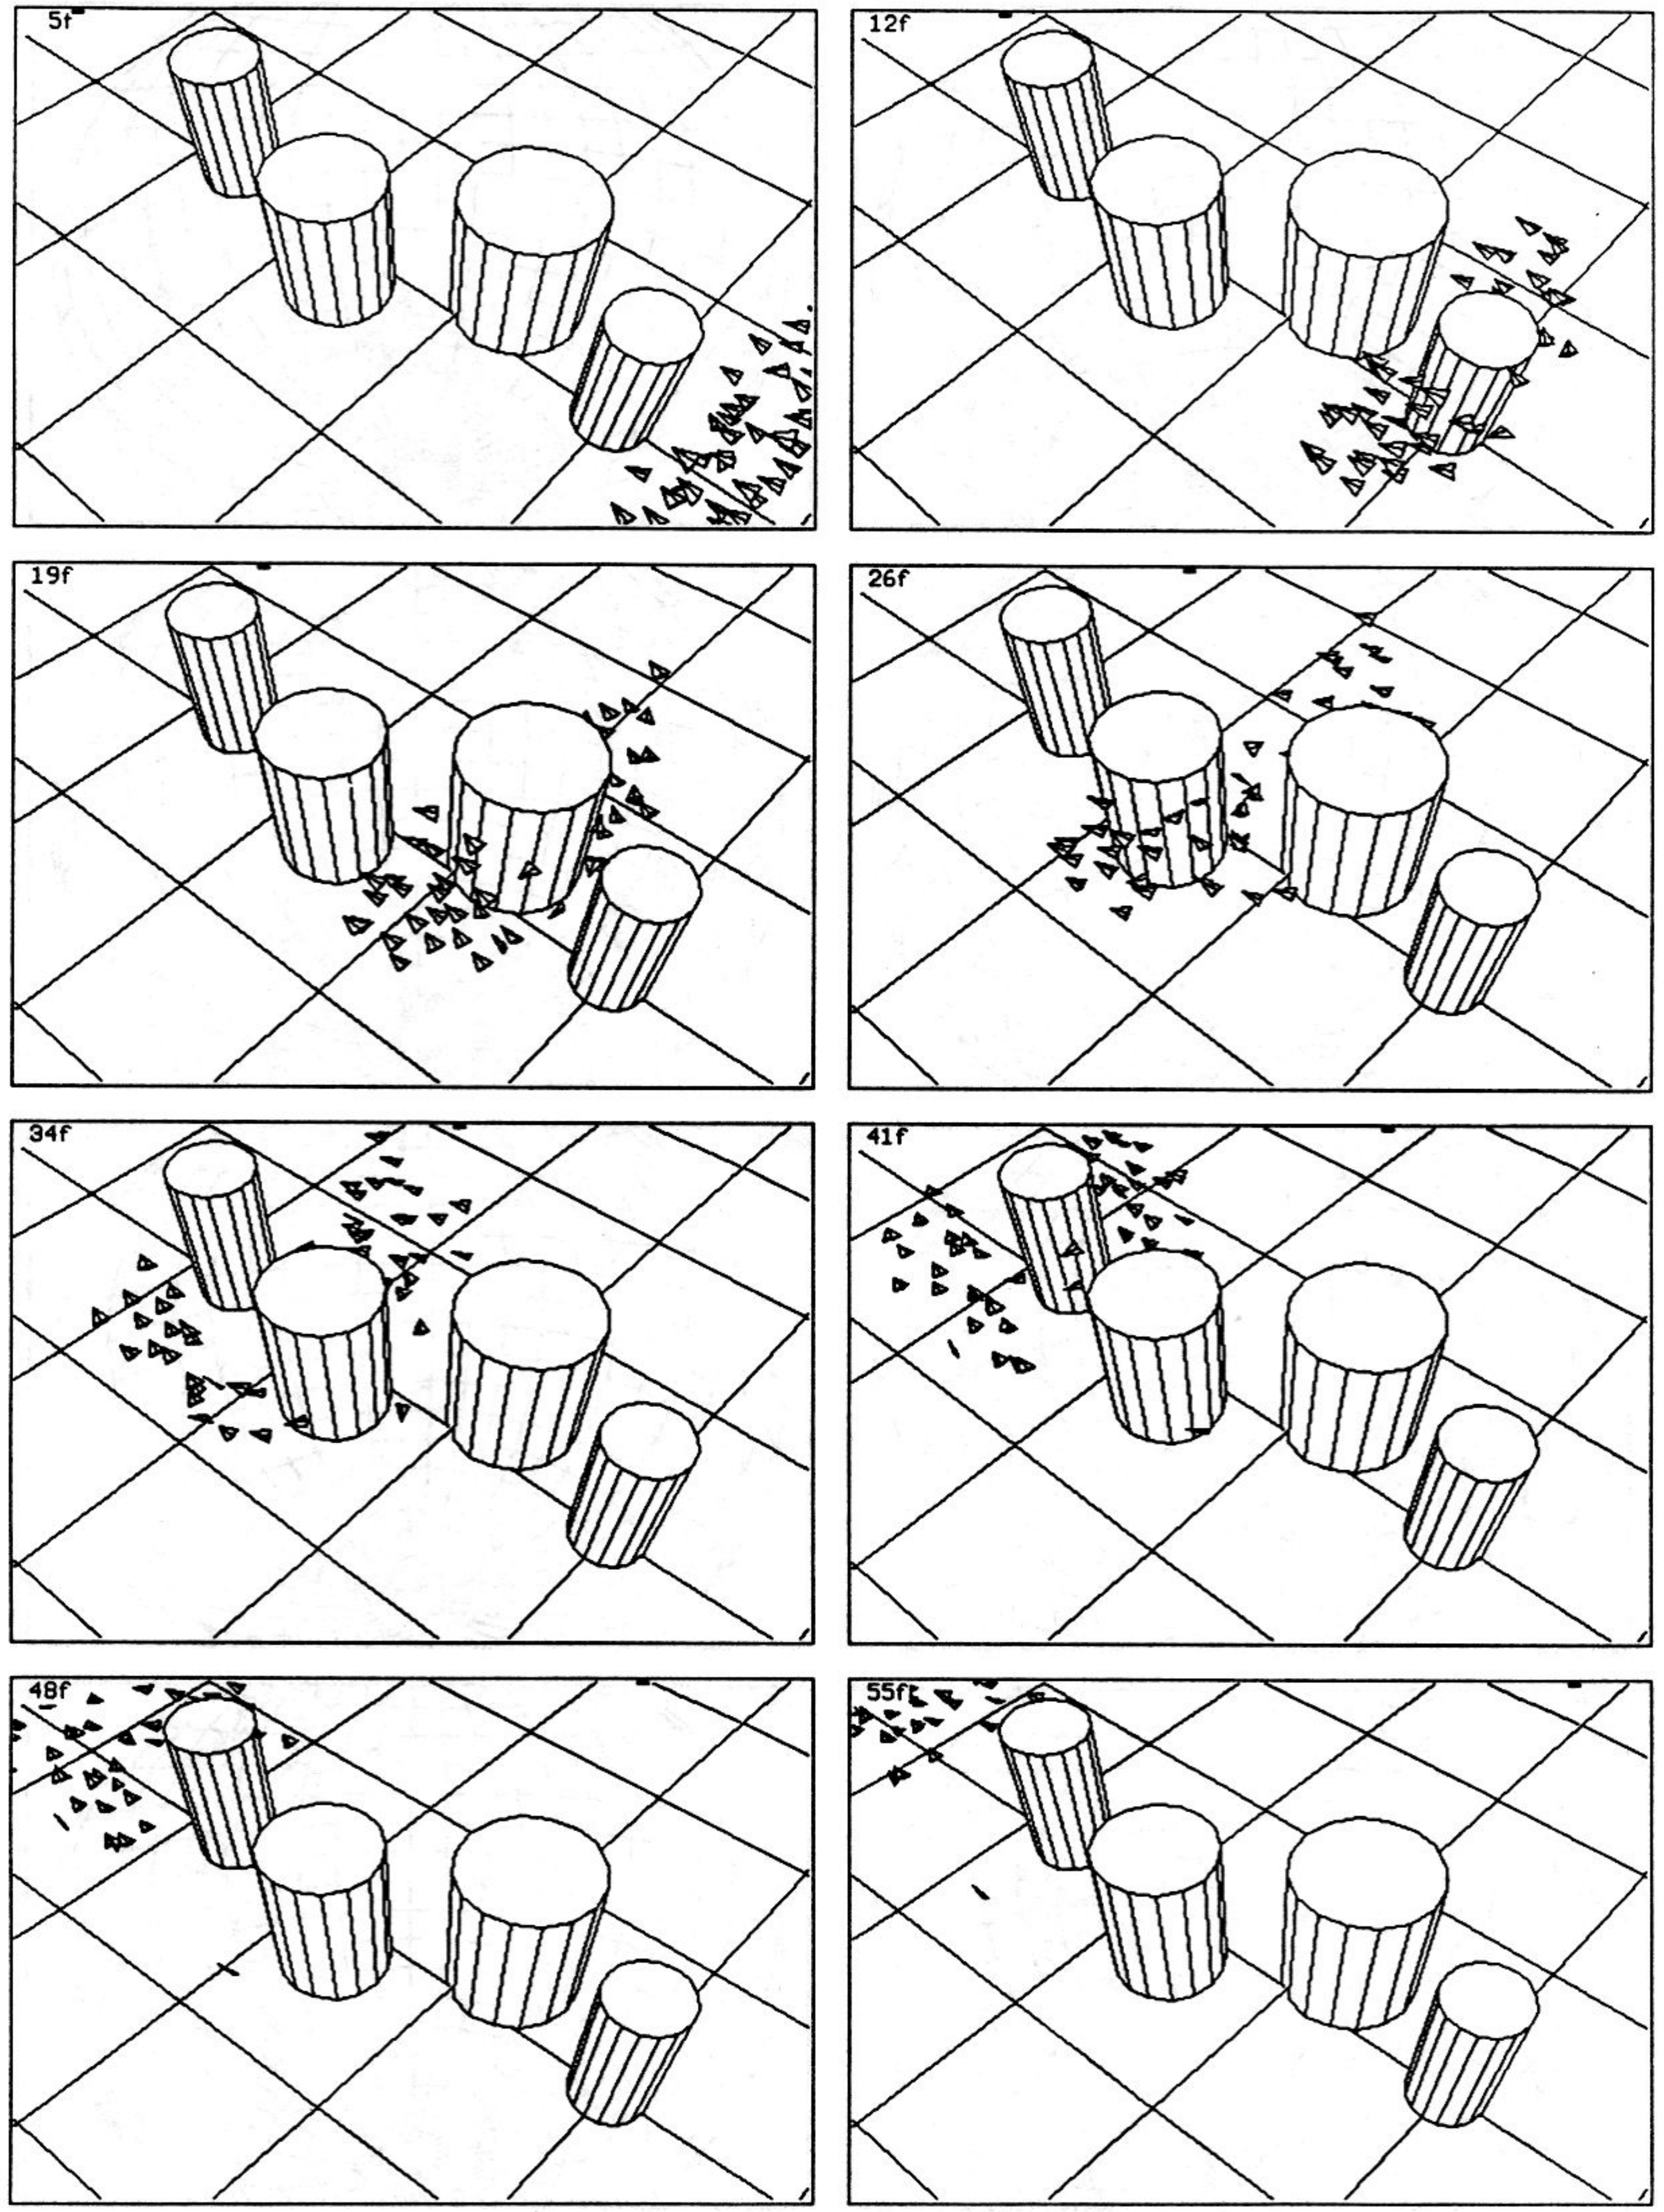
5f
12f
19f
26f
34f
41f
48f
55f

SIGGRAPH 1987

Breaking the Ice

Flocks, Herds, and Schools:
A Distributed Behavioral Model

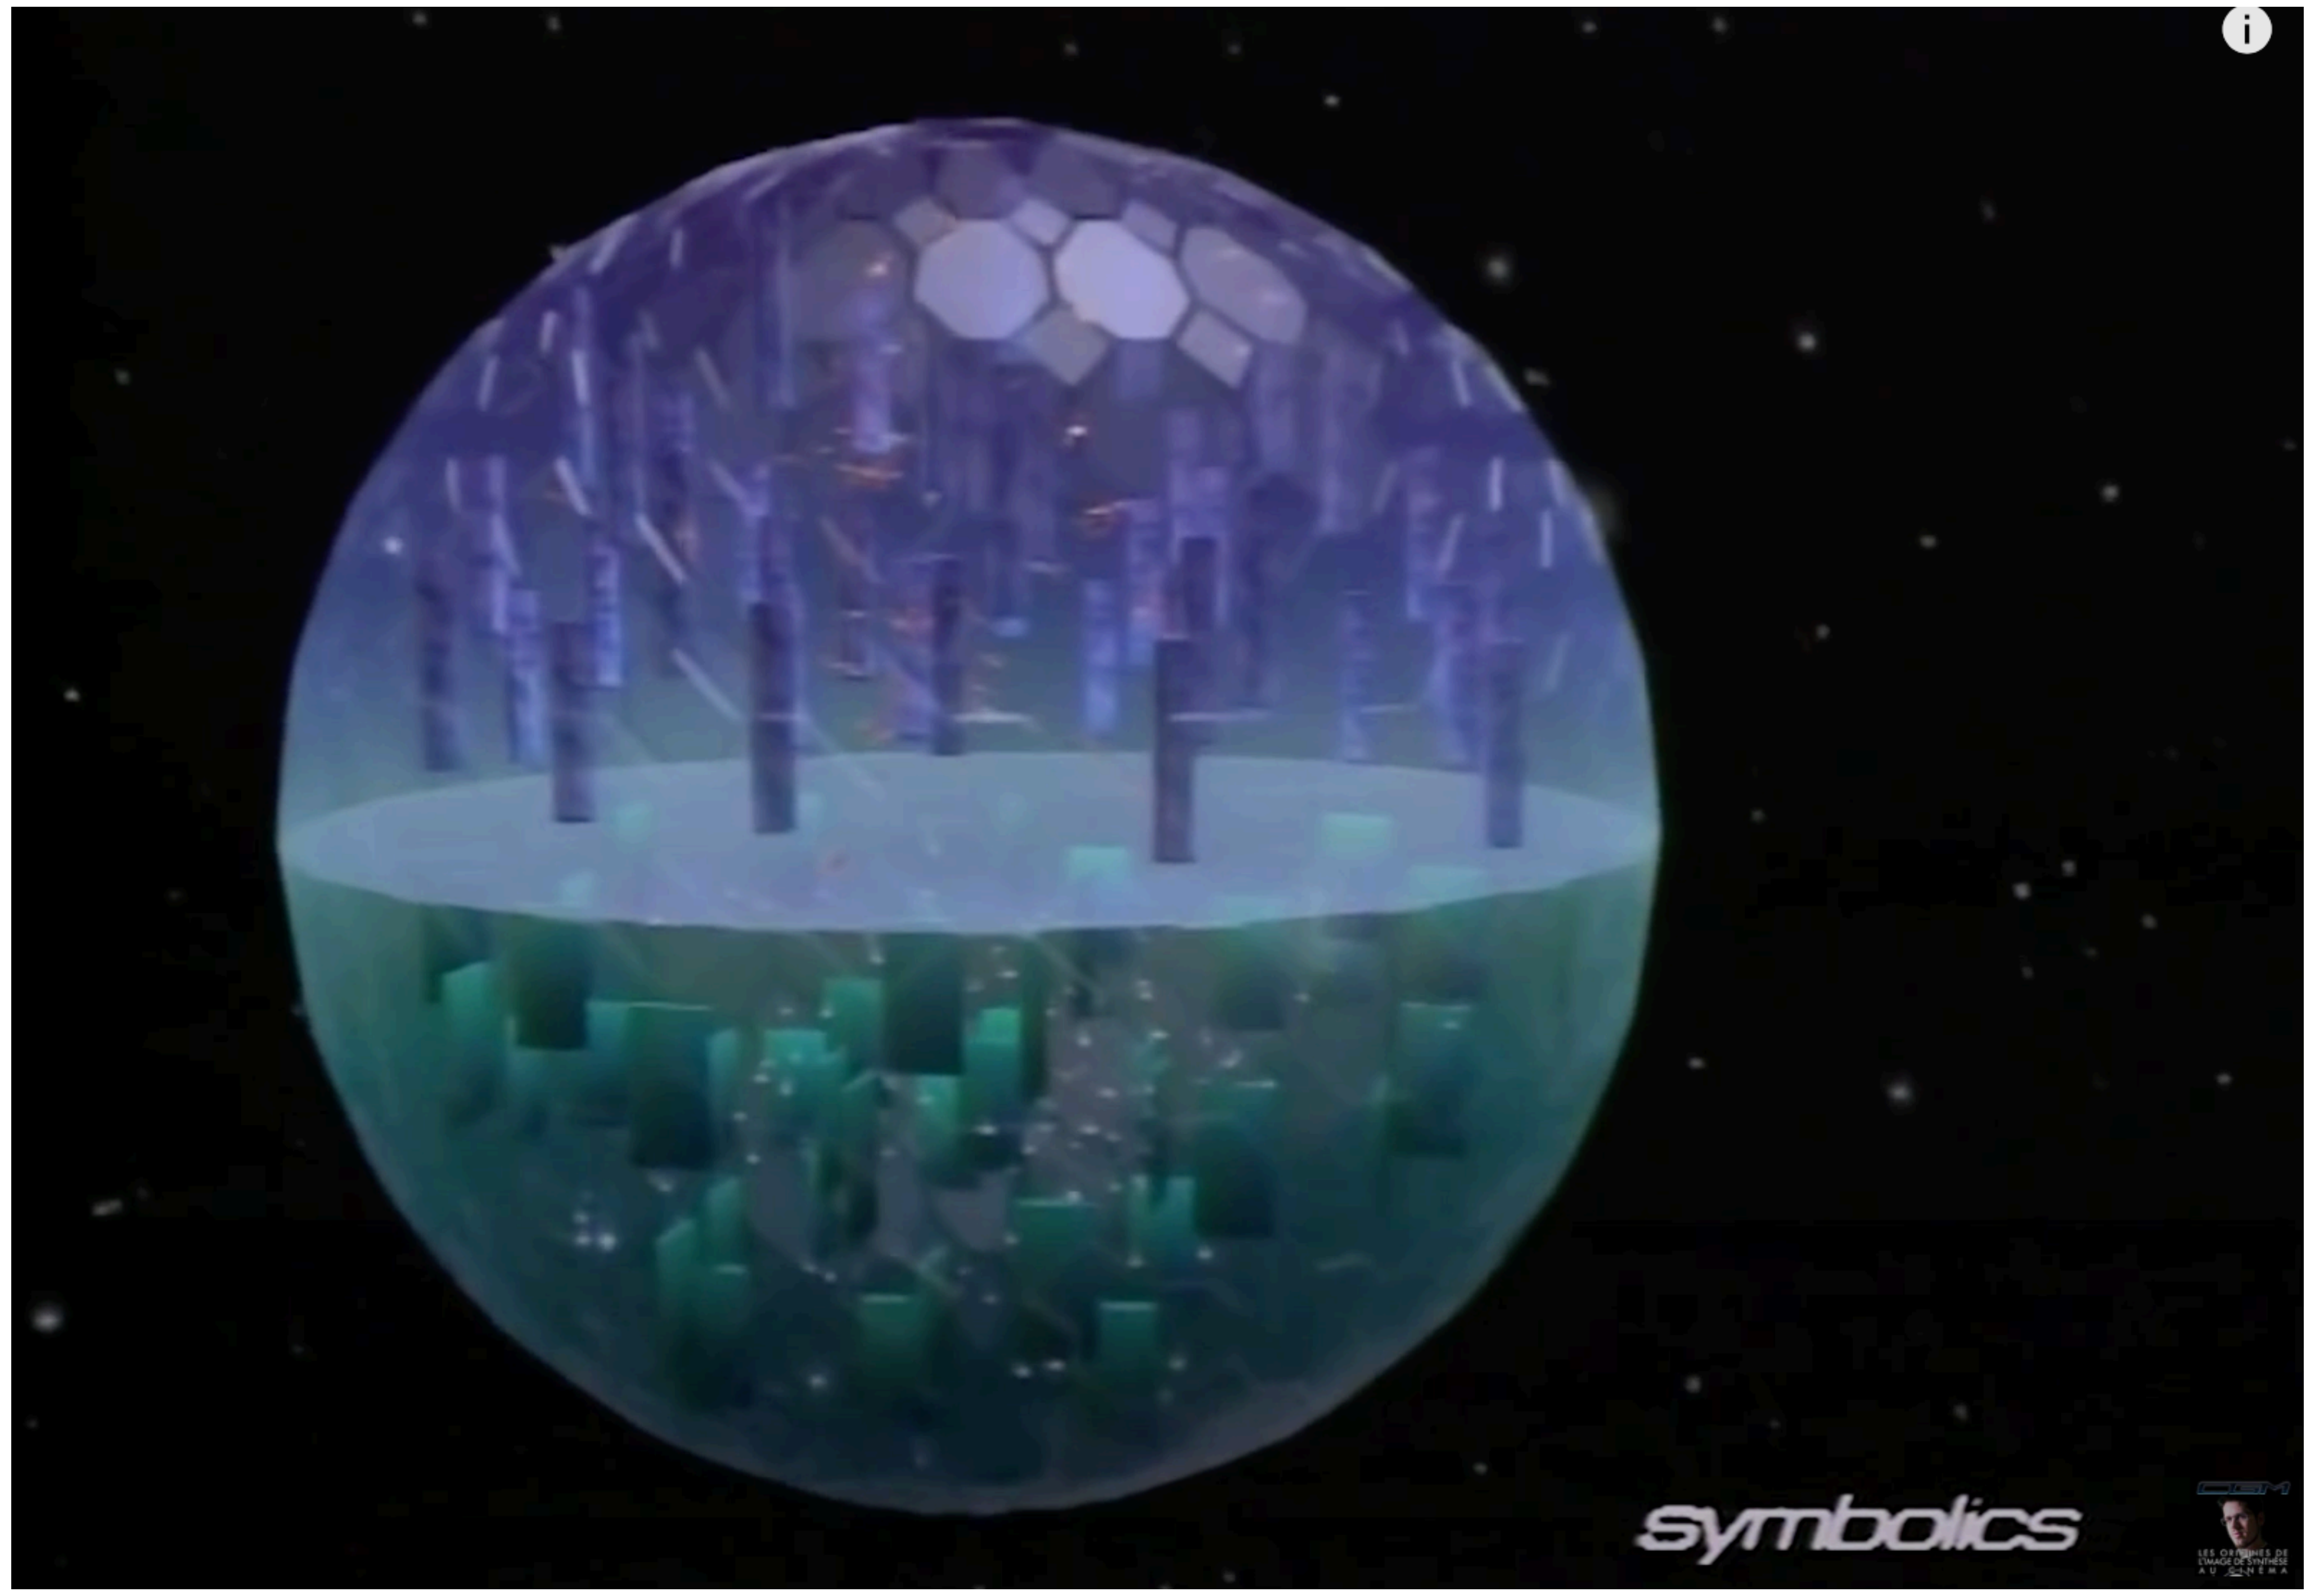
symbolics

symbolics
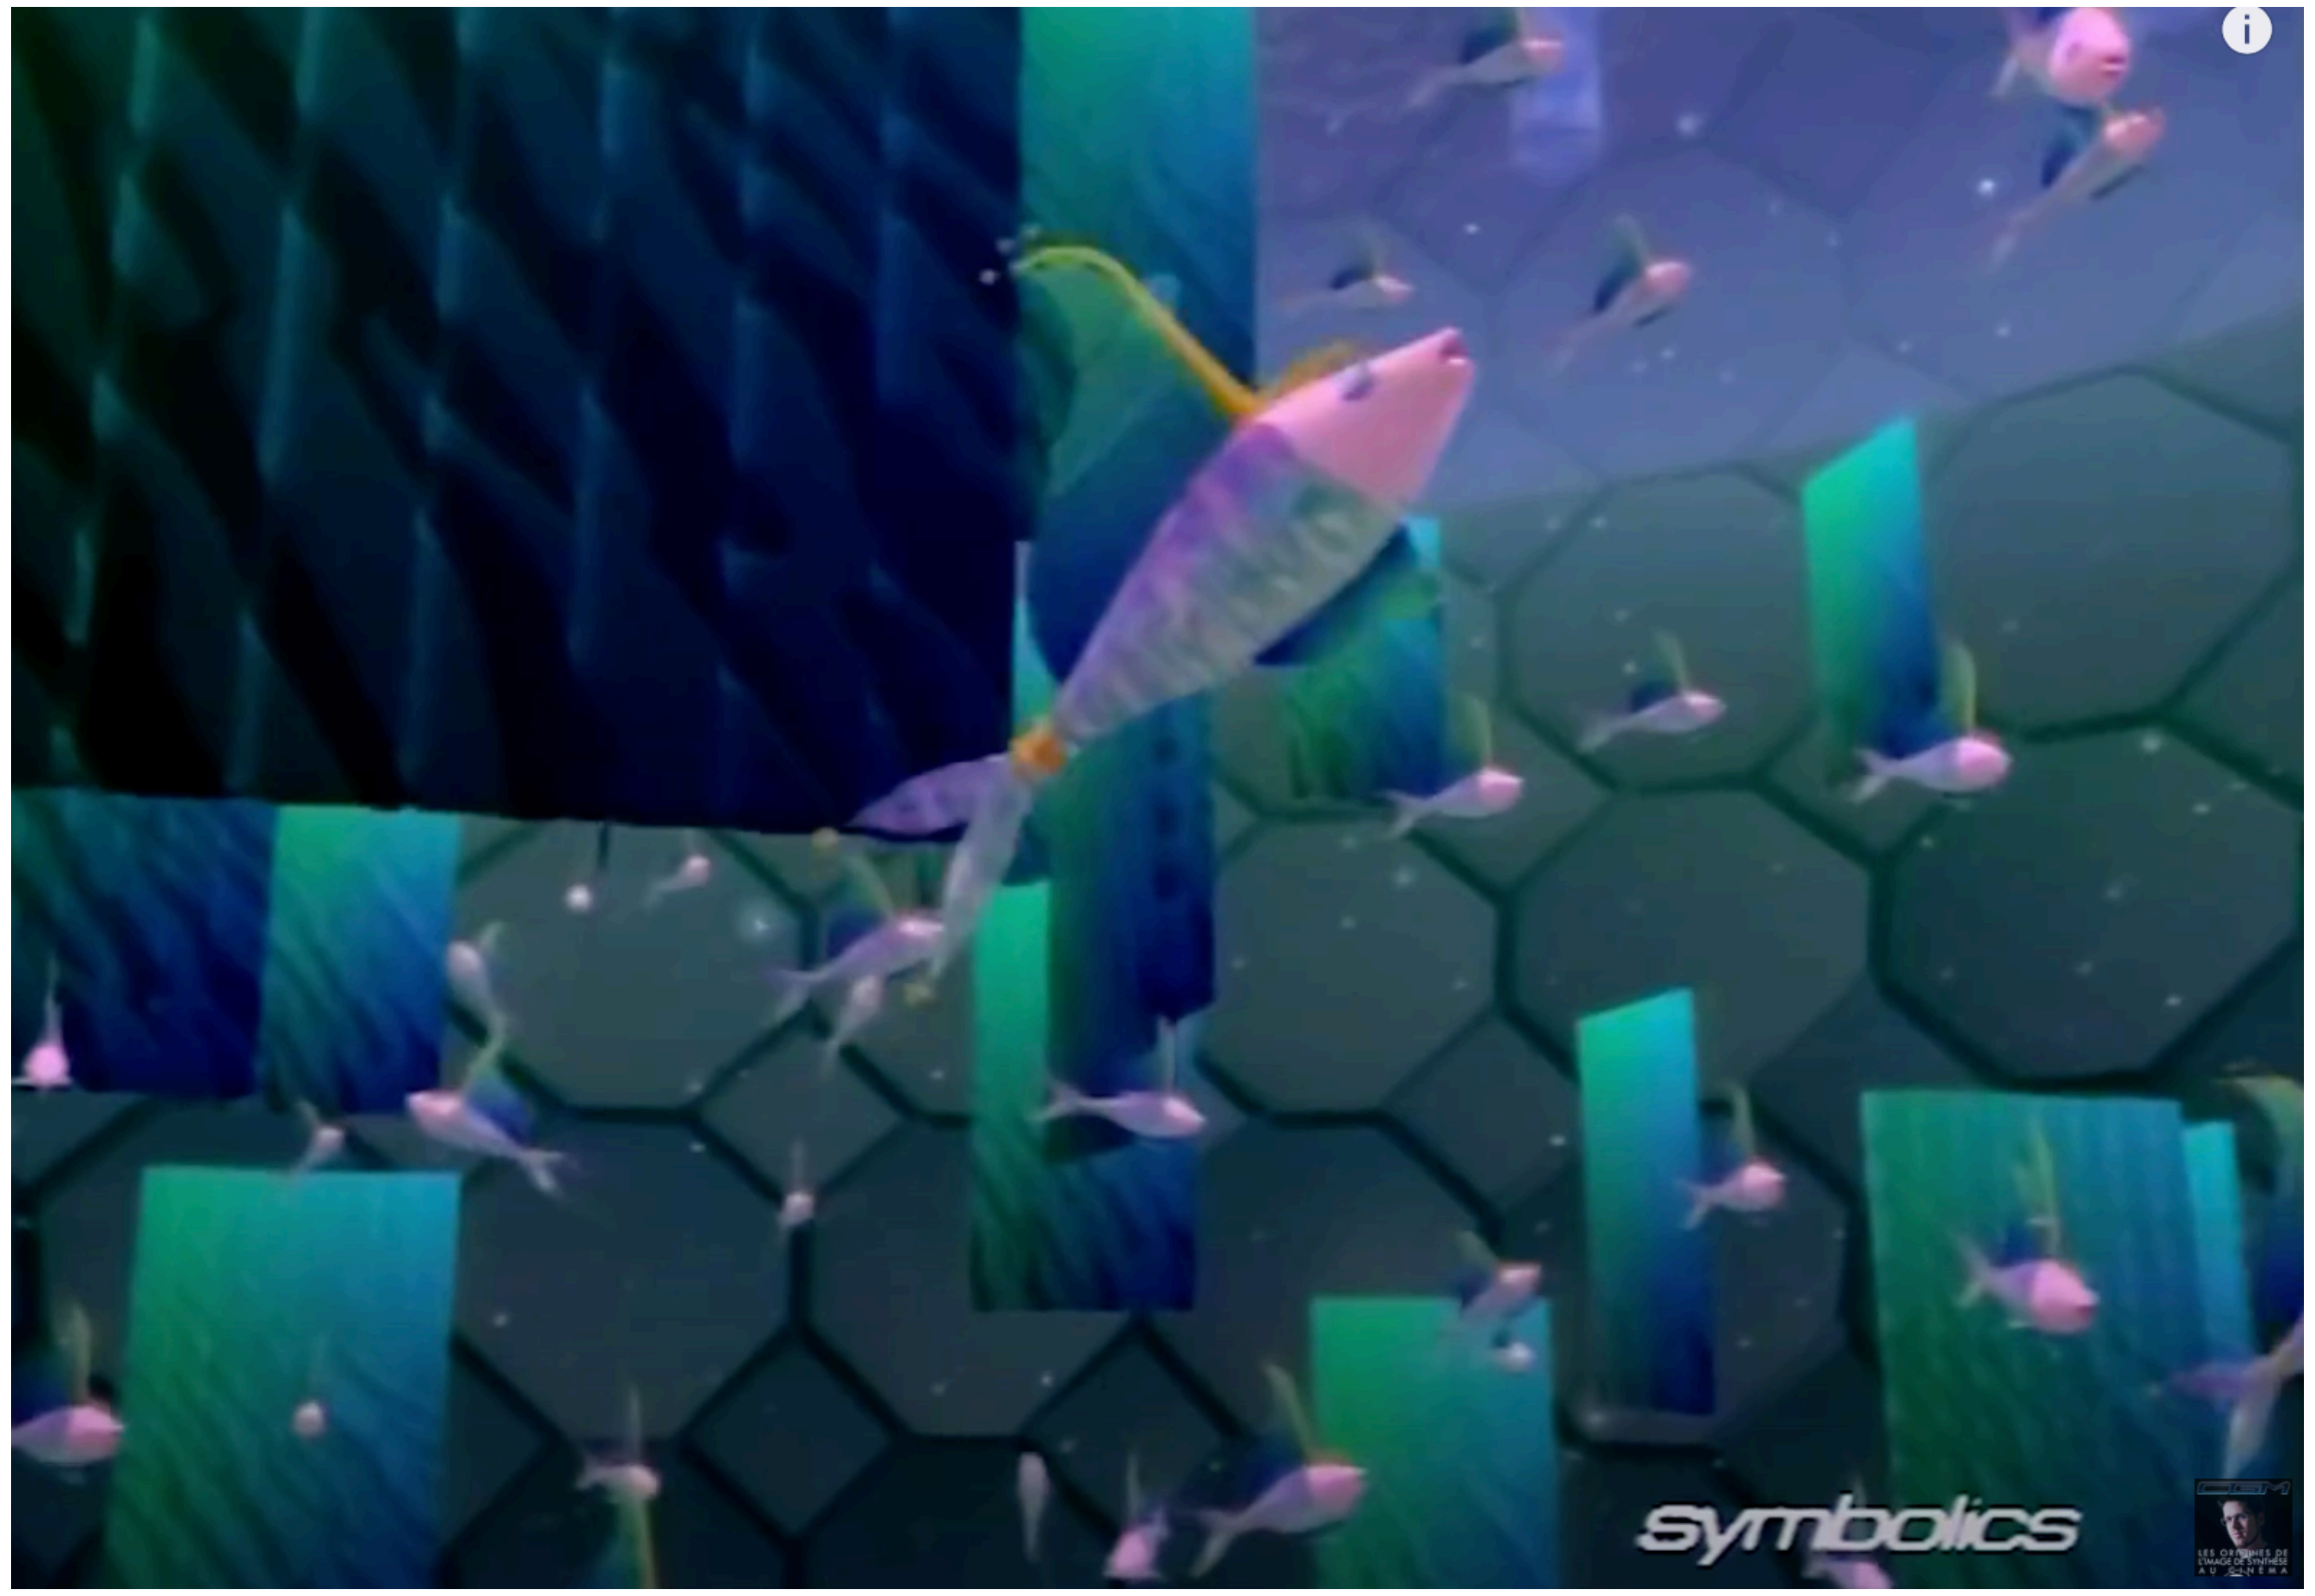
symbolics
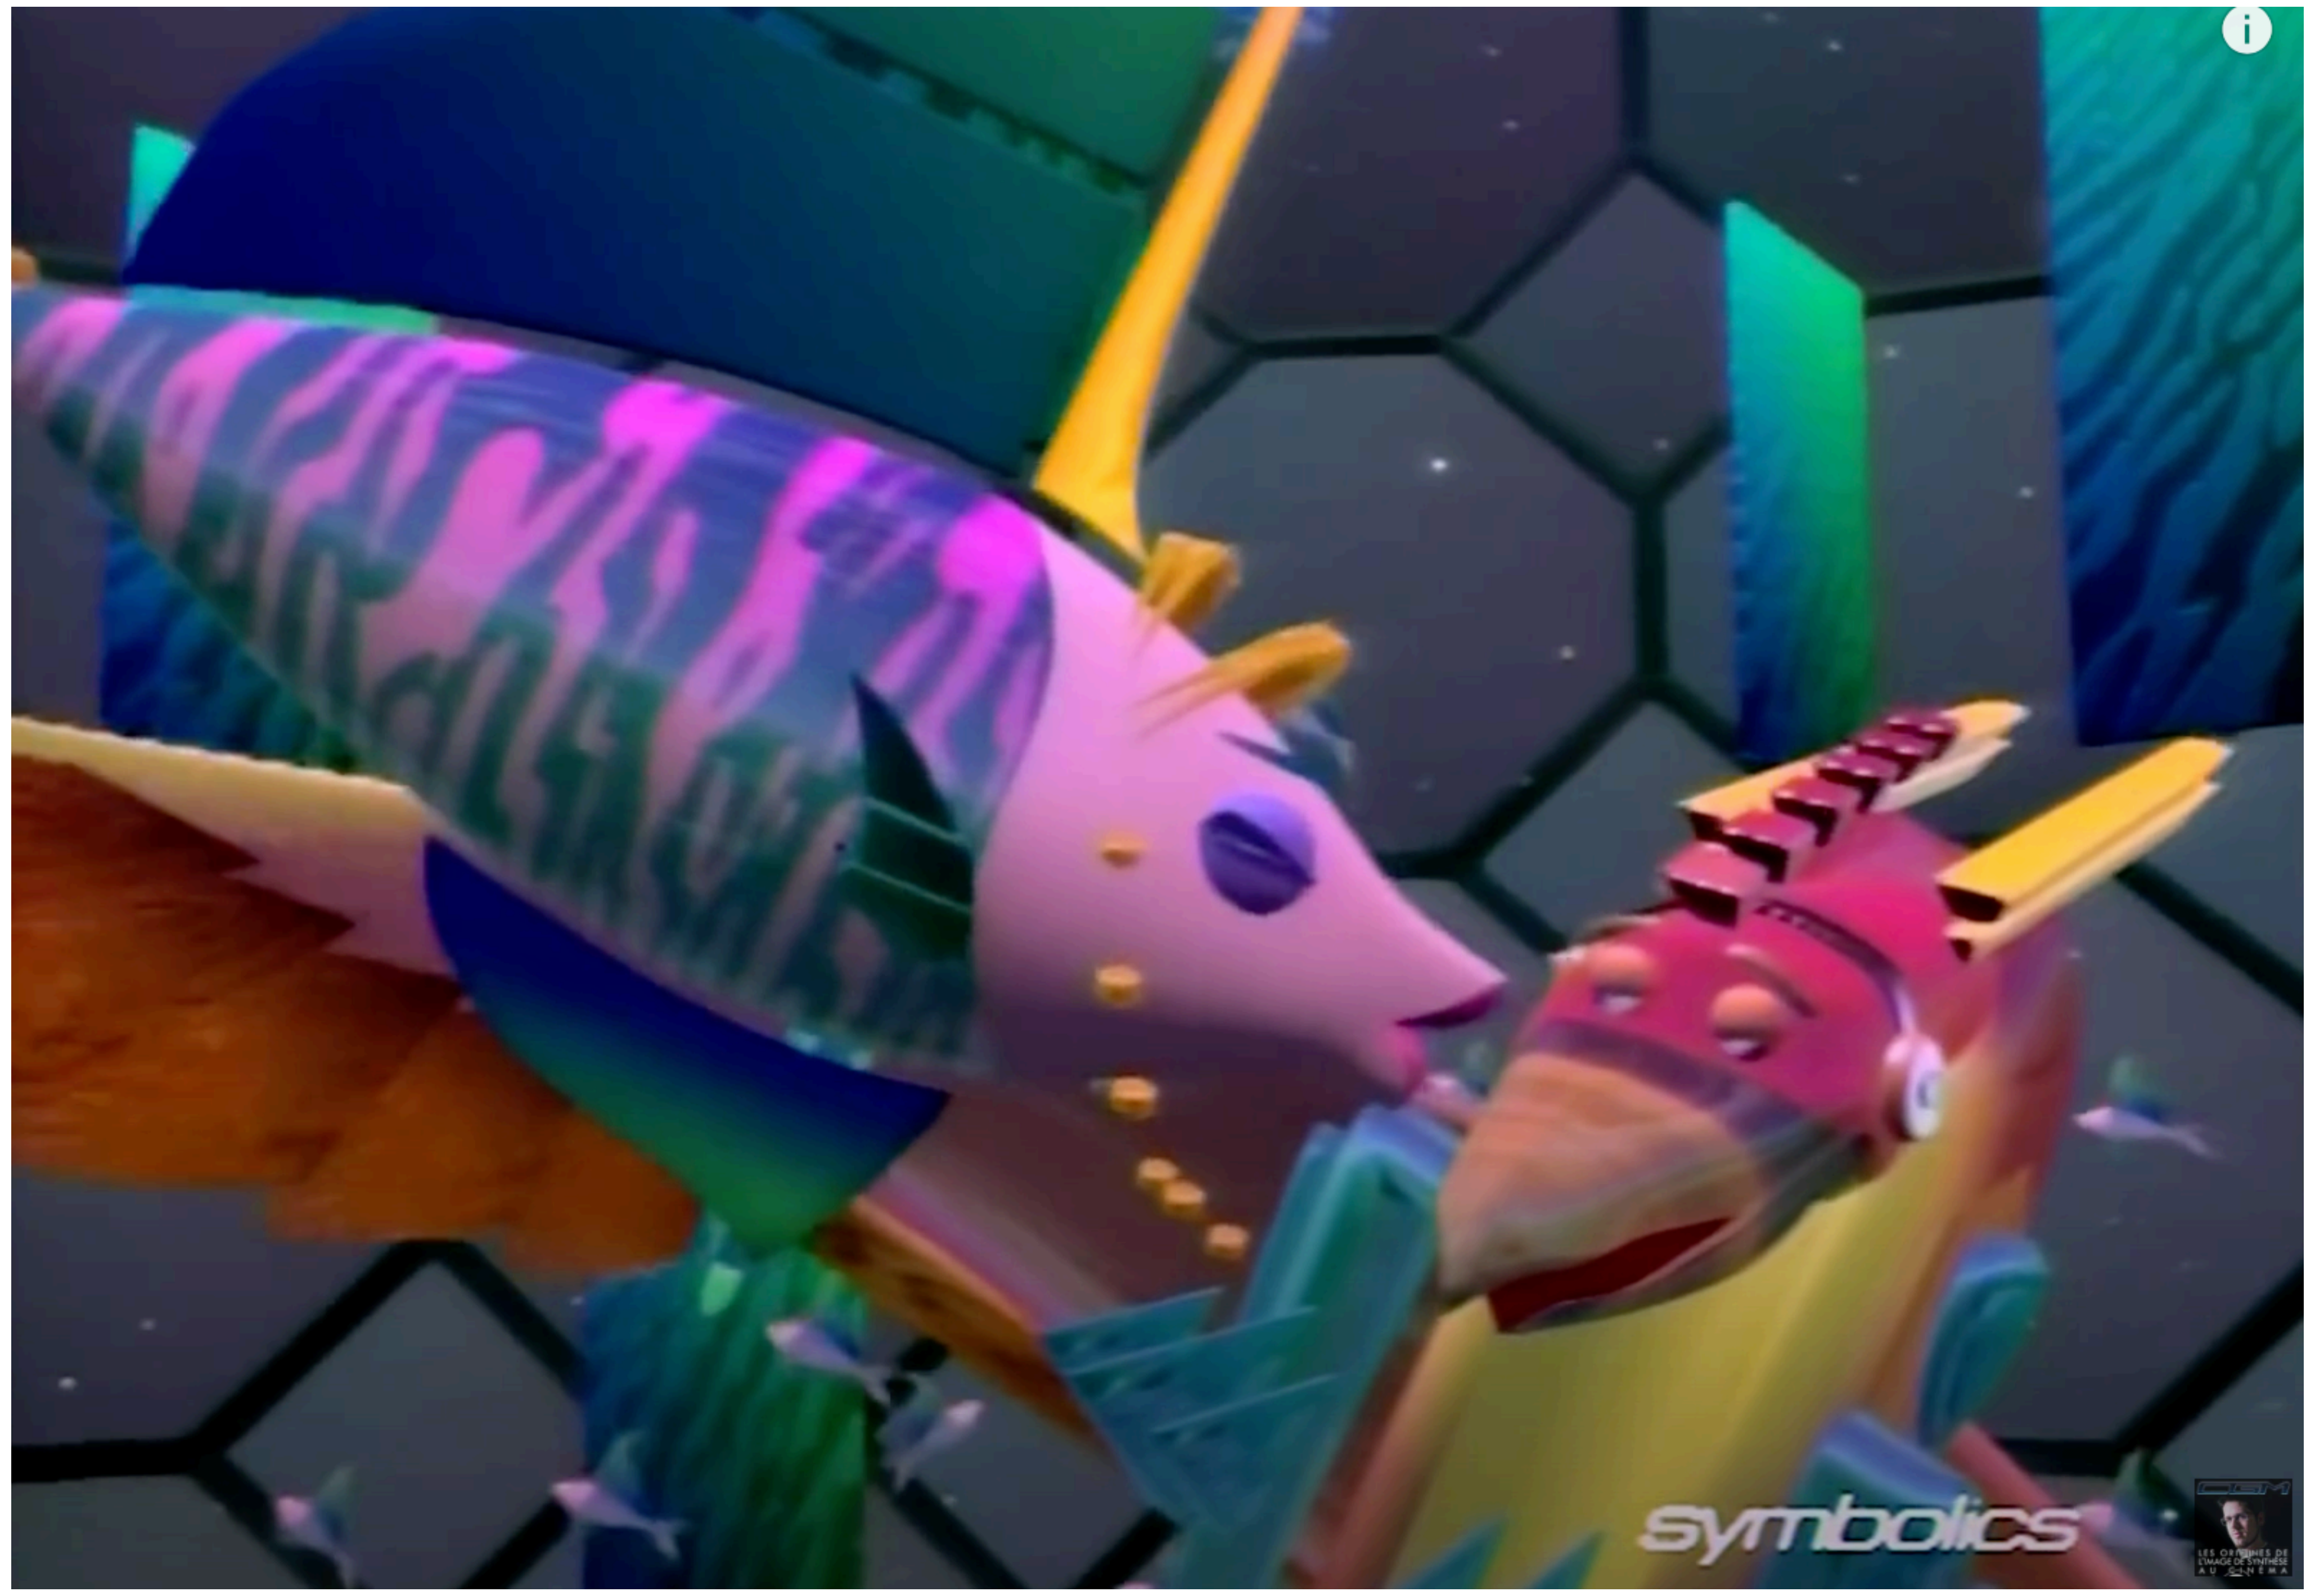
symbolics

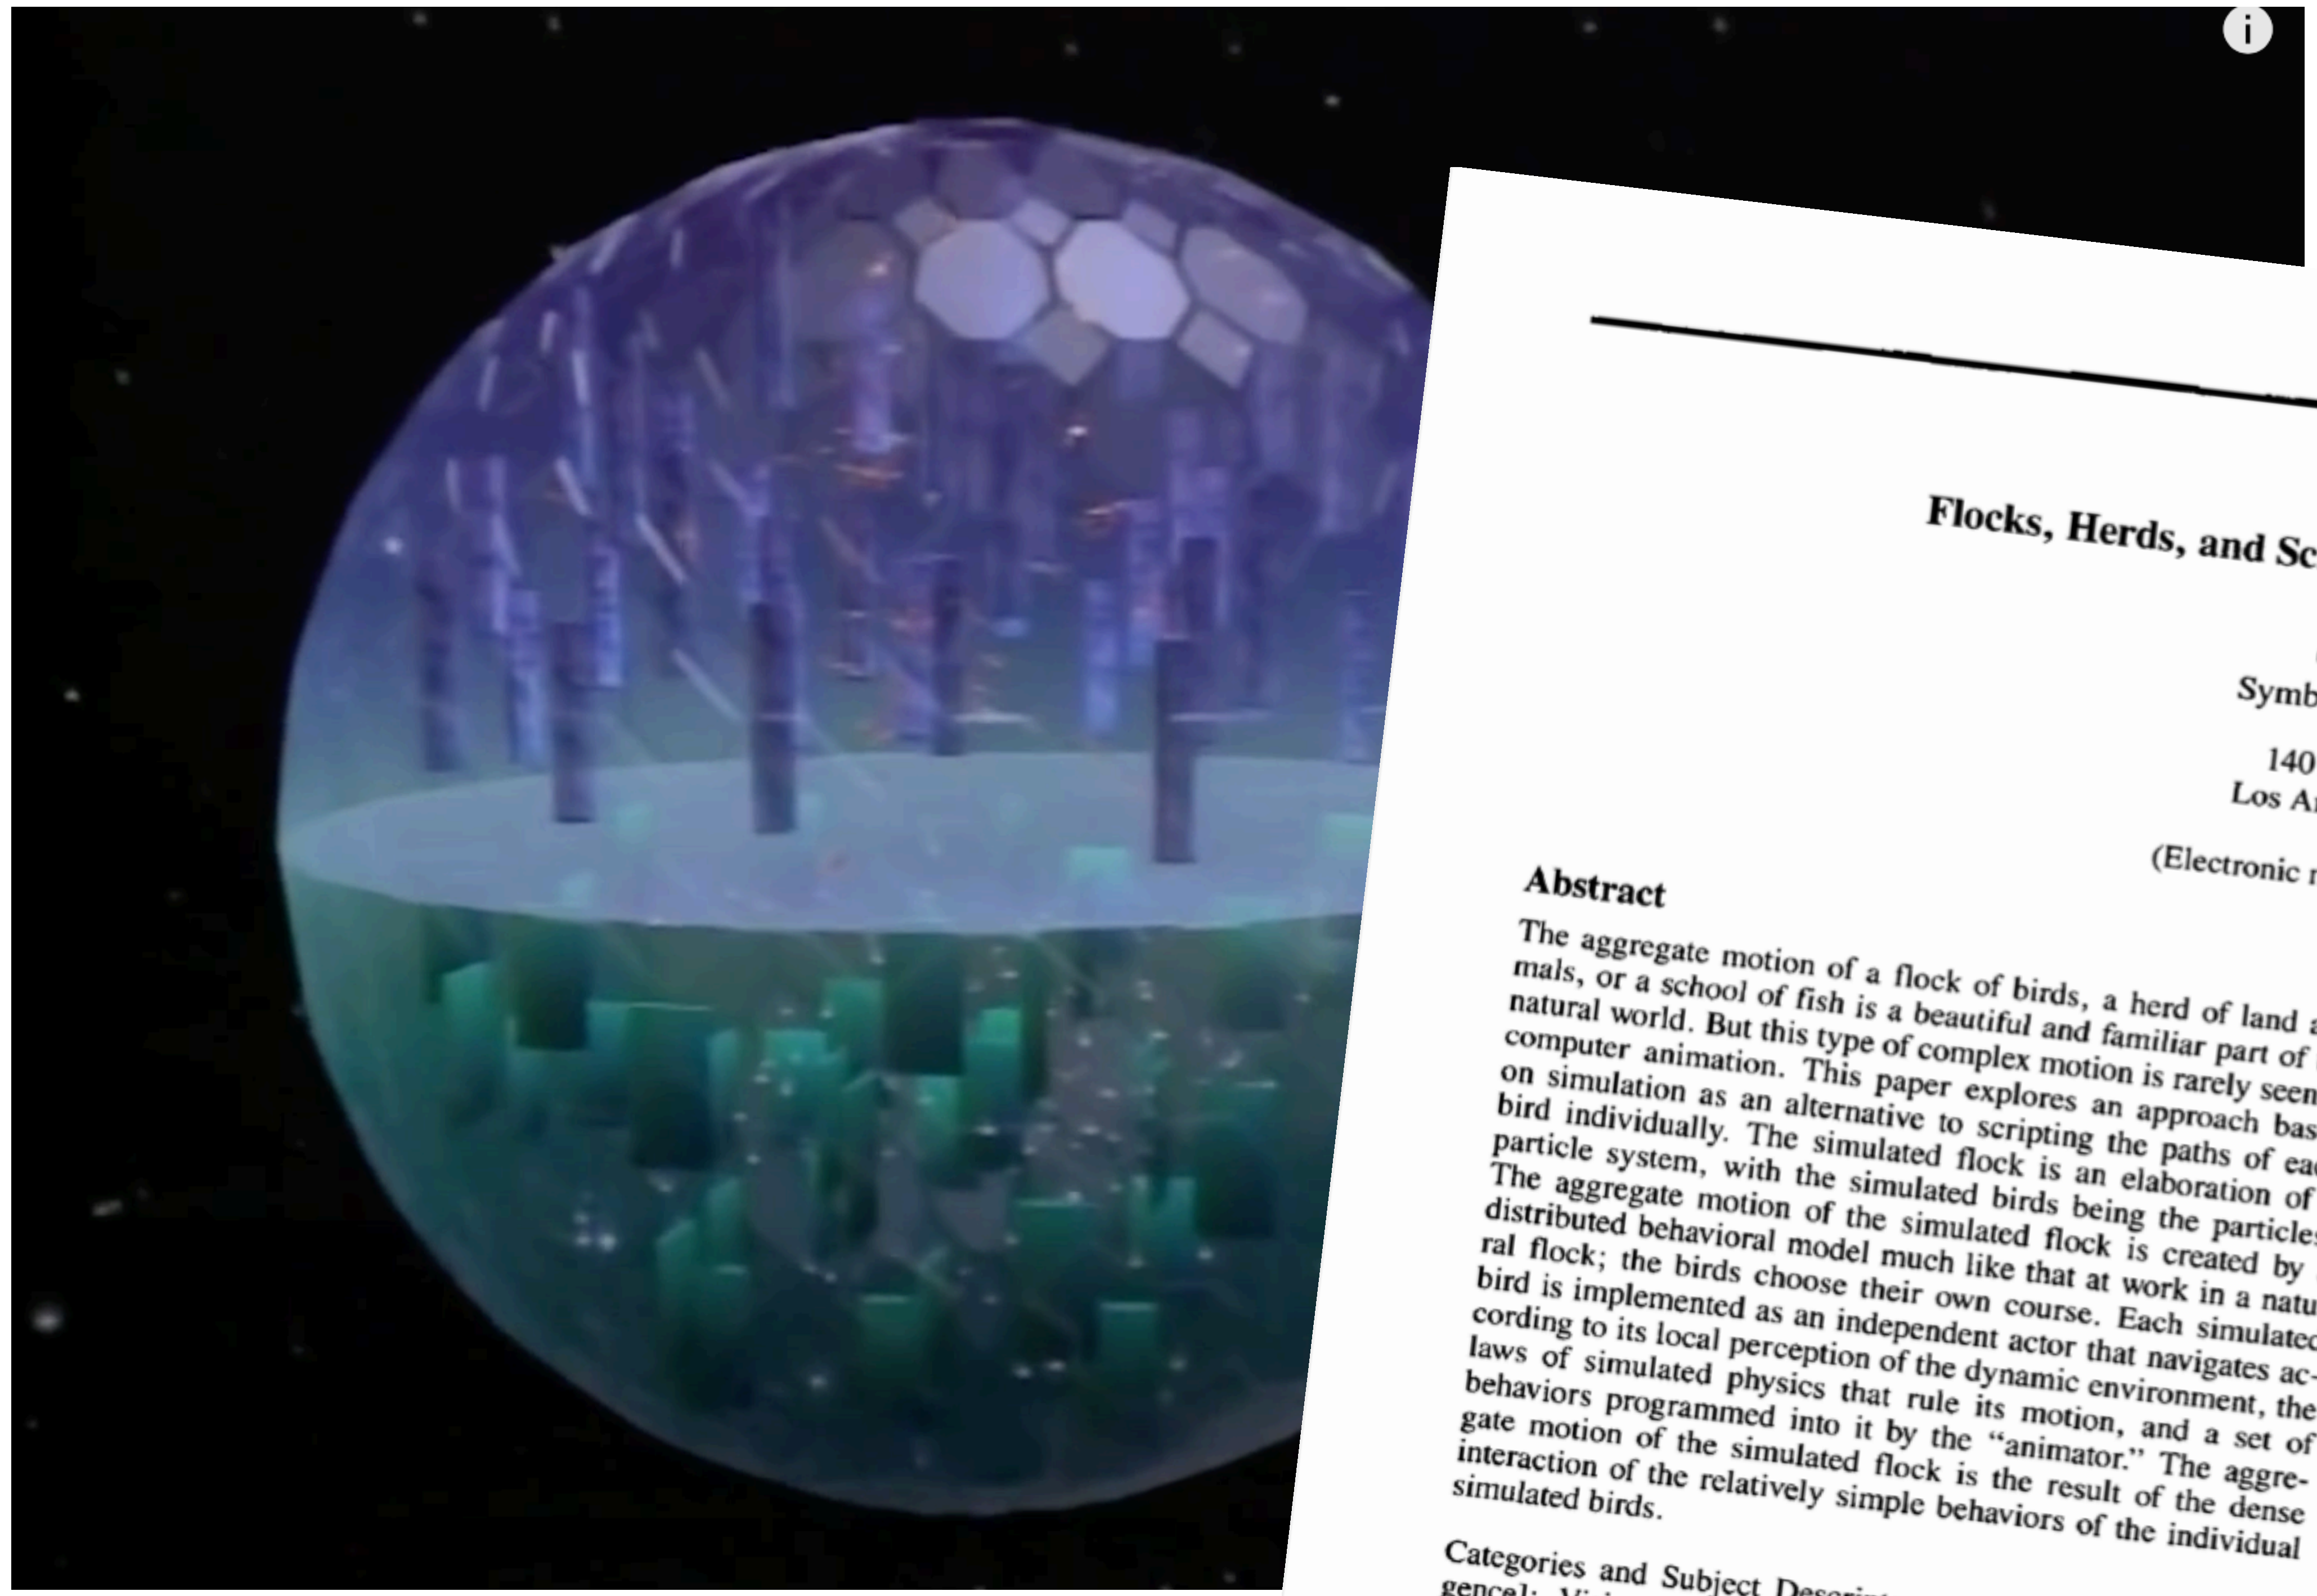

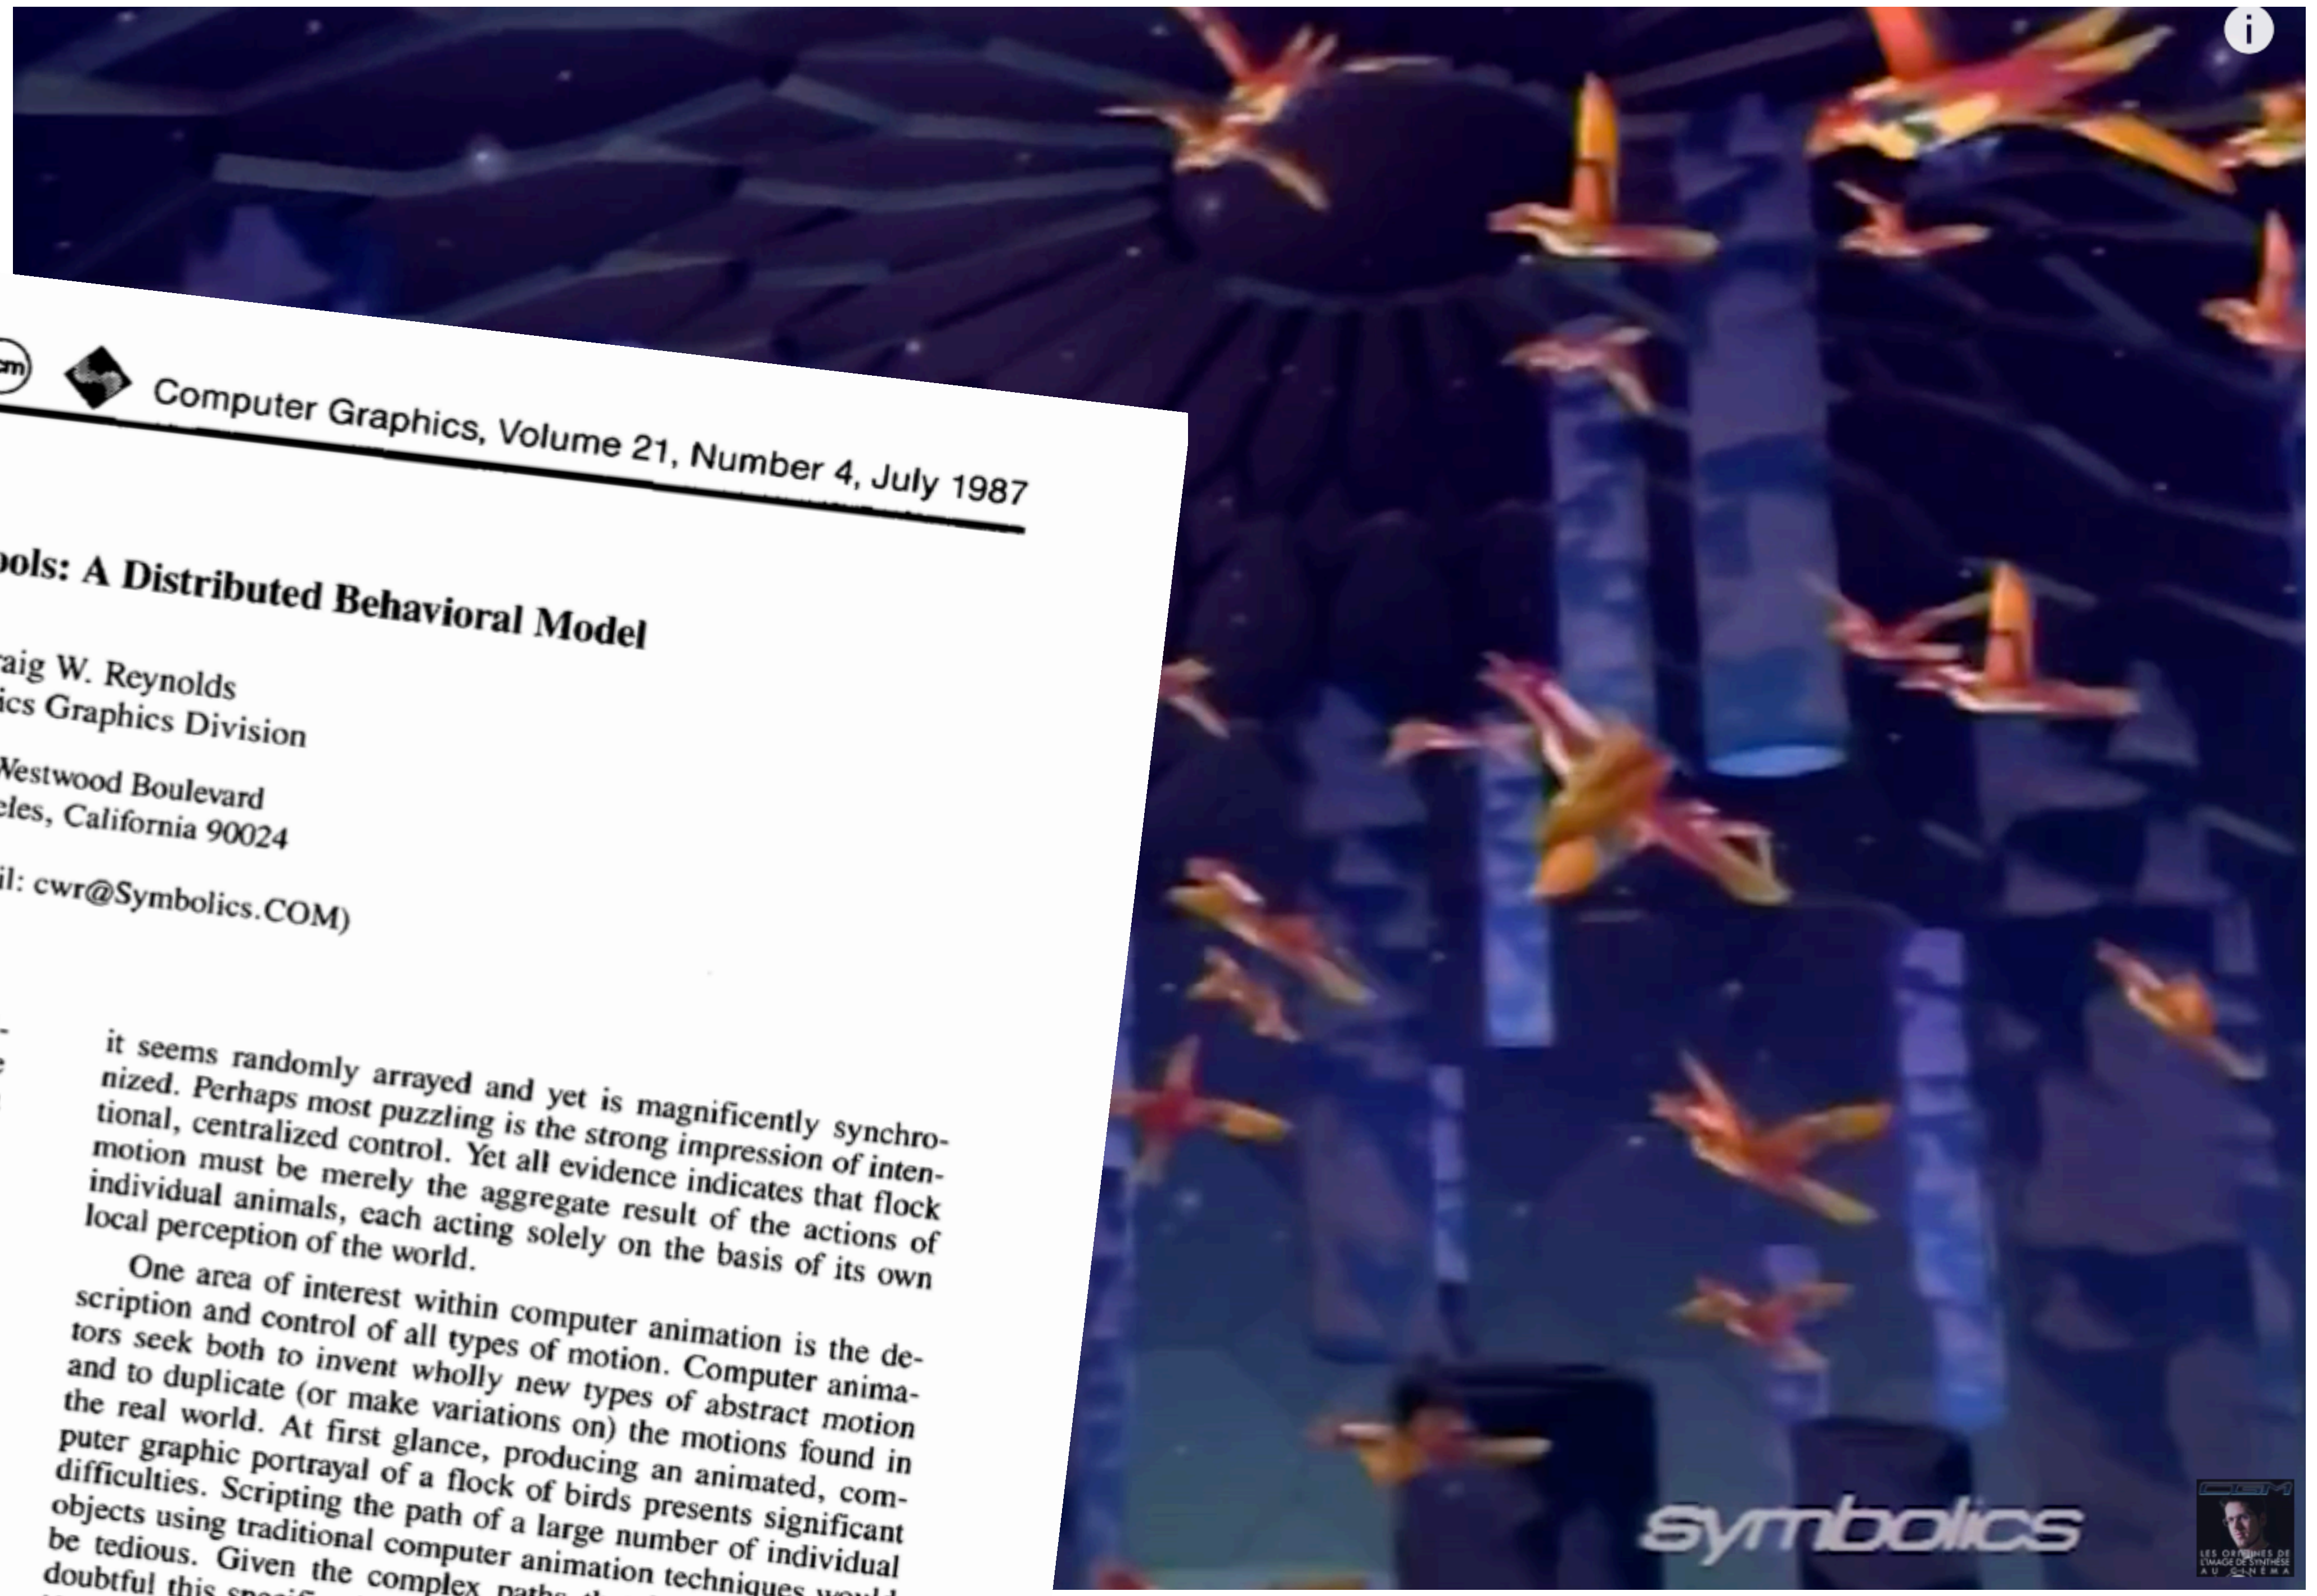

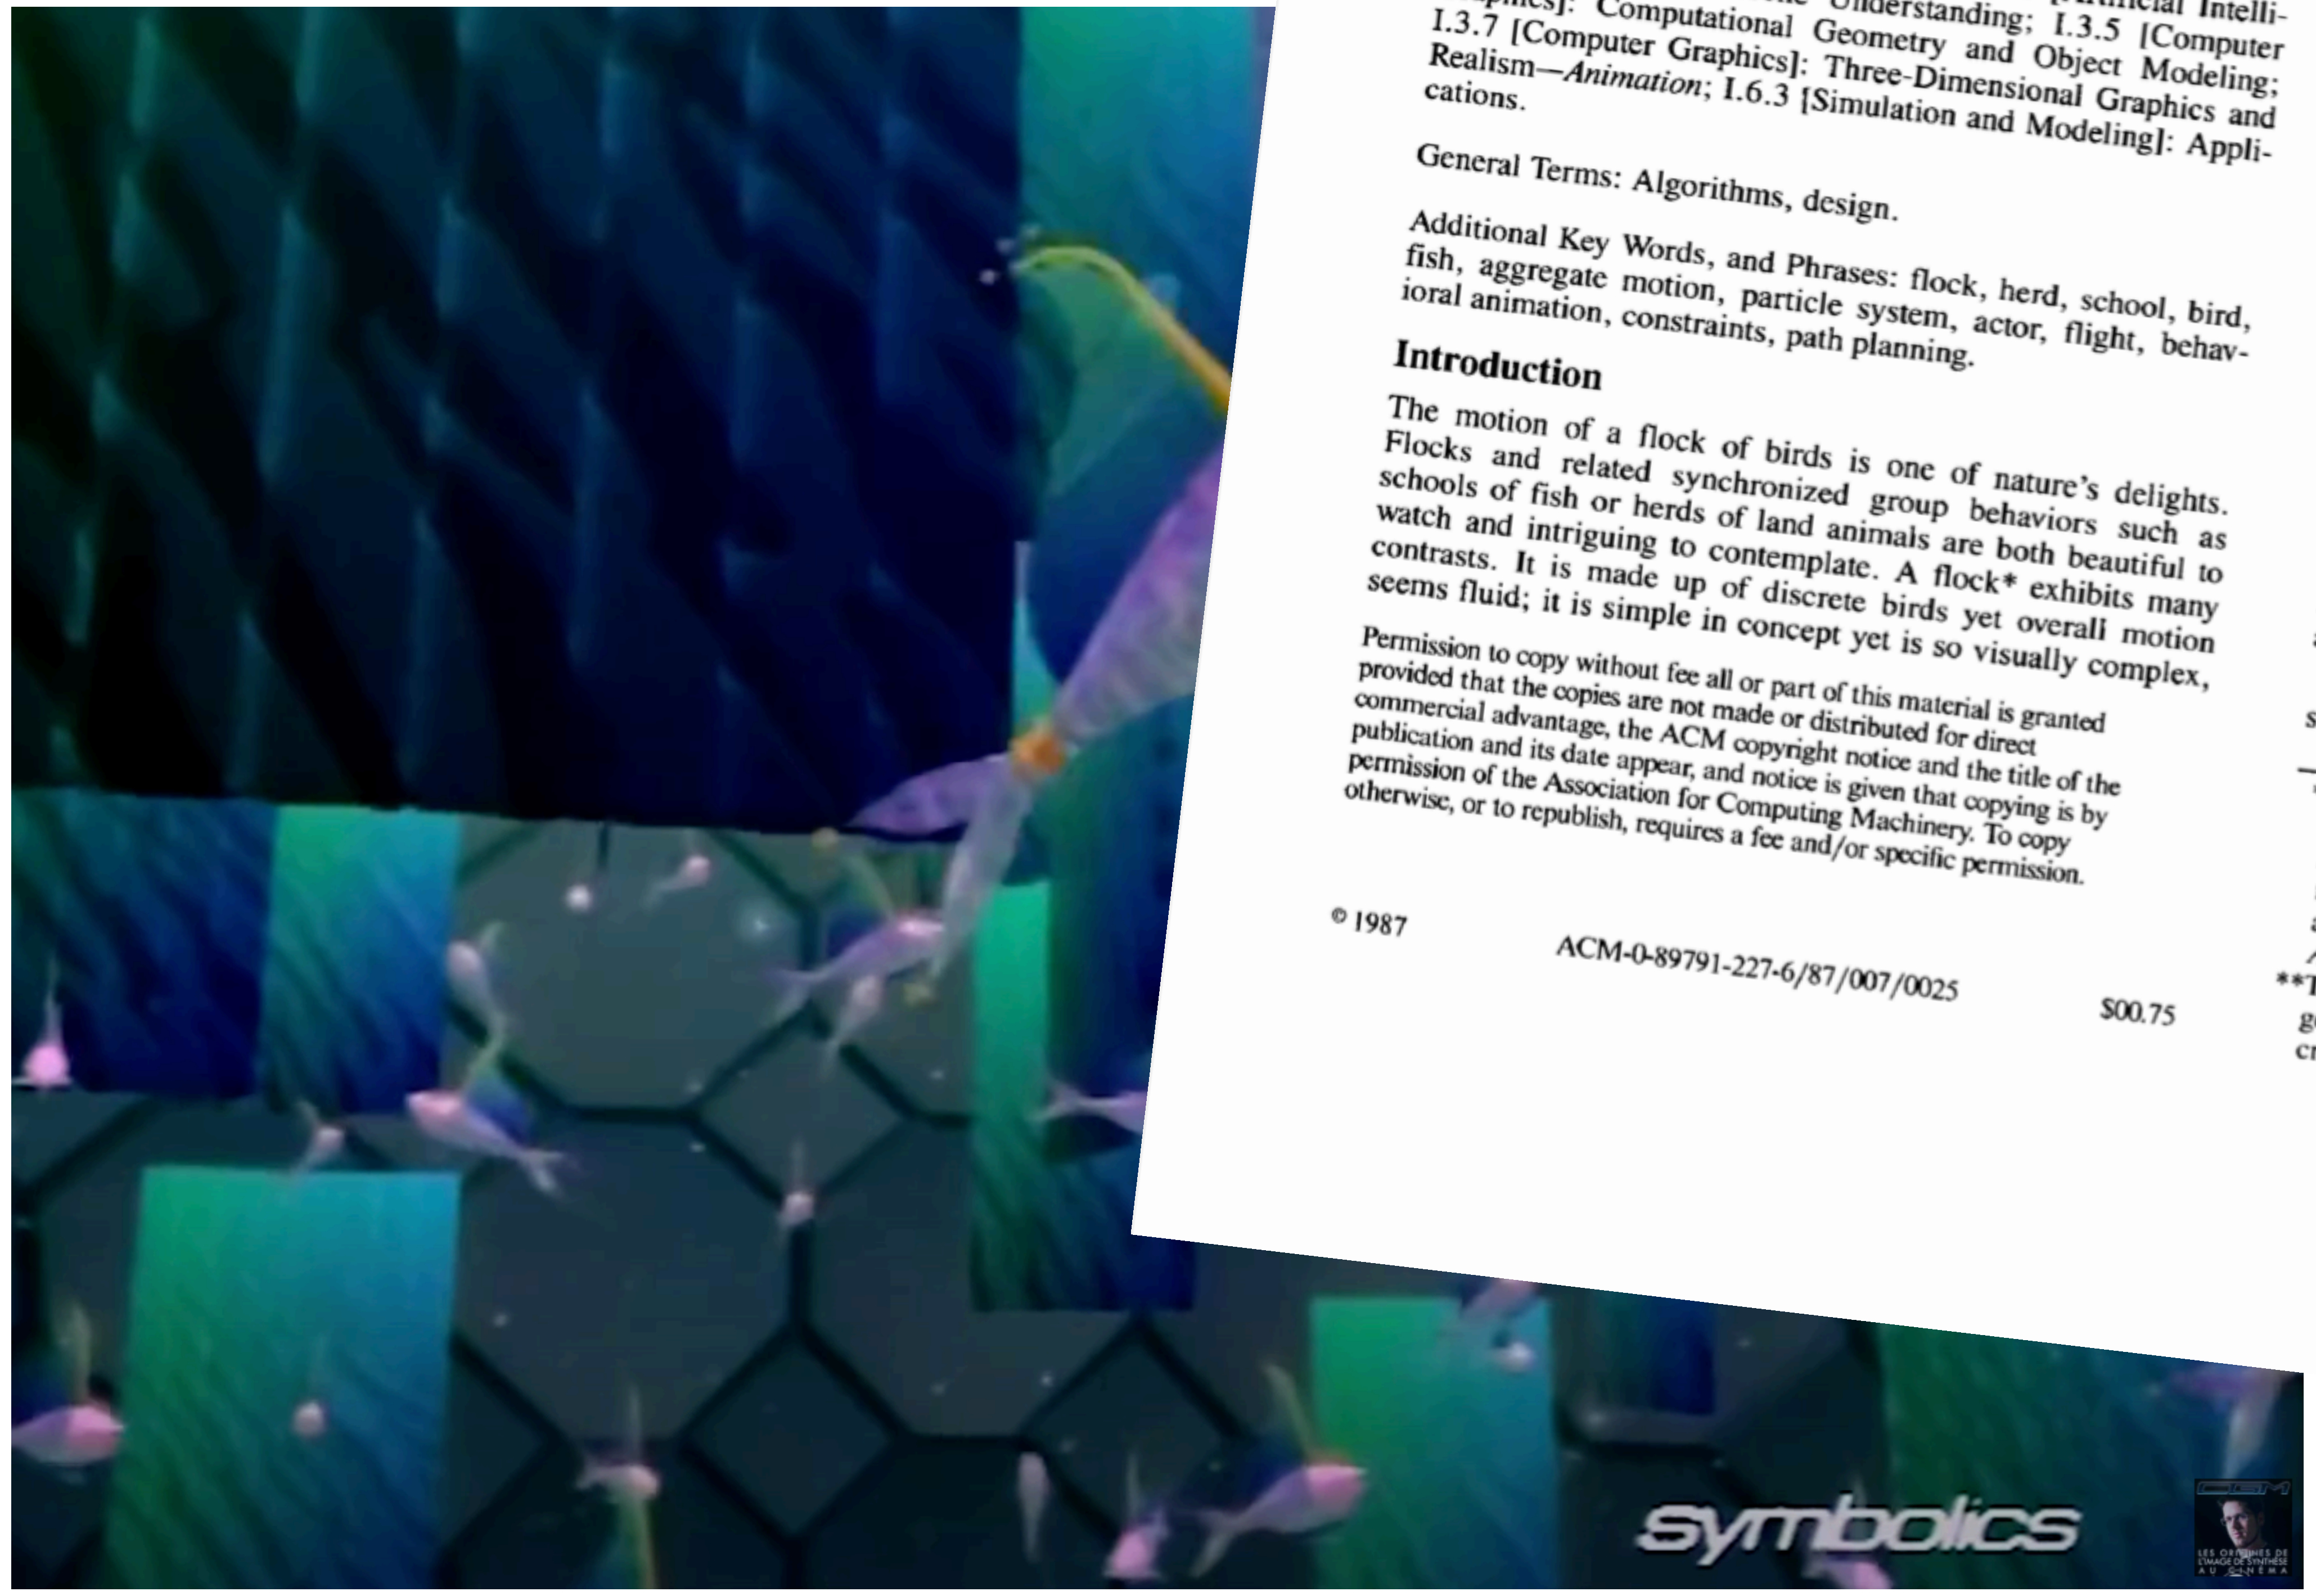

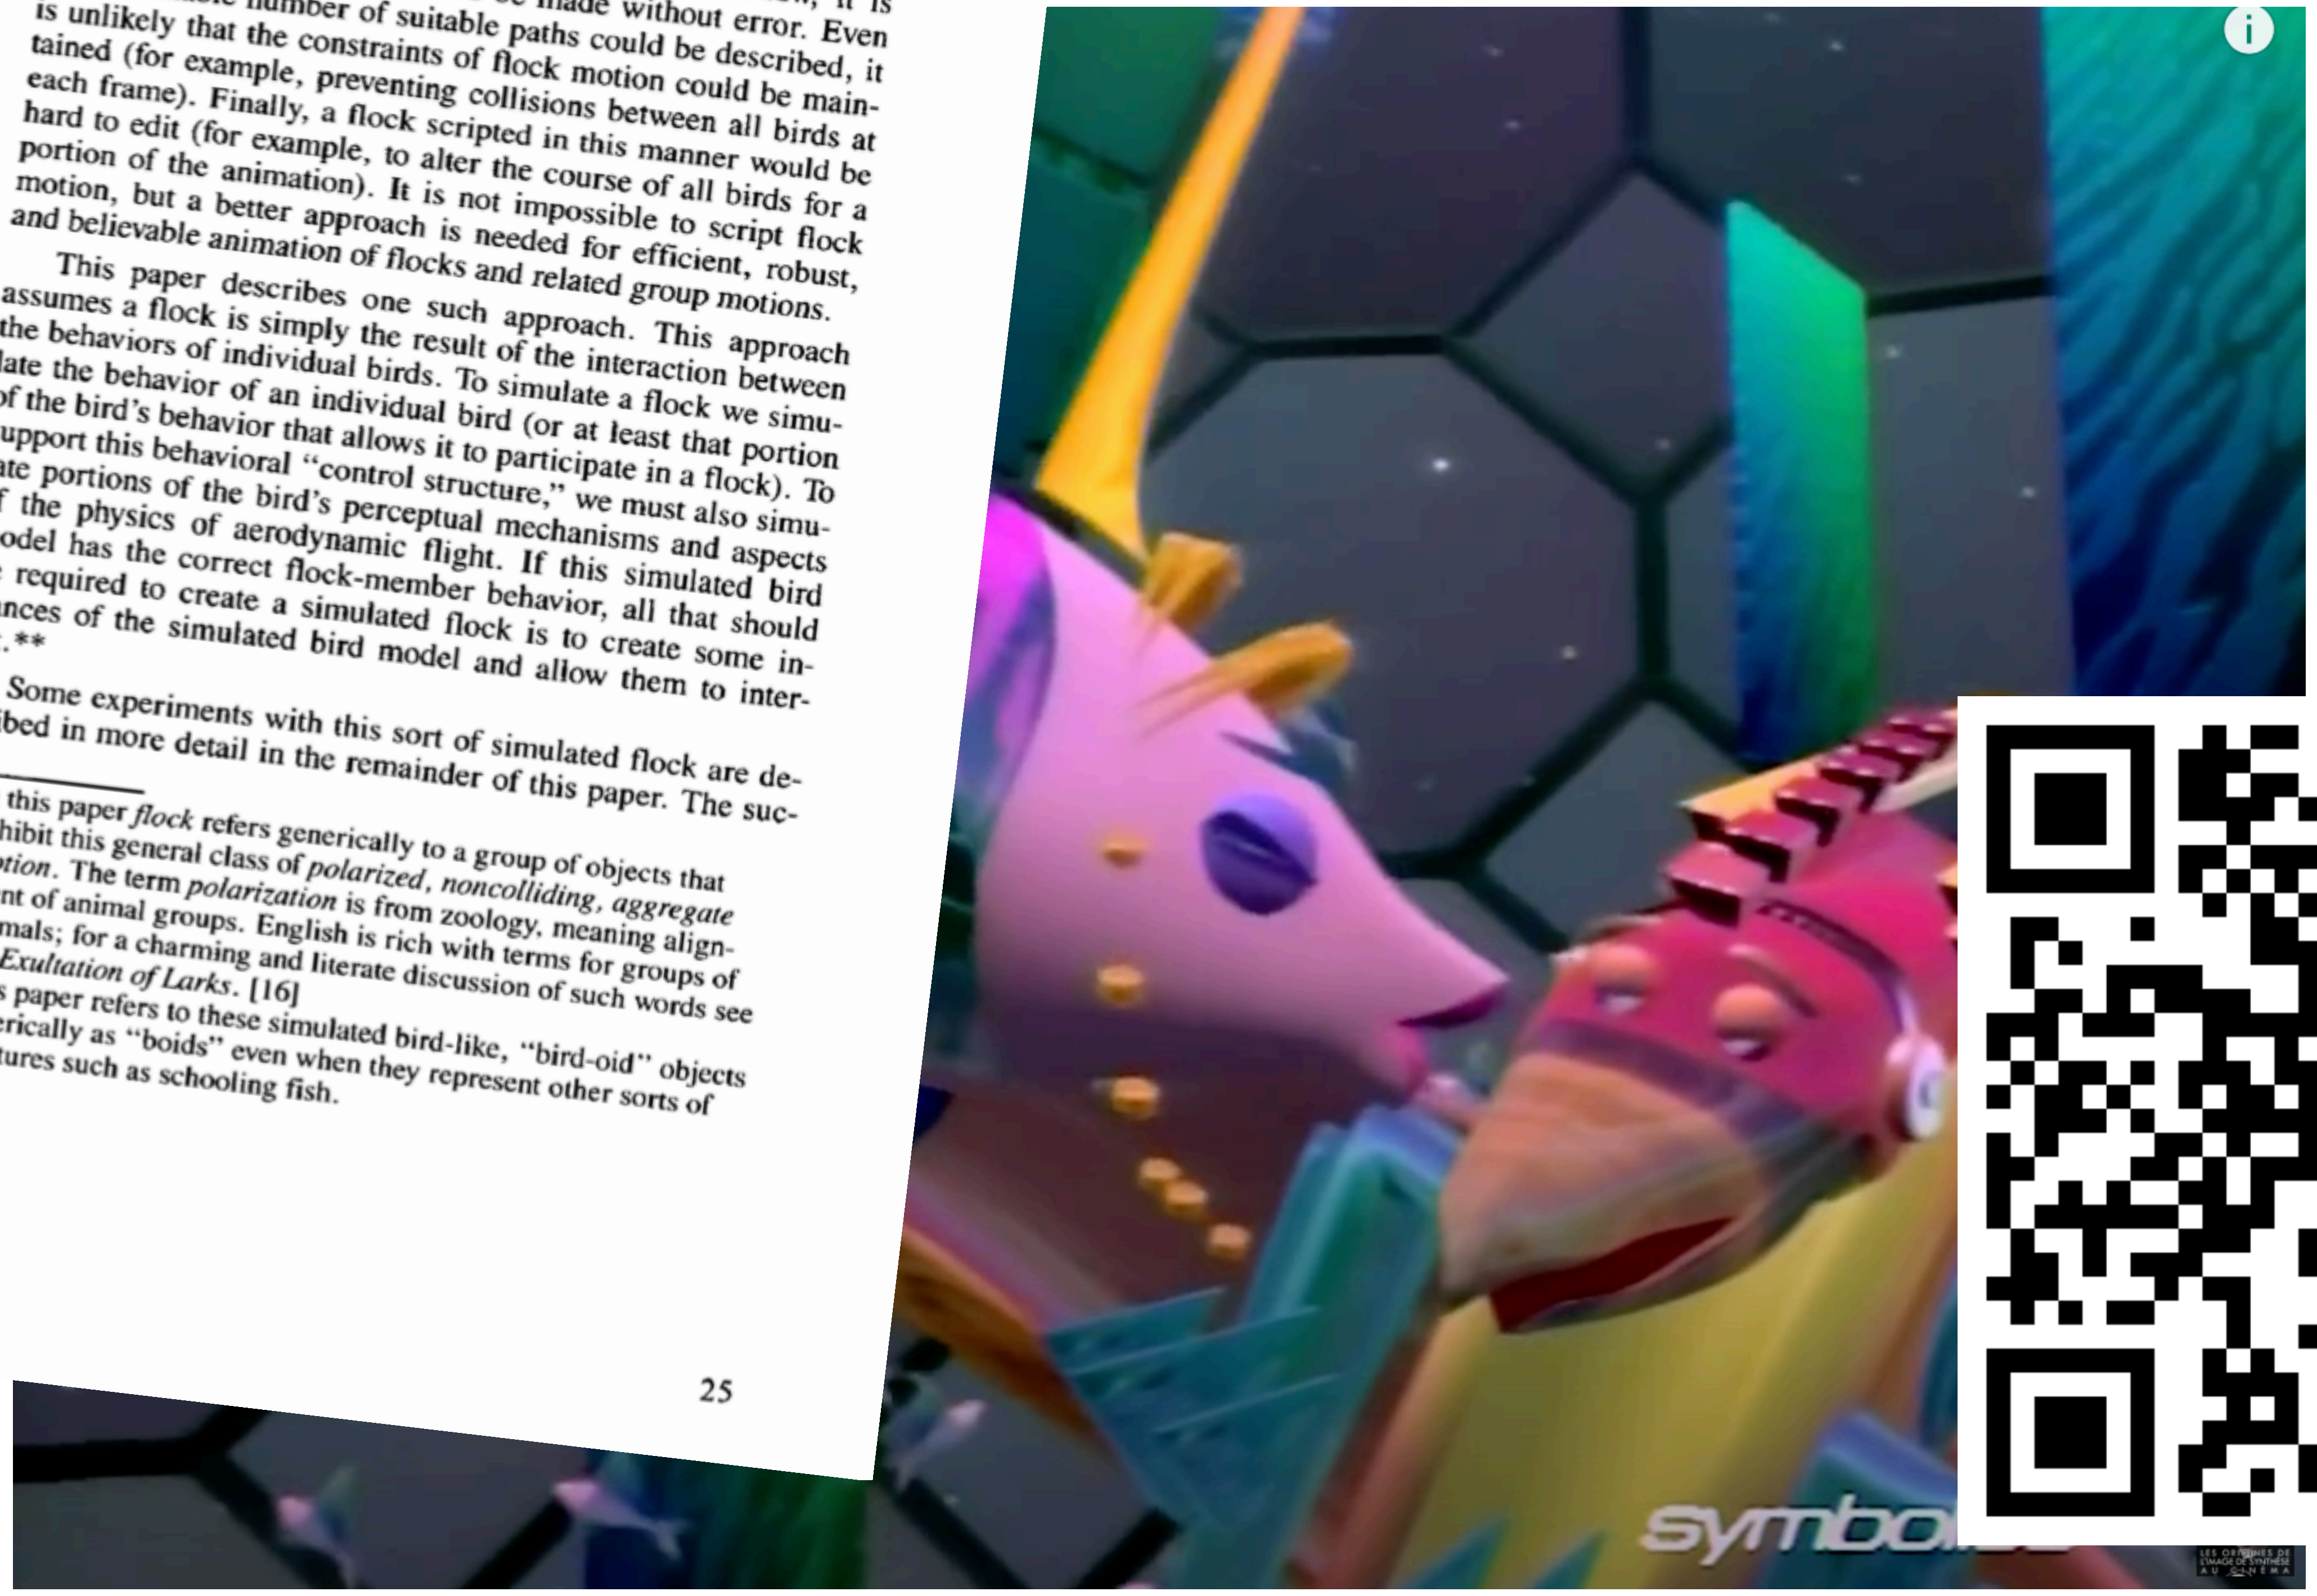

Computer Graphics, Volume 21, Number 4, July 1987

Flocks, Herds, and Schools: A Distributed Behavioral Model

Craig W. Reynolds
Symbolics Graphics Division

1401 Westwood Boulevard
Los Angeles, California 90024

(Electronic mail: cwr@Symbolics.COM)

Abstract

The aggregate motion of a flock of birds, a herd of land animals, or a school of fish is a beautiful and familiar part of the natural world. But this type of complex motion is rarely seen in computer animation. This paper explores an approach based on simulation as an alternative to scripting the paths of each bird individually. The simulated flock is an elaboration of a particle system, with the simulated birds being the particles. The aggregate motion of the simulated flock is created by a distributed behavioral model much like that at work in a natural flock; the birds choose their own course. Each simulated bird is implemented as an independent actor that navigates according to its local perception of the dynamic environment, the laws of simulated physics that rule its motion, and a set of behaviors programmed into it by the "animator." The aggregate motion of the simulated flock is the result of the dense interaction of the relatively simple behaviors of the individual simulated birds.

Categories and Subject Descriptors: I.2.10 [Artificial Intelligence]: Vision and Scene Understanding; I.3.5 [Computer Graphics]: Computational Geometry and Object Modeling; I.3.7 [Computer Graphics]: Three-Dimensional Graphics and Realism—*Animation*; I.6.3 [Simulation and Modeling]: Applications.

General Terms: Algorithms, design.

Additional Key Words, and Phrases: flock, herd, school, bird, fish, aggregate motion, particle system, actor, flight, behavioral animation, constraints, path planning.

Introduction

The motion of a flock of birds is one of nature's delights. Flocks and related synchronized group behaviors such as schools of fish or herds of land animals are both beautiful to watch and intriguing to contemplate. A flock* exhibits many contrasts. It is made up of discrete birds yet overall motion seems fluid; it is simple in concept yet is so visually complex, it seems randomly arrayed and yet is magnificently synchronized. Perhaps most puzzling is the strong impression of intentional, centralized control. Yet all evidence indicates that flock motion must be merely the aggregate result of the actions of individual animals, each acting solely on the basis of its own local perception of the world.

One area of interest within computer animation is the description and control of all types of motion. Computer animators seek both to invent wholly new types of abstract motion and to duplicate (or make variations on) the motions found in the real world. At first glance, producing an animated, computer graphic portrayal of a flock of birds presents significant difficulties. Scripting the path of a large number of individual objects using traditional computer animation techniques would be tedious. Given the complex paths that birds follow, it is doubtful this specification could be made without error. Even if a reasonable number of suitable paths could be described, it is unlikely that the constraints of flock motion could be maintained (for example, preventing collisions between all birds at each frame). Finally, a flock scripted in this manner would be hard to edit (for example, to alter the course of all birds for a portion of the animation). It is not impossible to script flock motion, but a better approach is needed for efficient, robust, and believable animation of flocks and related group motions.

This paper describes one such approach. This approach assumes a flock is simply the result of the interaction between the behaviors of individual birds. To simulate a flock we simulate the behavior of an individual bird (or at least that portion of the bird's behavior that allows it to participate in a flock). To support this behavioral "control structure," we must also simulate portions of the bird's perceptual mechanisms and aspects of the physics of aerodynamic flight. If this simulated bird model has the correct flock-member behavior, all that should be required to create a simulated flock is to create some instances of the simulated bird model and allow them to interact.**

Some experiments with this sort of simulated flock are described in more detail in the remainder of this paper. The suc-

ACM-0-89791-227-6/87/007/0025 $00.75

*In this paper *flock* refers generically to a group of objects that exhibit this general class of *polarized, noncolliding, aggregate motion*. The term *polarization* is from zoology, meaning alignment of animal groups. English is rich with terms for groups of animals; for a charming and literate discussion of such words see *An Exultation of Larks*. [16]

**This paper refers to these simulated bird-like, "bird-oid" objects generically as "boids" even when they represent other sorts of creatures such as schooling fish.

SYMBOLICS

GRAPHICS DIVISION

Boids and inverse design
2024-2025

Boid models are hard to “tune”

Boid models are hard to “tune”

They have lots of parameters,
which have nonlinear effect,
and all interact with each other.

Boid models are hard to “tune”

adjusting one knob requires
adjusting others to compensate

flock control panel

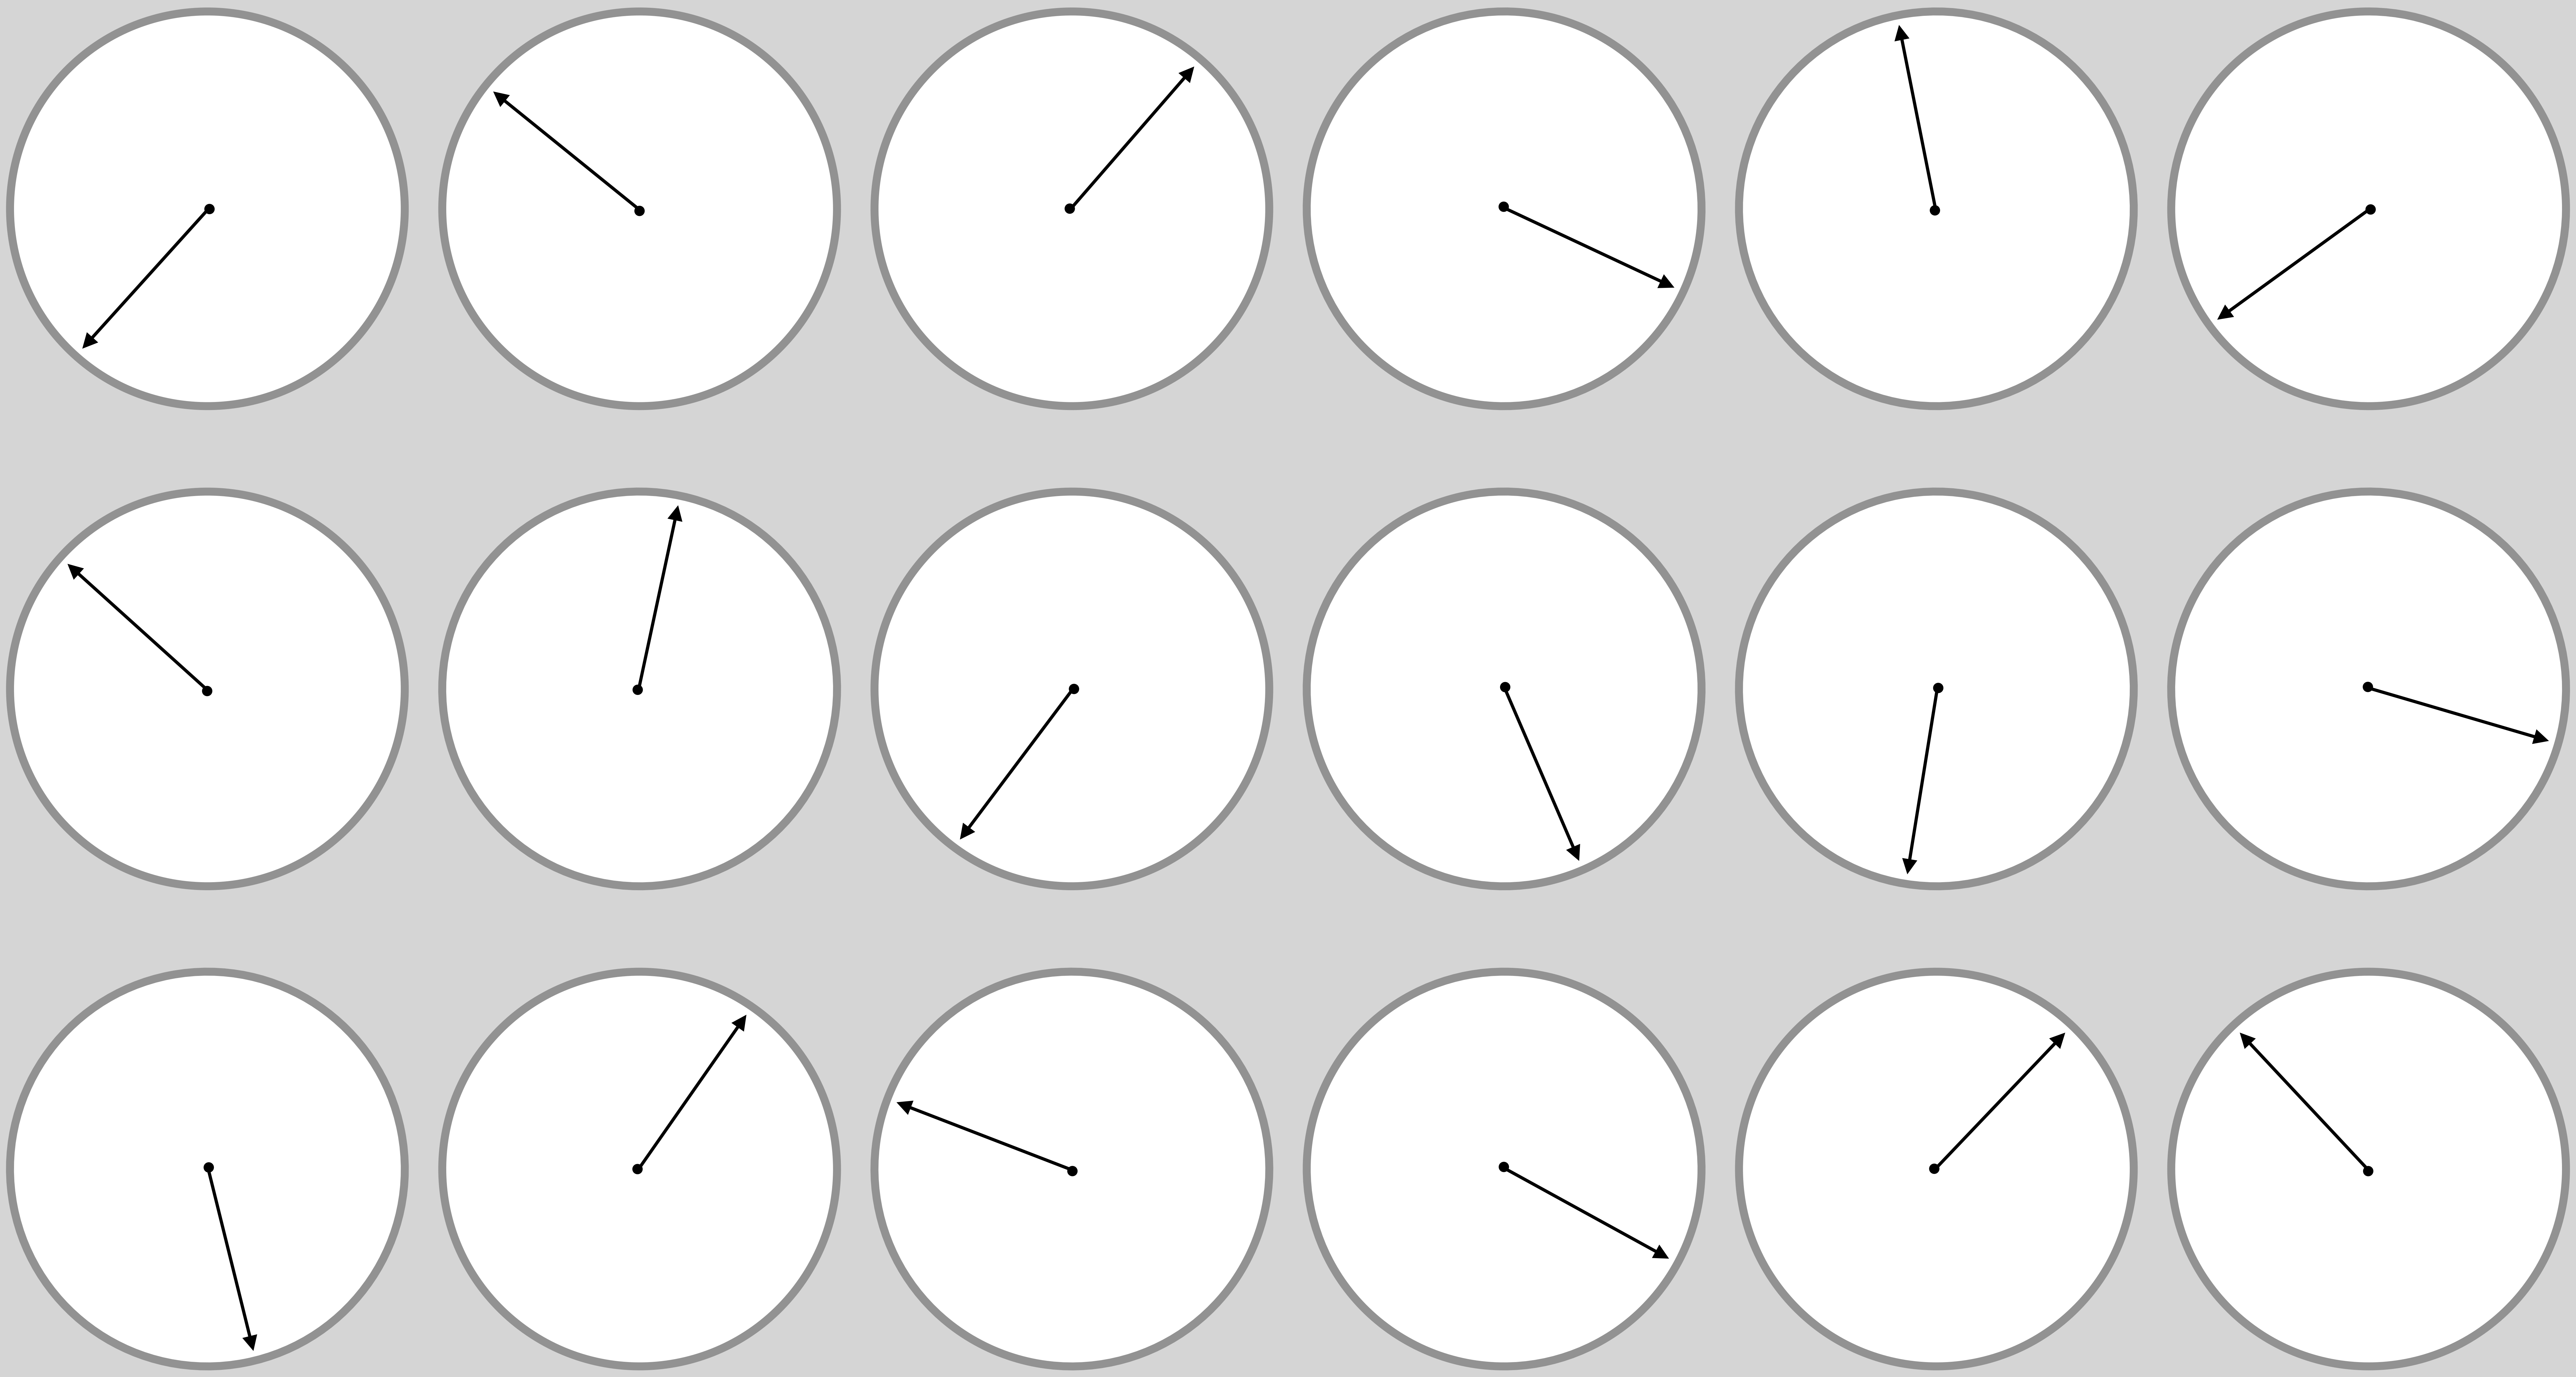

How can we use optimization to tune boid flocks to get a desired result?

How can we use optimization to tune boid flocks to get a desired result?

Biological example: finch versus crow.
Animation example: happy versus afraid.

How can we use optimization to tune boid flocks to get a desired result?

"Inverse design."

Create a metric/loss/fitness function.

Optimize toward design goal.

Preliminary work in progress

- Joint work with Gilbert Bernstein, Matthew Shang, Jennifer Luo at UW.
- Made reference boids model, first in Python then in c++.
- Two approaches being pursued:
  - Gradient descent with differentiable programming.
  - Gradient-free evolutionary optimization.
    - **Genetic algorithm: parameters for a fixed boid model**
    - Genetic programing: steering programs form scratch

Difficult to find gradient of chaotic system

Multi-agent systems are chaotic.
Finding a principled gradient is hard.
That analysis is ongoing.

In parallel, using evolutionary optimization

Genetic algorithm works moderately well.
Genetic programming *really not* working, so far.

GA evolution run — multi-objective fitness

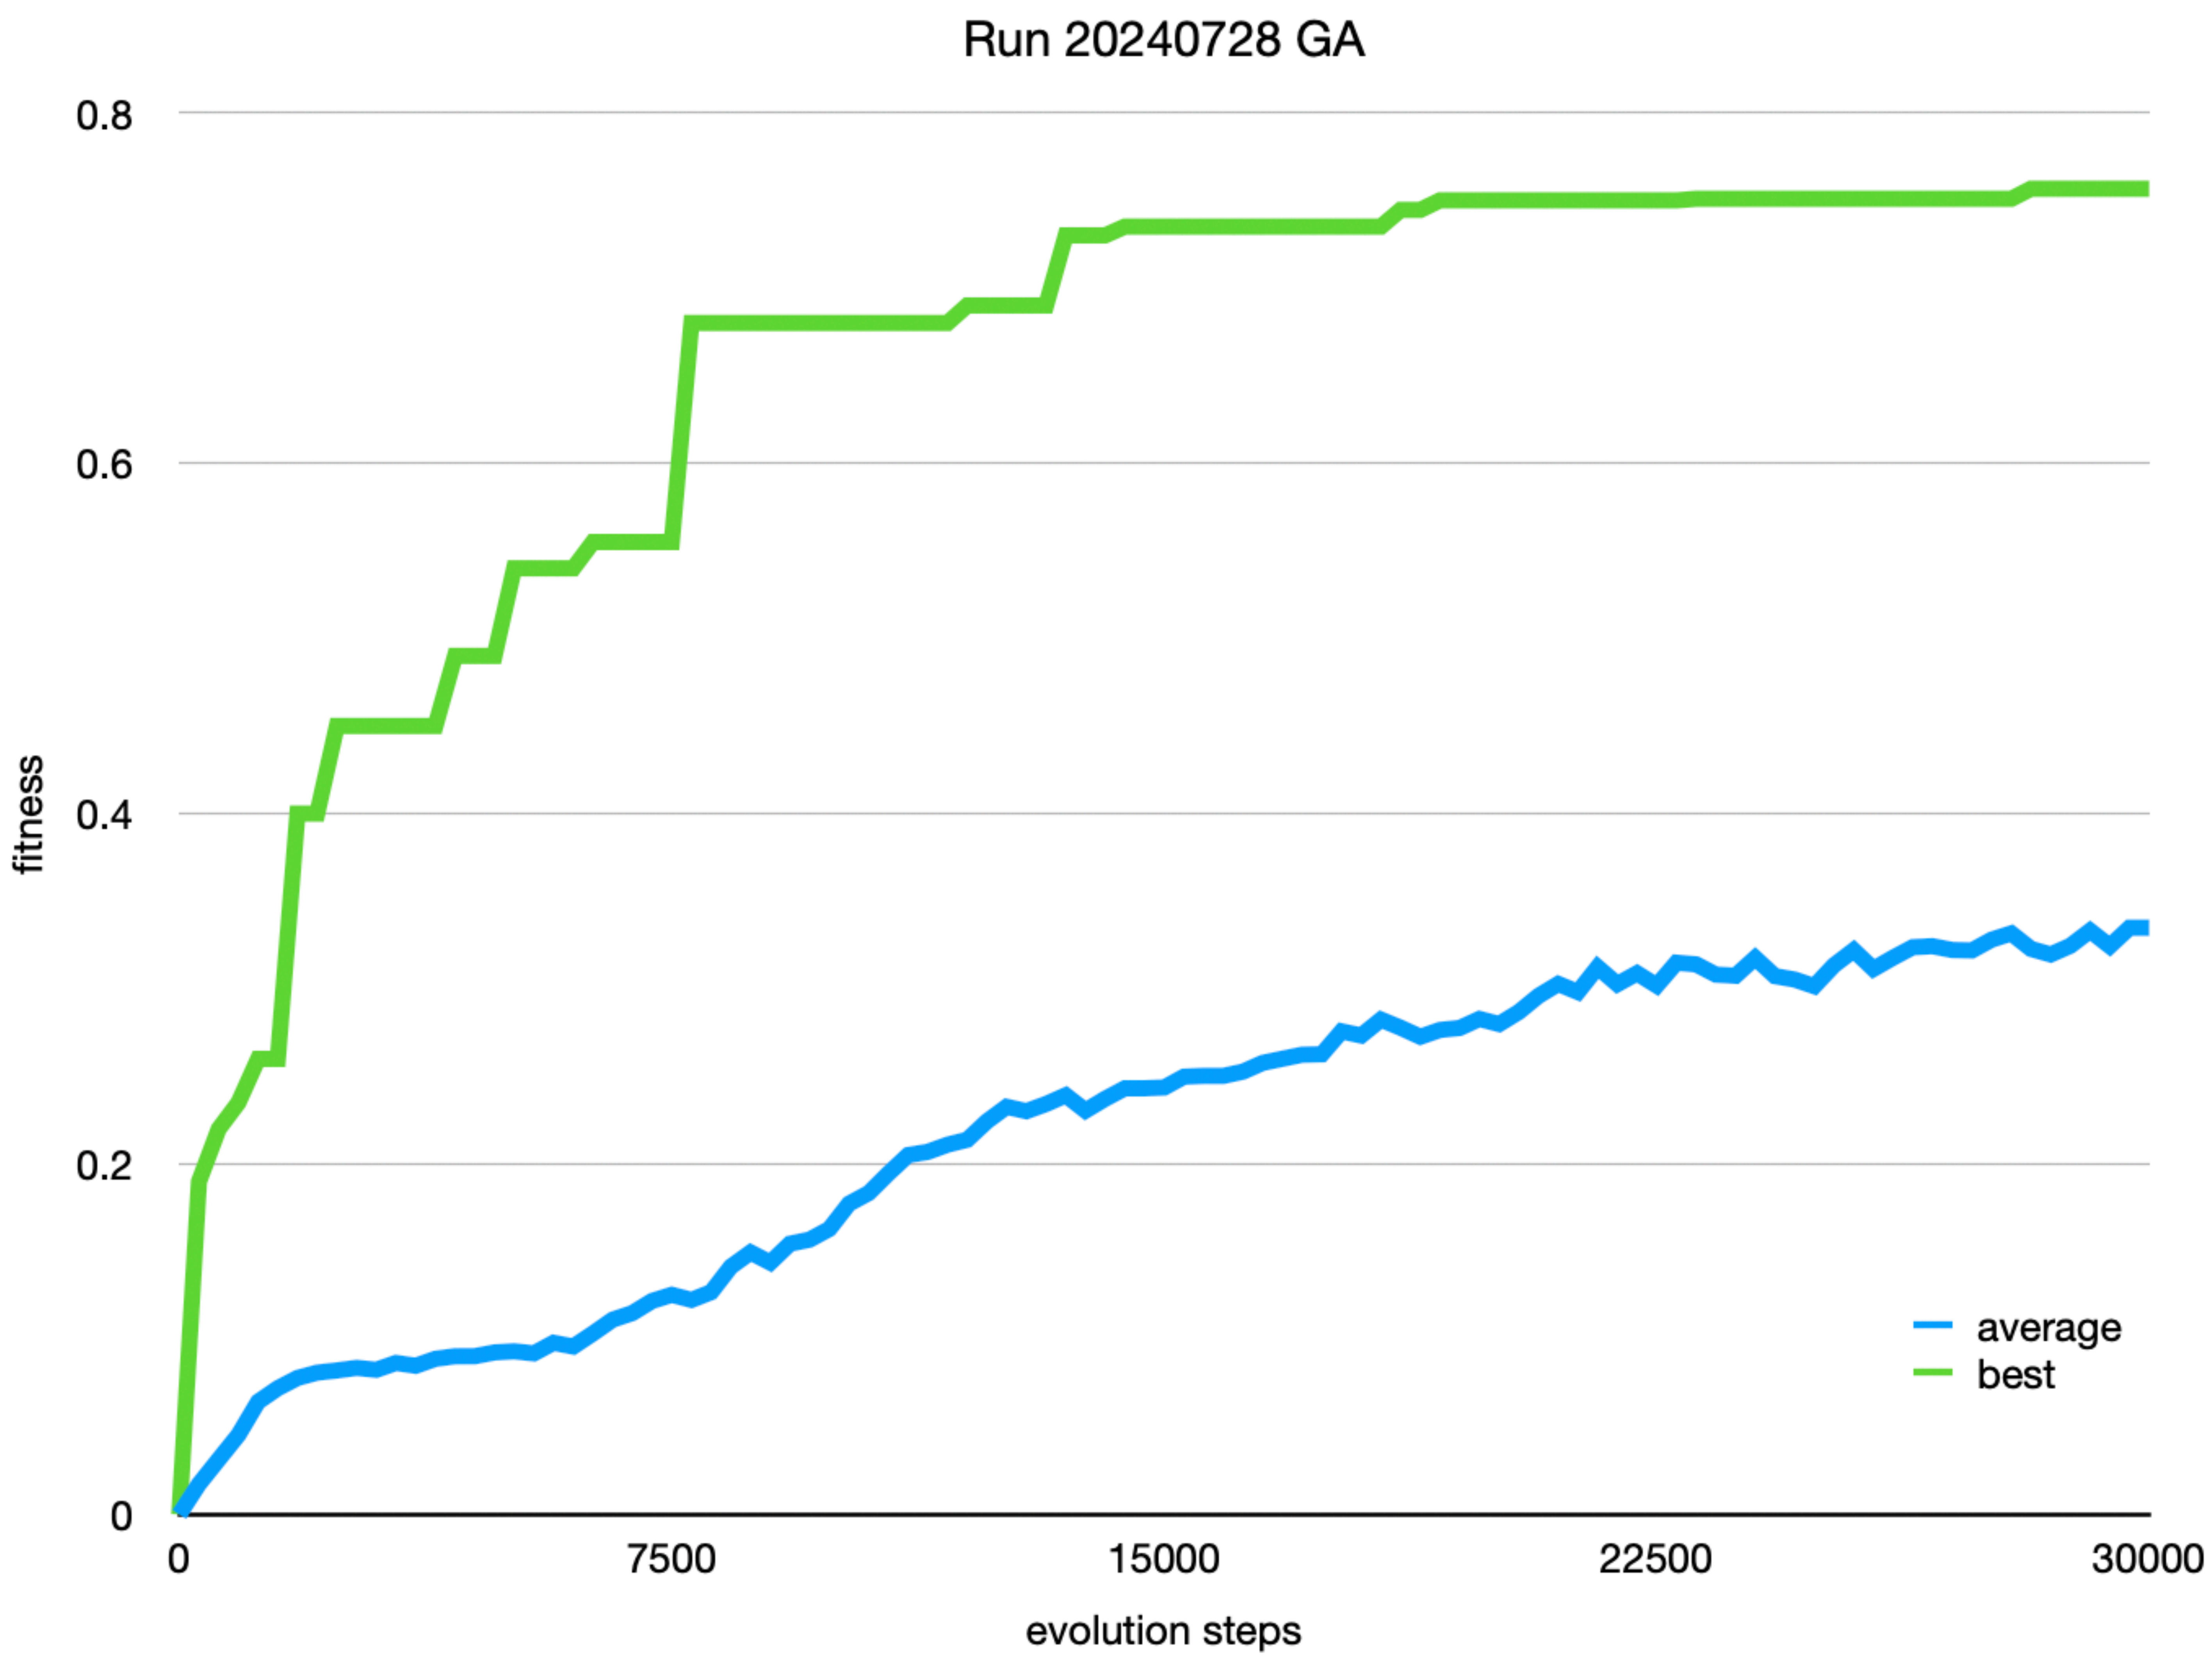

EvoFlock components

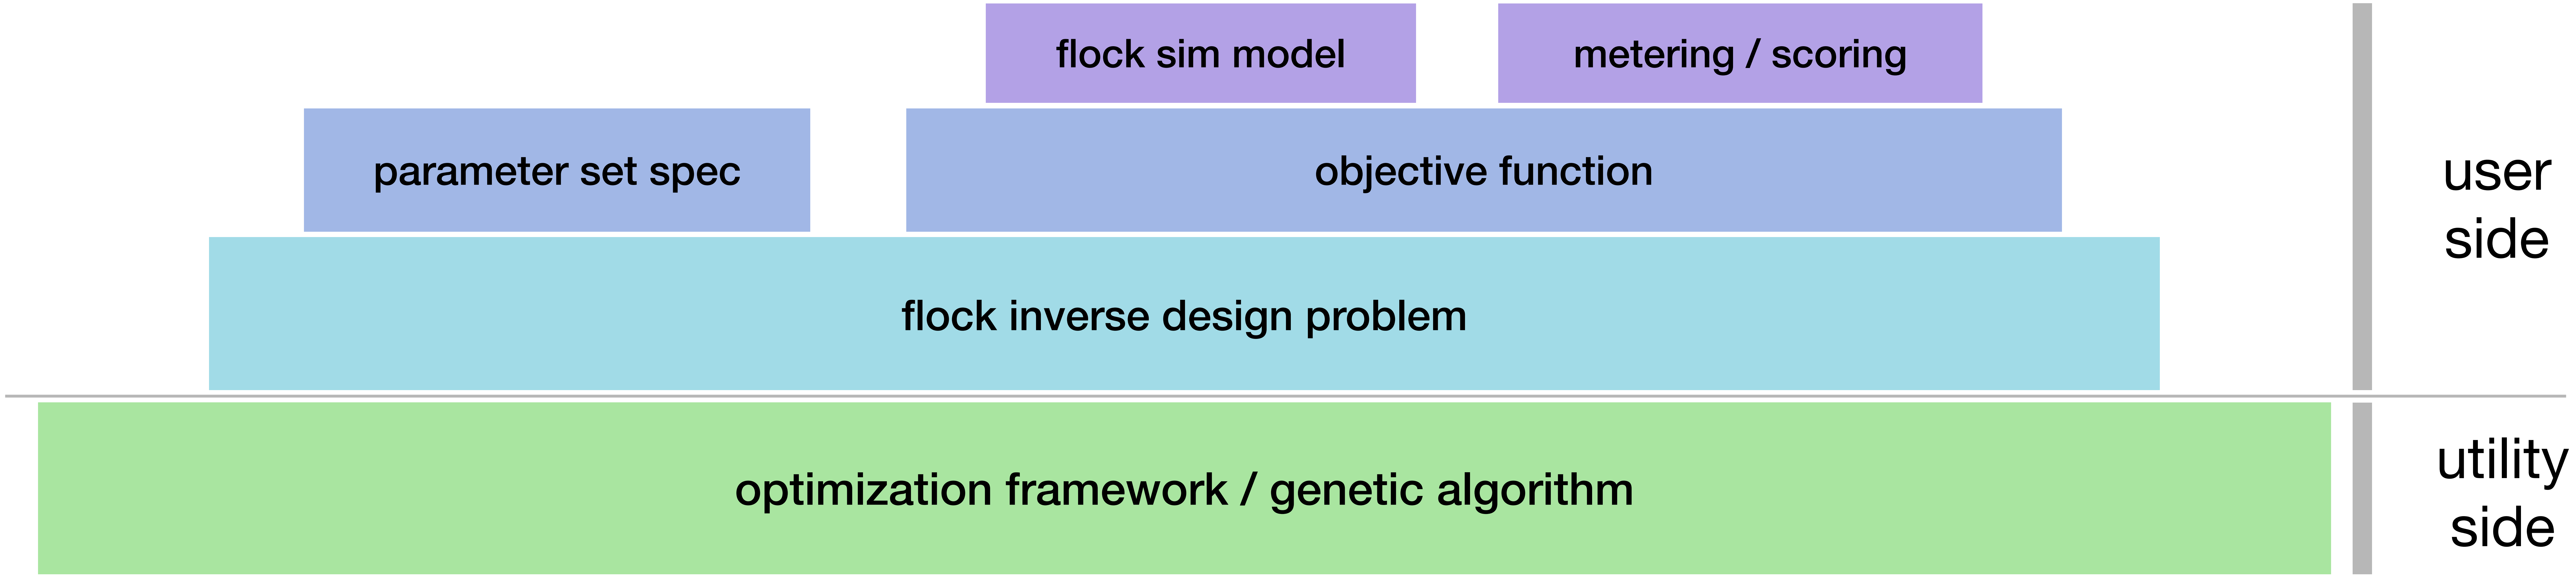

Normalized multi-objective fitness space.

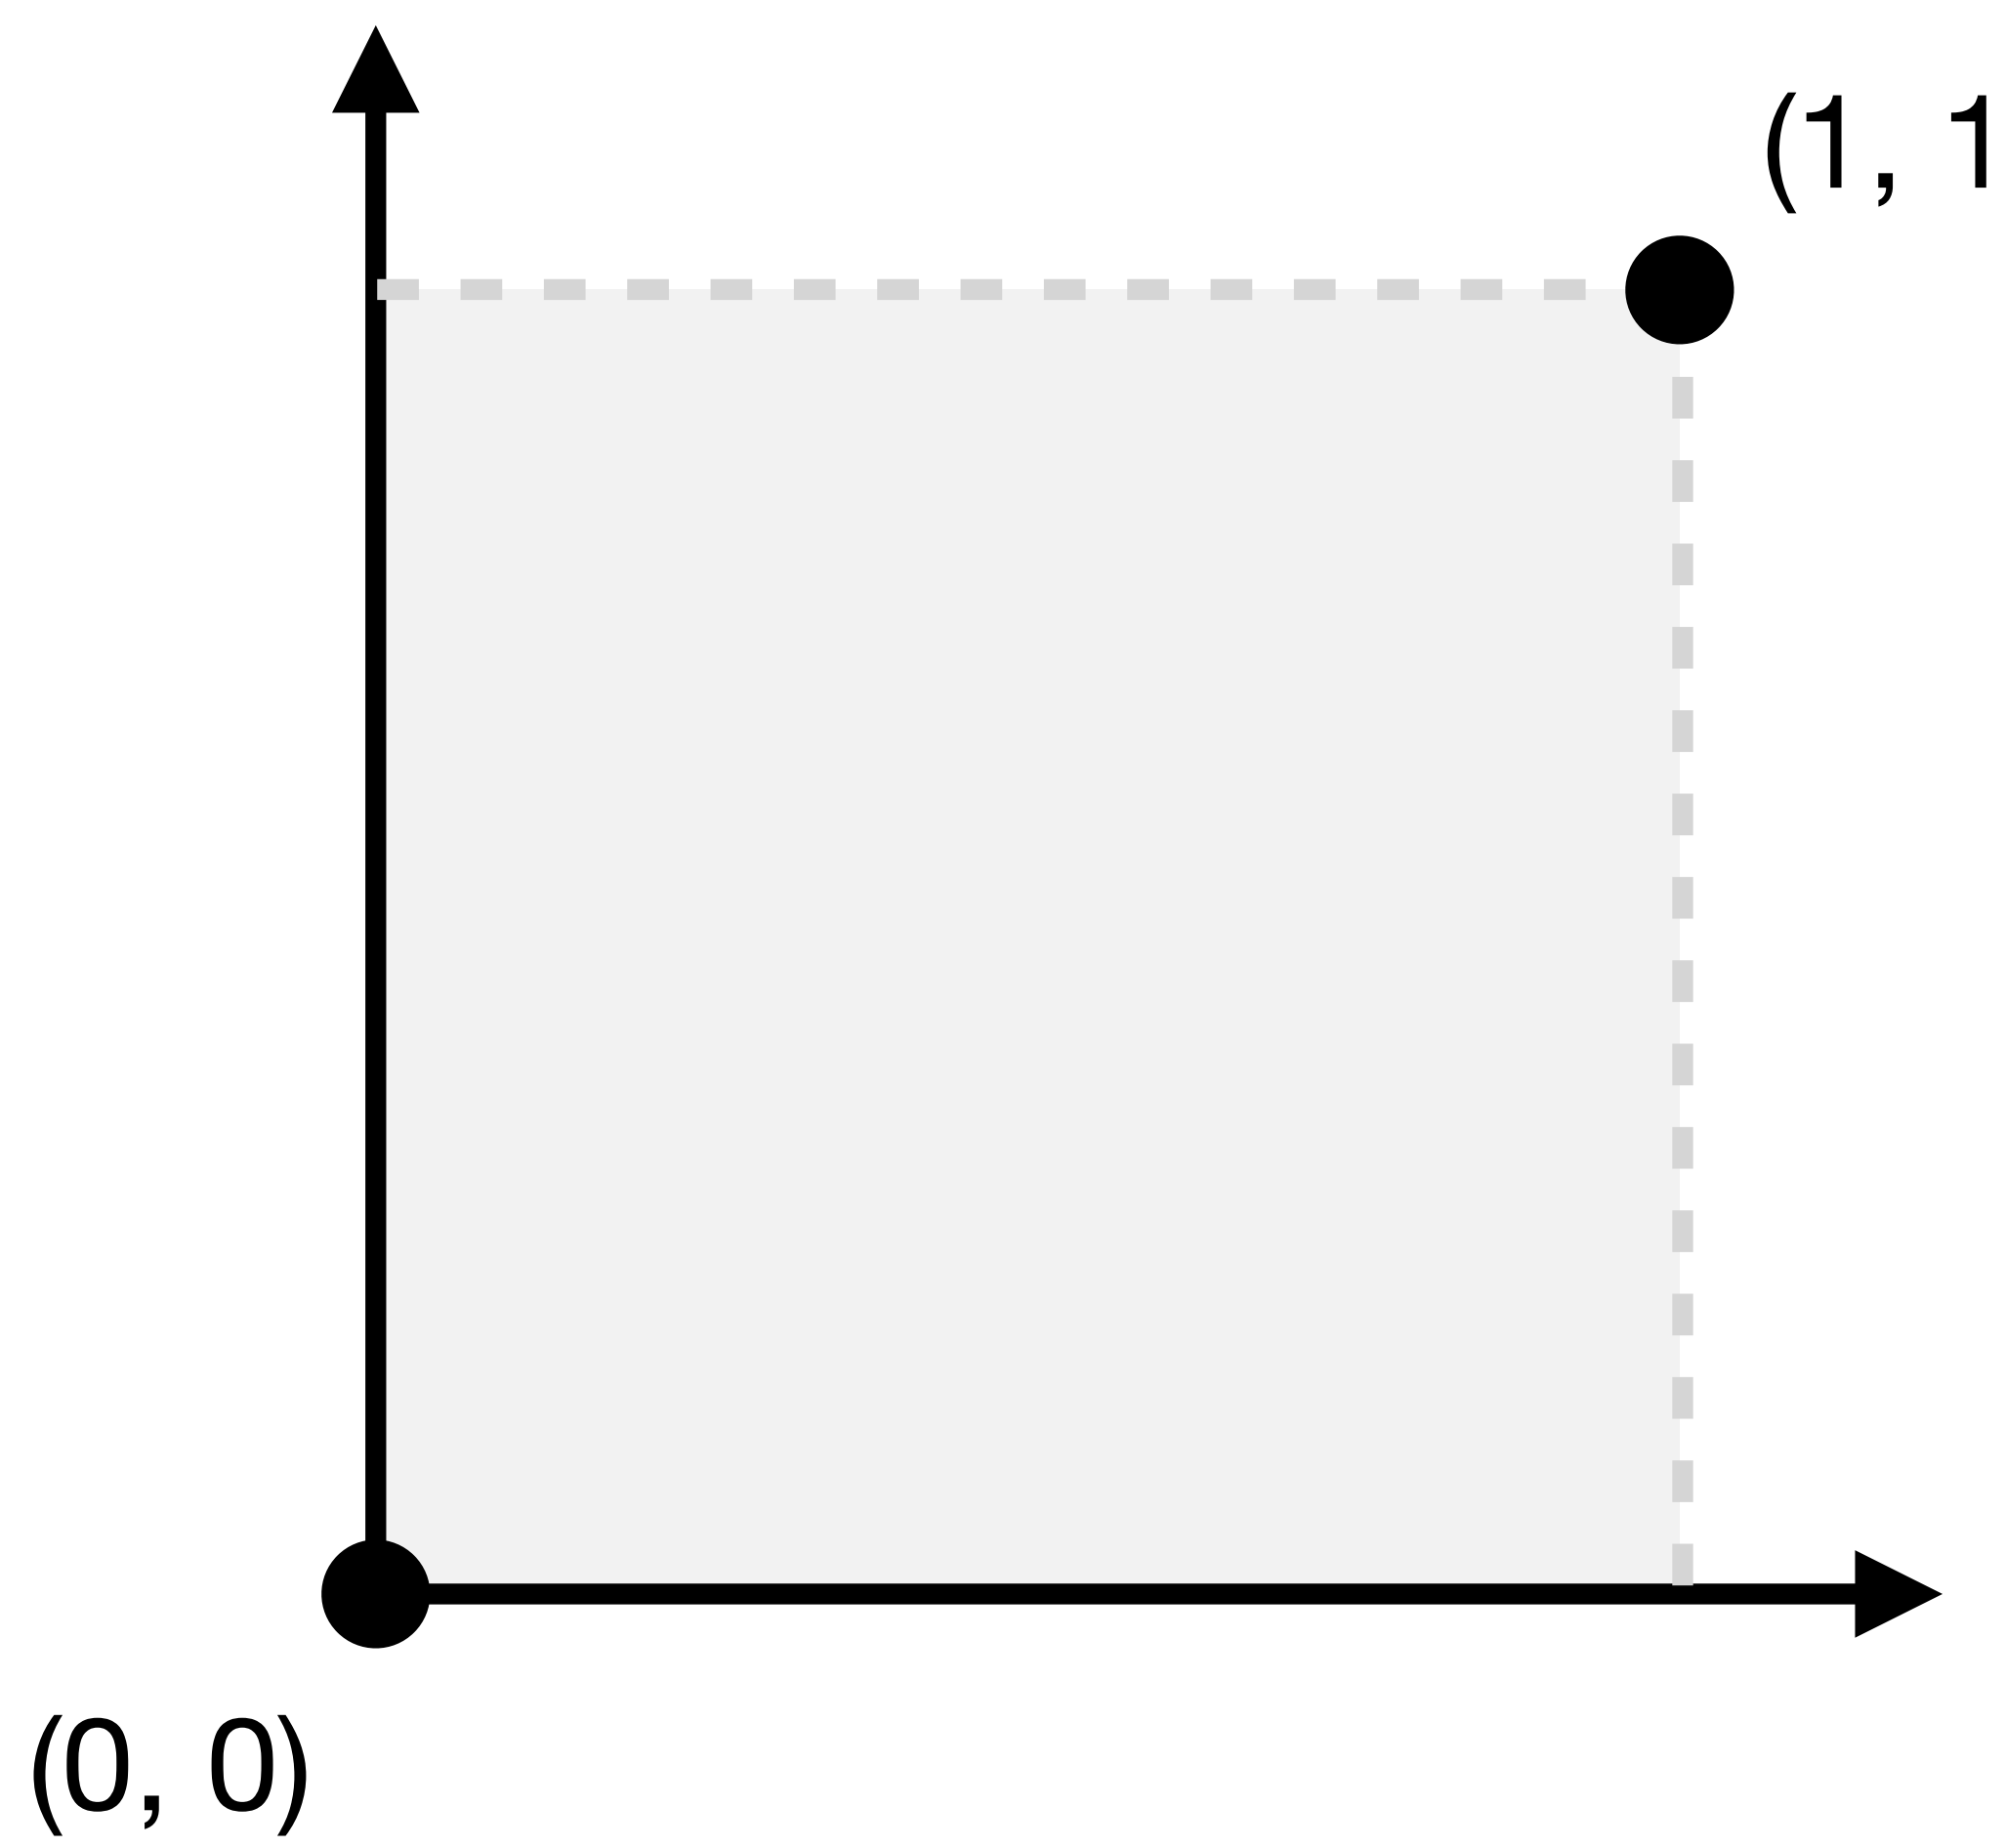

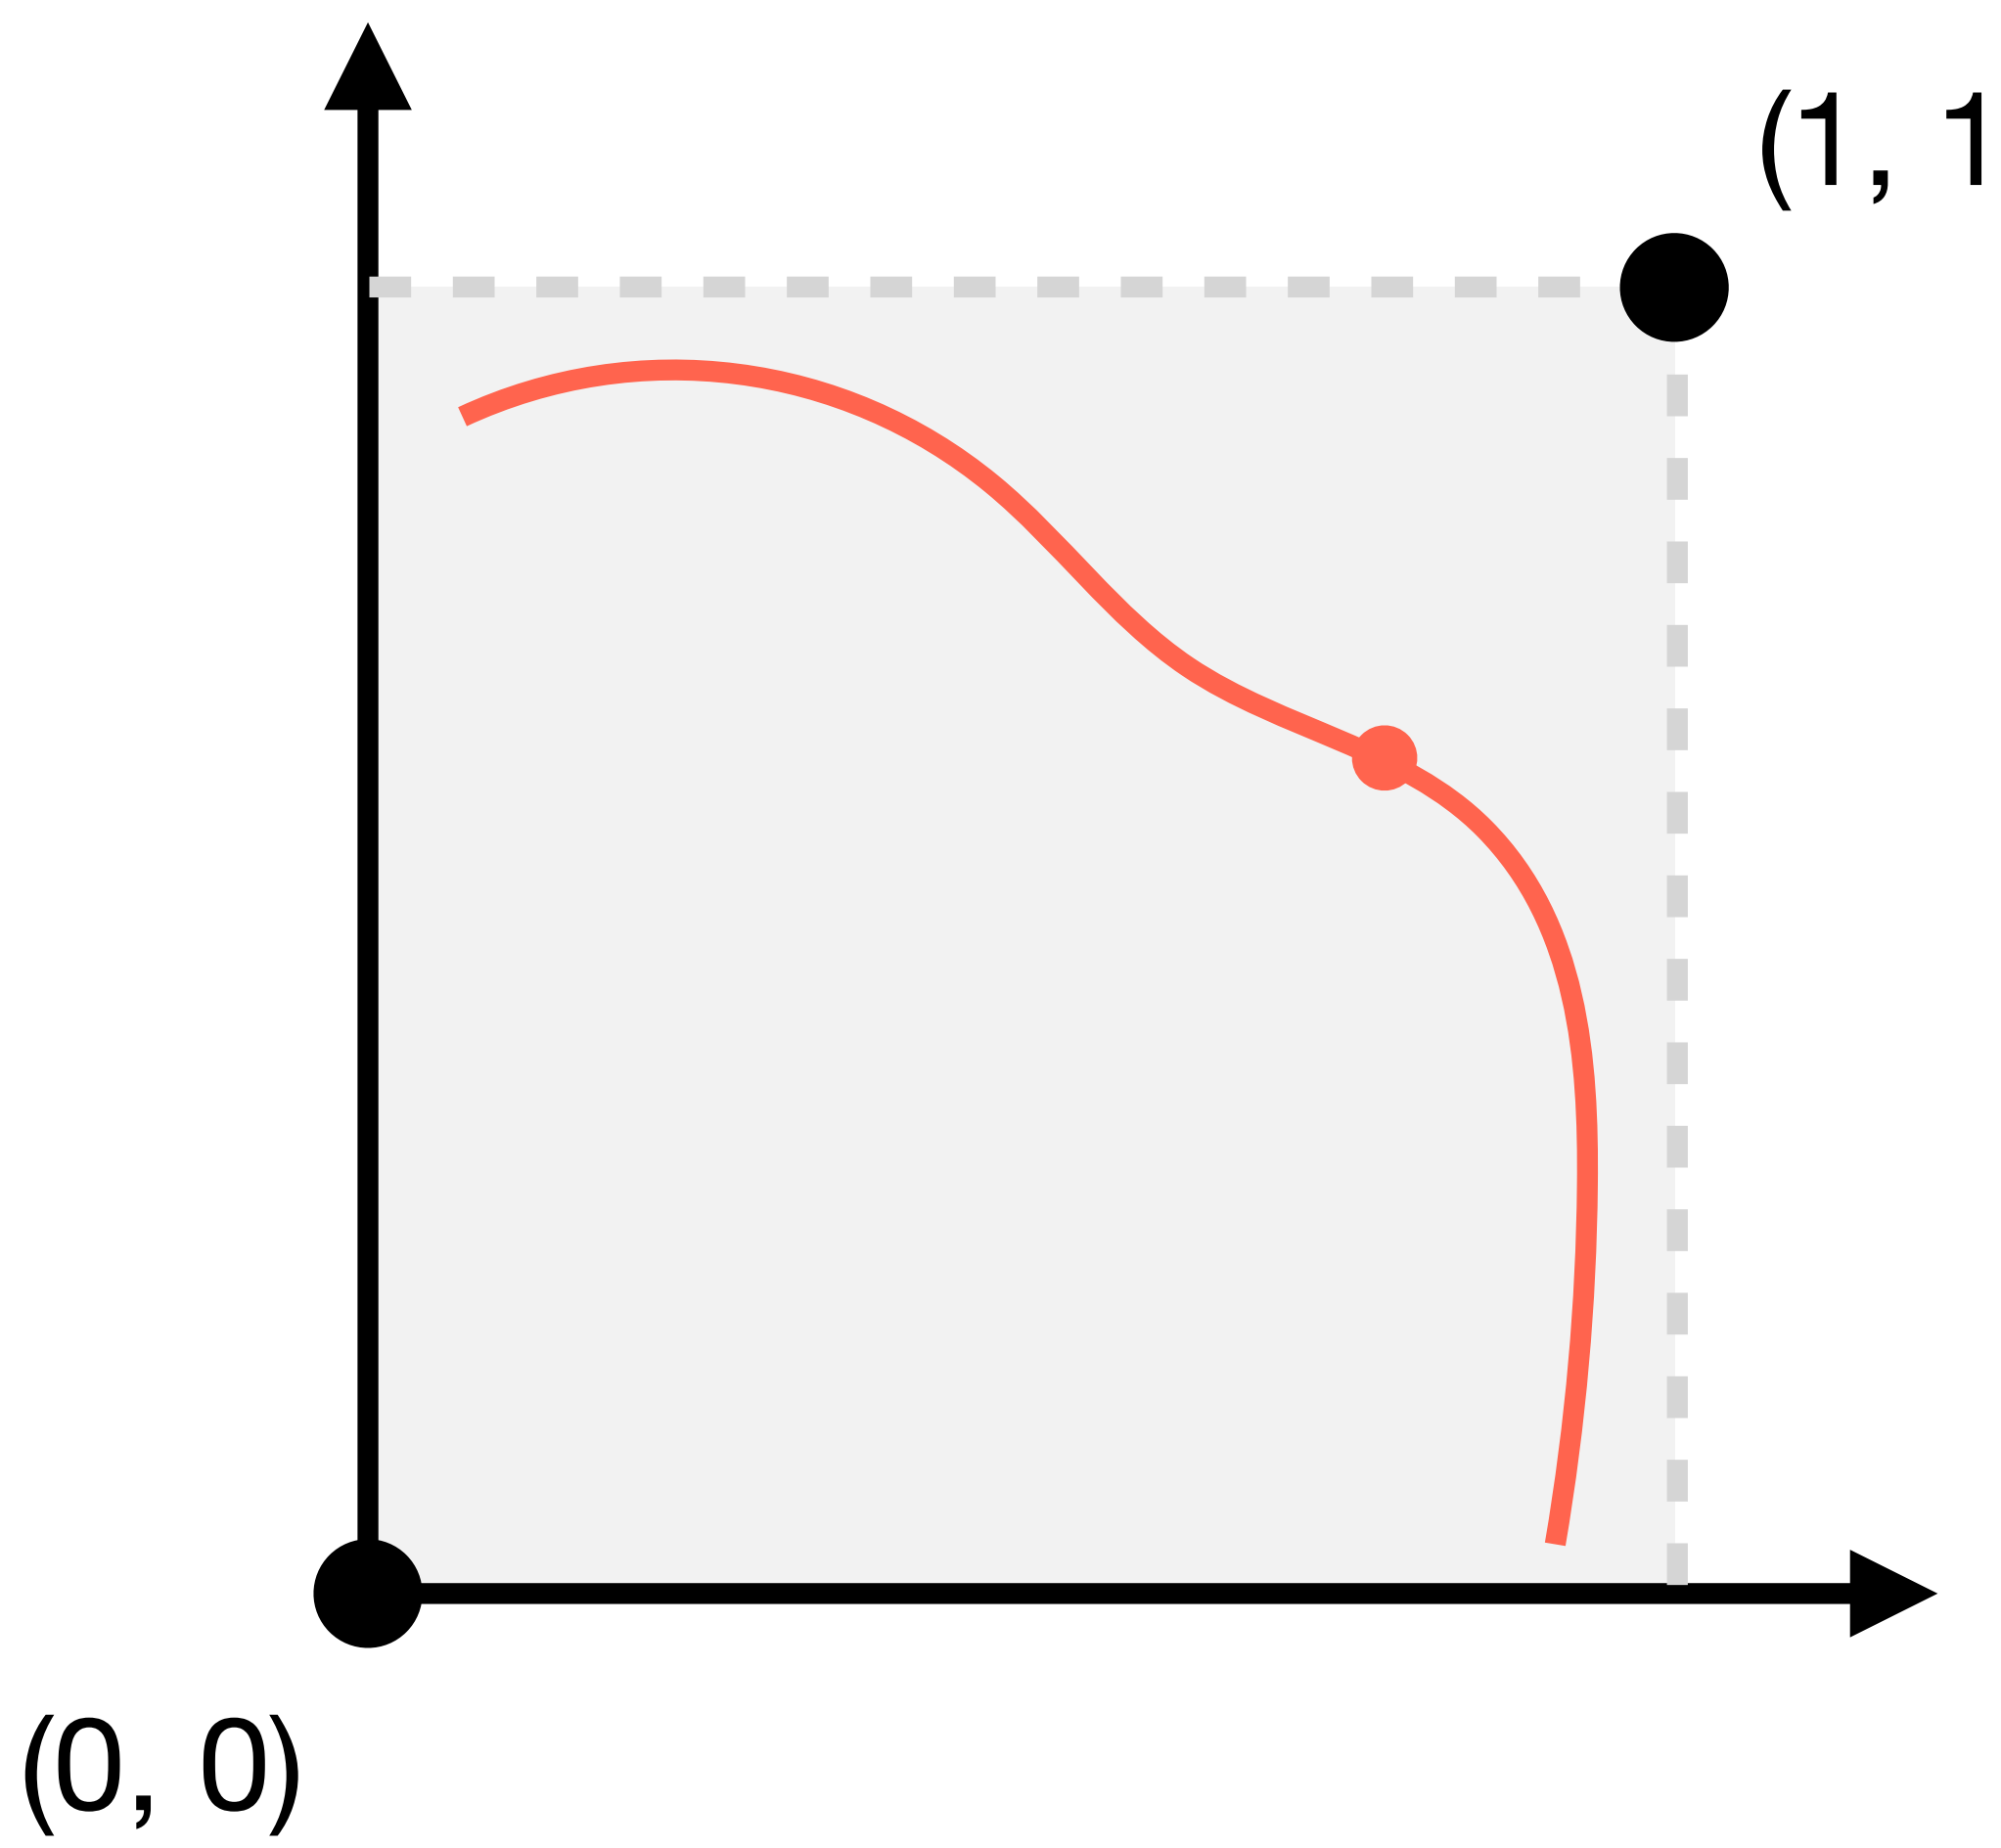

Pareto front for two mutually conflicting objectives.

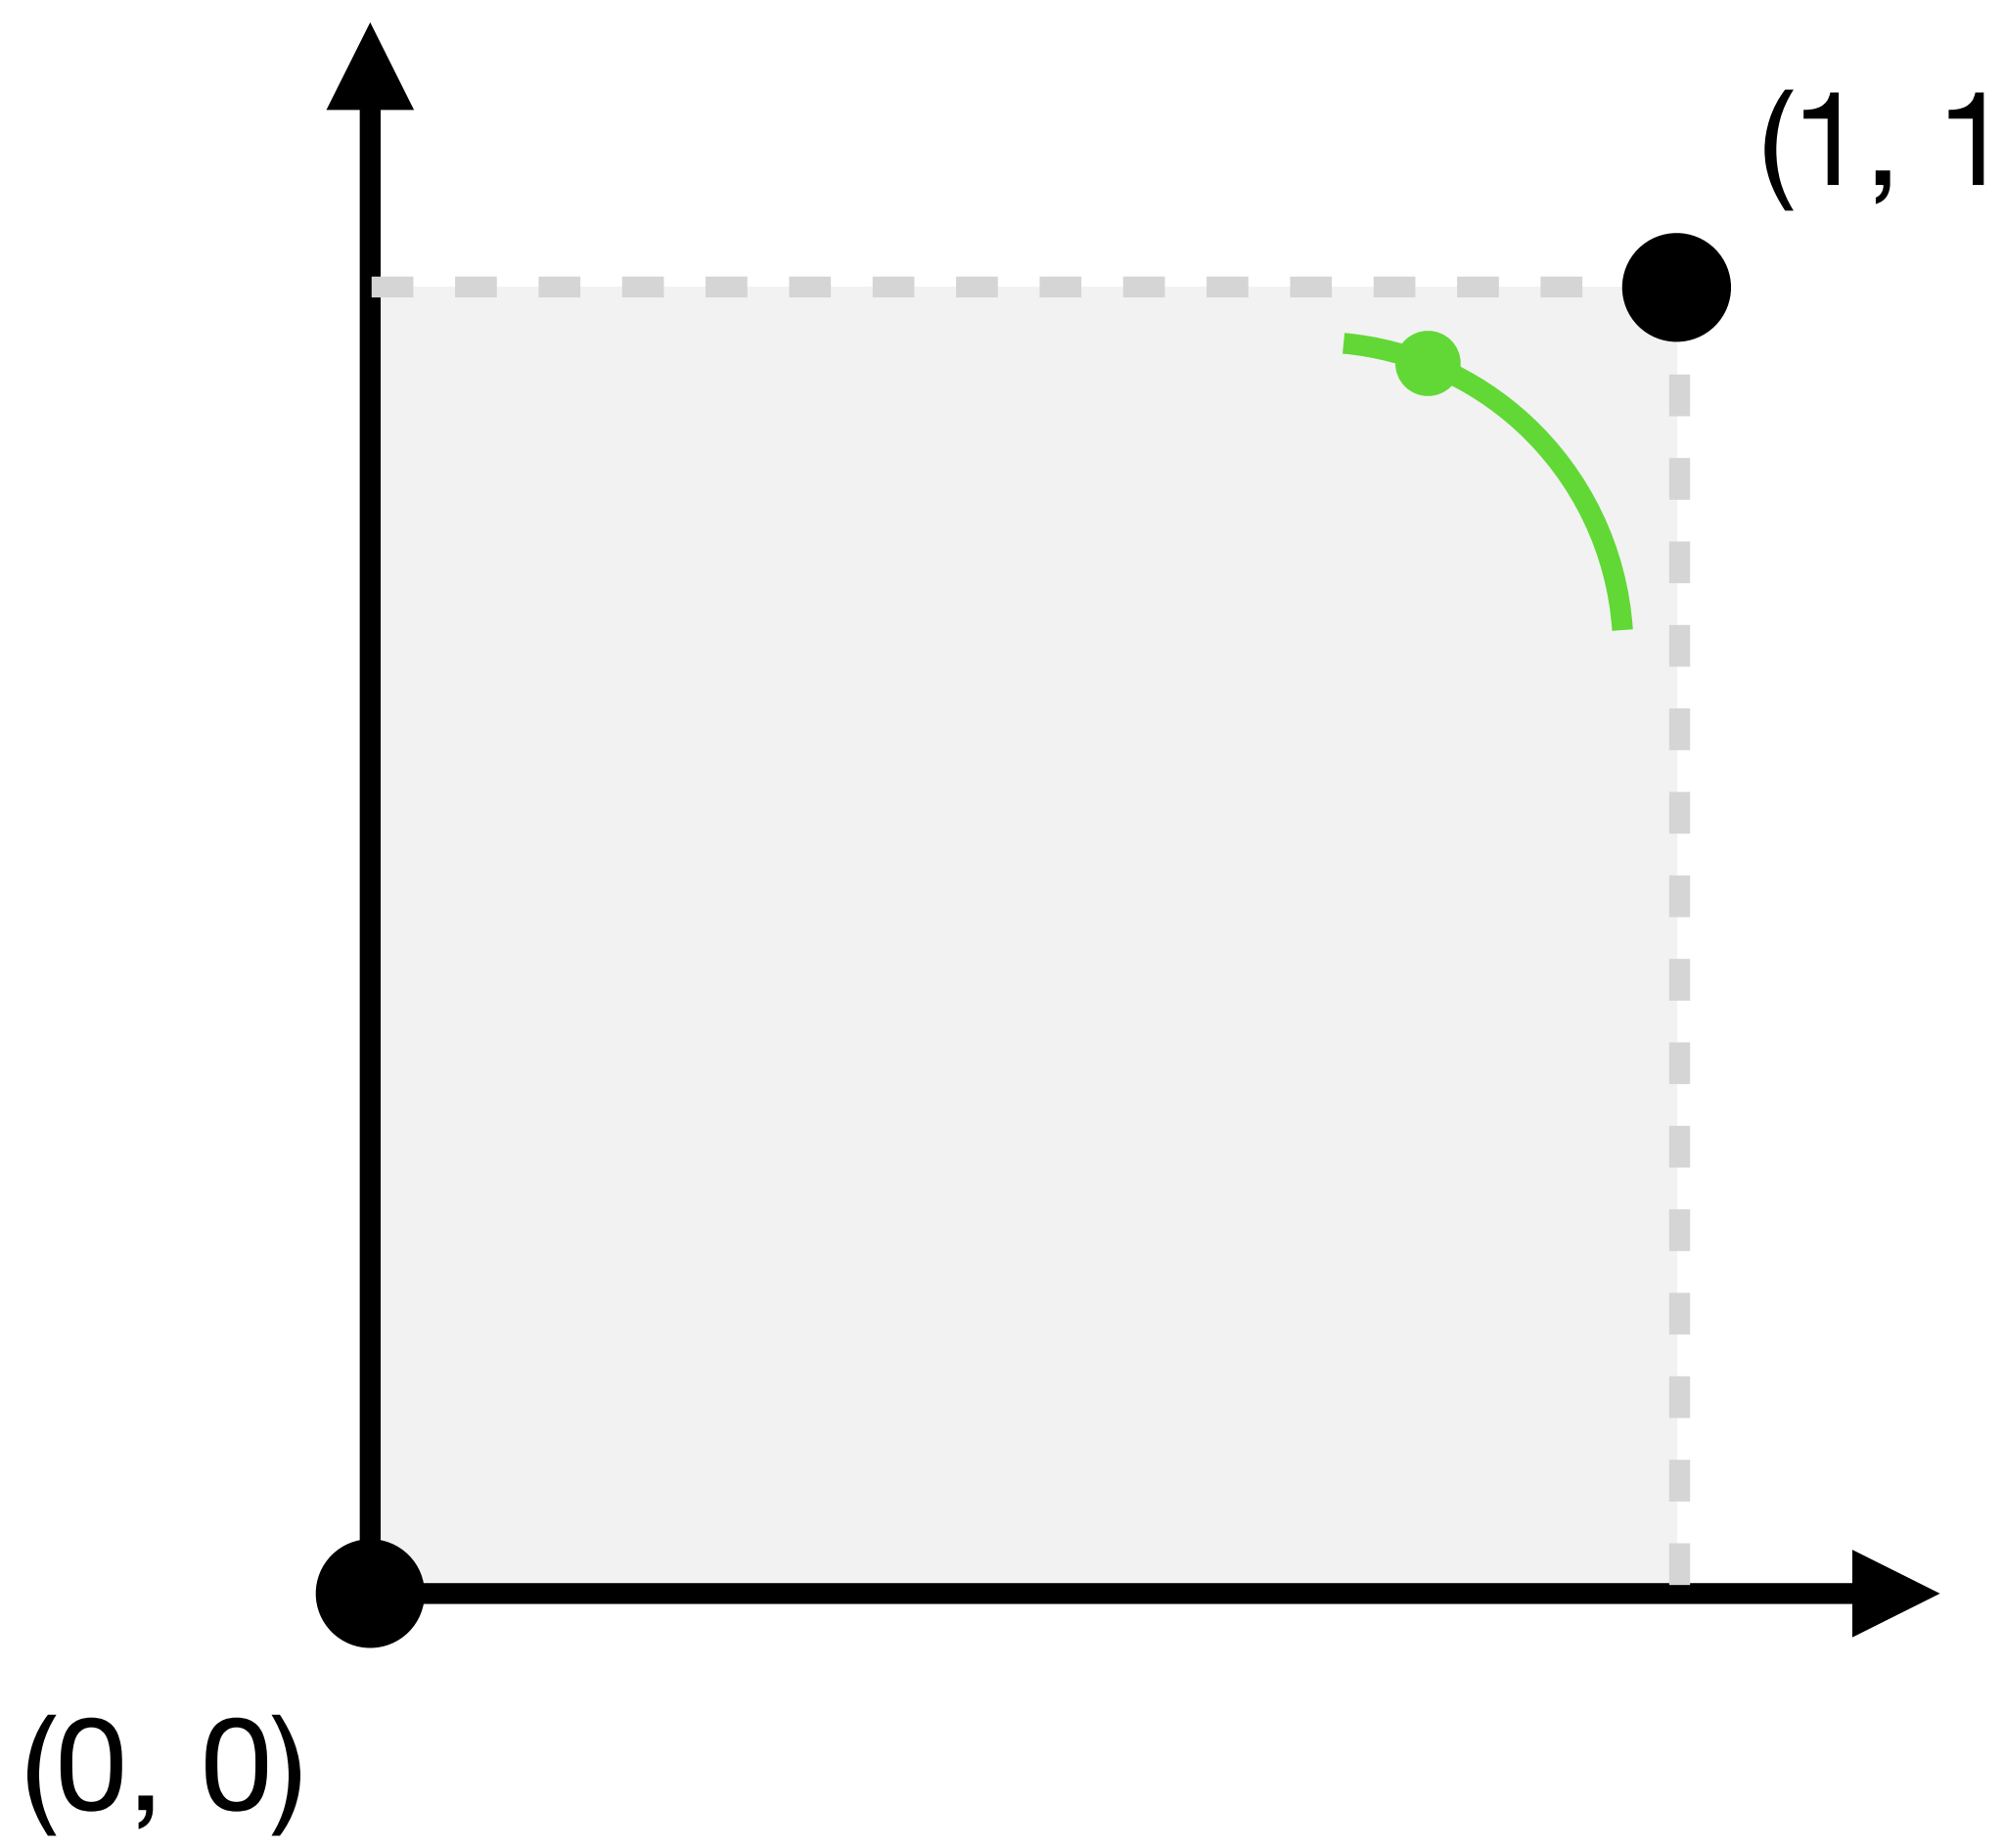

Pareto front for two “mostly compatible” objectives.

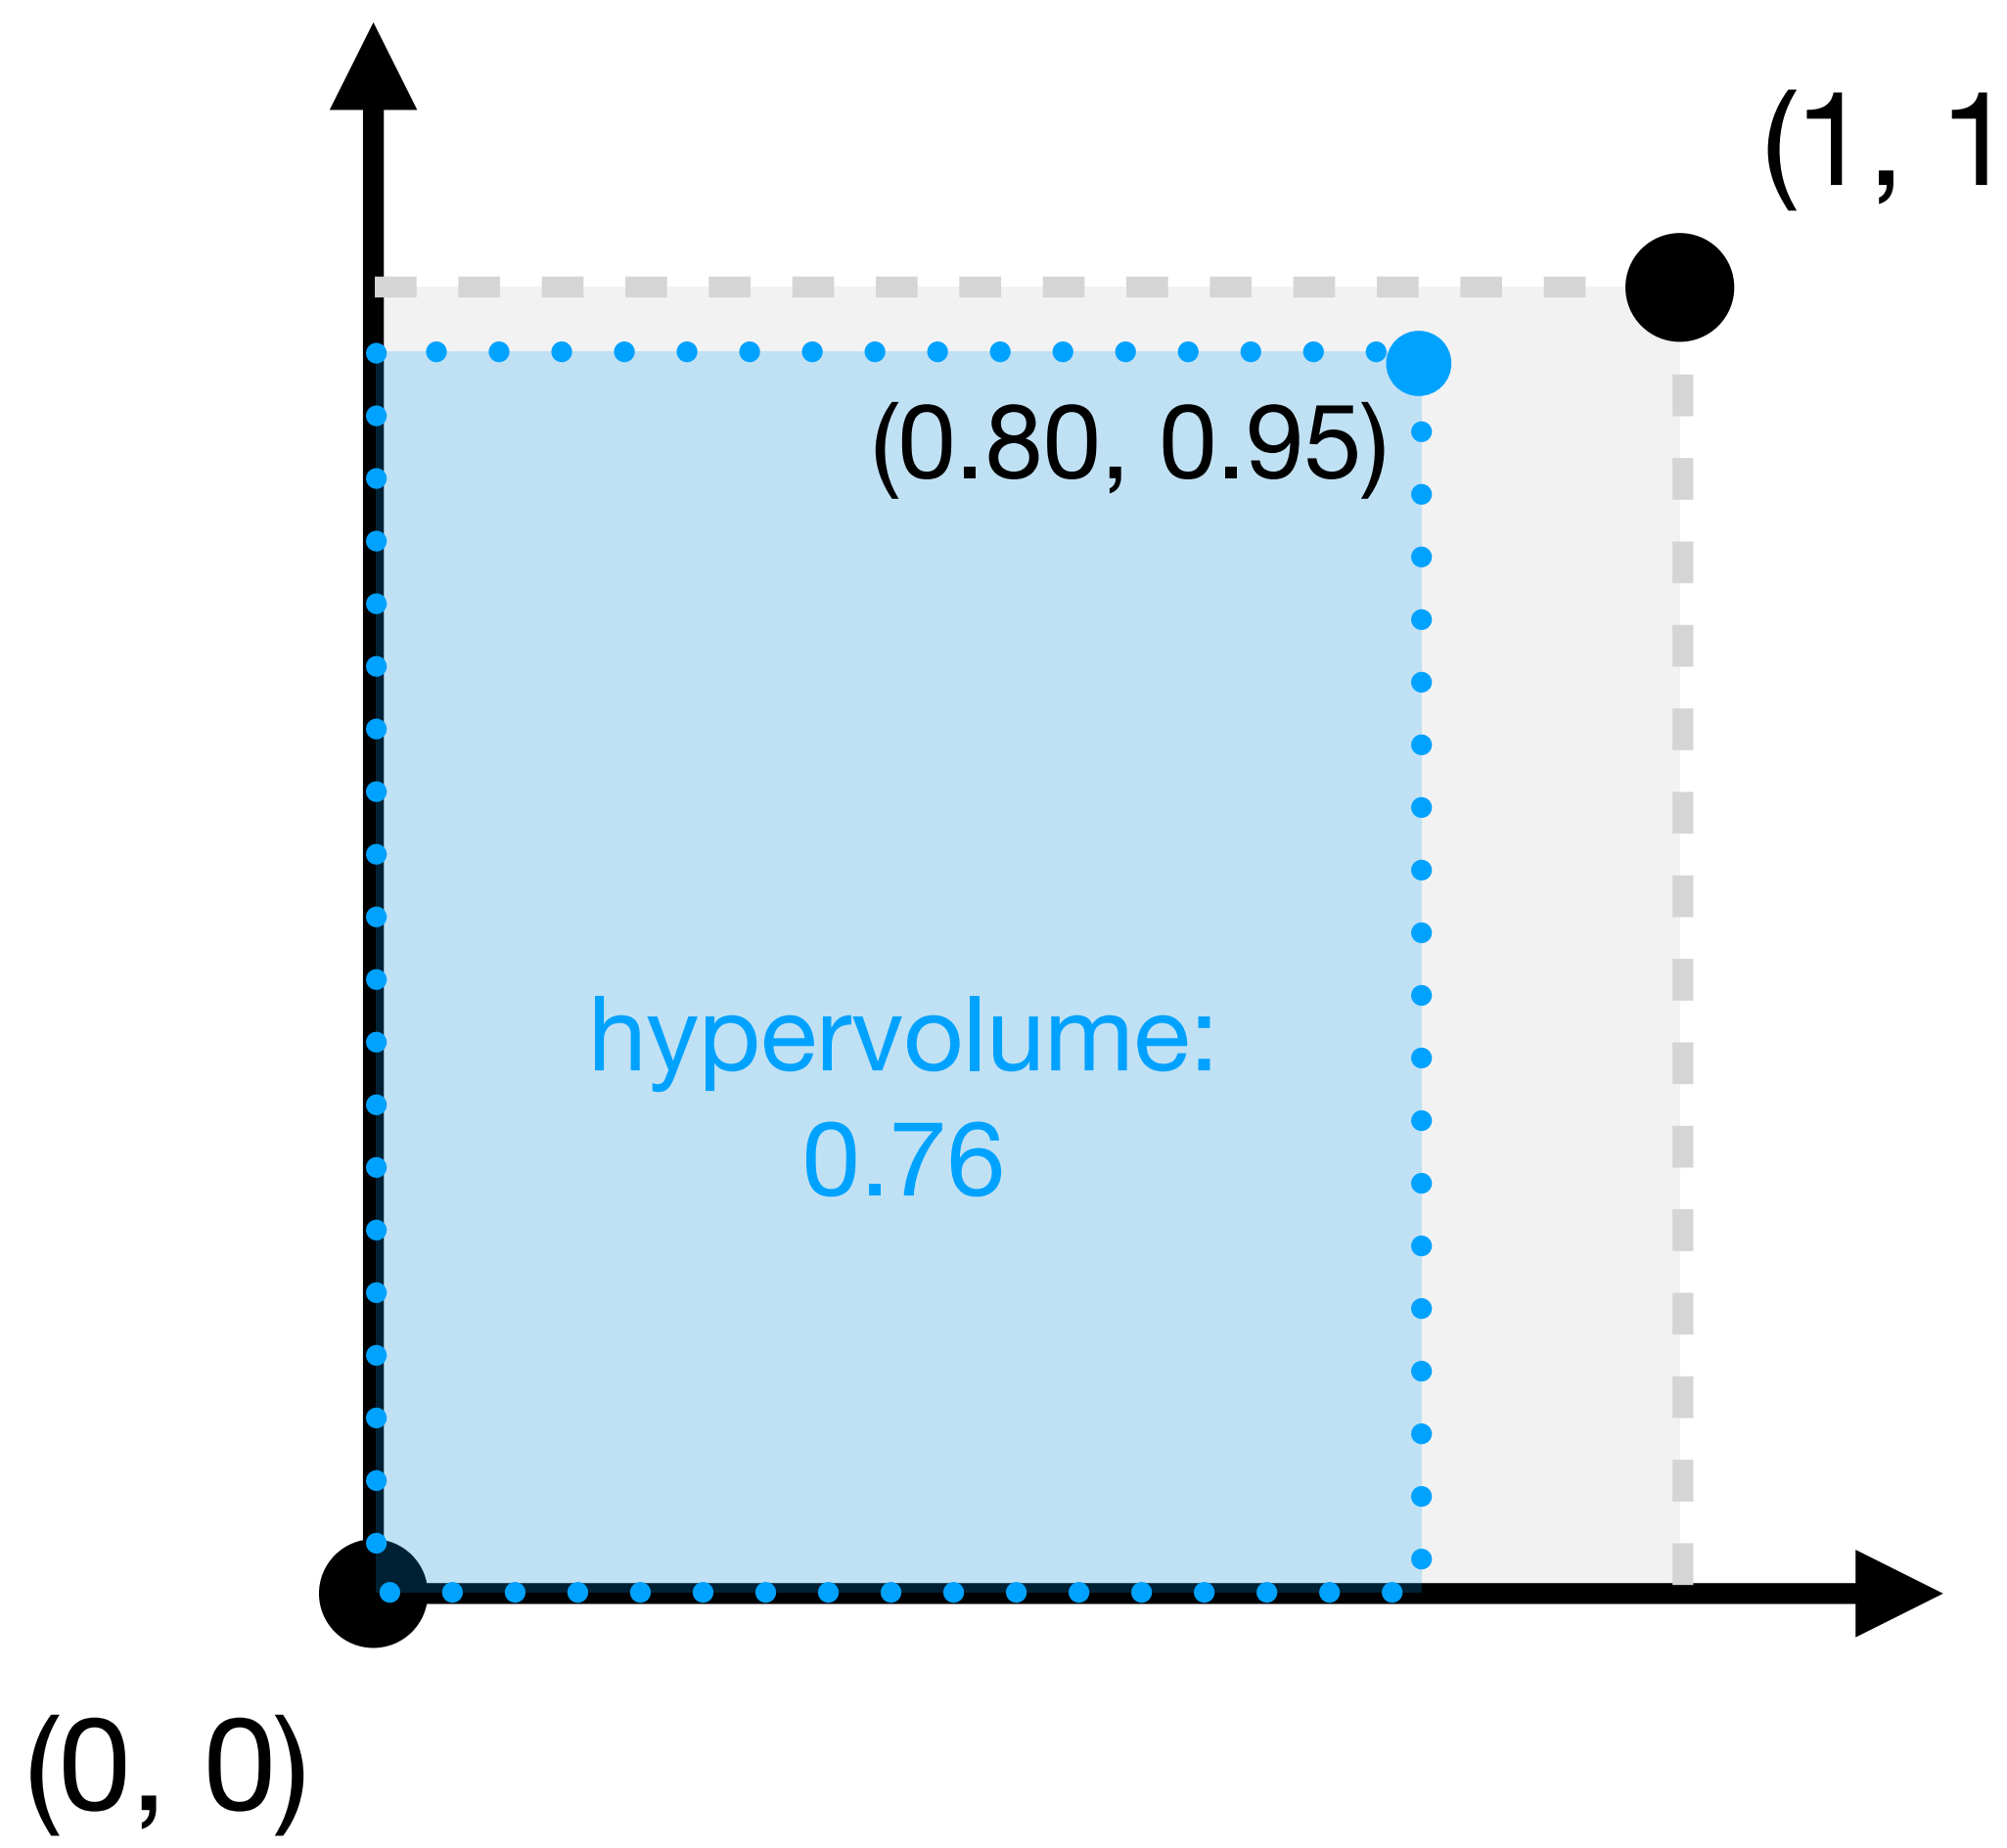

Scalarization (area) for two objectives.

Hypervolume of three objectives

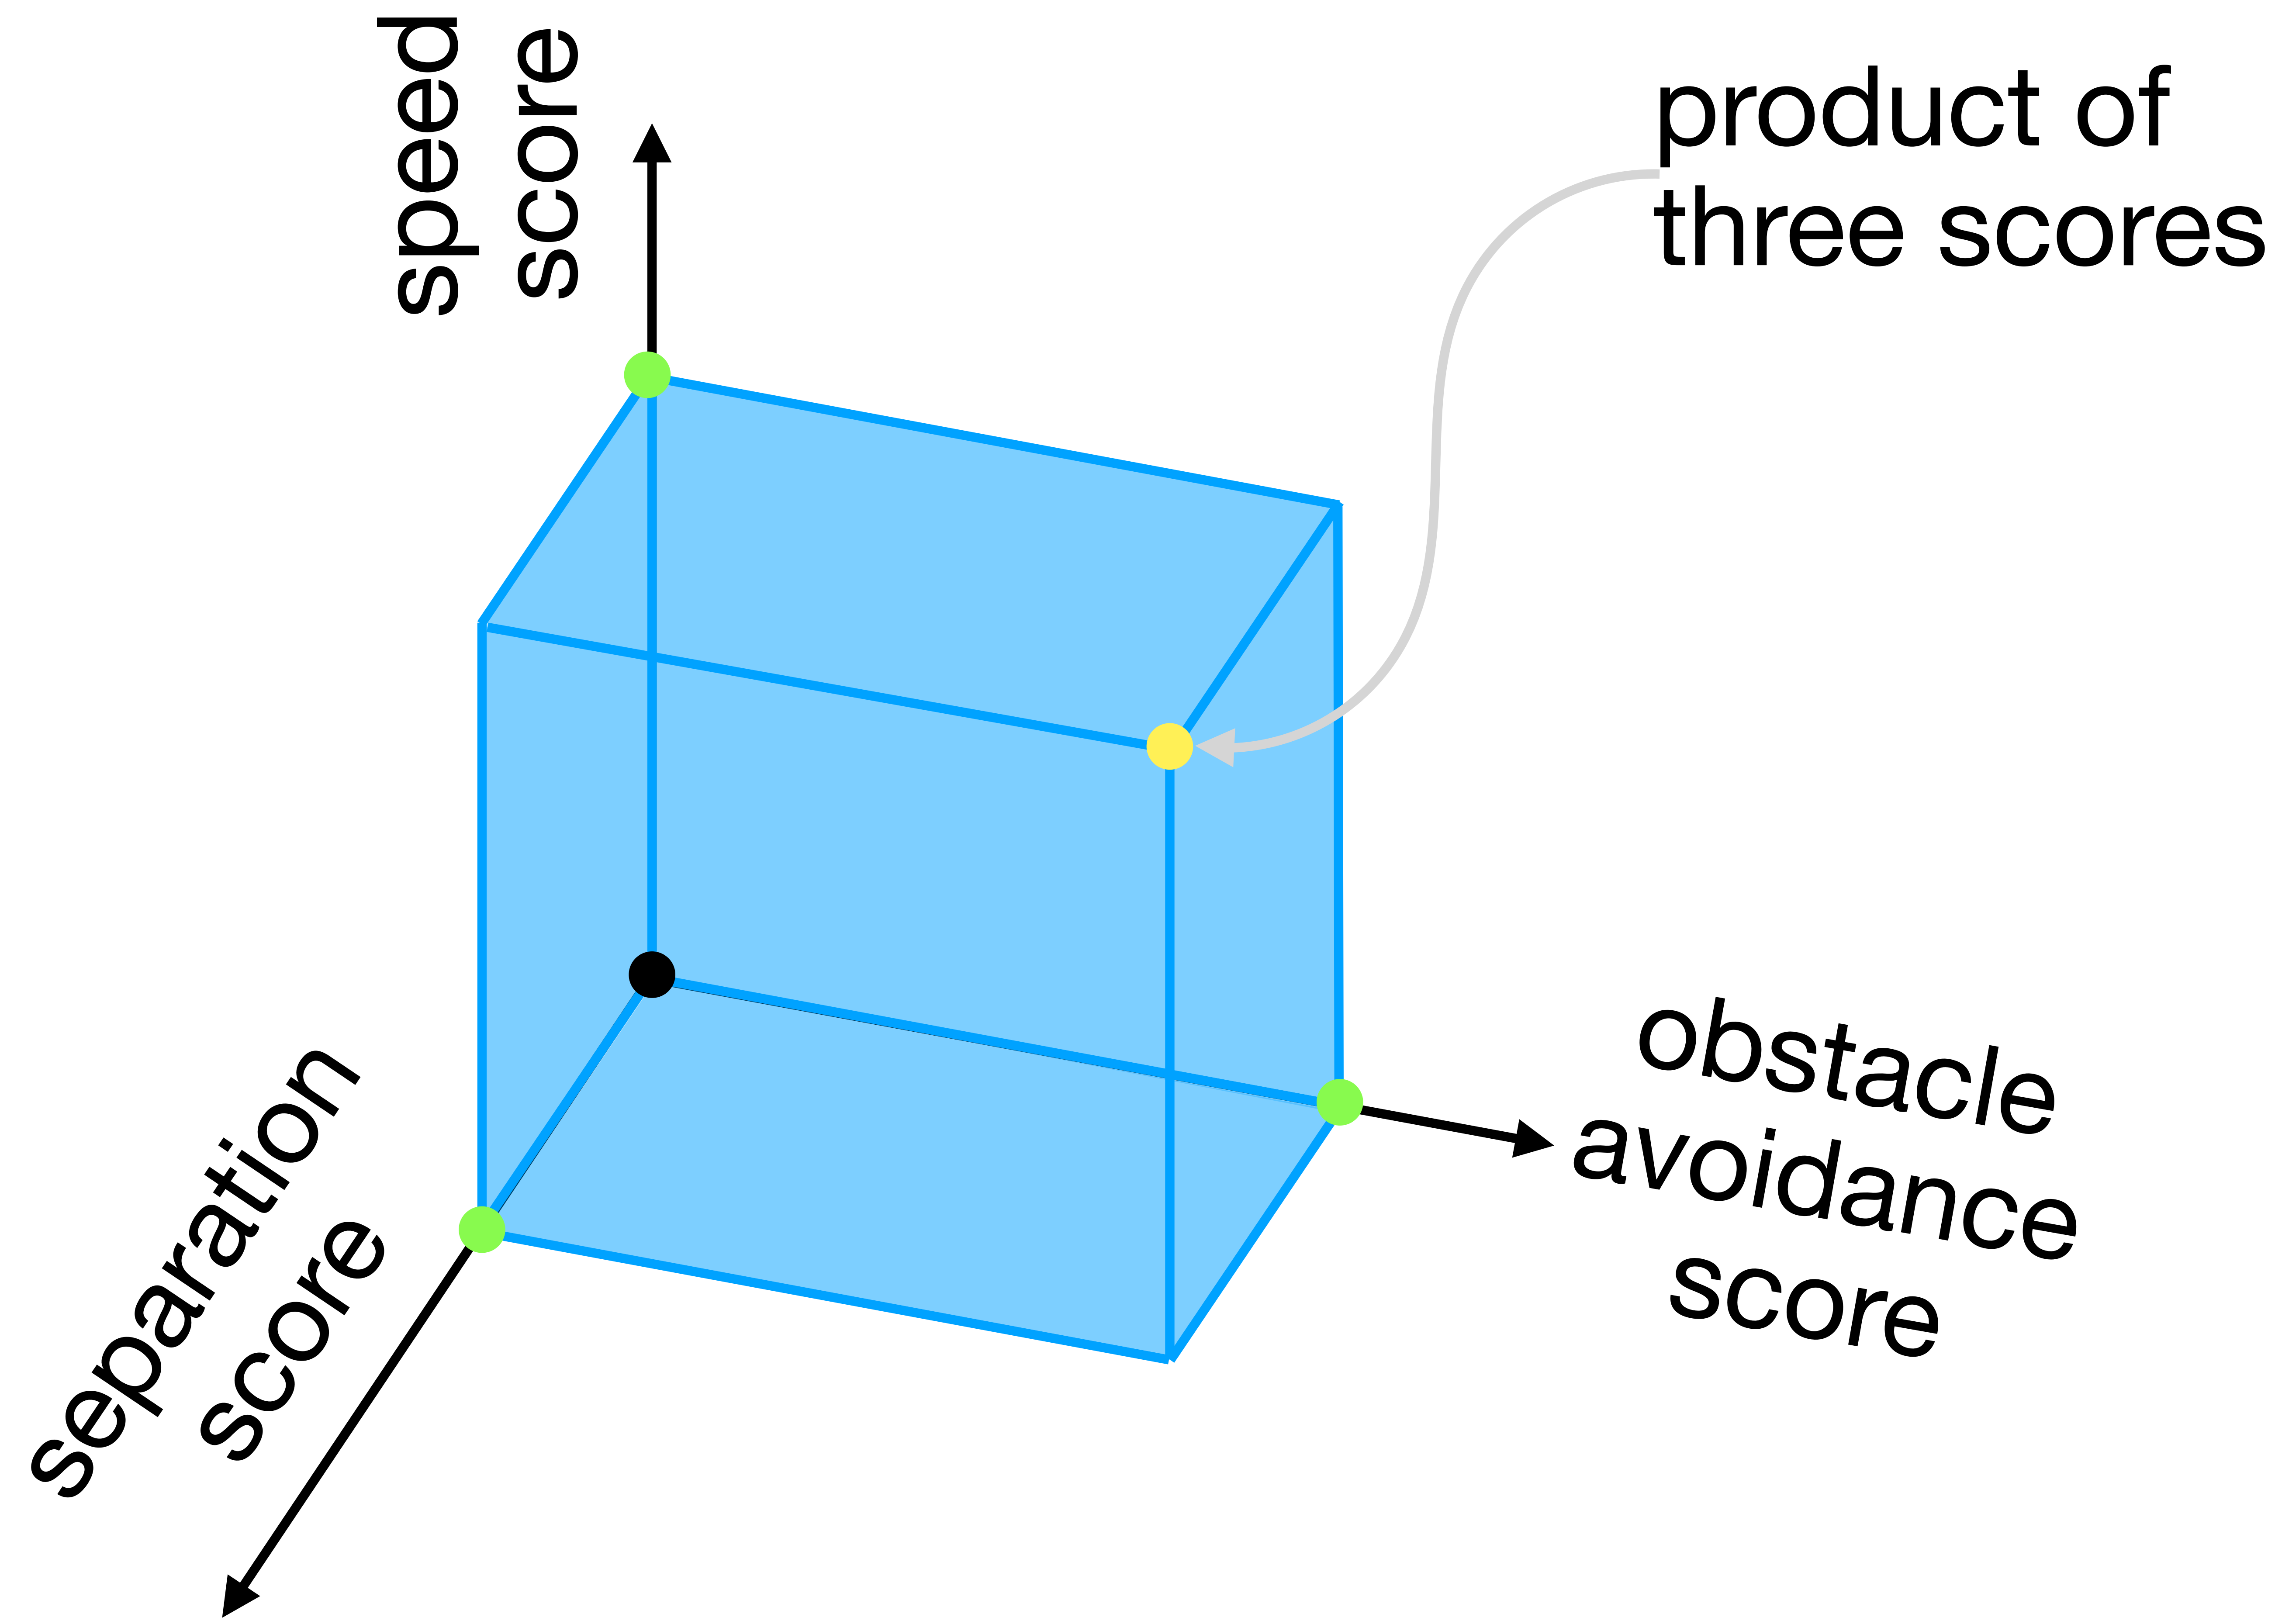

Weighting functions for separation and speed scores

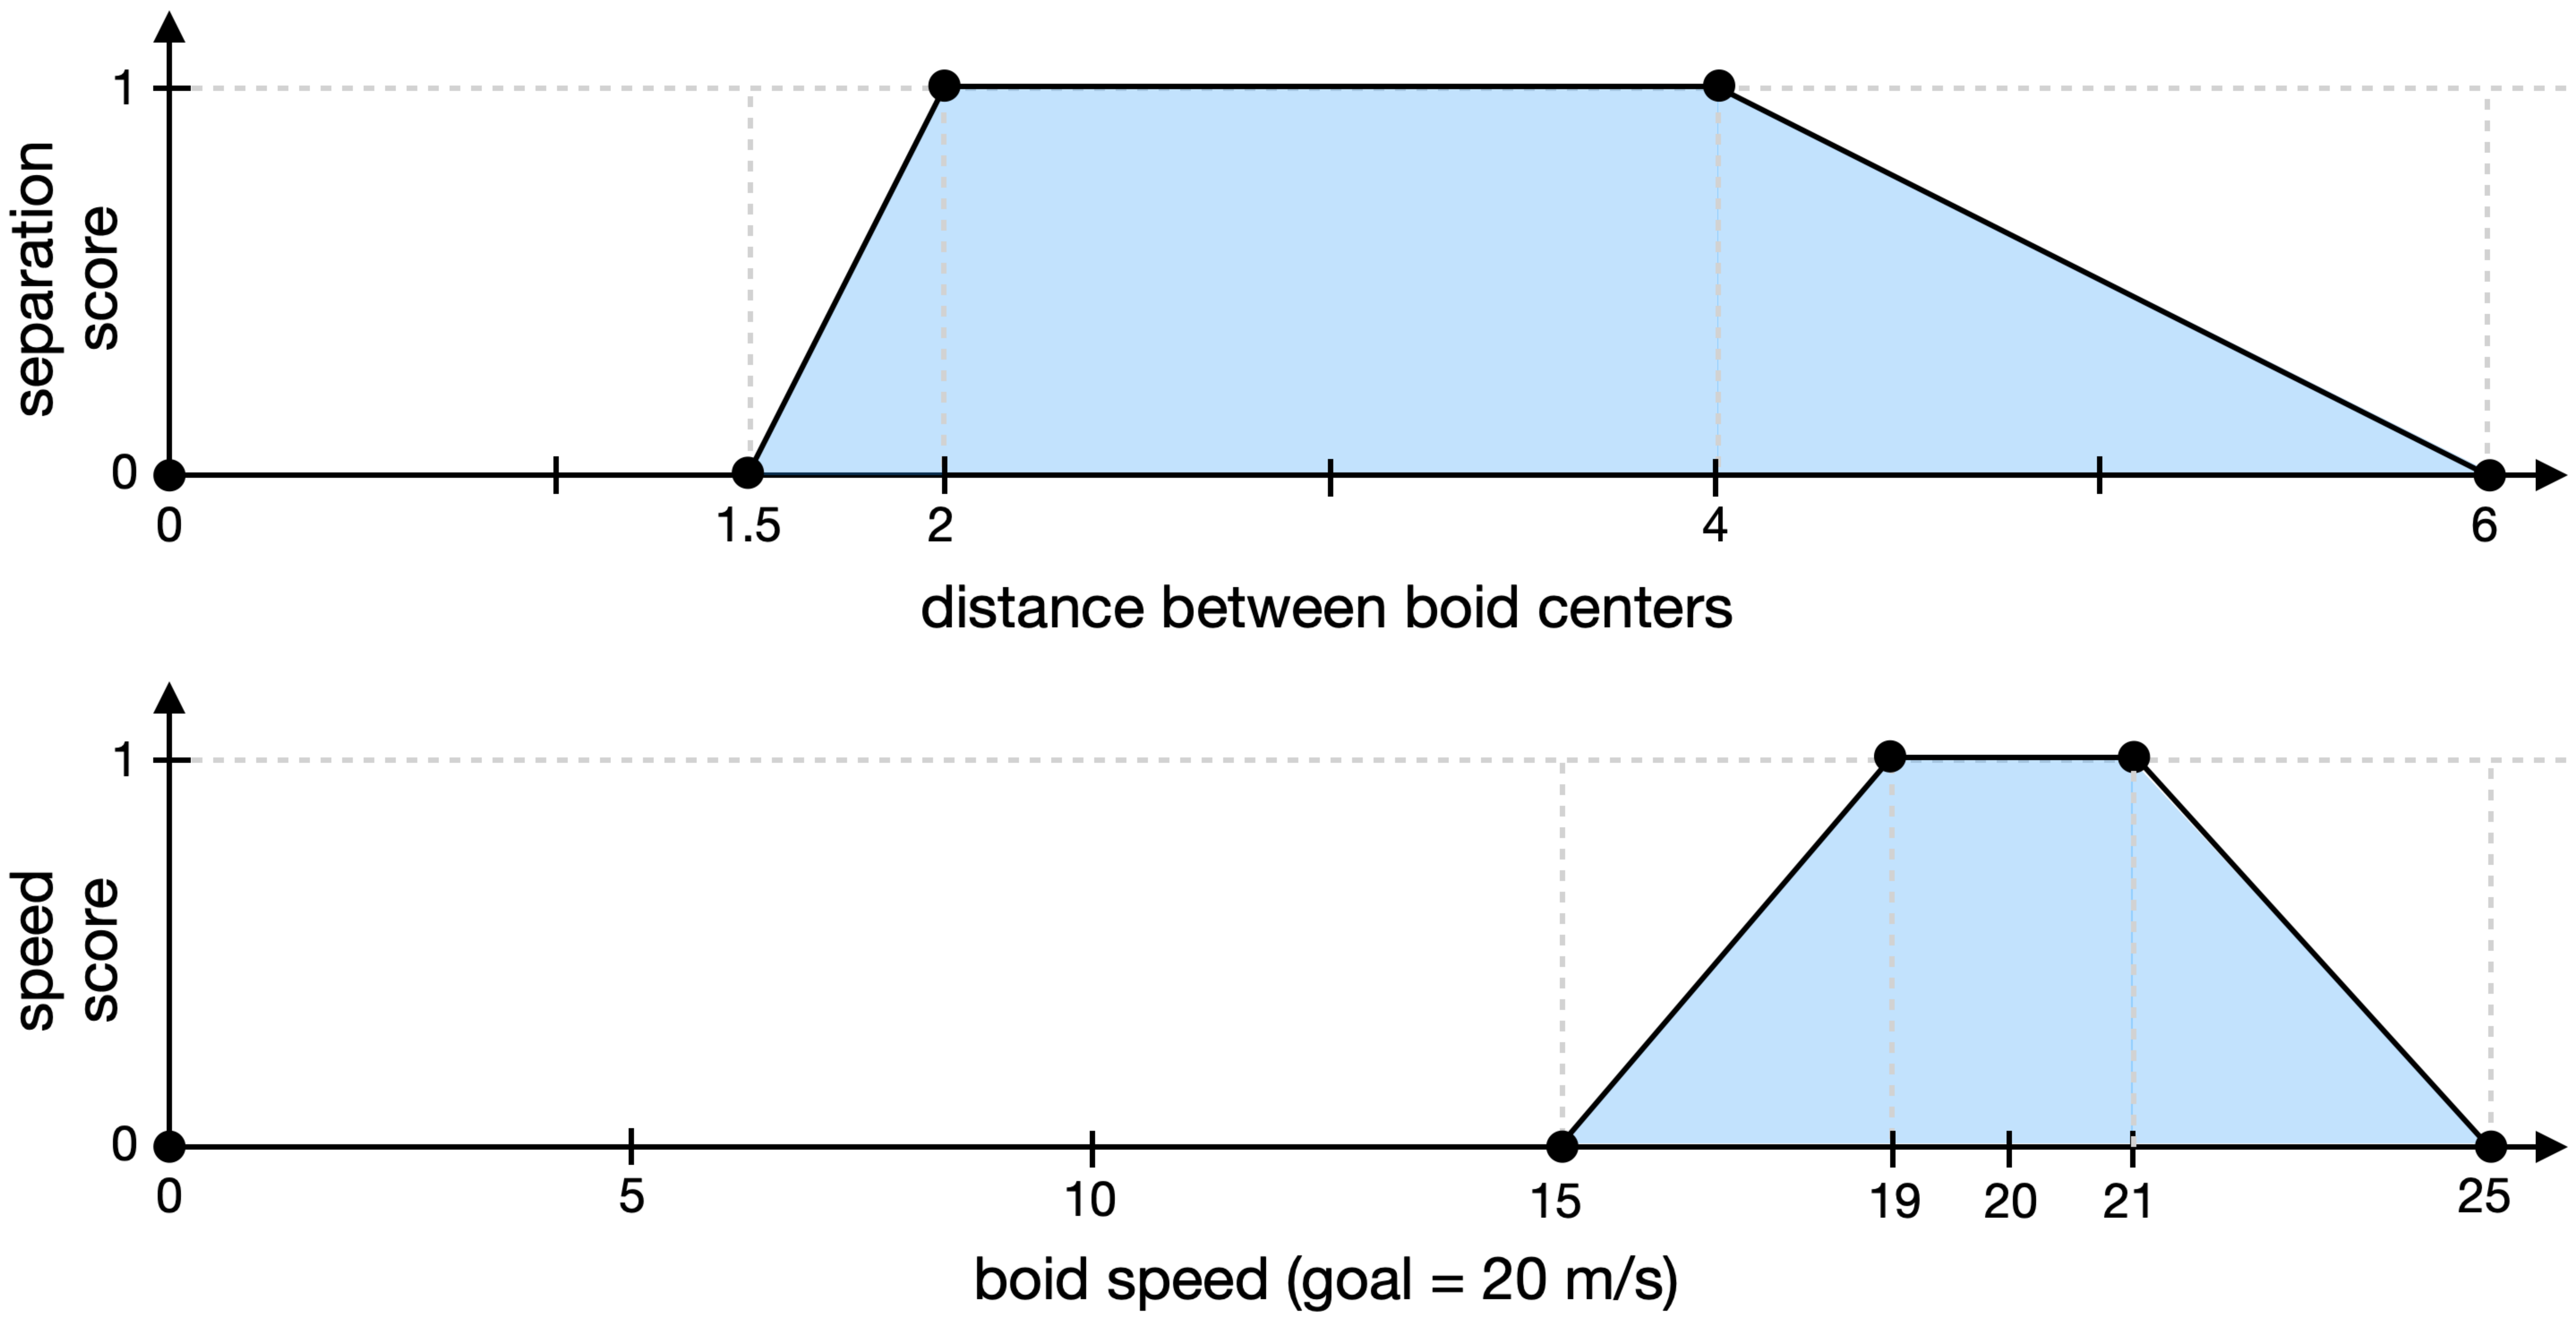

Score weighting functions: separation, speed, avoid

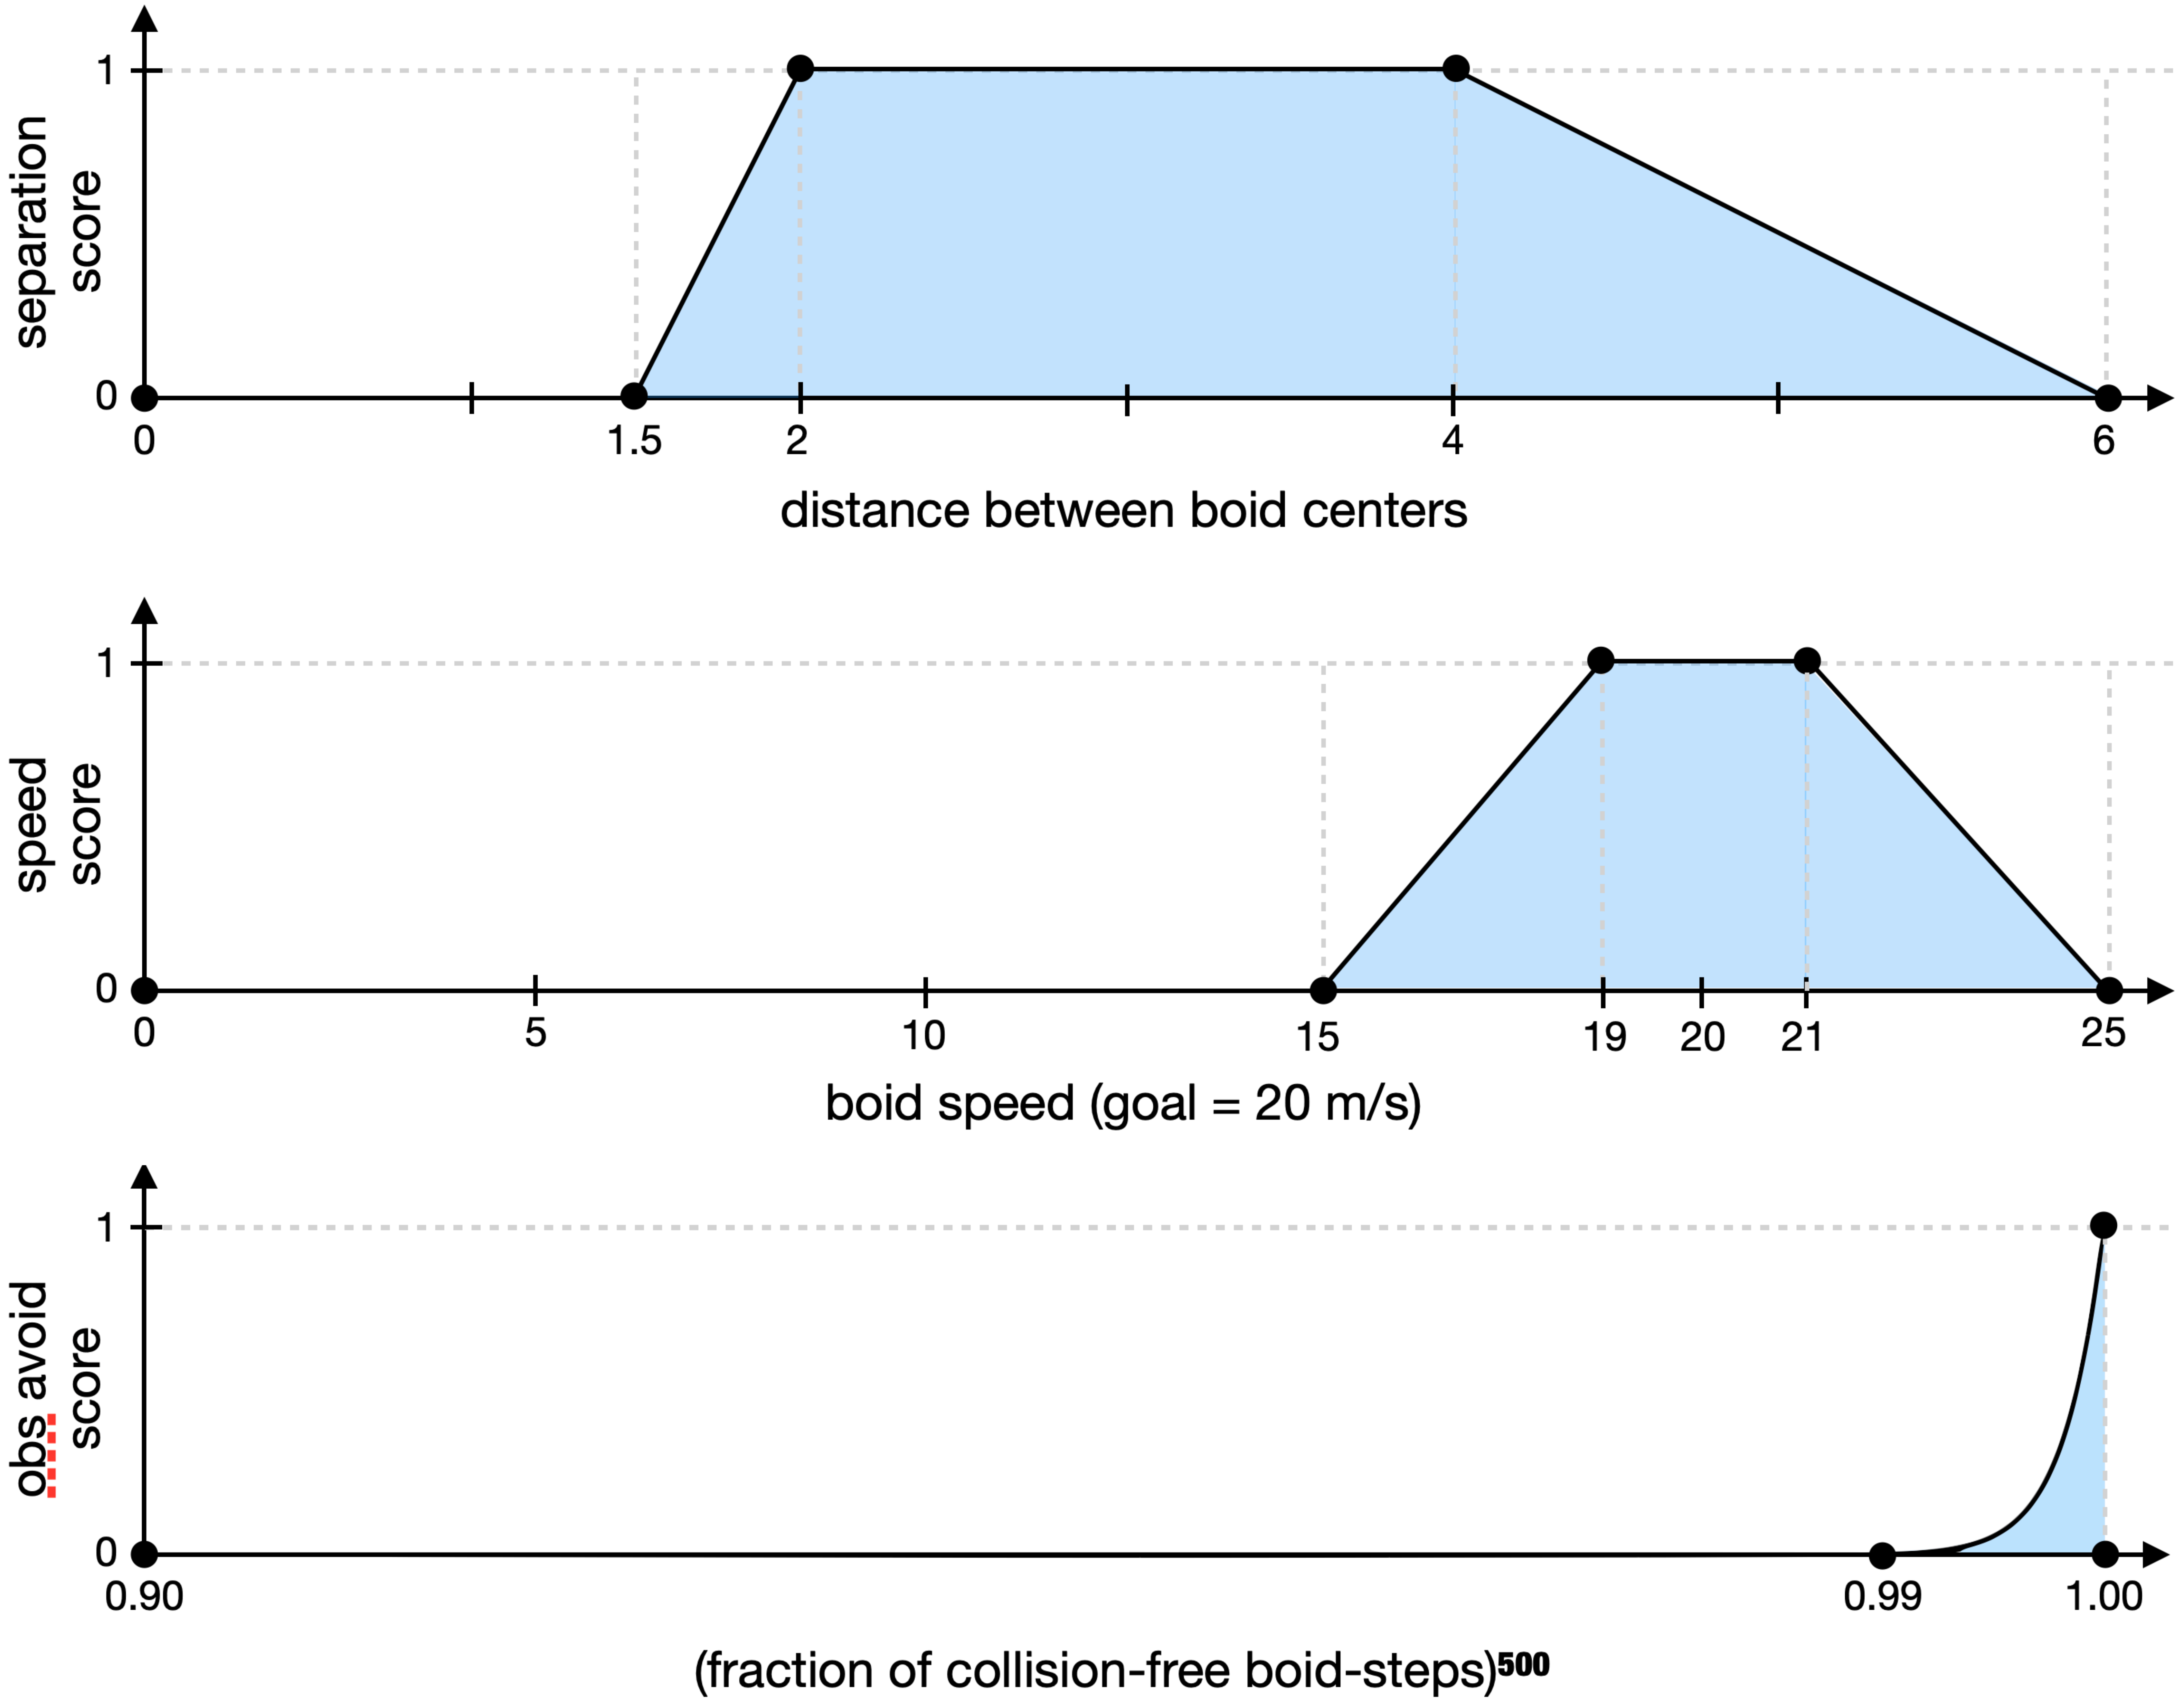

Random GP program for boid steering

```
Sub_v3(Neighbor_2_Velocity(),
       Add_v3(Ifle(93.7135,
                   Sub(Sub(22.6237, 52.086),
                       First_Obs_Dist()),
                   Ifle(First_Obs_Dist(),
                        -62.3947,
                        Neighbor_3_Velocity(),
                        Perpendicular_Component(Neighbor_1_Velocity(),
                                                Velocity())),
                   Vec3(Abs(First_Obs_Dist()),
                        Sub(First_Obs_Dist(),
                            32.0927),
                        Mult(First_Obs_Dist(),
                             53.8613))),
              Scale_v3(Add_v3(Velocity(),
                              Scale_v3(Neighbor_2_Velocity(),
                                       First_Obs_Dist())),
                       Abs(0.896672))))
```

Random GP program for boid steering

```
Ifle(Add(-90.7655,
         Length(Parallel_Component(Vec3(First_Obs_Dist(),
                                        21.4841,
                                        15.3372),
                                   Perpendicular_Component(Neighbor_1_Velocity(),
                                                           Neighbor_1_Velocity())))),
     Power(Length(Neighbor_3_Velocity()),
           50.0116),
     Neighbor_2_Velocity(),
     Ifle(Abs(-87.3284),
          -26.965,
          Velocity(),
          Vec3(-92.5262,
               Dot(Vec3(First_Obs_Dist(),
                        Length(Neighbor_3_Offset()),
                        Abs(-29.9717)),
                   Scale_v3(Neighbor_3_Velocity(),
                            44.4096)),
               Add(Sub(10.3116, -64.4813),
                   Dot(Sub_v3(Neighbor_2_Velocity(),
                              Add_v3(Neighbor_2_Offset(),
                                     Neighbor_2_Offset())),
                       Vec3(-56.1253,
                            First_Obs_Dist(),
                            6.30701))))))
```

Random GP program for boid steering

```
Cross(Vec3(Power(Mult(57.3145, 8.61107),
                 -9.24756),
           Power(12.8563,
                 Dot(Parallel_Component(Neighbor_3_Velocity(),
                                        Velocity()),
                     Neighbor_3_Offset())),
           Mult(23.9212, -3.02518)),
      Scale_v3(Add_v3(Neighbor_3_Velocity(),
                      Vec3(6.21334,
                           Dot(First_Obs_Normal(),
                               Scale_v3(Acceleration(),
                                        -7.96728)),
                           Mult(-33.6304,
                                Add(Abs(34.0285),
                                    85.7398)))),
               -75.979))
```

Thank you!

contact:

cwr@red3d.com

https://www.red3d.com/cwr/

these slides:

~~https://www.red3d.com/cwr/presentations/20250221_UCSC_camo_flocks.pdf~~