
DATAMART_DIM recipe

The DATAMART_DIM table I created for my data model contains two levels of the What (is being queried/ have access) hierarchy: database and one level down to data mart.

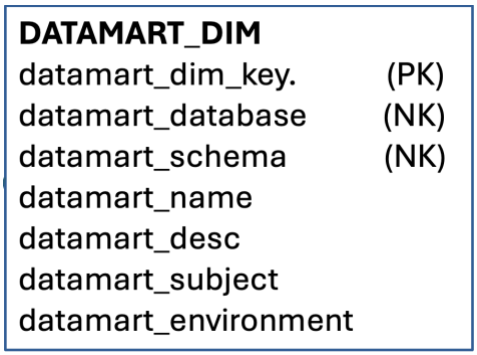

Source-to-target mappings:

Source table	Source column	Target table	Target column	Transformation / notes
Datamart_map	Database_name	Datamart_dim	Datamart_database	
Datamart_map	Owner	Datamart_dim	Datamart_schema	
Datamart_map	Datamart_abrev	Datamart_dim	Datamart_name	
Datamart_map	Datamart_name	Datamart_dim	Datamart_desc	
Datamart_map	Datamart_subject	Datamart_dim	Datamart_subject	
Datamart_map	Environment	Datamart_dim	Datamart_environment	Dev, test, prod


Since all of the columns are coming from one table audit_src.datamart_map, this is an easy dimension to build.

Load Table:

Create a load table for datamart_map. Remember to use your audit_src connection for load tables.

Stage Table:

1) In left pane, double click "Stage Table", so stage table is the focus of middle pane.
2) In right pane, change your connection to your Data Warehouse connection.
3) In right pane, select your load_datamart_map table and drag to middle pane.
4) In the "Add a New Metadata Object" screen, rename object Name to "stage_datamart", then click add.

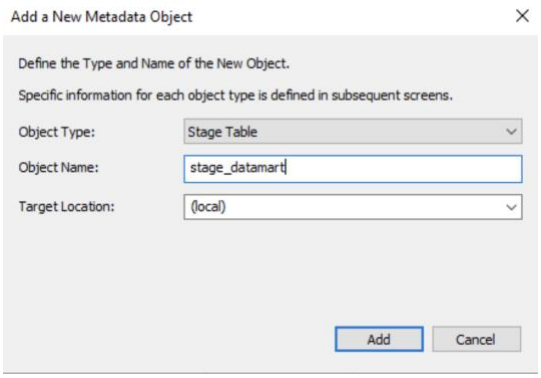

5) For the “Stage Table” screen, simply click OK.
6) Next, I renamed the columns to match my data model. Using the source-to-target mapping, here are the renames:
   Database_name to datamart_database
   Environment to datamart_environment
   Owner to datamart_schema
   Datamart_abrev to datamart_name
   Datamart_name to datamart_desc

stage_datamart Columns

Column Name	Display Name	Data Type	Source Table	Source Column
datamart_database	datamart database	varchar2(30)	load_datamart_map	database_name
datamart_schema	datamart schema	varchar2(40)	load_datamart_map	owner
datamart_name	datamart name	varchar2(10)	load_datamart_map	datamart_abrev
datamart_desc	datamart desc	varchar2(50)	load_datamart_map	datamart_name
datamart_subject	datamart subject	varchar2(30)	load_datamart_map	datamart_subject
datamart_environment	datamart environment	varchar2(4)	load_datamart_map	environment
dss_create_time	dss create time	date		dss_create_time
dss_update_time	dss update time	date		dss_update_time

7) In left pane, right click stage_datamart, select “create(recreate)”
8) In left pane, right click stage_datamart, select “code > rebuild update procedure”
9) In the Define Stage Procedure type screen click “Set”
10) For the “Select Parameters, simply click OK
11) In left pane, right click stage_datamart, then select “execute update procedure”

Results


Object	Message
stage_datamart	Procedure Completed
stage_dat...	1 stage_datamart updated. 12 new records. 0 records updated.

12) Display data. How does it look?


DATAMART_DIM:

1) In the left pane, double click “Dimension”, so Dimension is in focus for the middle pane.

2) In right pane, refresh your data warehouse connection, by clicking the blue sunglasses.
3) In the right pane, select the stage_datamart table and drag to the middle pane.
4) In the “Add a New Metadata Object” screen, rename to “datamart_dim”, then click Add.

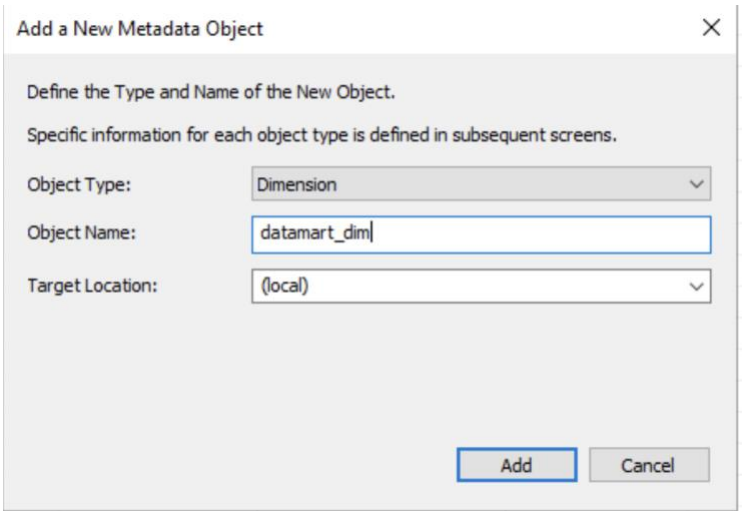


5) In the “Dimension Type” screen, click “Normal”.
6) In the “Dimension datamart_dim” screen, simply click OK.
7) In the “Create Database Table” screen, click “Create”.
8) In left pane, right click datamart_dim, then select “code > rebuild update procedure”
9) For the “Procedure Build Type”, select Set.
10) In the “datamart_dim Update build Options” screen click the square box to the far right of “Business Key Columns”, then in the “Business Key columns box select datamart_database, then arrow to right, next datamart_schema, then arrow to right. Once it looks like screen below, click OK.

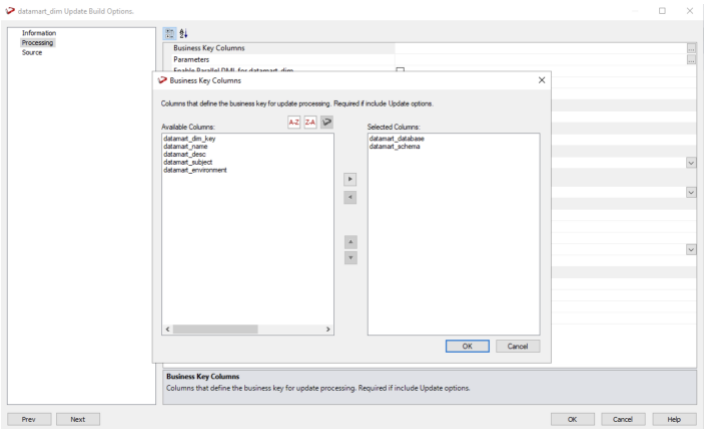

11) Now that your business key columns are defined, click OK.

12) In left pane, right click datamart_dim, then select “execute update procedure”.

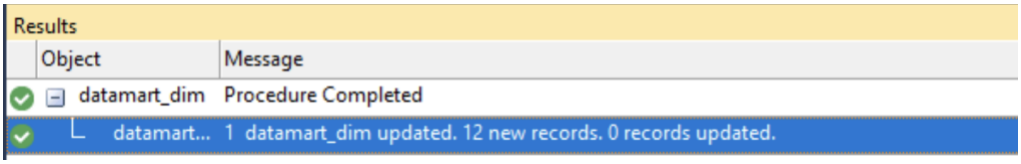

13) Display data. How does it look?

datamart_dim Columns

Column Name	Display Name	Data Type	Source Table	Source Column
datamart_dim_key	datamart dim ...	integer		datamart_dim_key
datamart_database	datamart data...	varchar2(30)	stage_datamart	datamart_database
datamart_schema	datamart sche...	varchar2(40)	stage_datamart	datamart_schema
datamart_name	datamart name	varchar2(10)	stage_datamart	datamart_name
datamart_desc	datamart desc	varchar2(50)	stage_datamart	datamart_desc
datamart_subject	datamart subje...	varchar2(30)	stage_datamart	datamart_subject
datamart_environment	datamart envir...	varchar2(4)	stage_datamart	datamart_environ...
dss_create_time	dss create time	date		dss_create_time
dss_update_time	dss update time	date		dss_update_time

