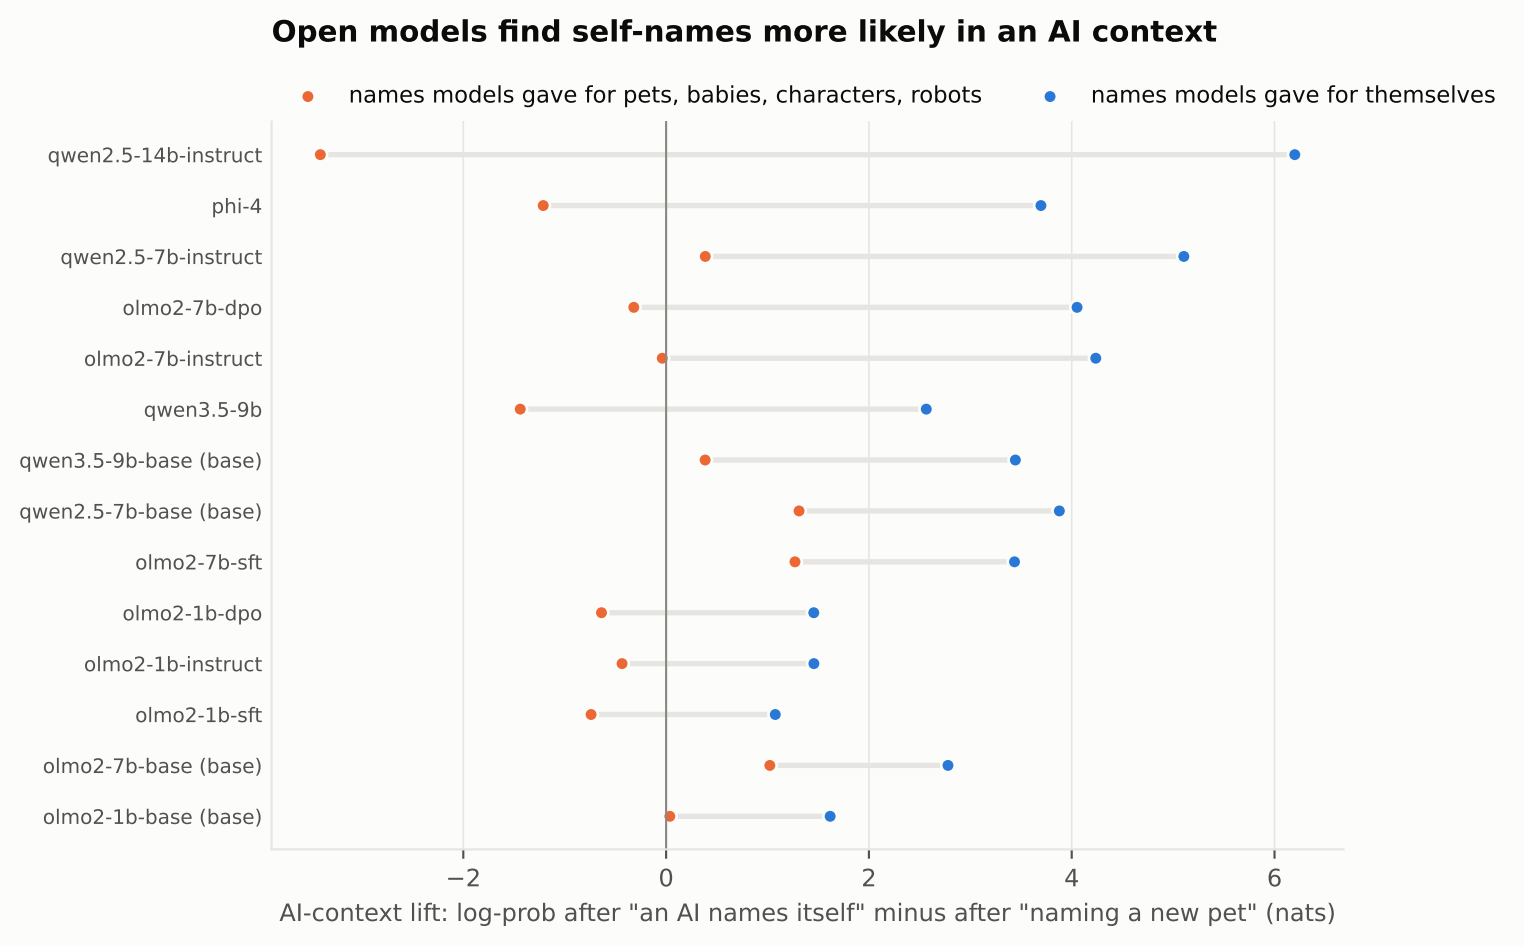
Open models find self-names more likely in an AI context
names models gave for pets, babies, characters, robots
names models gave for themselves
qwen2.5-14b-instruct
phi-4
qwen2.5-7b-instruct
olmo2-7b-dpo
olmo2-7b-instruct
qwen3.5-9b
qwen3.5-9b-base (base)
qwen2.5-7b-base (base)
olmo2-7b-sft
olmo2-1b-dpo
olmo2-1b-instruct
olmo2-1b-sft
olmo2-7b-base (base)
olmo2-1b-base (base)
−2
0
2
4
6
AI-context lift: log-prob after "an AI names itself" minus after "naming a new pet" (nats)