


Structure 5

netvisor-v5/



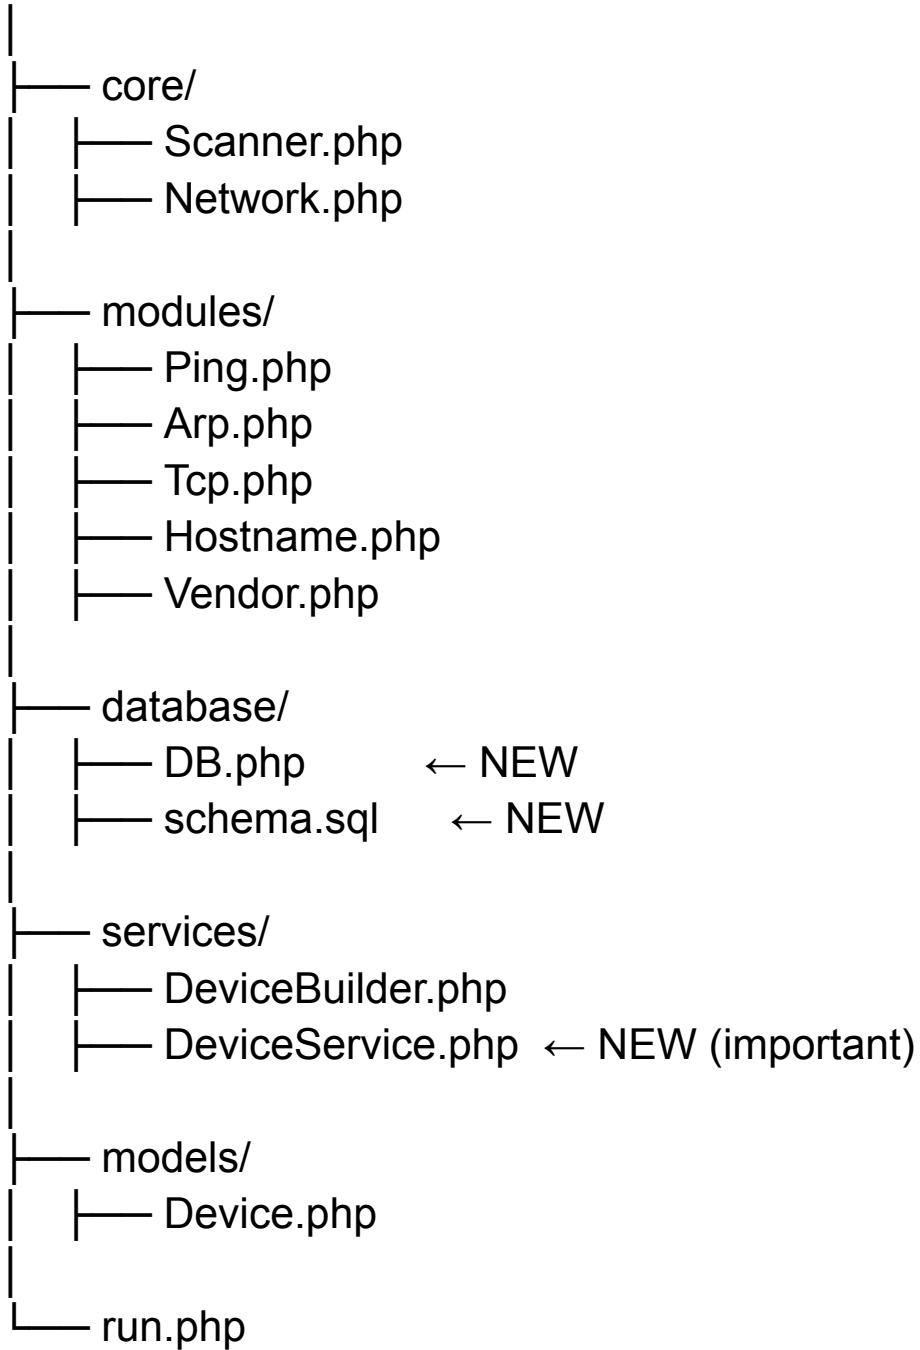

1. Database (MySQL)

schema.sql

```
CREATE TABLE devices (  
    id INT AUTO_INCREMENT PRIMARY KEY,  
    ip VARCHAR(45),  
    mac VARCHAR(45),  
    hostname VARCHAR(255),  
    vendor VARCHAR(255),  
    ports TEXT,  
    last_seen TIMESTAMP DEFAULT CURRENT_TIMESTAMP  
);
```



2. DB Connection

database/DB.php

```
<?php
```

```
class DB  
{  
    public static function connect()  
    {  
        return new PDO(  
            "mysql:host=localhost;dbname=netvisor",  
            "root",  
            ""  
        );  
    }  
}
```



3. Device Service (Core of V5)

services/DeviceService.php

```
<?php
```

```
require_once __DIR__ . "../database/DB.php";
```

```
class DeviceService
```

```
{
```

```
    private $db;
```

```
    public function __construct()
```

```
    {
```

```
        $this->db = DB::connect();
```

```
    }
```

```
    public function saveDevice($ip, $mac, $hostname, $vendor, $ports)
```

```
    {
```

```
        $stmt = $this->db->prepare("
```

```
            INSERT INTO devices (ip, mac, hostname, vendor, ports)
```

```
            VALUES (?, ?, ?, ?, ?)
```

```
        ");
```

```
        $stmt->execute([
```

```
            $ip,
```

```
            $mac,
```

```
            $hostname,
```

```
            $vendor,
```

```
            json_encode($ports)
```

```
        ]);
```

```
    }
```

```
    public function getAll()
```

```
    {
```

```
        return $this->db->query("SELECT * FROM devices")->fetchAll(PDO::FETCH_ASSOC);
```

```
    }
```

```
}
```

run.php — NETVISOR V5

<?php

```
require_once "core/Network.php";
require_once "core/Scanner.php";
```

```
require_once "modules/Ping.php";
require_once "modules/Arp.php";
require_once "modules/Tcp.php";
require_once "modules/Hostname.php";
require_once "modules/Vendor.php";
```

```
require_once "services/DeviceService.php";
```

```
echo "=====\n";
echo "    NETVISOR MINI DISCOVERY V5    \n";
echo "    DATABASE LAYER ACTIVE    \n";
echo "=====\n\n";
```

```
$service = new DeviceService();
```

```
$network = getLocalNetwork();
$ips = generateIPs($network);
```

```
list($aliveips, $arp) = scanNetwork($ips);
```

```
echo "Phase 1: Scan Completed\n";
echo "Phase 2: Enrich + Store Devices\n\n";
```

```
foreach ($aliveips as $ip)
```

```

{
    $mac = $arp[$ip] ?? "unknown";

    $ports = scanPorts($ip);

    $hostname = resolveHostname($ip);
    $vendor = getVendor($mac);

    // SAVE TO DATABASE
    $service->saveDevice(
        $ip,
        $mac,
        $hostname,
        $vendor,
        $ports
    );

    // OUTPUT
    echo "Saved Device:\n";
    echo "IP: $ip\n";
    echo "HOSTNAME: $hostname\n";
    echo "VENDOR: $vendor\n";
    echo "MAC: $mac\n";
    echo "PORTS: " . (empty($ports) ? "none" : implode(",", $ports))
    . "\n";
    echo "-----\n\n";
}

echo "TOTAL DEVICES SAVED: " . count($aliveIps) . "\n";
echo "DONE.\n";

```