


Probabilistic Graphical Models

Modeling networks:
Gaussian graphical models and Ising models:

Eric Xing

Lecture 9, February 13, 2019

Reading: see class homepage

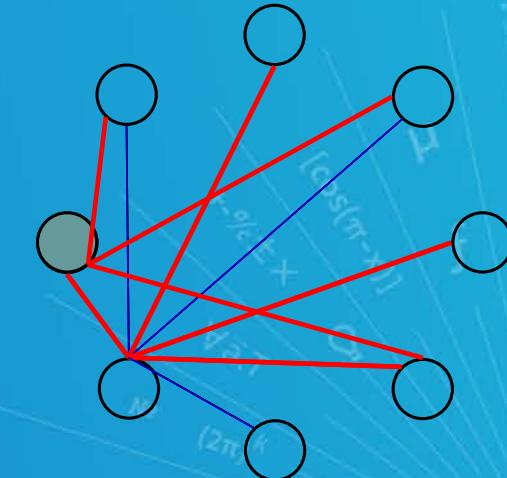





Network Research



Social Network

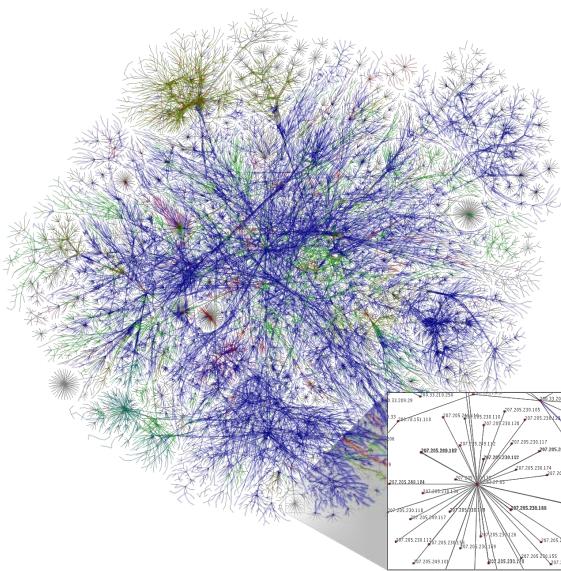

Internet

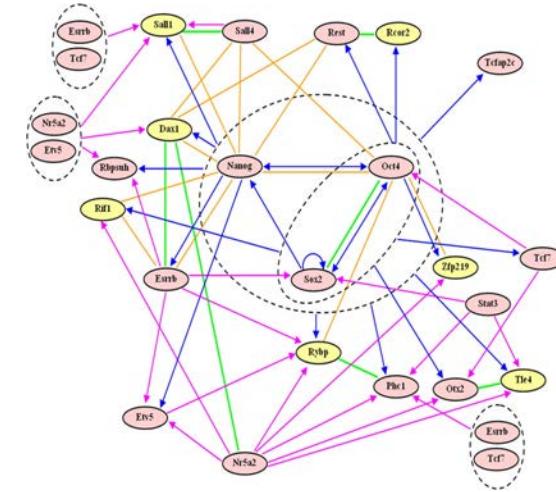



Regulatory Network






Where do networks come from?

□ The Jesus network

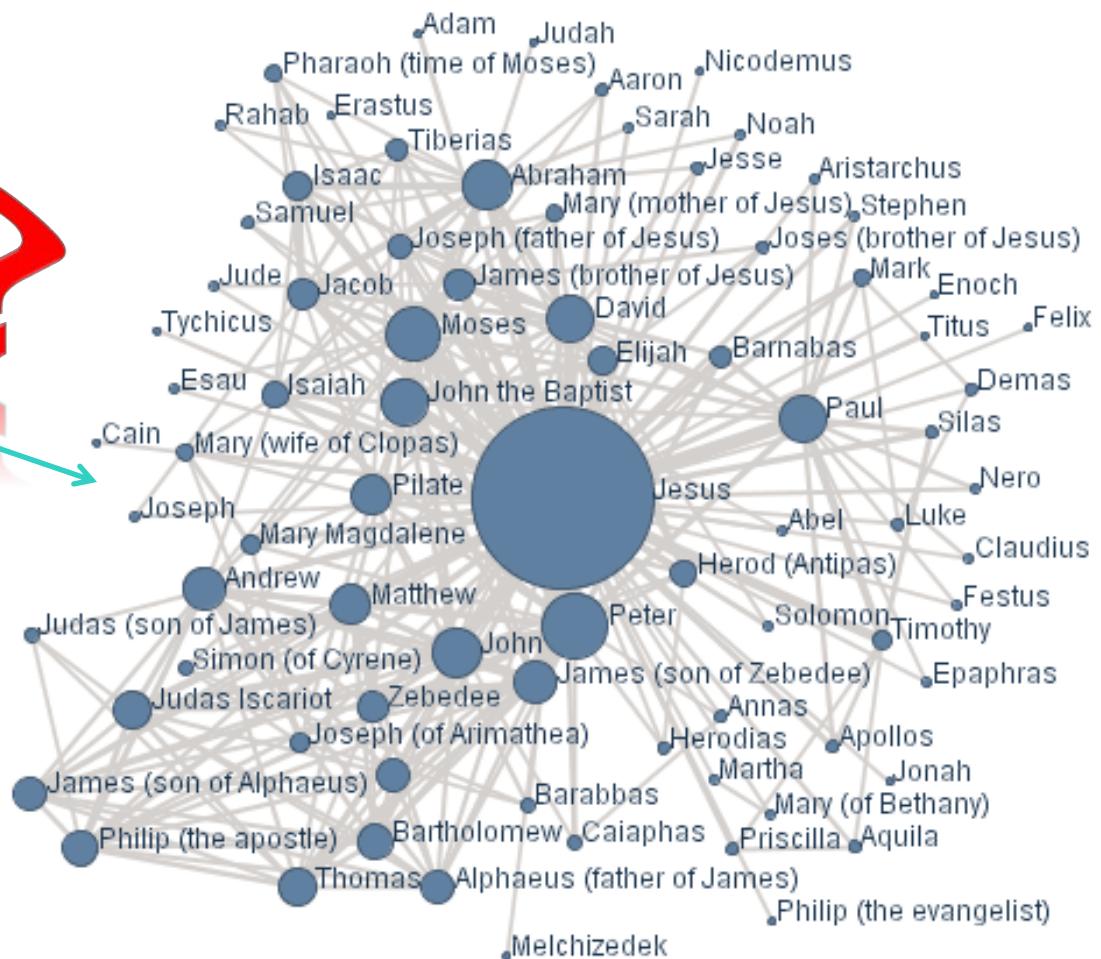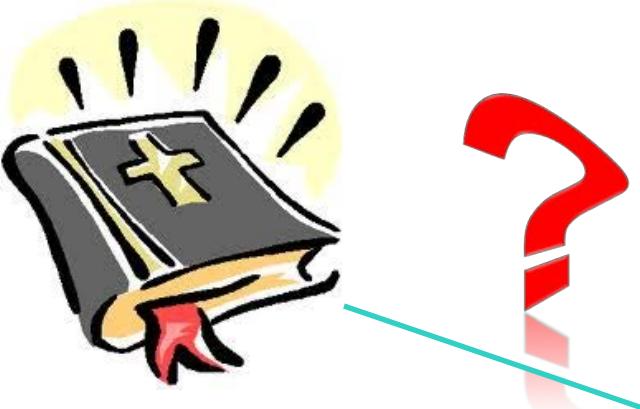





Evolving networks

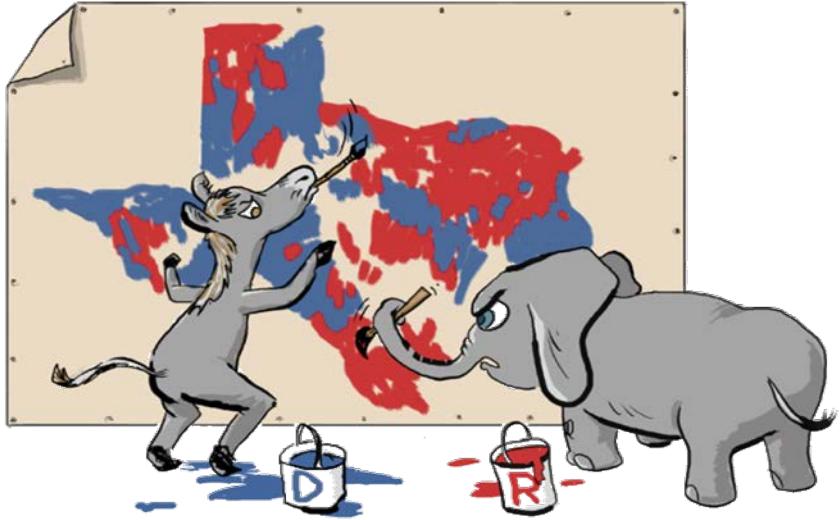


Can I get his vote?


Corporativity,
Antagonism,
Cliques,
...
over time?

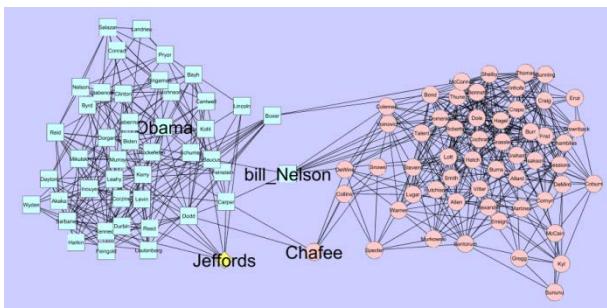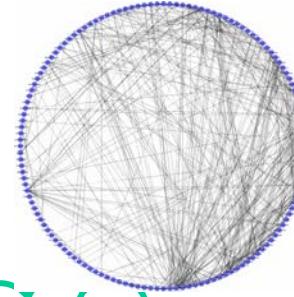

March 2005

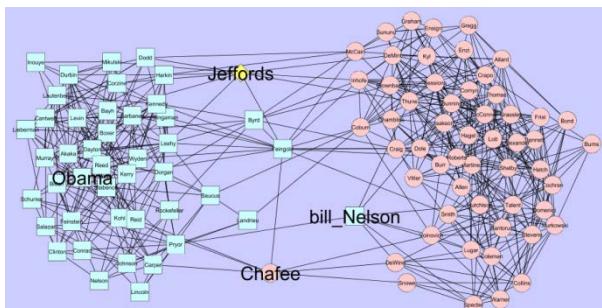

January 2006

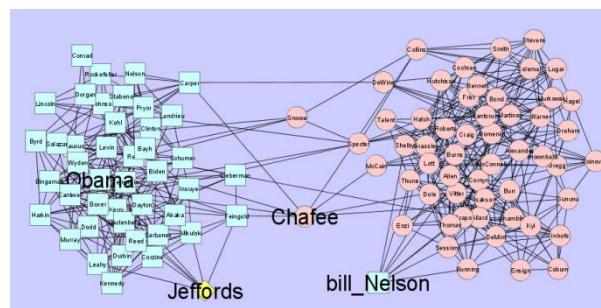


August 2006







Evolving networks

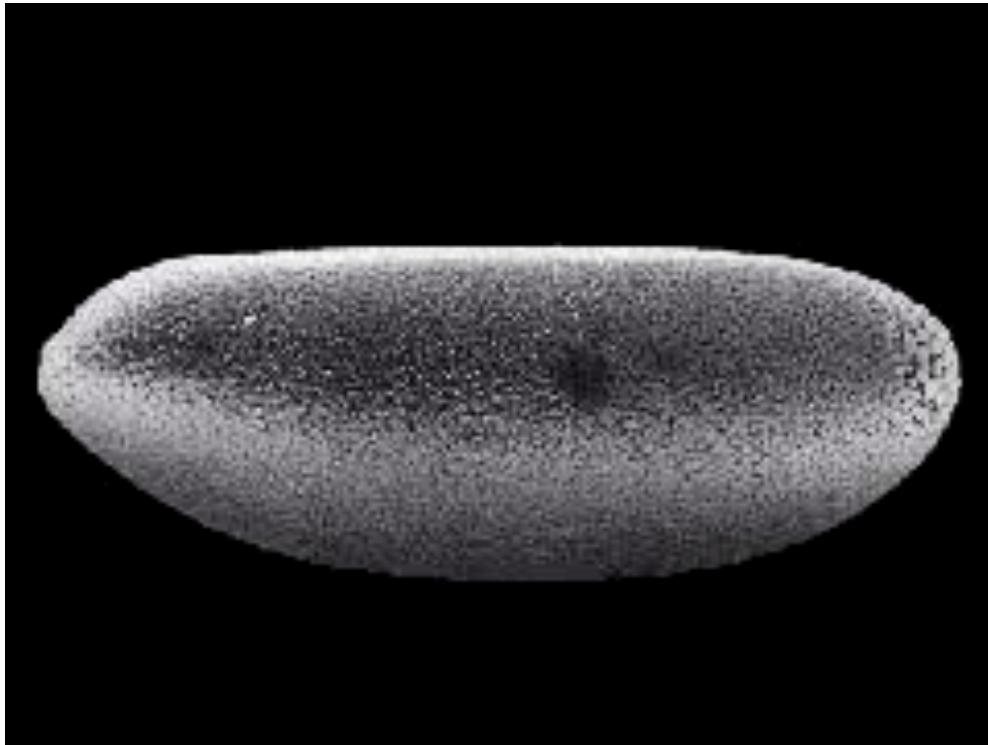


$t=1$



2






3



...

T

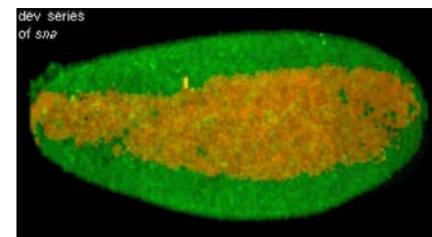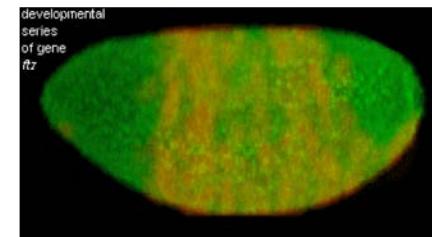




Recall: ML Structural Learning for completely observed GMs



$(x_1^{(1)}, \dots, x_n^{(1)})$
 $(x_1^{(2)}, \dots, x_n^{(2)})$

...

$(x_1^{(M)}, \dots, x_n^{(M)})$

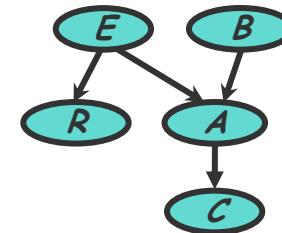




Two “Optimal” approaches

- ❑ “Optimal” here means the employed algorithms guarantee to return a structure that maximizes the objectives (e.g., LogLik)
 - ❑ Many heuristics used to be popular, but they provide no guarantee on attaining optimality, interpretability, or even do not have an explicit objective
 - ❑ E.g.: structured EM, Module network, greedy structural search, etc.
- ❑ We will learn two classes of algorithms for guaranteed structure learning, which are likely to be the only known methods enjoying such guarantee, but they only apply to certain families of graphs:
 - ❑ Trees: The Chow-Liu algorithm (lecture 3)
 - ❑ Pairwise MRFs: covariance selection, neighborhood-selection (this lecture)





Key Idea: network inference as parameter estimation

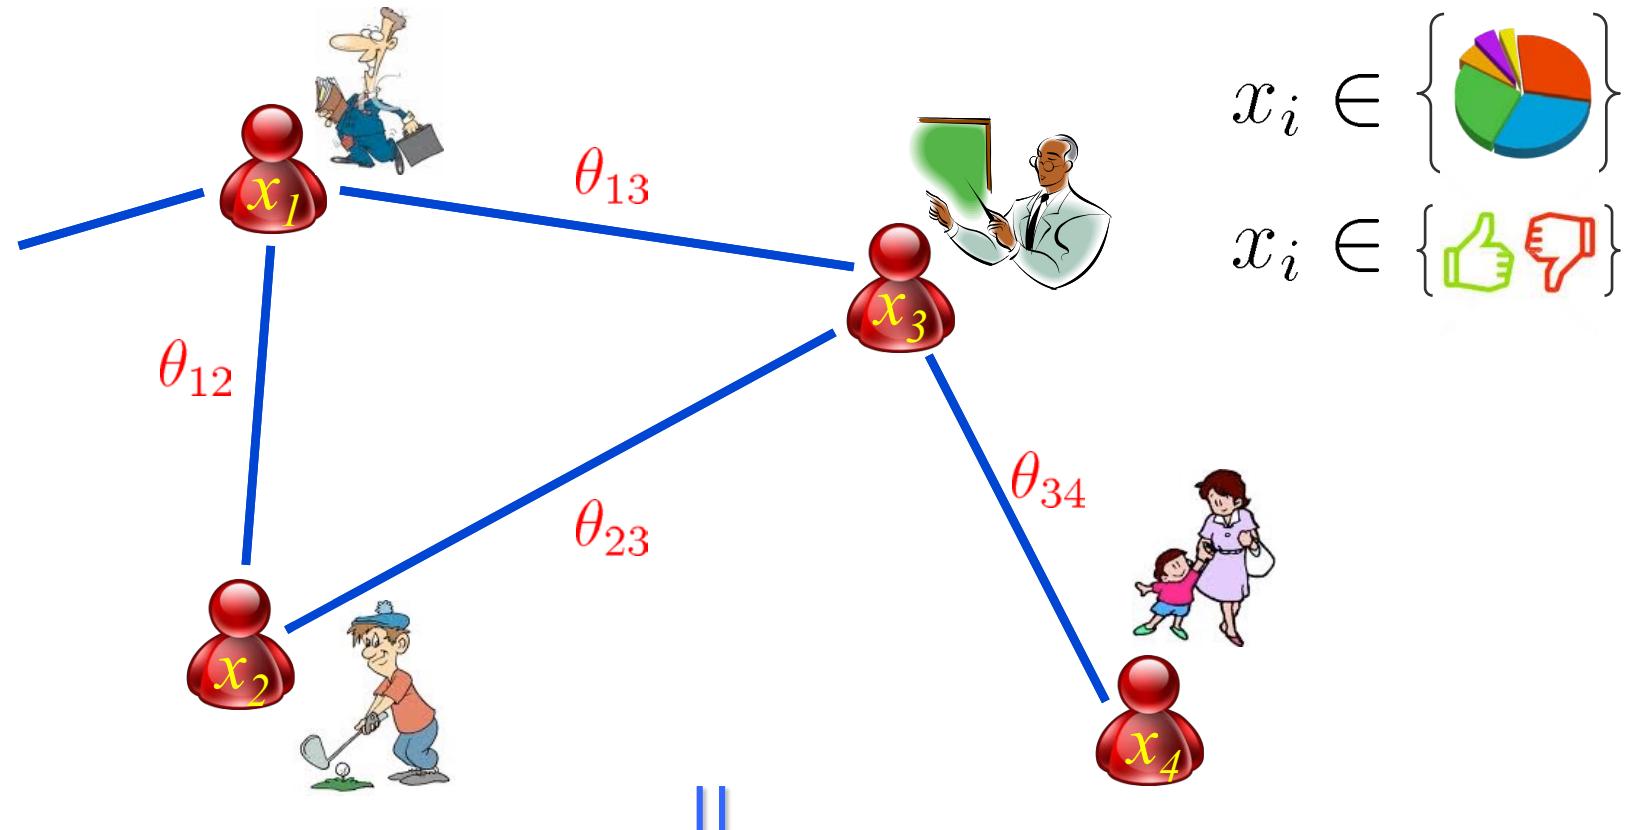

$$p(x_1, x_2, x_3, x_4) = \frac{1}{Z} \exp \{ \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_3 + \theta_4 x_4 + \theta_{12} x_1 x_2 + \theta_{13} x_1 x_3 + \theta_{23} x_2 x_3 + \theta_{34} x_3 x_4 \}$$






Model: Pairwise Markov Random Fields

$$p(x_1, x_2, x_3, x_4) = \frac{1}{Z} \exp\{\theta_1 x_1 + \theta_2 x_2 + \theta_3 x_3 + \theta_4 x_4 + \theta_{12} x_1 x_2 + \theta_{13} x_1 x_3 + \theta_{23} x_2 x_3 + \theta_{34} x_3 x_4\}$$

- ❑ Nodal states can be either discrete ([Ising/Potts model](#)), or continuous ([Gaussian graphical model](#)), or heterogeneous
- ❑ the parameter matrix encodes the graph structure

$$\begin{pmatrix} * & * & * & * & * & 0 \\ * & * & * & * & * & 0 \\ * & * & * & 0 & 0 & 0 \\ * & * & 0 & * & 0 & 0 \\ * & * & 0 & 0 & * & 0 \\ 0 & 0 & 0 & 0 & 0 & * \end{pmatrix}$$

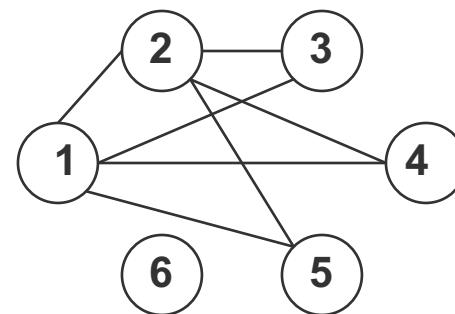



Recall Multivariate Gaussian

- Multivariate Gaussian density:

$$p(\mathbf{x} | \mu, \Sigma) = \frac{1}{(2\pi)^{n/2} |\Sigma|^{1/2}} \exp\left\{-\frac{1}{2} (\mathbf{x} - \mu)^T \Sigma^{-1} (\mathbf{x} - \mu)\right\}$$

- WOLG: let $\mu = 0$ $Q = \Sigma^{-1}$


$$p(x_1, x_2, \dots, x_p | \mu=0, Q) = \frac{|Q|^{1/2}}{(2\pi)^{n/2}} \exp\left\{-\frac{1}{2} \sum_i q_{ii} (x_i)^2 - \sum_{i < j} q_{ij} x_i x_j\right\}$$

- We can view this as a continuous Markov Random Field with potentials defined on every node and edge:






Gaussian Graphical Model

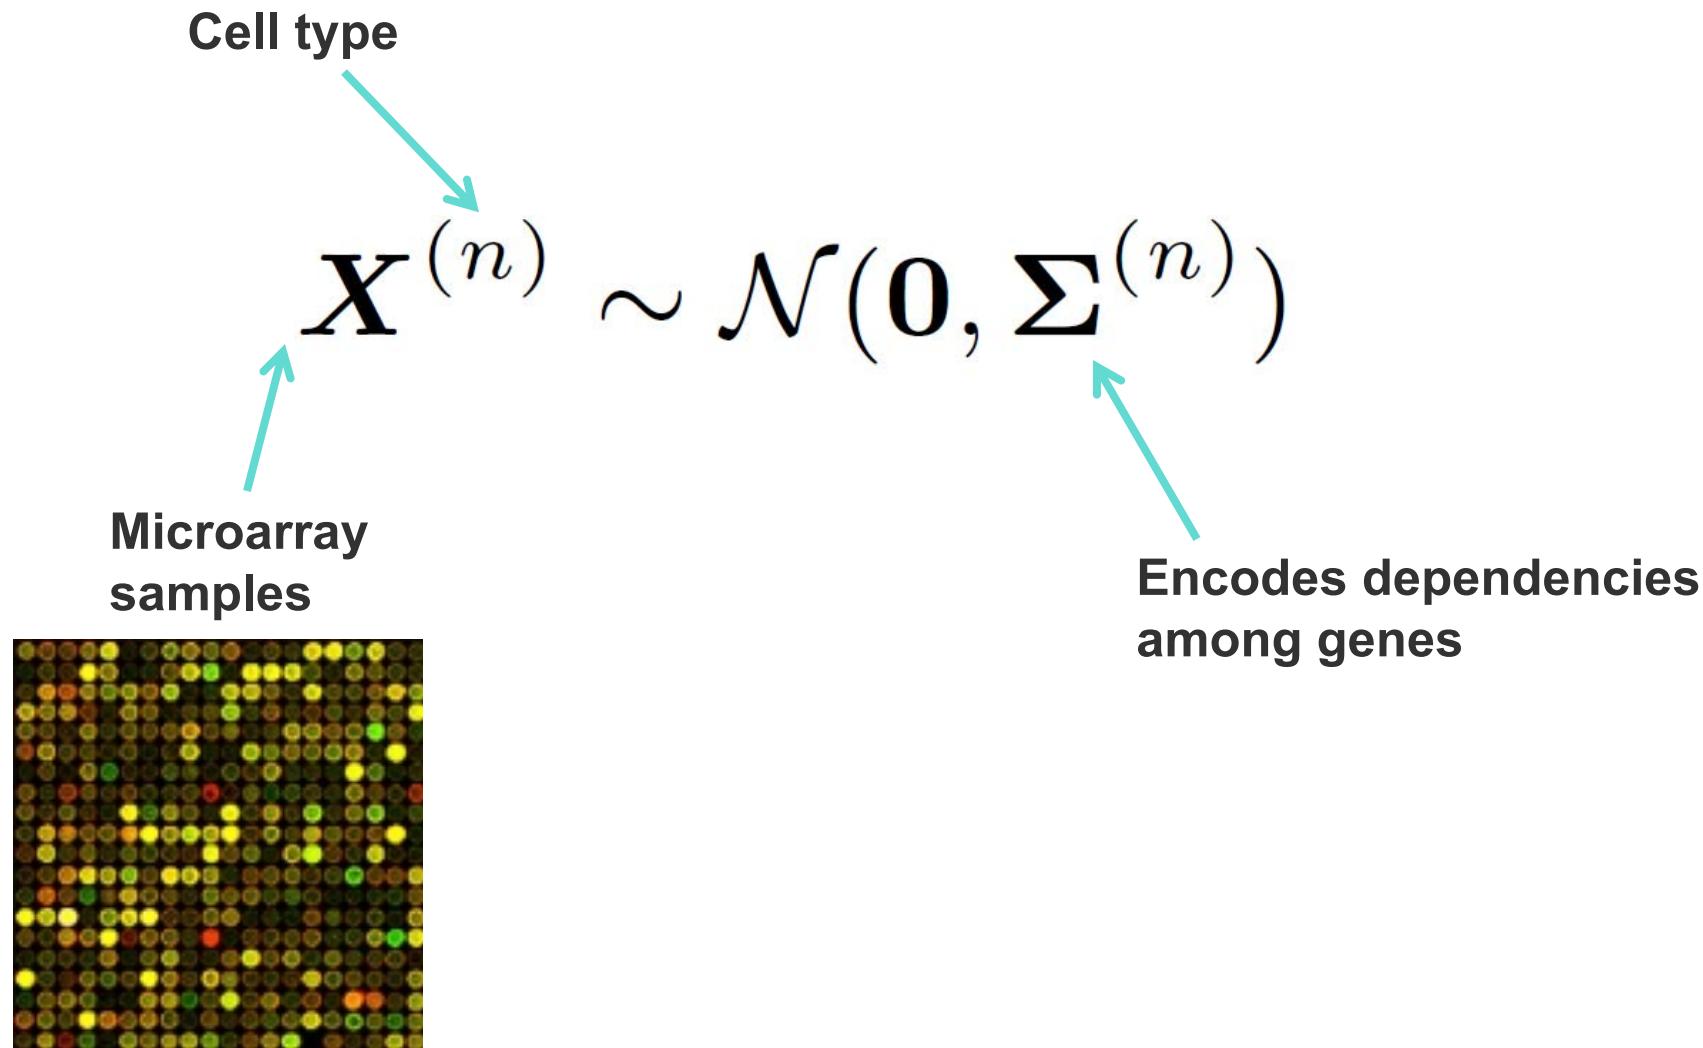



Precision Matrix Encodes Non-Zero Edges in Gaussian Graphical Modela

$$\Omega^{(n)} = (\Sigma^{(n)})^{-1}$$

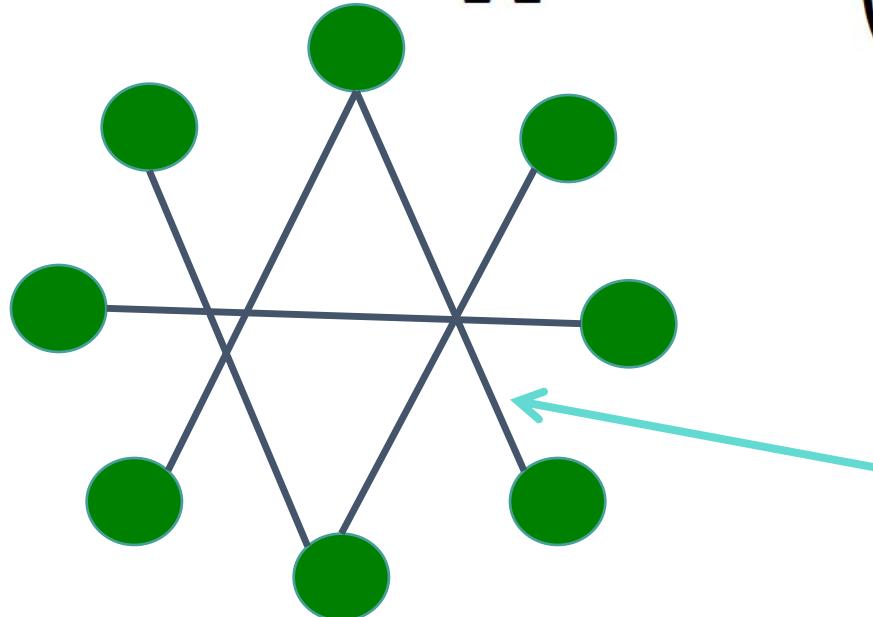

Edge corresponds to non-zero precision matrix element





Markov versus Correlation Network


- *Correlation network* is based on *Covariance Matrix*

$$\Sigma_{i,j} = 0 \Rightarrow X_i \perp X_j \text{ or } p(X_i, X_j) = p(X_i)p(X_j)$$

- A GGM is a *Markov Network* based on *Precision Matrix*

- Conditional Independence/Partial Correlation Coefficients are a more sophisticated dependence measure

$$Q_{i,j} = 0 \Rightarrow X_i \perp X_j | \mathbf{X}_{-ij} \text{ or } p(X_i, X_j | \mathbf{X}_{-ij}) = p(X_i | \mathbf{X}_{-ij})p(X_j | \mathbf{X}_{-ij})$$

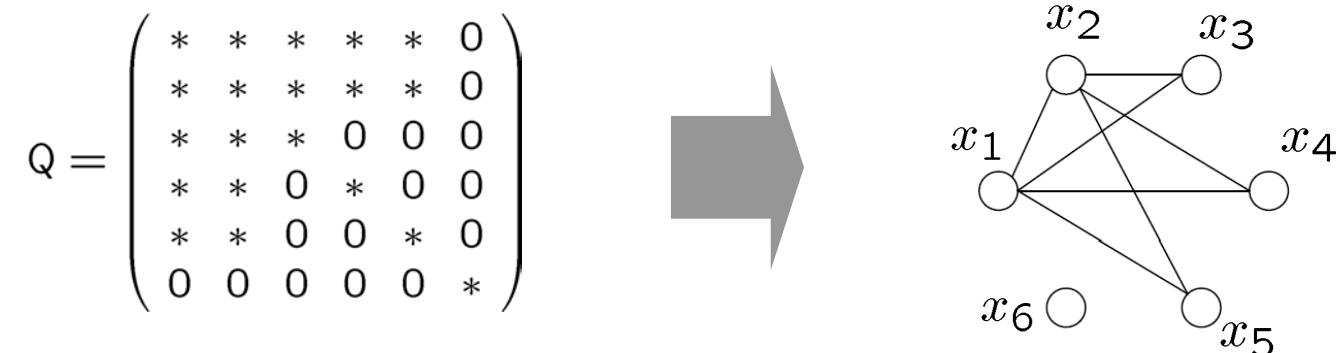

With small sample size, empirical covariance matrix cannot be inverted





Sparsity

- One common assumption to make: **sparsity**
- **Makes empirical sense:** Genes are only assumed to interface with small groups of other genes.
- **Makes statistical sense:** Learning is now feasible in high dimensions with small sample size

$$\Omega^{(n)} = (\Sigma^{(n)})^{-1}$$


sparse 





Network Learning with the LASSO

- ❑ Assume network is a Gaussian Graphical Model
- ❑ Perform LASSO regression of all nodes to a target node

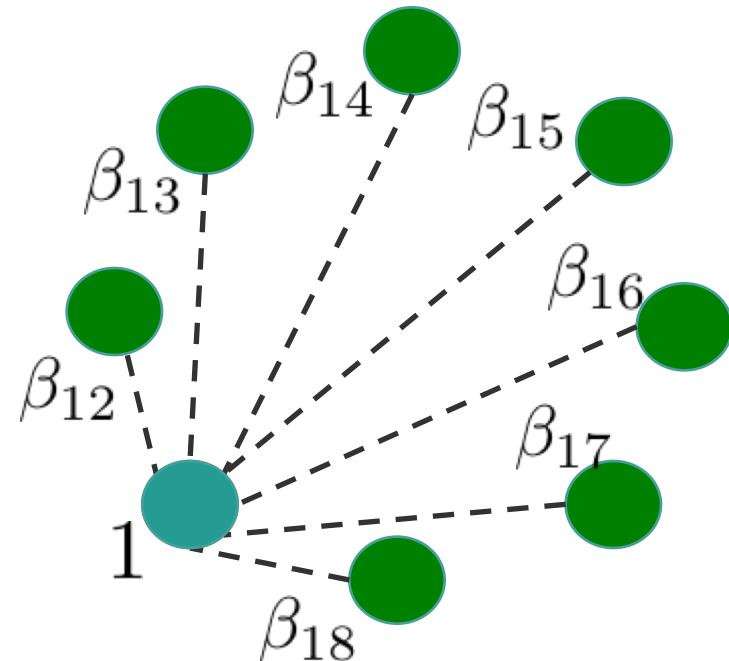




Network Learning with the LASSO

- LASSO can select the neighborhood of each node

$$\hat{\beta}_1 = \operatorname{argmin}_{\beta_1} \|\mathbf{Y} - \mathbf{X}\beta_1\|^2 + \lambda \|\beta_1\|_1$$

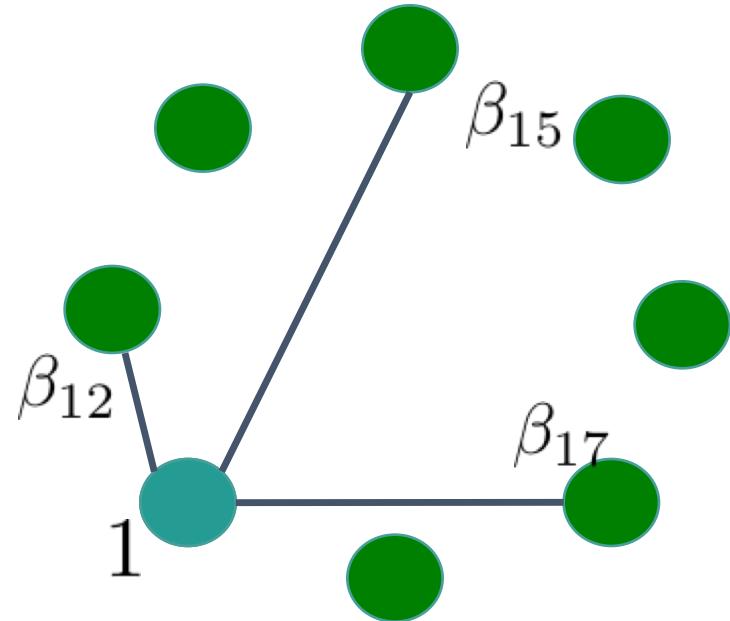



L1 Regularization (LASSO)

- ❑ A convex relaxation.


Constrained Form

$$\hat{\beta} = \operatorname{argmin}_{\beta} \|\mathbf{Y} - \mathbf{X}\beta\|^2$$

subject to:


$$\sum_{j=1}^p |\beta_j| \leq C$$

- ❑ Enforces sparsity!

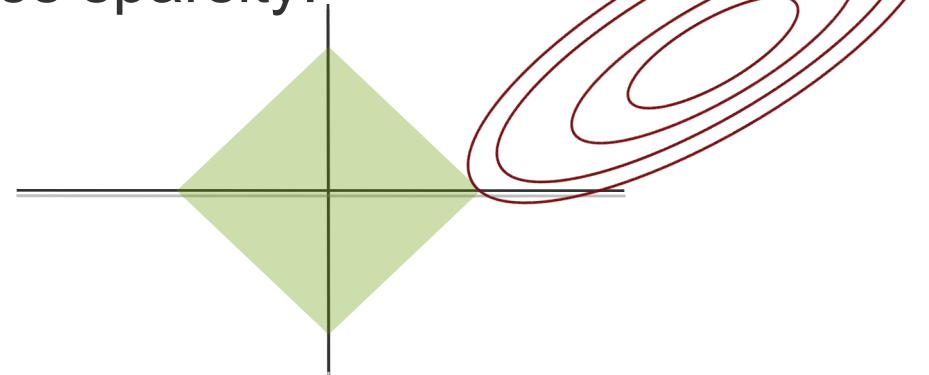

Lagrangian Form

$$\hat{\beta} = \operatorname{argmin}_{\beta} \|\mathbf{Y} - \mathbf{X}\beta\|^2 + \lambda \|\beta\|_1$$

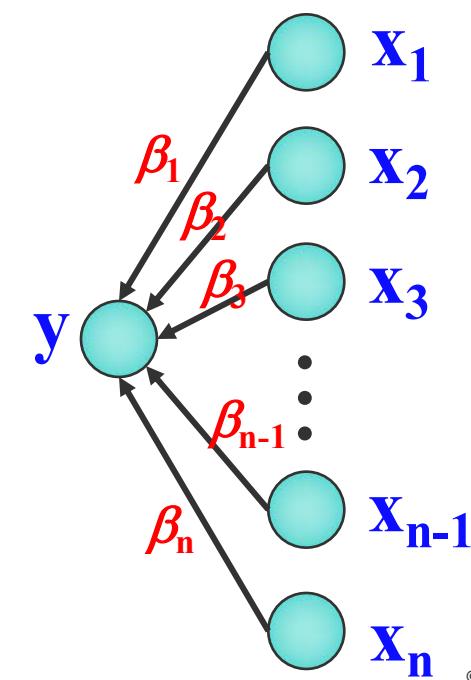



Theoretical Guarantees

- Assumptions
 - Dependency Condition: Relevant Covariates are not overly dependent
 - Incoherence Condition: Large number of irrelevant covariates cannot be too correlated with relevant covariates
 - Strong concentration bounds: Sample quantities converge to expected values quickly


If these assumptions are met, LASSO will asymptotically recover correct subset of covariates that relevant.





Network Learning with the LASSO

- Repeat this for every node
- Form the total edge set $\hat{\mathcal{E}} = \{(u, v) : \max(|\hat{\beta}_{uv}|, |\hat{\beta}_{vu}|) > 0\}$

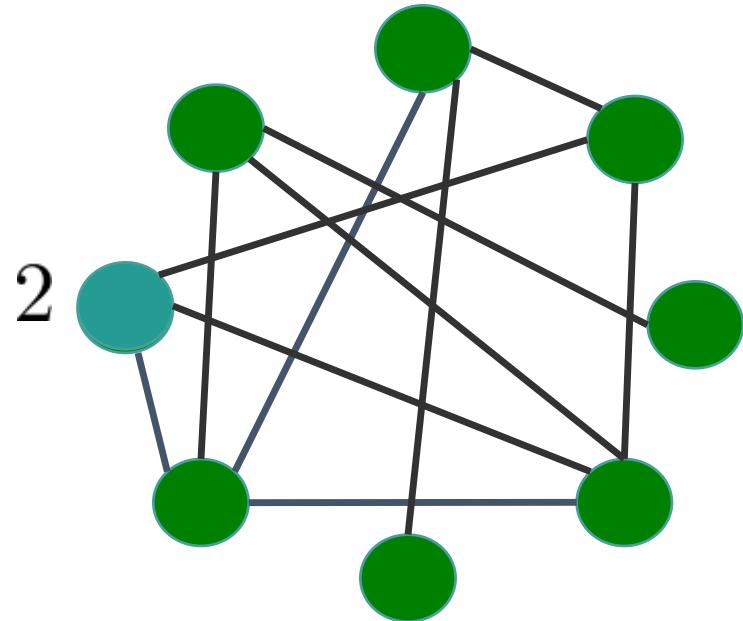



Consistent Structure Recovery

[Meinshausen and Bühlmann 2006, Wainwright 2009]

If $\lambda_s > C \sqrt{\frac{\log p}{S}}$

Then with high probability,

$$S(\hat{\beta}) \rightarrow S(\beta^*)$$





Why this algorithm work?

- ❑ What is the intuition behind graphical regression?
 - ❑ Continuous nodal attributes
 - ❑ Discrete nodal attributes
- ❑ Are there other algorithms?
- ❑ More general scenarios:
non-iid sample and evolving networks
- ❑ Case study





Multivariate Gaussian

- Multivariate Gaussian density:

$$p(\mathbf{x} | \mu, \Sigma) = \frac{1}{(2\pi)^{n/2} |\Sigma|^{1/2}} \exp\left\{-\frac{1}{2} (\mathbf{x} - \mu)^T \Sigma^{-1} (\mathbf{x} - \mu)\right\}$$

- A joint Gaussian:

$$p\left(\begin{bmatrix} \mathbf{x}_1 \\ \mathbf{x}_2 \end{bmatrix} | \mu, \Sigma\right) = \mathcal{N}\left(\begin{bmatrix} \mathbf{x}_1 \\ \mathbf{x}_2 \end{bmatrix} | \begin{bmatrix} \mu_1 \\ \mu_2 \end{bmatrix}, \begin{bmatrix} \Sigma_{11} & \Sigma_{12} \\ \Sigma_{21} & \Sigma_{22} \end{bmatrix}\right)$$

- How to write down $p(\mathbf{x}_2)$, $p(\mathbf{x}_1|\mathbf{x}_2)$ or $p(\mathbf{x}_2|\mathbf{x}_1)$ using the block elements in μ and Σ ?

- Formulas to remember:

$$p(\mathbf{x}_2) = \mathcal{N}(\mathbf{x}_2 | \mathbf{m}_2^m, \mathbf{V}_2^m)$$

$$\mathbf{m}_2^m = \mu_2$$

$$\mathbf{V}_2^m = \Sigma_{22}$$

$$p(\mathbf{x}_1|\mathbf{x}_2) = \mathcal{N}(\mathbf{x}_1 | \mathbf{m}_{1|2}, \mathbf{V}_{1|2})$$

$$\mathbf{m}_{1|2} = \mu_1 + \Sigma_{12} \Sigma_{22}^{-1} (\mathbf{x}_2 - \mu_2)$$

$$\mathbf{V}_{1|2} = \Sigma_{11} - \Sigma_{12} \Sigma_{22}^{-1} \Sigma_{21}$$





The matrix inverse lemma

- Consider a block-partitioned matrix:

$$M = \begin{bmatrix} E & F \\ G & H \end{bmatrix}$$

- First we diagonalize M

$$\begin{bmatrix} I & -FH^{-1} \\ 0 & I \end{bmatrix} \begin{bmatrix} E & F \\ G & H \end{bmatrix} \begin{bmatrix} I & 0 \\ -H^{-1}G & I \end{bmatrix} = \begin{bmatrix} E-FH^{-1}G & 0 \\ 0 & H \end{bmatrix}$$

- Schur complement:

$$M/H = E-FH^{-1}G$$

- Then we inverse, using this formula:

$$XYZ = W \Rightarrow Y^{-1} = ZW^{-1}X$$

$$\begin{aligned} M^{-1} &= \begin{bmatrix} E & F \\ G & H \end{bmatrix}^{-1} = \begin{bmatrix} I & 0 \\ -H^{-1}G & I \end{bmatrix} \begin{bmatrix} (M/H)^{-1} & 0 \\ 0 & H^{-1} \end{bmatrix} \begin{bmatrix} I & -FH^{-1} \\ 0 & I \end{bmatrix} \\ &= \begin{bmatrix} (M/H)^{-1} & -(M/H)^{-1}FH^{-1} \\ -H^{-1}G(M/H)^{-1} & H^{-1} + H^{-1}G(M/H)^{-1}FH^{-1} \end{bmatrix} = \begin{bmatrix} E^{-1} + E^{-1}F(M/E)^{-1}GE^{-1} & -E^{-1}F(M/E)^{-1} \\ -(M/E)^{-1}GE^{-1} & (M/E)^{-1} \end{bmatrix} \end{aligned}$$

- Matrix inverse lemma

$$(E-FH^{-1}G)^{-1} = E^{-1} + E^{-1}F(H-GE^{-1}F)^{-1}GE^{-1}$$





The covariance and the precision matrices

$$\Sigma = \begin{bmatrix} \sigma_{11} & \bar{\sigma}_1^T \\ \bar{\sigma}_1 & \Sigma_{-1} \end{bmatrix}$$



$$M^{-1} = \begin{bmatrix} (M/H)^{-1} & -(M/H)^{-1} FH^{-1} \\ -H^{-1}G(M/H)^{-1} & H^{-1} + H^{-1}G(M/H)^{-1} FH^{-1} \end{bmatrix}$$



$$Q = \begin{bmatrix} q_{11} & -q_{11}\bar{\sigma}_1^T \Sigma_{-1}^{-1} \\ -q_{11}\Sigma_{-1}^{-1}\bar{\sigma}_1 & \Sigma_{-1}^{-1}(I + q_{11}\bar{\sigma}_1\bar{\sigma}_1^T \Sigma_{-1}^{-1}) \end{bmatrix} = \begin{bmatrix} q_{11} & \bar{q}_1^T \\ \bar{q}_1 & Q_{-1} \end{bmatrix}$$





Single-node Conditional

$$p(\mathbf{x}_1 | \mathbf{x}_2) = \mathcal{N}(\mathbf{x}_1 | \mathbf{m}_{1|2}, \mathbf{V}_{1|2})$$

$$\mathbf{m}_{1|2} = \mu_1 + \Sigma_{12}\Sigma_{22}^{-1}(\mathbf{x}_2 - \mu_2)$$

$$\mathbf{V}_{1|2} = \Sigma_{11} - \Sigma_{12}\Sigma_{22}^{-1}\Sigma_{21}$$

- The conditional dist. of a single node i given the rest of the nodes can be written as:

$$p(X_i | \mathbf{X}_{-i}) = \mathcal{N}\left(\mu_i + \Sigma_{X_i \mathbf{X}_{-i}} \Sigma_{\mathbf{X}_{-i} \mathbf{X}_{-i}}^{-1} (\mathbf{X}_{-i} - \mu_{\mathbf{X}_{-i}}), \right. \\ \left. \Sigma_{X_i X_i} - \Sigma_{X_i \mathbf{X}_{-i}} \Sigma_{\mathbf{X}_{-i} \mathbf{X}_{-i}}^{-1} \Sigma_{\mathbf{X}_{-i} X_i}\right)$$

- WOLG: let $\mu = 0$

$$p(X_i | \mathbf{X}_{-i}) = \mathcal{N}\left(\Sigma_{X_i \mathbf{X}_{-i}} \Sigma_{\mathbf{X}_{-i} \mathbf{X}_{-i}}^{-1} \mathbf{X}_{-i}, \Sigma_{X_i X_i} - \Sigma_{X_i \mathbf{X}_{-i}} \Sigma_{\mathbf{X}_{-i} \mathbf{X}_{-i}}^{-1} \Sigma_{\mathbf{X}_{-i} X_i}\right) \\ = \mathcal{N}\left(\vec{\sigma}_i^T \Sigma_{-i}^{-1} \mathbf{X}_{-i}, q_{i|-i}\right) \\ = \mathcal{N}\left(\frac{\vec{q}_i^T}{-q_{ii}} \mathbf{X}_{-i}, q_{i|-i}\right)$$

$$Q = \begin{bmatrix} q_{11} & -q_{11}\vec{\sigma}_1^T \Sigma_{-1}^{-1} \\ -q_{11}\Sigma_{-1}^{-1}\vec{\sigma}_1 & \Sigma_{-1}^{-1}(I + q_{11}\vec{\sigma}_1\vec{\sigma}_1^T \Sigma_{-1}^{-1}) \end{bmatrix} = \begin{bmatrix} q_{11} & \vec{q}_1^T \\ \vec{q}_1 & Q_{-1} \end{bmatrix}$$





Conditional auto-regression

- From

$$p(X_i | \mathbf{X}_{-i}) = \mathcal{N}\left(\frac{\vec{q}_i^T}{-q_{ii}} \mathbf{X}_{-i}, q_{i|-i}\right)$$

- We can write the following conditional auto-regression function for each node:
- Neighborhood est. based on auto-regression coefficient

$$S_i \equiv \{j : j \neq i, \theta_{ij} \neq 0\}$$





Conditional independence

- From

$$p(X_i | \mathbf{X}_{-i}) = \mathcal{N}\left(\frac{\vec{q}_i^T}{-q_{ii}} \mathbf{X}_{-i}, q_{ii}\right)$$

- Given an estimate of the neighborhood s_i , we have:

$$p(X_i | \mathbf{X}_{-i}) = p(X_i | \mathbf{X}_s)$$

- Thus the neighborhood s_i defines the Markov blanket of node i





Trends in GGM:

- Covariance selection (classical method)
 - Dempster [1972]:
 - Sequentially pruning smallest elements in precision matrix
 - Drton and Perlman [2008]:
 - Improved statistical tests for pruning
- L_1 -regularization based method
 - Meinshausen and Bühlmann [Ann. Stat. 06]:
 - Used LASSO regression for neighborhood selection
 - Banerjee [JMLR 08]:
 - Block sub-gradient algorithm for finding precision matrix
 - Friedman et al. [Biostatistics 08]:
 - Efficient fixed-point equations based on a sub-gradient algorithm
 - ...

Serious limitations in practice: breaks down when covariance matrix is not invertible

Structure learning is possible even when # variables > # samples





The Meinshausen-Bühlmann (MB) algorithm:

- Solving separated Lasso for every single variables:

$x_1, x_2, \dots, x_{k-1}, x_k, x_{k+1}, \dots, x_p$

Step 1: Pick up one variable

$z = x_1, x_2, \dots, x_{k-1},$ x_{k+1}, \dots, x_p

Step 2: Think of it as “y”, and the rest as “z”

Step 3: Solve Lasso regression problem between y and z

$$y = \theta^\top z$$

The resulting coefficient does not correspond to the Q value-wise

Step 4: Connect the k -th node to those having nonzero weight in w





L_1 -regularized maximum likelihood learning

- Input: Sample covariance matrix S

$$S_{i,j} \equiv \frac{1}{N} \sum_{n=1}^N x_i^{(n)} x_j^{(n)}$$

- Assumes standardized data (mean=0, variance=1)
- S is generally rank-deficient
 - Thus the inverse does not exist
- Output: Sparse precision matrix Q
 - Originally, Q is defined as the inverse of S , but not directly invertible
 - Need to find a sparse matrix that can be thought as of as an inverse of S

$$Q^* = \arg \max_Q \left\{ \ln \det Q - \text{tr}(SQ) - \rho \|Q\|_1 \right\}$$

log likelihood $\ln \prod_{t=1}^N \mathcal{N}(x^{(t)} | 0, Q^{-1})$ regularizer

- Approach: Solve an L_1 -regularized maximum likelihood equation






From matrix opt. to vector opt.: *coupled* Lasso for every single Var.

- Focus only on one row (column), keeping the others constant

$$Q = \begin{pmatrix} L & \mathbf{l} \\ \mathbf{l}^T & \lambda \end{pmatrix}$$

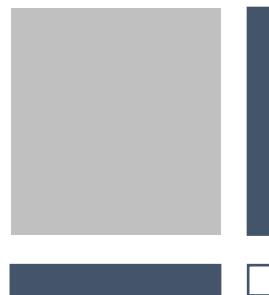

- Optimization problem for blue vector is shown to be Lasso (L_1 -regularized quadratic programming)
- Difference from MB's: Resulting Lasso problems are coupled
 - The gray part is actually not constant; changes after solving one Lasso problem (because it is the opt of the entire Q that optimize a single loss function, whereas in MB each lasso has its own loss function..)
 - This coupling is essential for stability under noise





Learning Ising Model (i.e. pairwise MRF)

- Assuming the nodes are discrete (e.g., voting outcome of a person), and edges are weighted, then for a sample x , we have

$$P(\mathbf{x}|\Theta) = \exp\left(\sum_{i \in V} \theta_{ii}^t x_i + \sum_{(i,j) \in E} \theta_{ij} x_i x_j - A(\Theta) \right)$$

- It can be shown the pseudo-conditional likelihood for node k is

$$\mathbb{P}_\theta(x_k | x_{\setminus k}) = \text{logistic}\left(2x_k \langle \theta_{\setminus k}, x_{\setminus k} \rangle\right)$$






Question: vector-valued nodes






New Problem: Evolving Social Networks

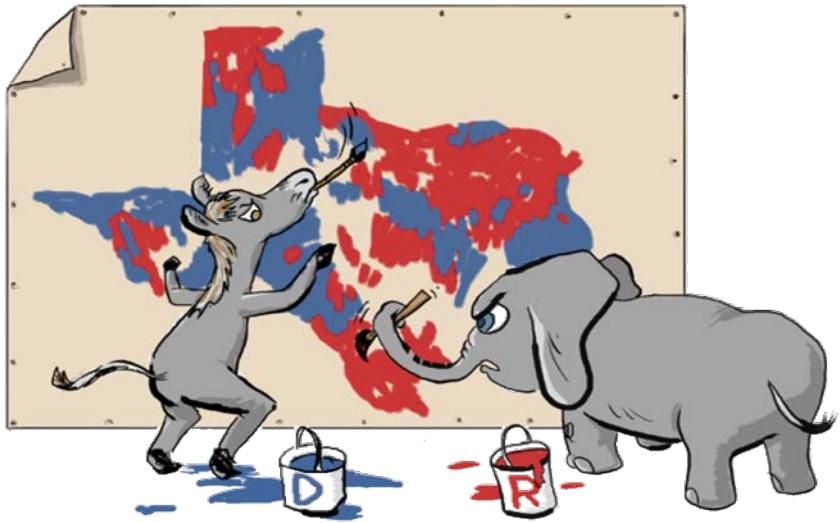


Can I get his vote?


Corporativity,
Antagonism,
Cliques,
...
over time?

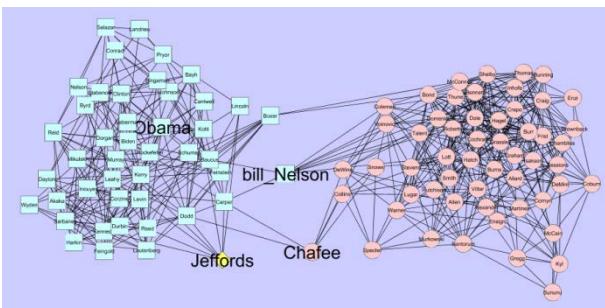

March 2005

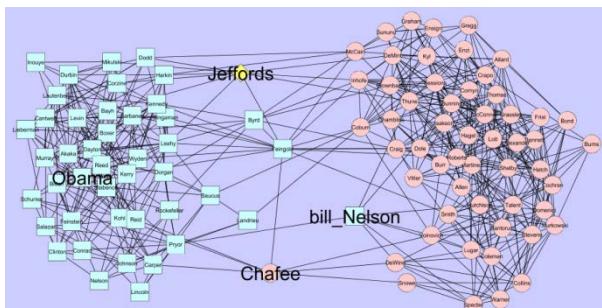

January 2006

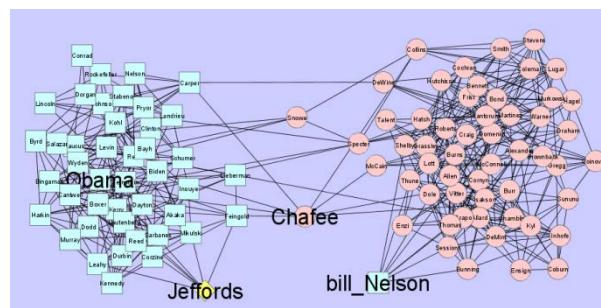


August 2006





Reverse engineering time-specific "rewiring" networks

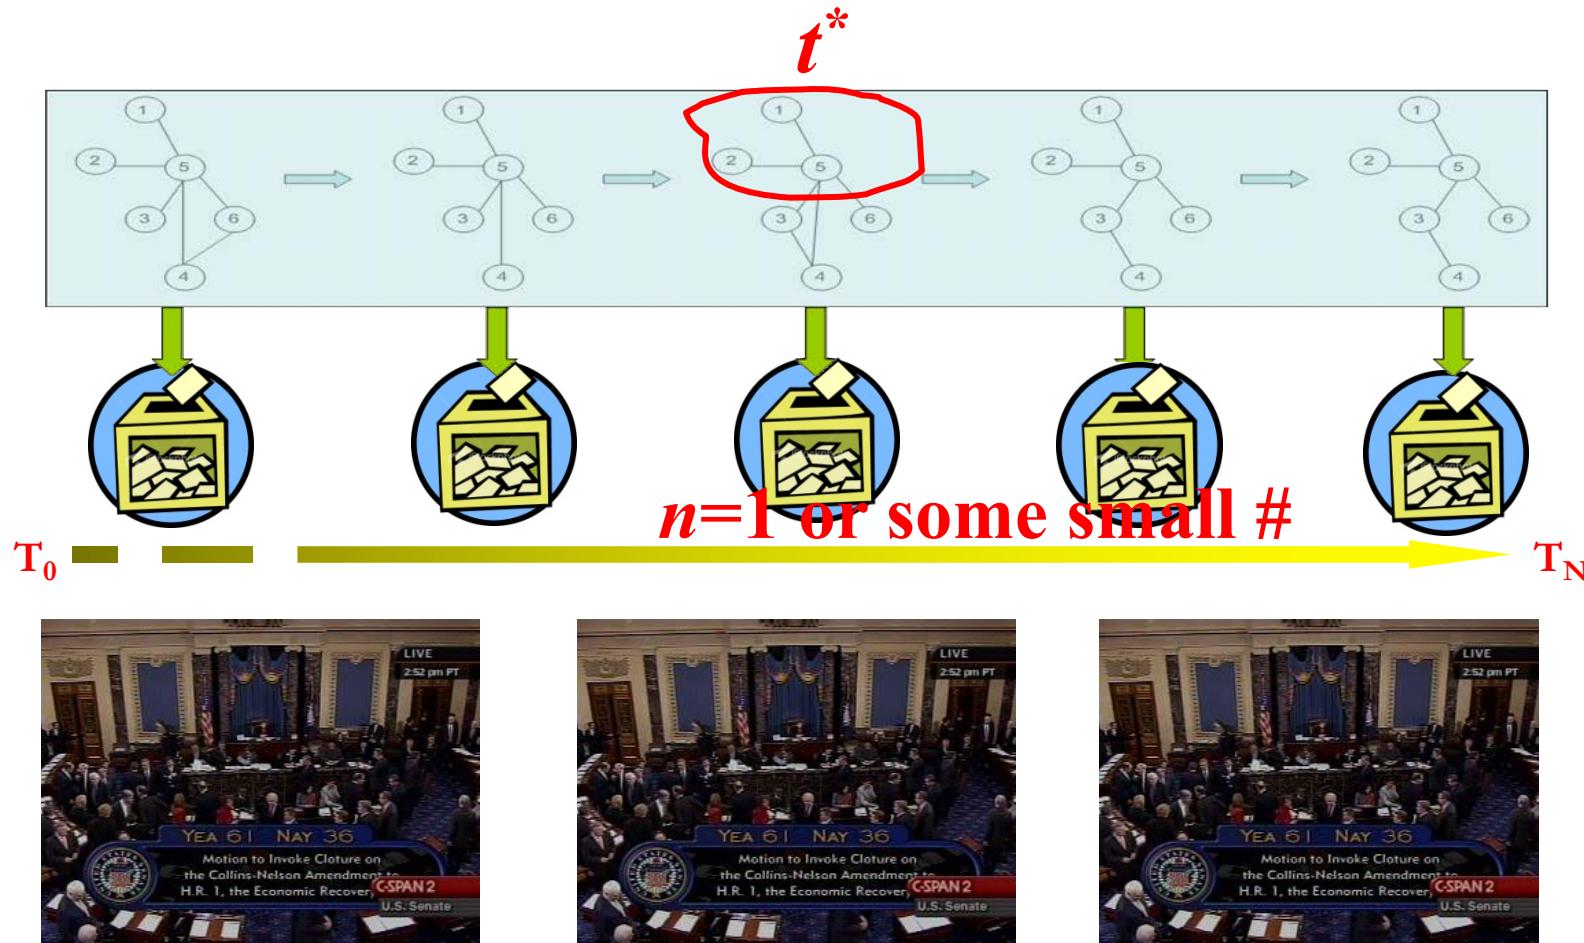



Inference I

[Song, Kolar and Xing, Bioinformatics 09]

- ❑ **KELLER**: Kernel Weighted L_1 -regularized Logistic Regression


$$\hat{\theta}_i^t = \arg \min_{\theta_i^t} l_w(\theta_i^t) + \lambda_1 \parallel \theta_i^t \parallel_1 \quad \forall t$$

where $l_w(\theta_i^t) = \sum_{t'=1}^T w(\mathbf{x}^{t'}; \mathbf{x}^t) \log P(x_i^{t'} | \mathbf{x}_{-i}^{t'}, \theta_i^t)$.

- ❑ Constrained convex optimization
 - ❑ Estimate time-specific nets one by one, based on "virtual iid" samples
 - ❑ Could scale to $\sim 10^4$ genes, but under stronger smoothness assumptions

Lasso:

$$\hat{\theta} = \arg \min_{\theta} \sum_{n=1}^N \gamma(\mathbf{x}^{(n)}; \theta) + \lambda_1 \parallel \theta \parallel_1$$

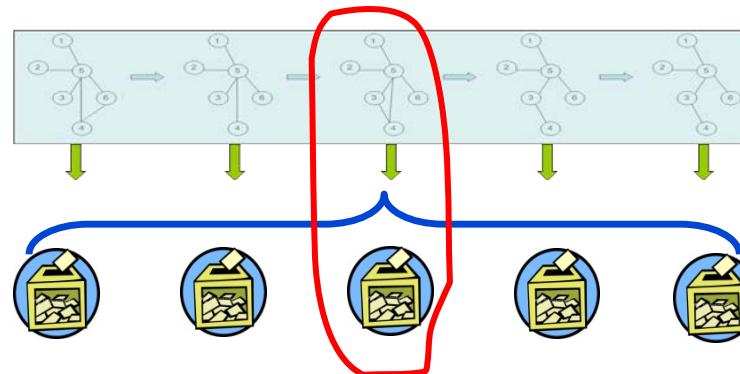




Algorithm – nonparametric neighborhood selection

- Conditional likelihood

$$\mathbb{P}_{\theta^t}(x_i^t | x_{\setminus i}^t) = \text{logistic}\left(2x_i^t \langle \theta_{\setminus i}^t, x_{\setminus i}^t \rangle\right)$$

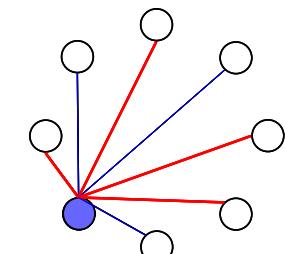

- Neighborhood Selection: $S(x_i) = \{j \mid \theta_{i,j}^t \neq 0\}$

- Time-specific graph regression:

- Estimate at $t^* \in [0, 1]$


$$\min_{\theta \in \mathbb{R}^{p_n-1}} \left\{ - \sum_{t \in \mathcal{T}^n} w_t(t^*) \gamma(\theta_i; x^t) + \lambda_1 \|\theta_i\|_1 \right\}$$

Where

$$\gamma(\theta_i^t; x^t) = \log \mathbb{P}_{\theta_i^t}(x_i^t | x_{\setminus i}^t)$$

and

$$w_t(t^*) = \frac{K_{h_n}(t - t^*)}{\sum_{t' \in \mathcal{T}^n} K_{h_n}(t' - t^*)}$$

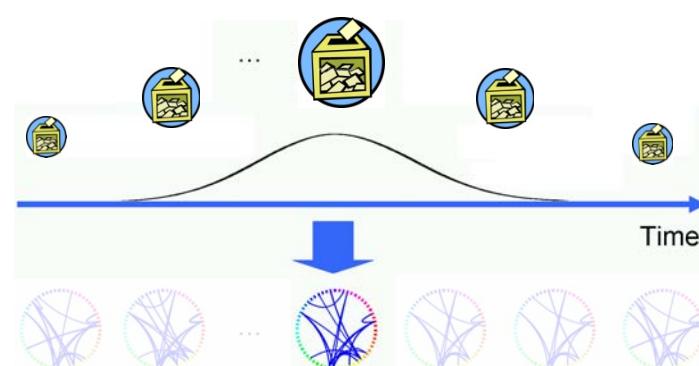



Structural consistency of KELLER

Assumptions

- Define:

$$Q_u^t := \mathbb{E} [\nabla^2 \log \mathbb{P}_{\theta^t}[X_u | X_{\setminus u}]] , \quad \forall u \in V \quad \Sigma_u^t := \mathbb{E} [X_{\setminus u}^t X_{\setminus u}^{t^T}] , \quad \forall u \in V$$
$$s = \max_u \max_t |S_u^t|, \quad \theta_{\min} = \min_{e \in E} \max |\theta_e^t|$$

- A1: Dependency Condition

$$\Lambda_{\min}(Q_{SS}^{t^*}) \geq C_{\min}, \quad \forall t \in [0, 1]$$

$$\Lambda_{\max}(\Sigma^{t^*}) \leq D_{\max}, \quad \forall t \in [0, 1]$$

- A2: Incoherence Condition $\exists \alpha \in (0, 1]$ such that

$$\|Q_{S^c S}^{t^*} (Q_{SS}^{t^*})^{-1}\|_{\infty} \leq 1 - \alpha, \quad \forall t^* \in [0, 1]$$

- A3: Smoothness Condition

$$\max_{u,v} \sup_{t^*} |\sigma'_{uv}(t^*)| \leq A_0, \quad \max_{u,v} \sup_{t^*} |\sigma''_{uv}(t^*)| \leq A$$

- A4: Bounded Kernel $\max_{u,v} \sup_{t^*} |\theta'_{uv}(t^*)| \leq B_0, \quad \max_{u,v} \sup_{t^*} |\theta''_{uv}(t^*)| \leq B$

$$\exists M_k \geq 1 \quad \max_{z \in \mathbb{R}} |K(z)| \leq M_k \quad \max_{z \in \mathbb{R}} K(z)^2 \leq M_k$$





Theorem

[Kolar and Xing, 09]

Assume that A1, A2, A3, A4 hold. Furthermore, assume that the following conditions hold:

1. $h_n = \mathcal{O}(n^{-\frac{1}{3}})$
2. $s_n h_n = o(1)$,
3. $\frac{s_n^3 \log p_n}{nh_n} = o(1)$
4. $\lambda_1 = \mathcal{O}(\sqrt{\frac{\log p}{nh_n}})$
5. $\theta_{\min}^* = \Omega(\sqrt{\frac{s_n \log p_n}{nh_n}})$

then

$$\mathbb{P} [\hat{G}(\lambda_1, h_n, t^*) \neq G^{t^*}] = \mathcal{O} \left(\exp \left(-C \frac{nh_n}{s_n^3} + C' \log p \right) \right) \rightarrow 0$$





Inference II

[Amr and Xing, PNAS 2009, AOAS 2009]

- **TESLA**: Temporally Smoothed L_1 -regularized logistic regression

$$\begin{aligned}\hat{\theta}_i^1, \dots, \hat{\theta}_i^T &= \arg \min_{\theta_i^1, \dots, \theta_i^T} \sum_{t=1}^T l_{avg}(\theta_i^t) \\ &\quad + \lambda_1 \sum_{t=1}^T \| \theta_{-i}^t \|_1 \\ &\quad + \lambda_2 \sum_{t=2}^T \| \theta_i^t - \theta_i^{t-1} \|_q^q,\end{aligned}$$


where $l_{avg}(\theta_i^t) = \frac{1}{N^t} \sum_{d=1}^{N^t} \log P(x_{d,i}^t | \mathbf{x}_{d,-i}^t, \theta_i^t)$.

- Constrained convex optimization
 - Scale to ~5000 nodes, does not need smoothness assumption, can accommodate abrupt changes.





Temporally Smoothed Graph Regression

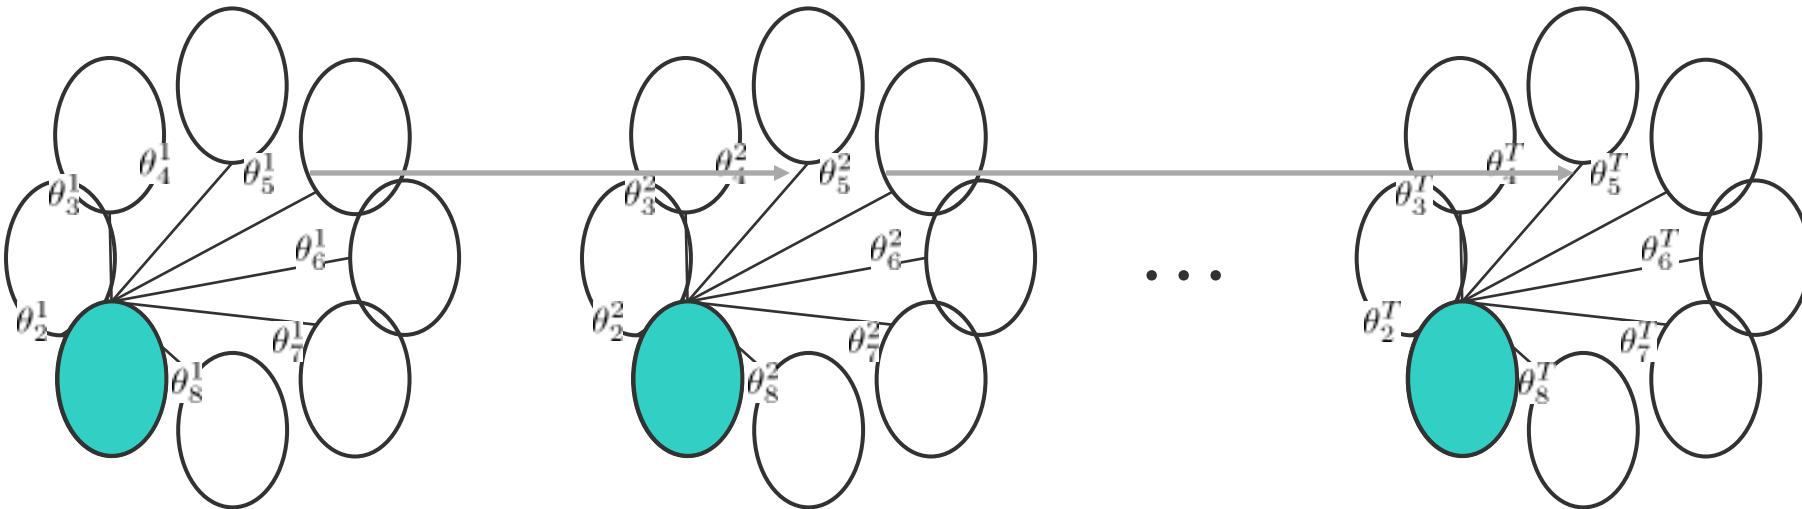

TESLA:

$$\min_{\theta_i^1, \dots, \theta_i^T, u_i^1, \dots, u_i^T; v_i^2, \dots, v_i^T} \sum_{t=1}^T \ell(\mathbf{x}^t; \theta_i^t) + \lambda_1 \sum_{t=1}^T \mathbf{1}' \mathbf{u}_i^t + \lambda_2 \sum_{t=2}^T \mathbf{1}' \mathbf{v}_i^t$$

s. t. $-u_{i,j}^t \leq \theta_{i,j}^t \leq u_{i,j}^t, \quad t = 1, \dots, T, \forall j \in V \setminus i,$

s. t. $-v_{i,j}^t \leq \theta_{i,j}^t - \theta_{i,j}^{t-1} \leq v_{i,j}^t, \quad t = 2, \dots, T, \forall j \in V \setminus i,$





Modified estimation procedure

- estimate block partition on which the coefficient functions are constant

$$\min_{\beta} \sum_{i=1}^n (Y_i - \mathbf{X}_i \beta(t_i))^2 + 2\lambda_2 \sum_{k=1}^p \|\beta_k\|_{\text{TV}} \quad (*)$$

- estimate the coefficient functions on each block of the partition

$$\min_{\gamma \in \mathbb{R}^p} \sum_{t_i \in j} (Y_i - \mathbf{X}_i \gamma)^2 + 2\lambda_1 \|\gamma\|_1 \quad (**)$$





Structural Consistency of TESLA


[Kolar, and Xing, 2009]

- I. It can be shown that, by applying the results for model selection of the Lasso on a *temporal difference transformation* of (*), **the block are estimated consistently**
- II. Then it can be further shown that, by applying Lasso on (**), **the neighborhood of each node on each of the estimated blocks consistently**
- Further advantages of the two step procedure
 - choosing parameters easier
 - faster optimization procedure





Senate network – 109th congress

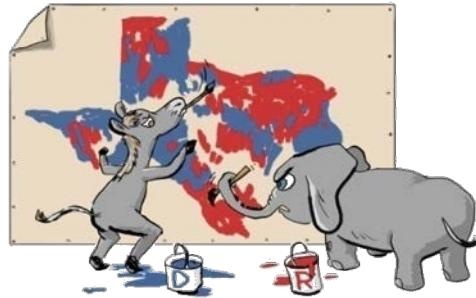


- ❑ Voting records from 109th congress (2005 - 2006)
- ❑ There are 100 senators whose votes were recorded on the 542 bills, each vote is a binary outcome







Senate network – 109th congress

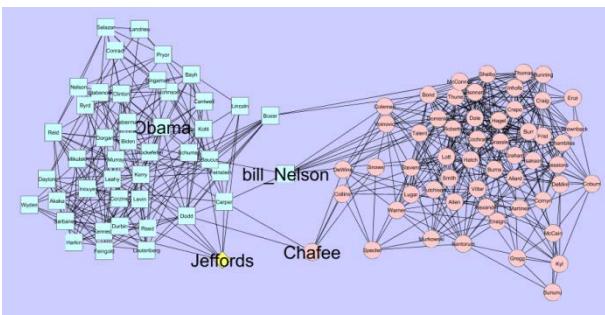

March 2005

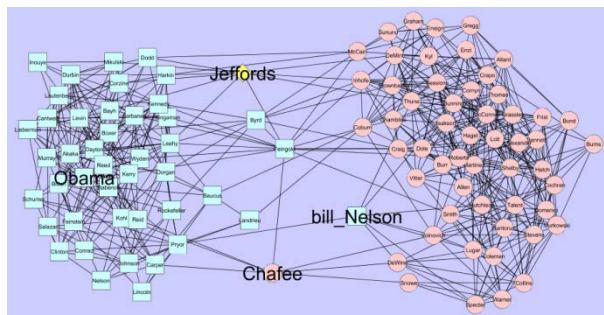

January 2006

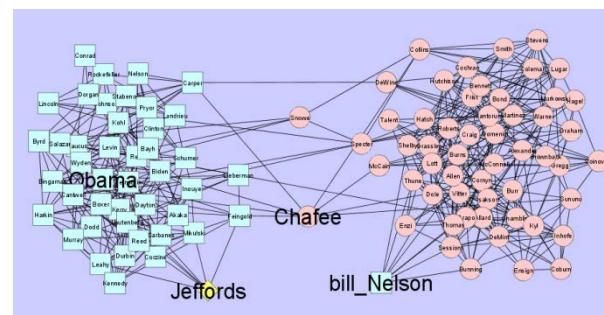


August 2006







Senator Chafee

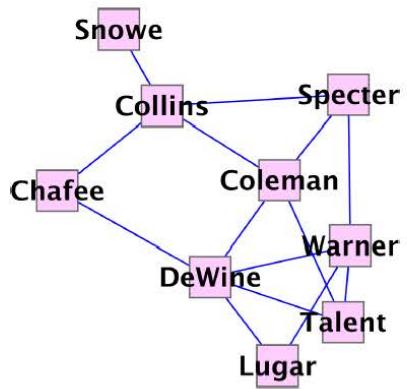

(a) $t = 0.1$

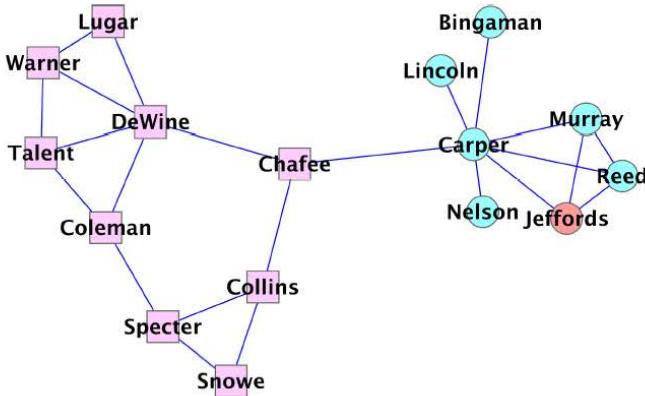

(b) $t = 0.4$


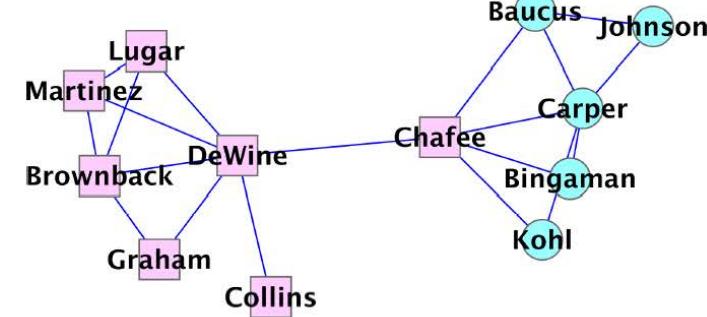


(c) $t = 0.8$






Senator Ben Nelson

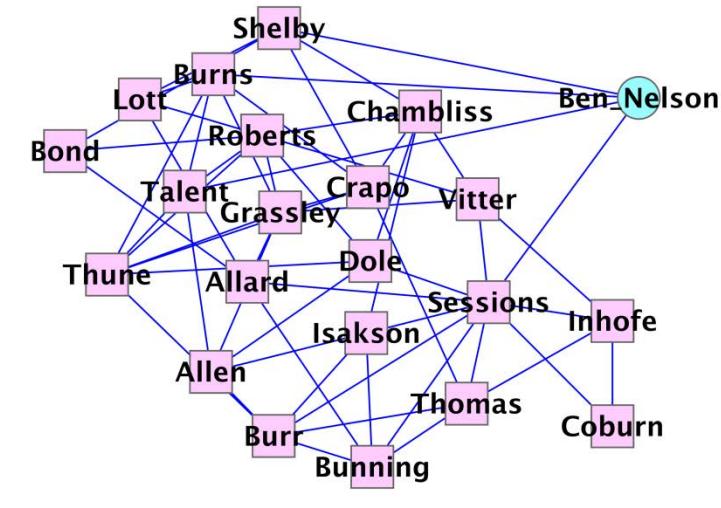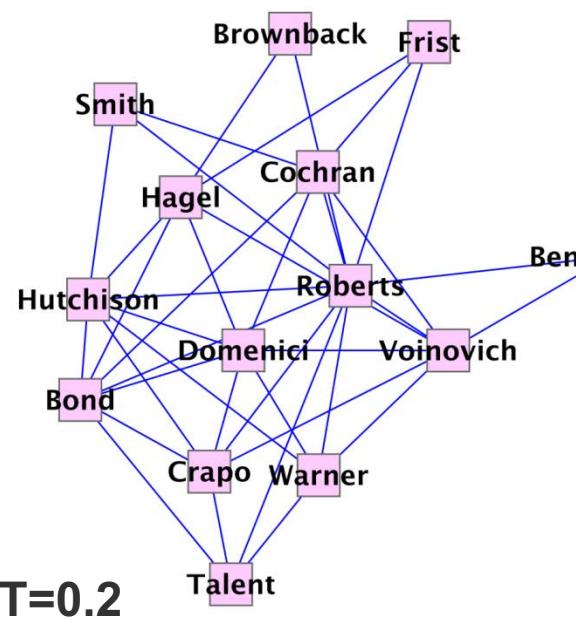




Progression and Reversion of Breast Cancer cells

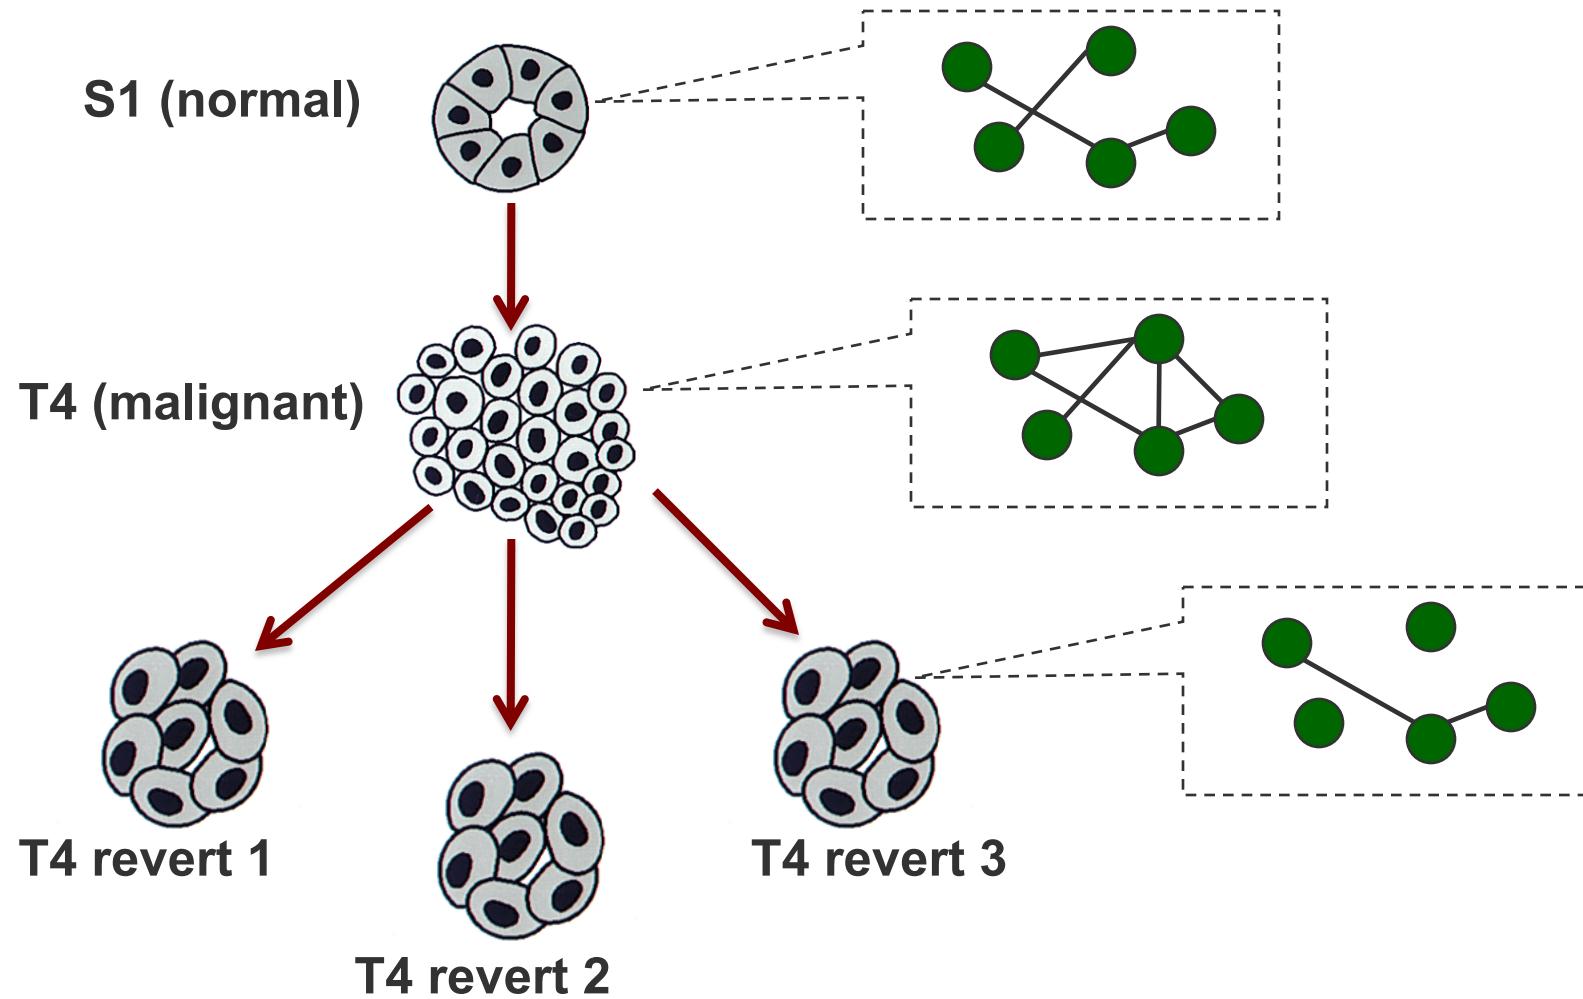




Estimate Neighborhoods Jointly Across All Cell Types

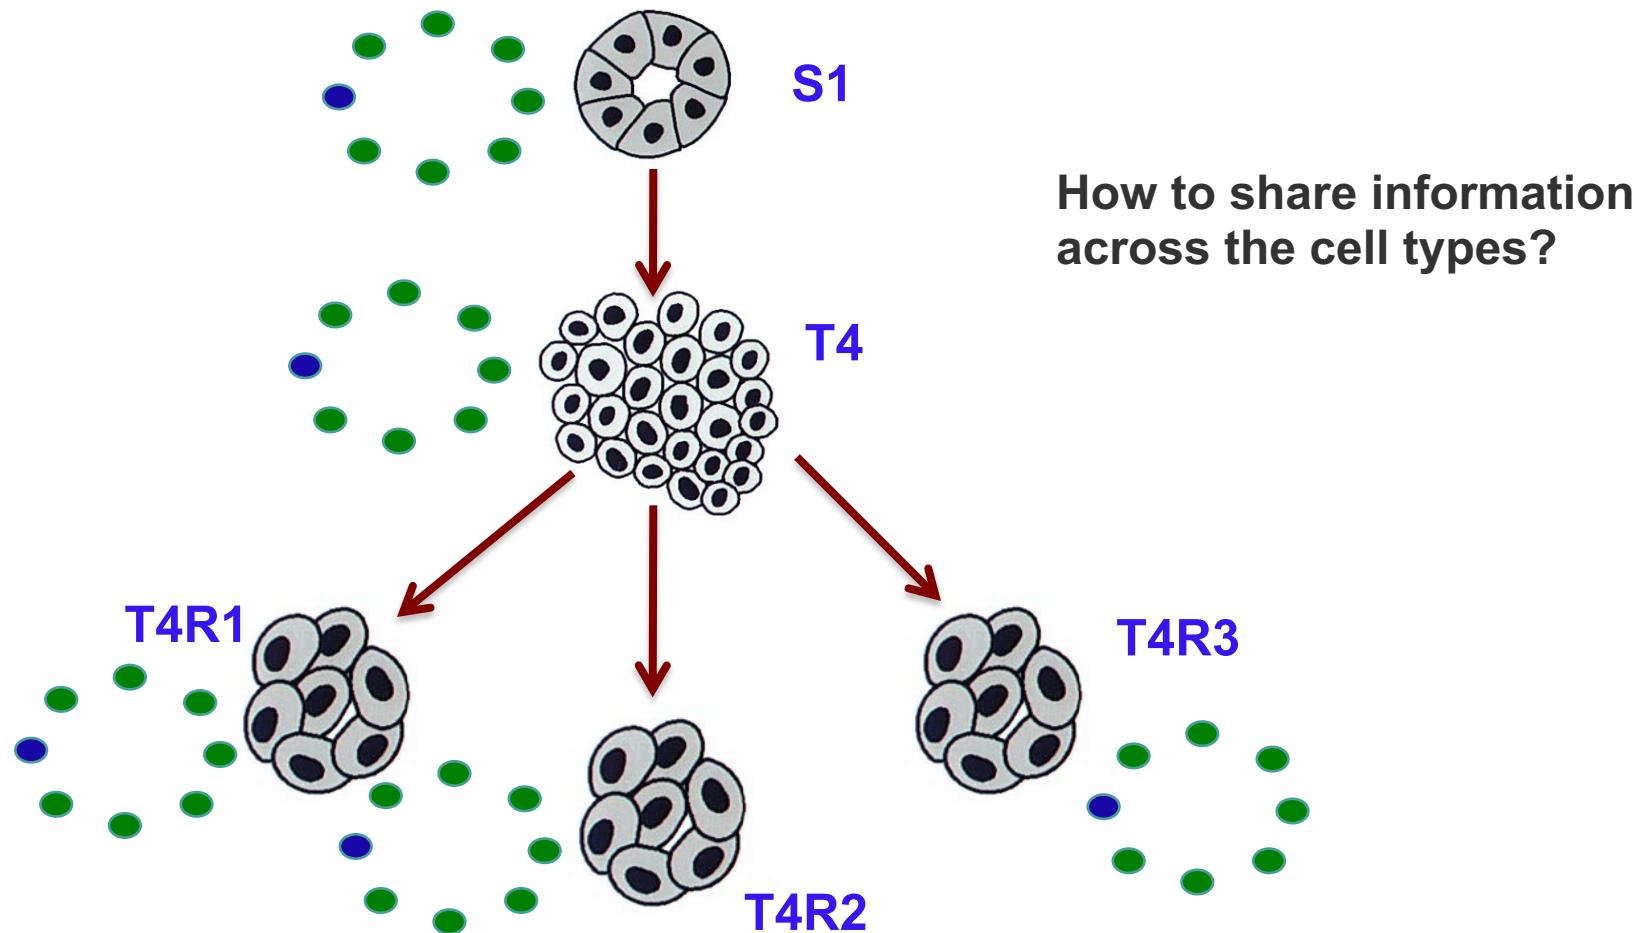



Sparsity of Difference

Penalize differences between networks of adjacent cell types

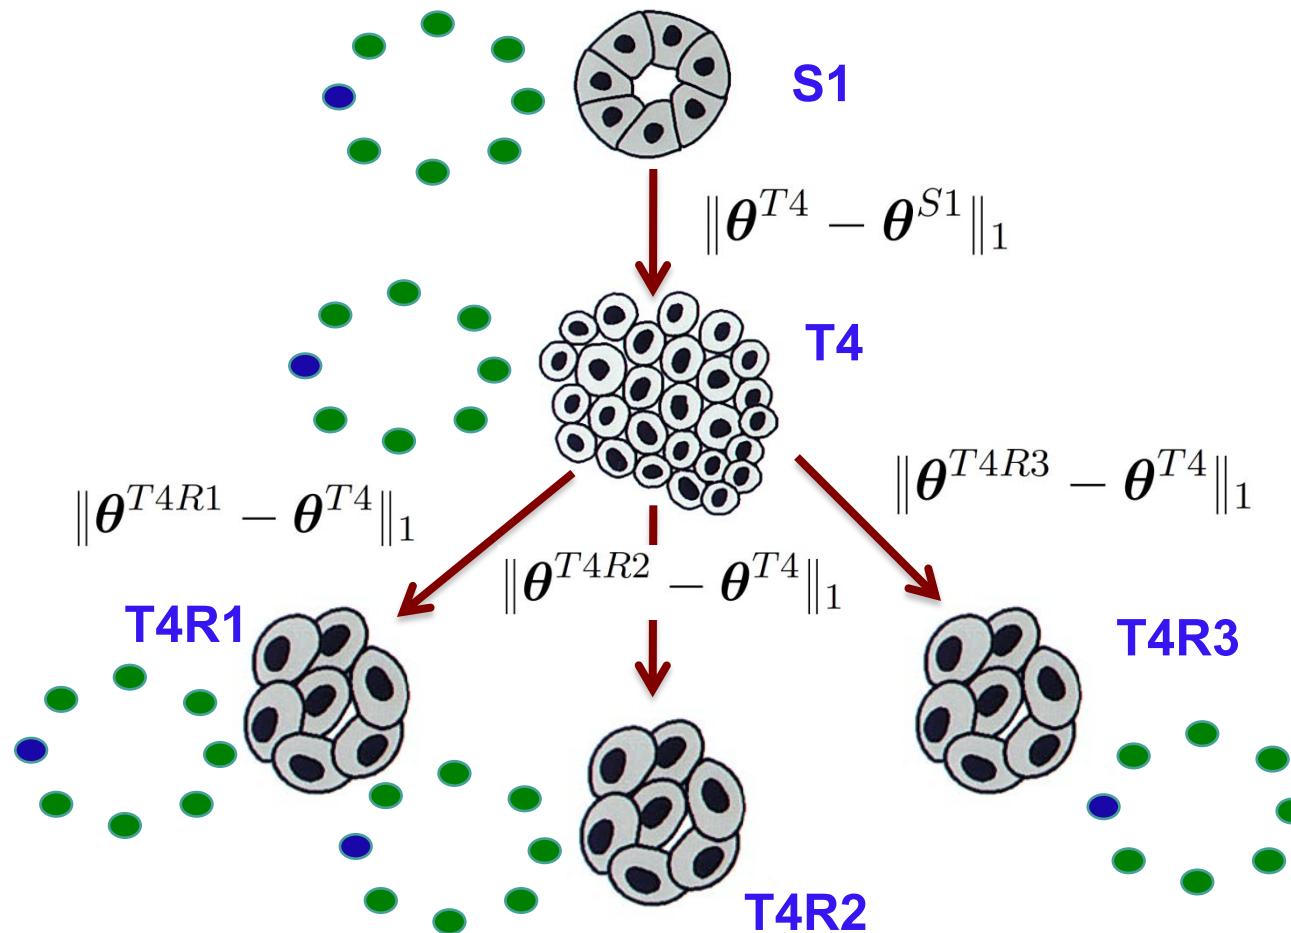



Tree-Guided Graphical Lasso (Treegl)


$$\hat{\boldsymbol{\theta}}_{\setminus u}^{(1)}, \dots, \hat{\boldsymbol{\theta}}_{\setminus u}^{(n)} = \operatorname{argmin}_{\boldsymbol{\theta}_{\setminus u}^{(1)}, \dots, \boldsymbol{\theta}_{\setminus u}^{(n)}} \left(\sum_{n=1}^N \sum_{s=1}^{S_n} (x_u^{(n,s)} - \boldsymbol{\theta}_{\setminus u}^{(n)} \mathbf{x}_{\setminus u}^{(n,s)})^2 \right. \\ \left. + \lambda_1 \sum_{n=1}^N \|\boldsymbol{\theta}_{\setminus u}^{(n)}\|_1 + \lambda_2 \sum_{n=2}^N \|\boldsymbol{\theta}_{\setminus u}^{(n)} - \boldsymbol{\theta}_{\setminus u}^{(\pi(n))}\|_1 \right)$$

sparsity **Sparsity of difference**





Network Overview

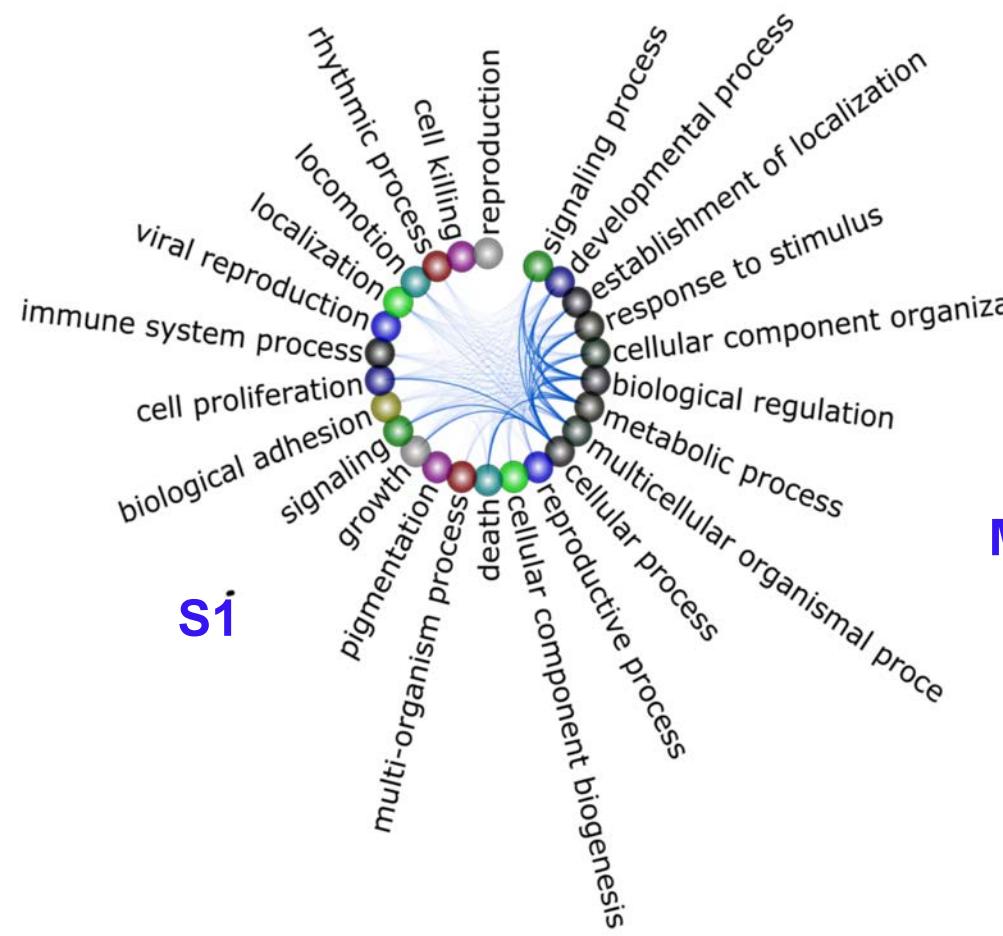

S1

EGFR-ITGB1

T4


MMP

PI3K-MAPKK






Interactions – Biological Processes

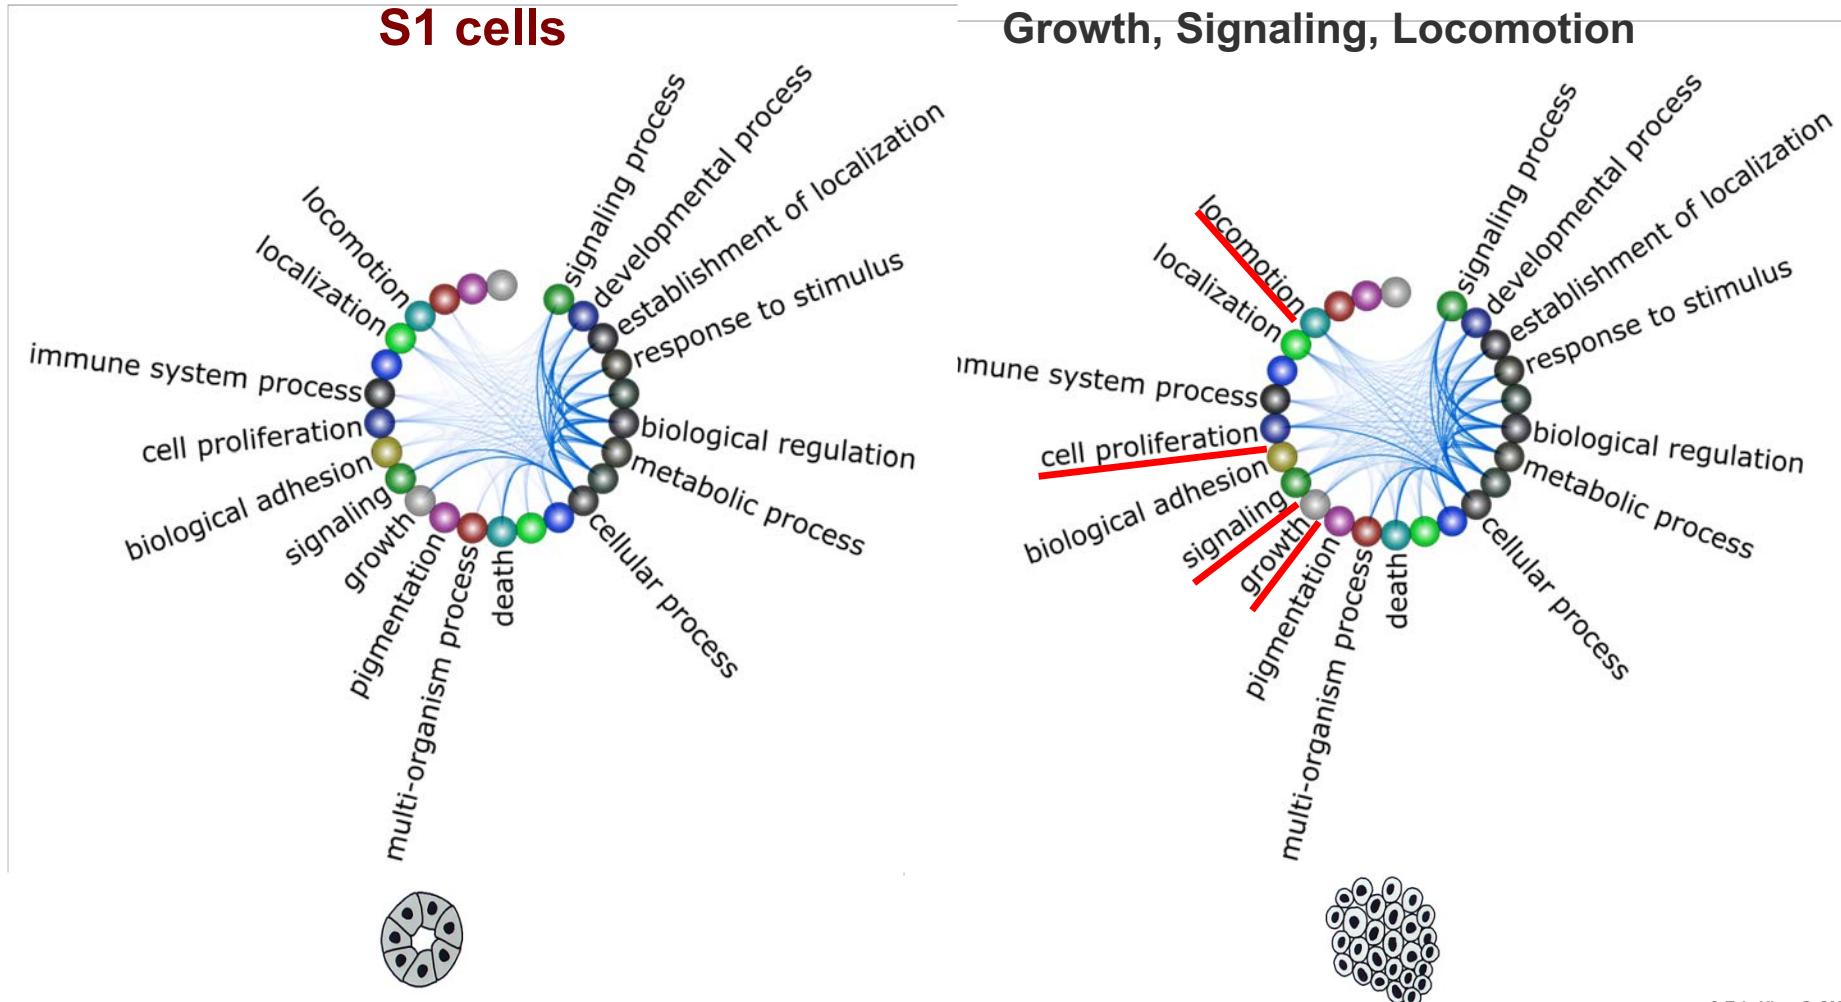




Interactions – Biological Processes

T4 cells

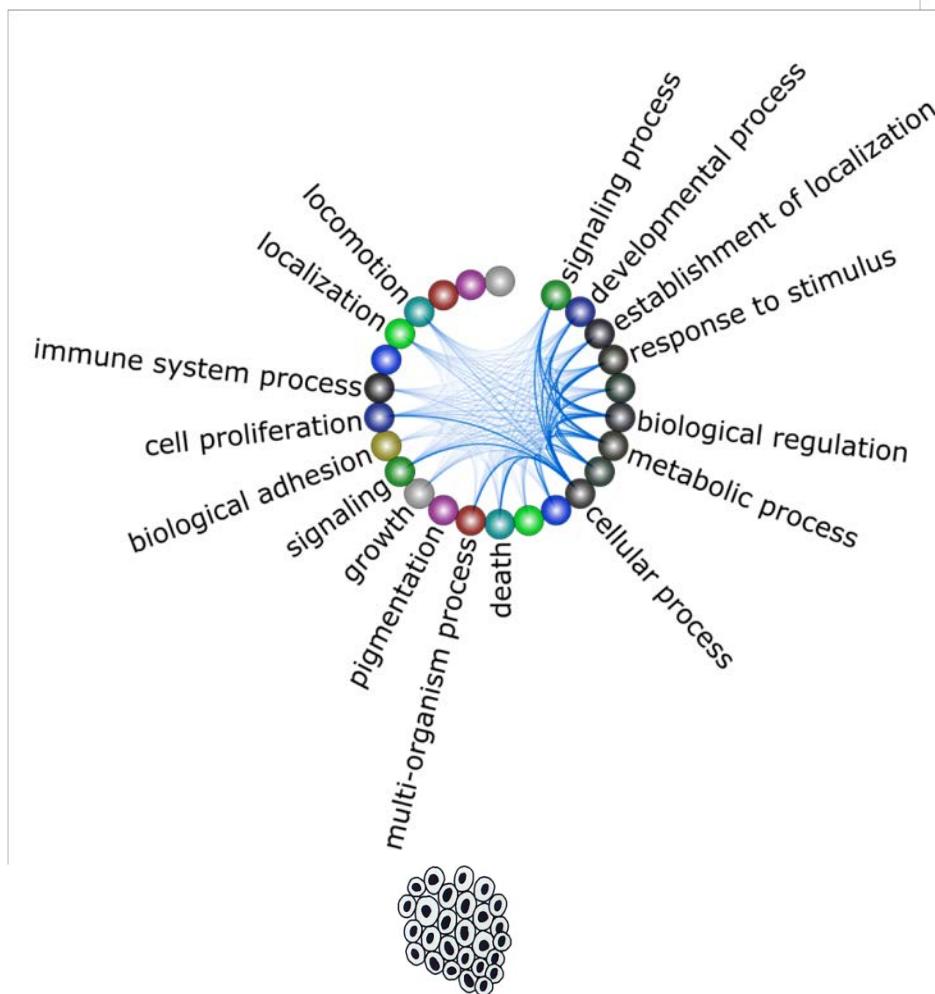


**MMP-T4R cells:
Significantly reduced
interactions**

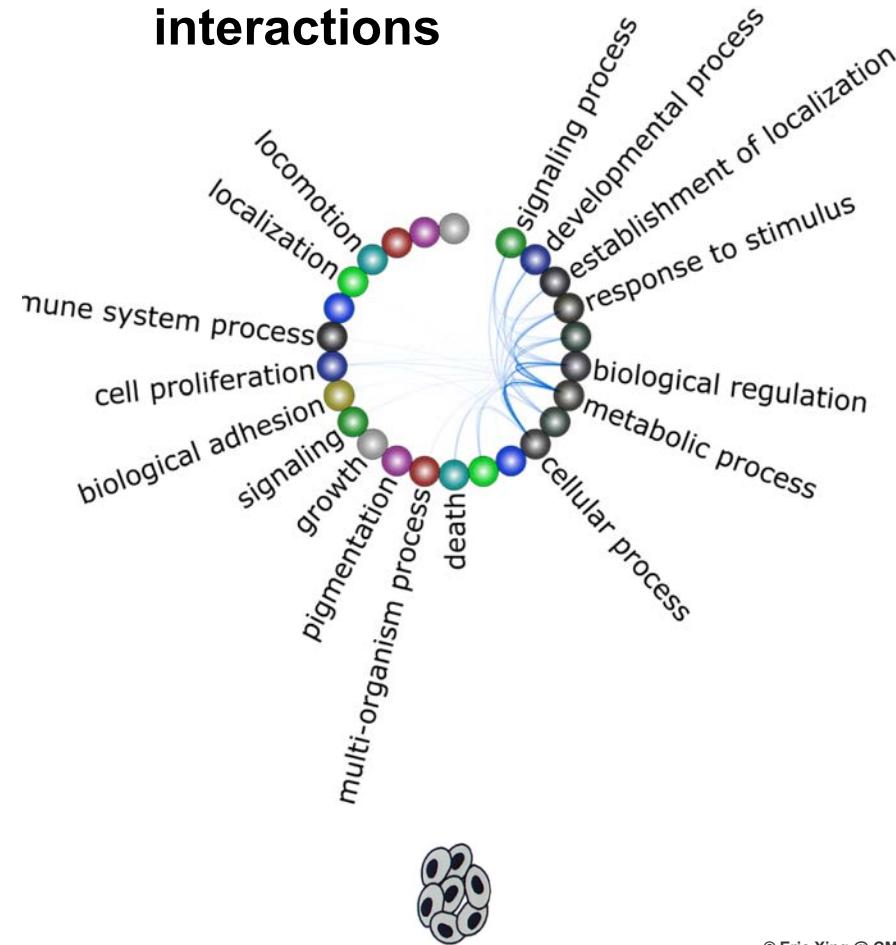



Interactions – Biological Processes

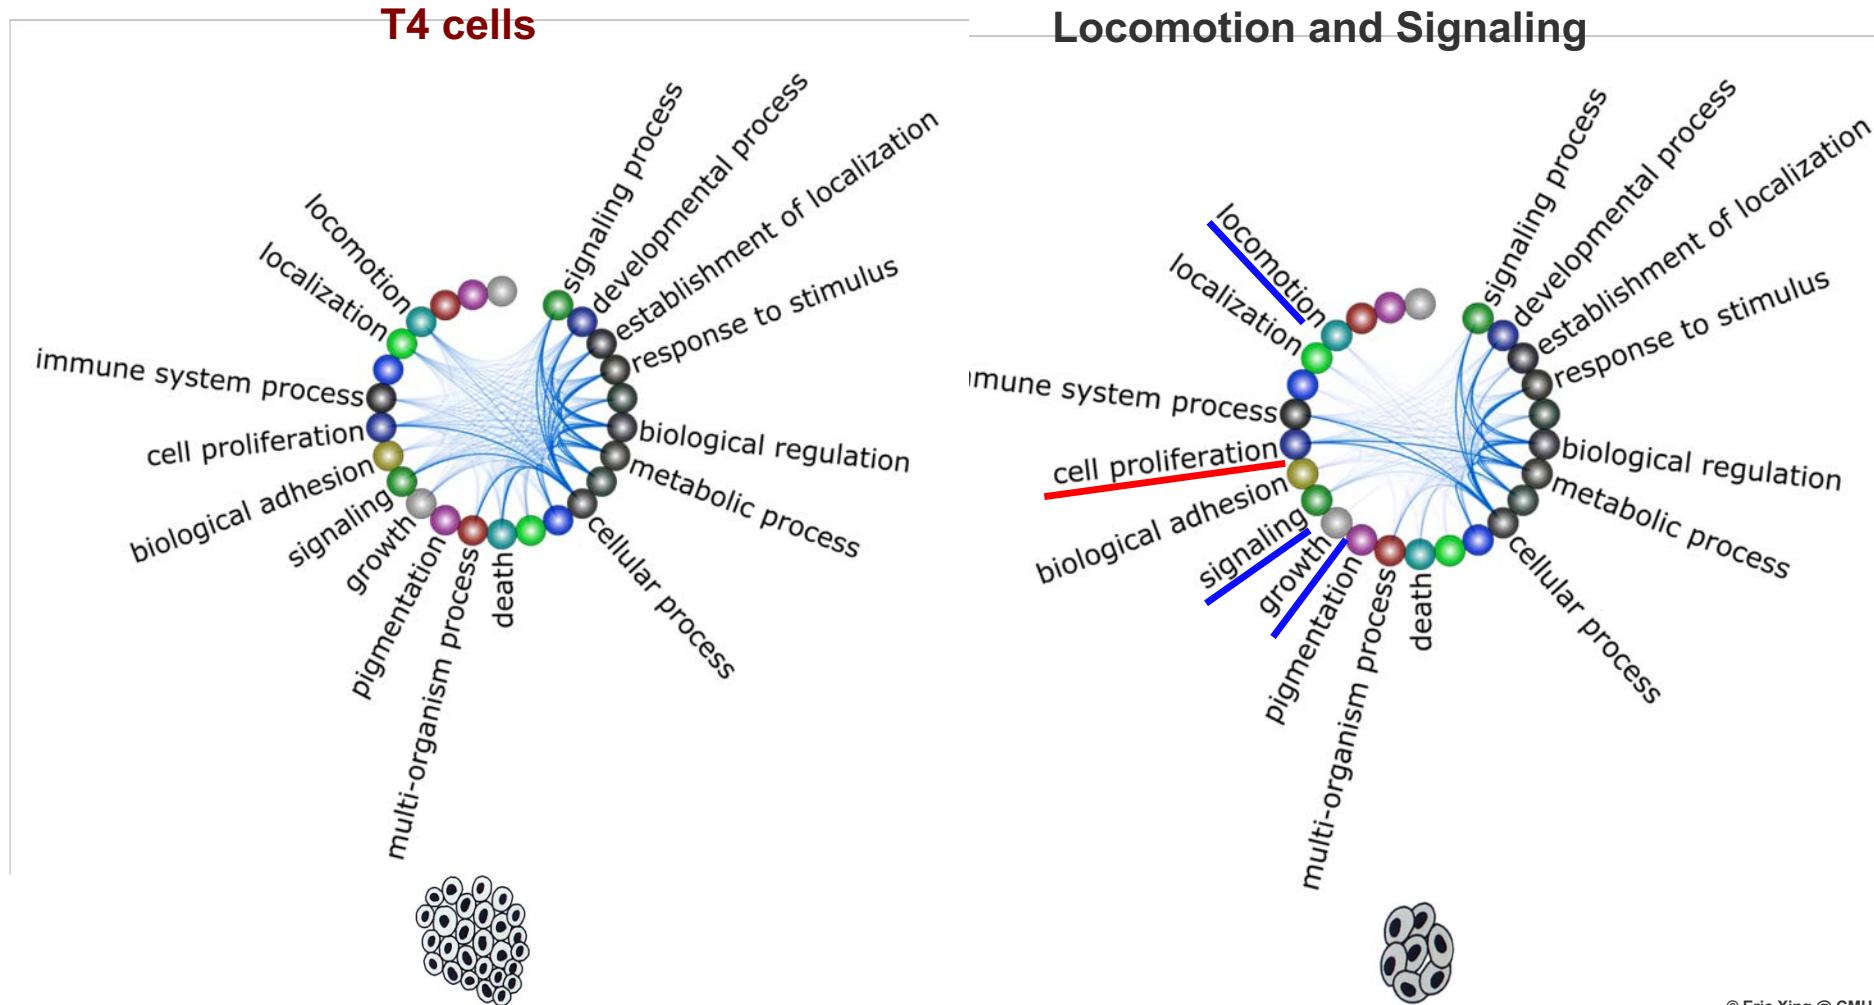




Fancier network est. scenarios


- Dynamic Directed (auto-regressive) Networks

[Song, Kolar and Xing, NIPS 2009]

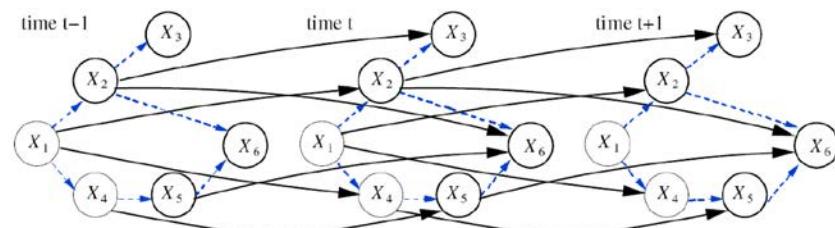


- Missing Data

[Kolar and Xing, ICML 2012]

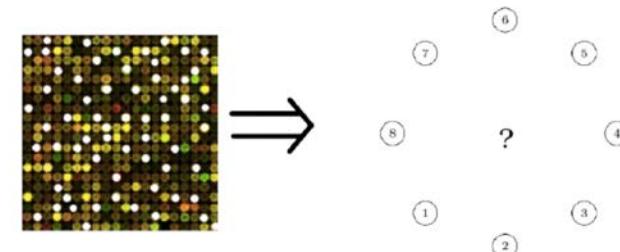

- Multi-attribute Data

[Kolar, Liu and Xing, JMLR 2013]

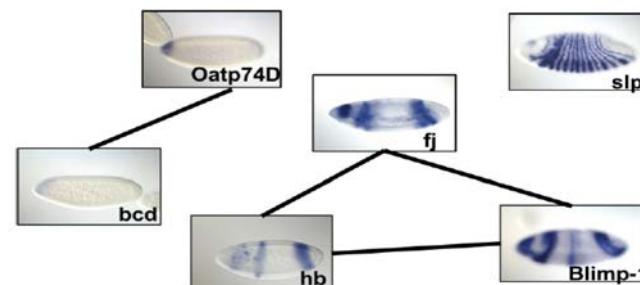



Summary

- Graphical Gaussian Model
 - The precision matrix encode structure
 - Not estimatable when $p >> n$
- Neighborhood selection:
 - Conditional dist under GGM/MRF
 - Graphical lasso
 - Sparsistency
- Time-varying Markov networks
 - Kernel reweighting est.
 - Total variation est.

