Run the Kubernetes environment

Needs: Docker Desktop, `kubectl`, Minikube, Helm, Bun 1.3+, OpenSSL, Python 3, and `lsof`. The script skips tools already available and asks before installing through Homebrew on macOS or existing apt sources on Debian/Ubuntu. It does not add package repositories. If Docker is stopped, it asks before opening it. Unavailable tools are named before setup stops.

Start

1. Unzip the project and open Terminal in its folder.
2. Run `./start.sh k8s`. If needed, run `bash ./start.sh k8s`.


Keep the terminal open. The first run builds images and installs cluster components.

Open and stop

When setup finishes, open `https://takehome.localhost:8443`. If the browser reports `ERR_CERT_AUTHORITY_INVALID`, trust the local CA at the path printed by the script, then reload.

For Logs, select `k8s/overlays/local/log-access-token`. Use the shared token only over trusted HTTPS.


Press **Ctrl+C** to stop the connection. Stop Minikube with `minikube stop -p takehome`.

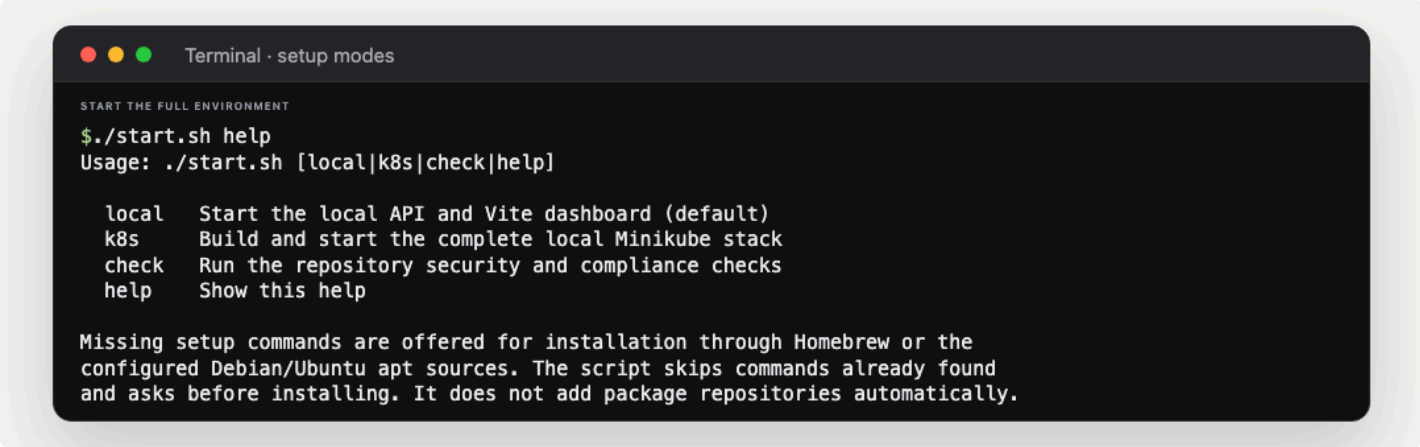

Start the complete environment with `./start.sh k8s`.

Check readiness

`kubectl --context takehome get nodes` `kubectl --context takehome -n demo get deployments` `kubectl --context takehome -n demo get cluster postgres-cluster`

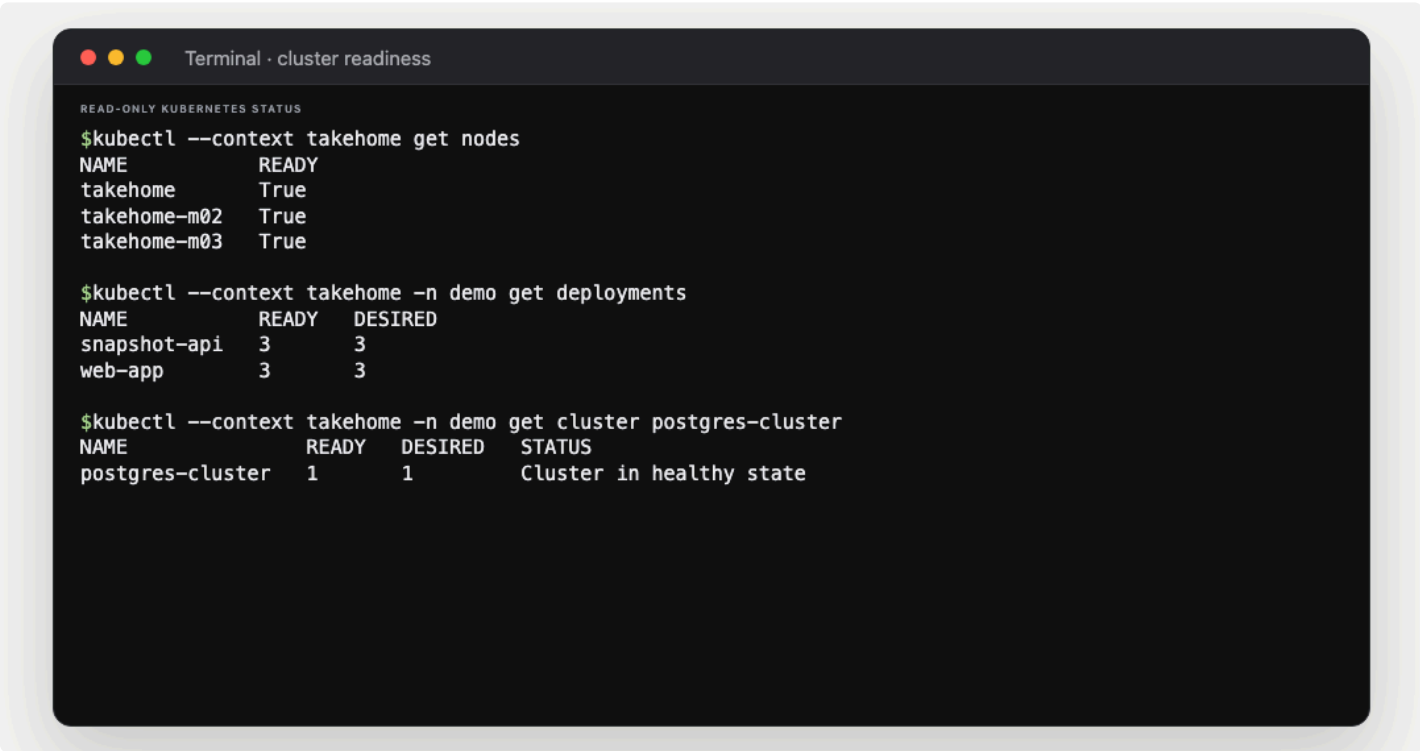

Read-only commands and example readiness output.