
## CS380-EX6

Logging in as ted(without providing a password)


What occurs is by using the username as such, we are able to end the condition and comment out the rest of the code, allowing us to bypass the password and login.




## login: ted');#

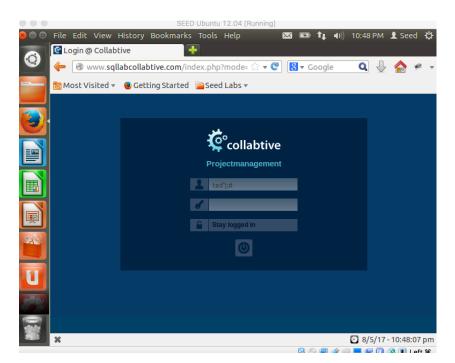

## Logging in as admin (without providing a password)

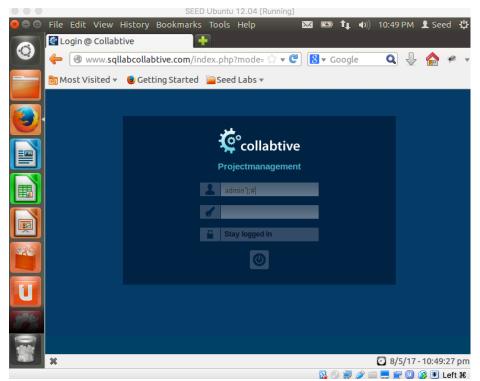

login: admin');#

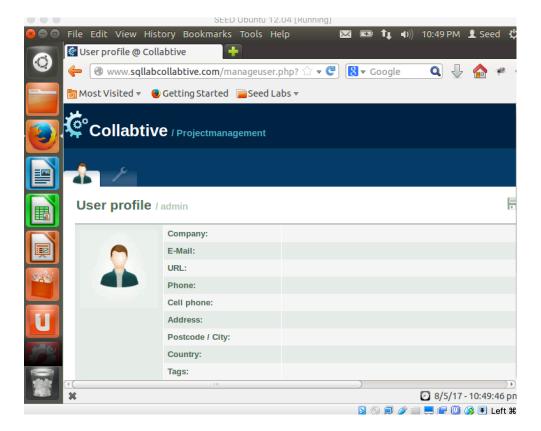

Logging in with a blank username (without providing a password)

This one was interesting. I logged in using the login 'OR name = name);# and at first it recognized us just as Desktop. However, when I checked the account information, it was showing as admin.

