

Compte rendu pentest machine Linux Raphaël LAURENT

Objectif

Adresse IP de la machine à attaquer : 10.16.20.187

Obtenir le flag rootAttaque

Partie physique :

On commence par créer notre machine attaquante :

OS : Kali-2022.4

Carte réseau : Bridge sur eth1



IP : 10.16.21.19/12

On branche un câble allant de eth1 au VLAN 800.

Partie logiciel :

On démarre notre Kali, on ouvre un terminal et on se met en root :

```
(kali@kali)-[~]
$ sudo -s
[sudo] password for kali:
(root@kali)-[/home/kali]
#
```

On commence par ping la machine attaquée pour voir si elle répond :


```
(root@kali)-[/home/kali]
# ping 10.16.20.187
PING 10.16.20.187 (10.16.20.187) 56(84) bytes of data.
64 bytes from 10.16.20.187: icmp_seq=1 ttl=64 time=0.612 ms
64 bytes from 10.16.20.187: icmp_seq=2 ttl=64 time=0.636 ms
64 bytes from 10.16.20.187: icmp_seq=3 ttl=64 time=0.554 ms
64 bytes from 10.16.20.187: icmp_seq=4 ttl=64 time=0.595 ms
64 bytes from 10.16.20.187: icmp_seq=5 ttl=64 time=0.601 ms
64 bytes from 10.16.20.187: icmp_seq=6 ttl=64 time=0.586 ms
64 bytes from 10.16.20.187: icmp_seq=7 ttl=64 time=0.458 ms
64 bytes from 10.16.20.187: icmp_seq=8 ttl=64 time=0.975 ms
64 bytes from 10.16.20.187: icmp_seq=9 ttl=64 time=0.491 ms
64 bytes from 10.16.20.187: icmp_seq=10 ttl=64 time=0.590 ms
^C
--- 10.16.20.187 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 9178ms
rtt min/avg/max/mdev = 0.458/0.609/0.975/0.132 ms
```

La machine répond bien.

On utilise ensuite la commande nmap pour voir quels sont les ports ouverts :

```
(root@kali)-[/home/kali]
# nmap -p- 10.16.20.187
Starting Nmap 7.93 ( https://nmap.org ) at 2026-01-09 03:45 EST
Nmap scan report for 10.16.20.187
Host is up (0.00081s latency).
Not shown: 65530 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    filtered ssh
80/tcp    open  http
2222/tcp  filtered EtherNetIP-1
6000/tcp  filtered X11
7000/tcp  filtered afs3-fileserver
MAC Address: 08:00:27:9B:5B:9F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 5.33 seconds
```

On peut voir que le port 80 est ouvert, donc on essaie de l'ouvrir dans un navigateur :

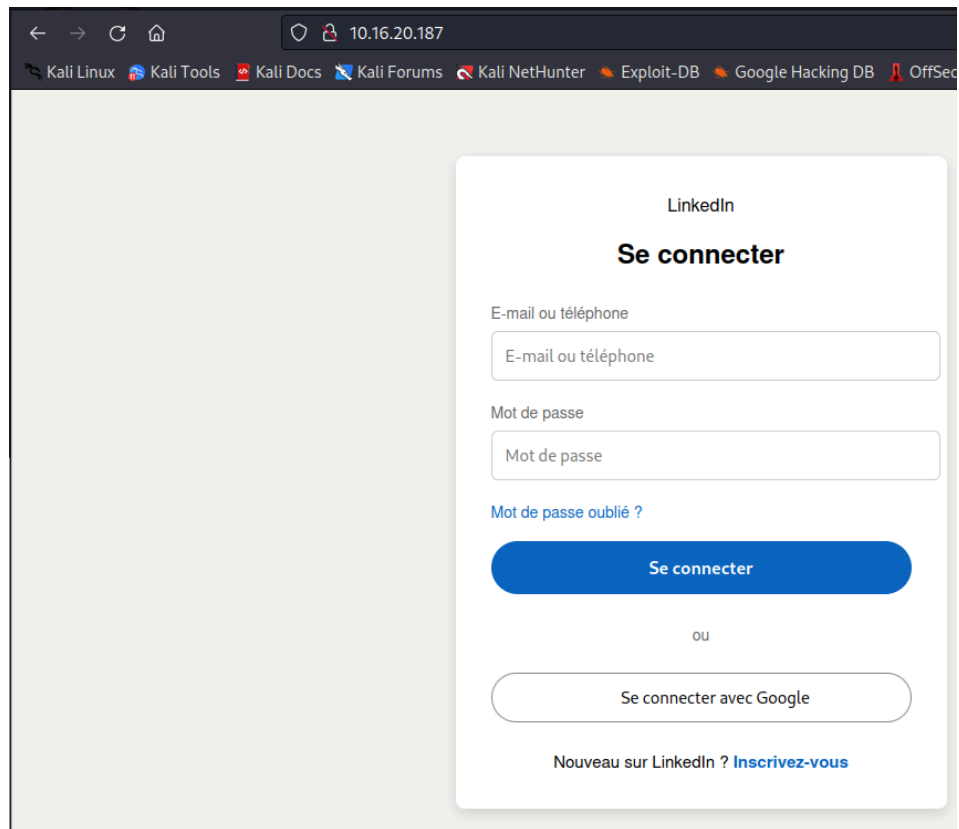

On y trouve un site, donc on regarde le code source de la page avec curl :

```
(root@kali) - [/home/kali]
└─# curl 10.16.20.187
<!DOCTYPE html>
<html lang="fr">
<head>
  <meta charset="UTF-8">
  <title>LinkedIn Login, Sign in | LinkedIn</title>
  <link rel="stylesheet" href="style.css">
  <link rel="icon" href="favicon.png">
</head>
<body>

<div class="global-wrapper">
  <div class="login-card">

    <h1 class="title">Se connecter</h1>

    <form>
      <label for="username">E-mail ou téléphone</label>
      <input type="text" id="username" placeholder="E-mail ou téléphone">

      <label for="password">Mot de passe</label>
      <input type="password" id="password" placeholder="Mot de passe">

      <a href="#" class="forgot-link">Mot de passe oublié ?</a>

      <button type="submit" class="login-btn">Se connecter</button>
    </form>

    <div class="divider">
      <span>ou</span>
    </div>

    <button class="google-btn">
      
      Se connecter avec Google
    </button>

    <div class="signup">
      Nouveau sur LinkedIn ? <a href="#" class="signup-link">Inscrivez-vous</a>
    </div>
  </div>
</div>
```

```

</div>

</div>
</div>
<script>
    const L = "kltt3ns";
    const P = "Vm0wd2QyVkhVWghVV0dSUFZsZG9WRmx0ZEhkVU1WcDBUVlpPV0Zac2JETlhhMUpUVmpKS1IySkVUbGhoTVVwVVZtcEJlRmRlVmtsajVtaG9UV3N3ZUZk
VlpIcGxSbGw0V2toV2FWSnRVbkjXYTFaaFuxWmtWMXBfVWxSTmF6RTBWakkxUjFawFNraFZhemxhWwSR2RscFdXbUZqYkZaeVdrWlNubUY2U1RCV2EyTXhwRePhVjF0dVZ
s5mh1bXhYVld4b2lXZEdVbkpYYlVacVRWZFNRRlZ0ZUd0VWJGcDFVV3hVvJFKc2NGaFda3BIVTBaYWRWsnNTbGRTTAWMQ==" ; 😊
</script>

</body>
</html>

```

On peut voir que le formulaire ne renvoie vers rien mais qu'il y a un login et un mot de passe, donc on teste de se connecter en SSH :

```

(root@kali)~/home/kali
# ssh kltt3ns@10.16.20.187
ssh: connect to host 10.16.20.187 port 22: Connection timed out

```

On exécute de nouveau la commande nmap pour lister les ports :

```

(root@kali)~/home/kali
# nmap -p- 10.16.20.187
Starting Nmap 7.93 ( https://nmap.org ) at 2026-01-09 04:18 EST
Nmap scan report for 10.16.20.187
Host is up (0.00059s latency).
Not shown: 65529 closed tcp ports (reset)
PORT      STATE      SERVICE
22/tcp    filtered  ssh
80/tcp    open      http
2222/tcp  filtered  EtherNetIP-1
6000/tcp  filtered  X11
7000/tcp  filtered  afs3-fileserver
8000/tcp  filtered  http-alt
MAC Address: 08:00:27:9B:5B:9F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 4.30 seconds

```

On peut voir que les ports 22, 2222, 6000, 7000, 8000 sont en filtered, ce qui signifie qu'il faut essayer le port knocking sur les ports 6000, 7000, 8000 :

```

(root@kali)~/home/kali
# nmap -F -Pn -p 6000 10.16.20.187
Starting Nmap 7.93 ( https://nmap.org ) at 2026-01-09 04:22 EST
Nmap scan report for 10.16.20.187
Host is up (0.00057s latency).
PORT      STATE      SERVICE
6000/tcp  filtered  X11
MAC Address: 08:00:27:9B:5B:9F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.39 seconds

(root@kali)~/home/kali
# nmap -F -Pn -p 7000 10.16.20.187
Starting Nmap 7.93 ( https://nmap.org ) at 2026-01-09 04:22 EST
Nmap scan report for 10.16.20.187
Host is up (0.00061s latency).
PORT      STATE      SERVICE
7000/tcp  filtered  afs3-fileserver
MAC Address: 08:00:27:9B:5B:9F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.38 seconds

(root@kali)~/home/kali
# nmap -F -Pn -p 8000 10.16.20.187
Starting Nmap 7.93 ( https://nmap.org ) at 2026-01-09 04:22 EST
Nmap scan report for 10.16.20.187
Host is up (0.00052s latency).
PORT      STATE      SERVICE
8000/tcp  filtered  http-alt
MAC Address: 08:00:27:9B:5B:9F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.42 seconds

```

Juste après avoir fait le port knocking, on essaie de se connecter en SSH mais le mot de passe

"Vm0wd2QyVkhVWghVV0dSUFZsZG9WRmx0ZEhkVU1WcDBUVlpPV0Zac2JETlhhMUpUVmpKS1IySkVUbGhoTVVwVVZ" ne marche pas :

```

(root@kali)~/home/kali
# ssh kltt3ns@10.16.20.187
kltt3ns@10.16.20.187's password:
Permission denied, please try again.
kltt3ns@10.16.20.187's password:
Permission denied, please try again.
kltt3ns@10.16.20.187's password:
kltt3ns@10.16.20.187: Permission denied (publickey,password,keyboard-interactive).

```

On va donc essayer de déchiffrer le mot de passe :

