## **Classes and Interfaces**

Dan Wahlin

Twitter: @danwahlin

John Papa


Twitter: @john\_papa



# **Defining Classes**



# The Role of Classes in TypeScript

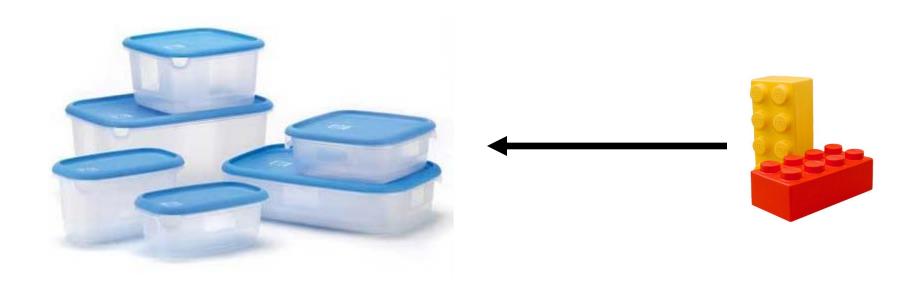

Classes act as containers for different members

# **TypeScript Class Members**

Fields

Constructors

Properties

Functions



# **Defining a Class**

```
class Car {
    //Fields

    //Constructor

    //Properties

    //Functions
}
```

Classes act as containers that encapsulate code

## **Defining Constructors**

Constructors are used to initialize fields

```
class Car {
                           Field
    engine: string;
                                         Constructor
    constructor(engine: string) {
        this.engine = engine;
                                Shorthand way to
                                  declare a field
class Car {
    constructor(public engine: string) { }
```

#### **Adding Functions**

```
class Car {
    engine: string;
    constructor (engine: string) {
        this.engine = engine;
    start() {
        return "Started " + this.engine;
    stop() {
        return "Stopped " + this.engine;
```

Class members are public by default

## **Defining Properties**

```
class Car {
    private _engine: string;
    constructor(engine: string) {
       this.engine = engine;
    get engine(): string {
                                  Properties act as filters and
        return this._engine;
                                   can have get or set blocks
    set engine(value: string) {
        if (value == undefined) throw 'Supply an Engine!';
        this._engine = value;
```

## **Using Complex Types**

```
class Engine {
    constructor(public horsePower: number,
                public engineType: string) { }
                           Complex Type
class Car {
    private _engine: Engine;
    constructor(engine: Engine) {
       this.engine = engine;
    }
```

## **Instantiating a Type**

Types are instantiated using the "new" keyword

```
var engine = new Engine(300, 'V8');
var car = new Car(engine);
```

# **Casting Types**

This fails

```
var table : HTMLTableElement =
  document.createElement('table');
```

This succeeds

```
var table : HTMLTableElement =
  <HTMLTableElement>document.createElement('table');
```

Cast HTMLElement to HTMLTableElement

# **Type Definition Files**

 As you work with the DOM or other libraries you need a Type Definition file (\*.d.ts file)

 lib.d.ts file is built-in out of the box for the DOM and JavaScript


• Additional Type Definition files for 3<sup>rd</sup> party scripts can be found at:

https://github.com/borisyankov/DefinitelyTyped

# **Extending Types**



# **Extending Types with TypeScript**

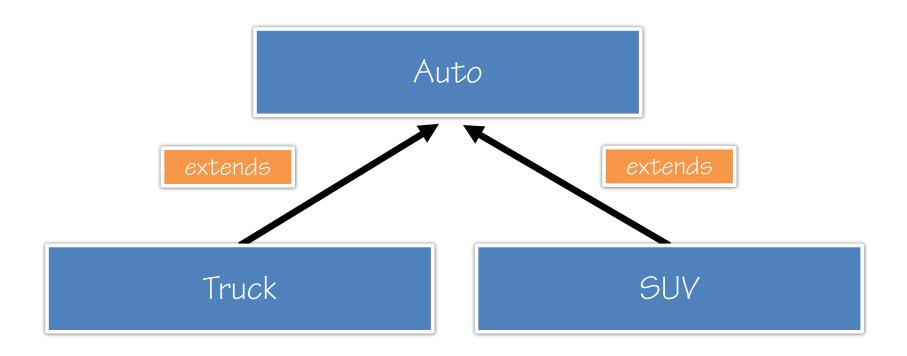

#### **Extending a Type**

Types can be extended using the TypeScript "extends" keyword

```
class ChildClass extends ParentClass {
    constructor() {
        super();
        Child class constructor must call
        base class (super) constructor
```

## **Type Extension Example**


```
class Auto {
    engine: Engine;
    constructor(engine: Engine) {
        this.engine = engine;
                          Truck derives from
                               Auto
class Truck extends Auto {
    fourByFour: bool;
    constructor(engine: Engine, fourByFour: bool) {
        super(engine);
                               Call base class
                                constructor
        this.fourByFour = fourByFour;
```

# **Using Interfaces**



#### What's an Interface?

A factory requires that all engines being built have a standard "interface":

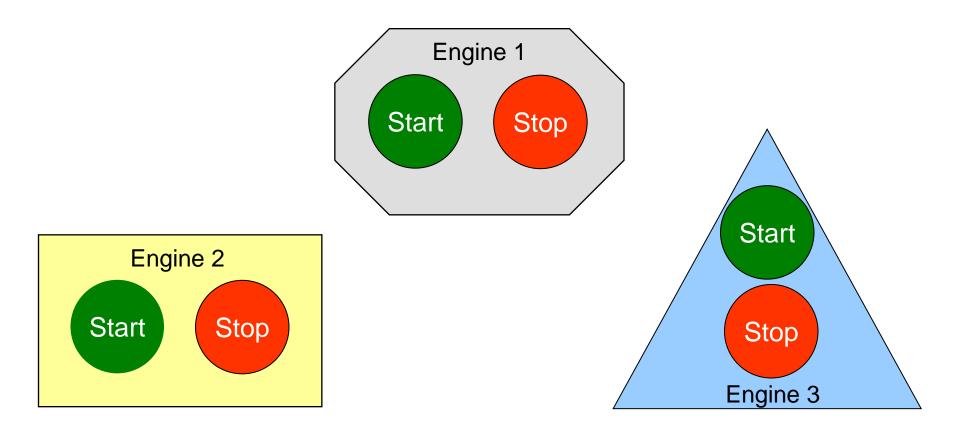

## **Defining an Interface**

Interfaces provide a way to define a "contract" that other objects must implement

IEngine Interface defines 2 members

# **Understanding Functions in an Interface**

```
interface IEngine {
start() accepts a single
                                                         start() doesn't
parameter named callback
                                                        return any data
          start(callback: (startStatus: bool,
                 engineType: string) => void) : void;
                                                      callback() doesn't
                    callback parameter must be a
                                                       return any data
                      function that accepts a
                      boolean and a string as
                            parameters
```

## **Optional Members in an Interface**

```
interface IAutoOptions {
    engine: IEngine;
    basePrice: number;
    state: string;
    make?: string;
    model?: string;
    year?: number;
}
```

#### Implementing an Interface

```
class Engine implements IEngine {
   constructor(public horsePower: number,
                public engineType: string) { }
    start(callback: (startStatus: bool,
          engineType: string) => void) {
        window.setTimeout(() => {
            callback(true, this.engineType);
        }, 1000);
    stop(callback: (stopStatus: bool,
         engineType: string) => void) {
        window.setTimeout(() => {
            callback(true, this.engineType);
        }, 1000);
```

Interfaces provide a way to enforce a "contract"

#### Using an Interface as a Type

Interfaces help ensure that proper data is passed

```
class Auto {
    engine: IEngine;
    basePrice: number;
    //More fields...
    constructor(data: IAutoOptions) {
        this.engine = data.engine;
        this.basePrice = data.basePrice;
```

# **Extending an Interface**



#### **Extending an Interface**

```
interface IAutoOptions {
    engine: IEngine;
    basePrice: number;
    state: string;
    make?: string;
    model?: string;
    year?: number;
                      Defines | AutoOptions members plus
                             custom members
interface ITruckOptions extends IAutoOptions {
    bedLength?: string;
    fourByFour: bool;
```

#### **Using an Extended Interface**

```
class Truck extends Auto {
    private _bedLength: string;
    fourByFour: bool;
                                    Extended interface
    constructor(data: ITruckOptions) {
        super(data);
        this.bedLength = data.bedLength;
        this.fourByFour = data.fourByFour;
```

## **Summary**

TypeScript provides code encapsulation through classes

Classes can inherit from other classes

 Interfaces provide a "code contract" to ensure consistency across objects

Interfaces can extend other interfaces