Intel Exchange

Cyware Intel Exchange - Google SecOps SOAR Integration

User Guide

Version: 1.0.0

Table of Contents

Table of Contents 2
Overview **4**
Cyware Intel Exchange Platform 4
Google SecOps 4
Cyware Intel Exchange Integration for Google SecOps SOAR Integration 4
Release Notes 5
App Installation & Configuration **7**
Pre-Requisites 7
Google SecOps 7
Cyware Intel Exchange 7
Installing the Integration **8**
Configuration **10**
Actions **14**
Invoking Actions **14**
Invoke Action Manually (from Case) 14
Invoke Action Automatically (from Playbook/Block) 15
Select Entities for Action 15
Select Specific Entities for Action 15
Select All Entities for Action 16
Select Entities of Specific Type for Action 16
Actions provided in the Integration **17**
Action 1: Ping 17
Action 2: Add IOCs to Allowed list 18
Action 3: Remove IOCs from Allowed list 19
Action 4: Get IOC Details 20
Action 5: Add Note to IOCs 25
Action 6: Get Allowed IOCs 26
Action 7: Manage Tags in IOCs 29
Action 8: Mark IOCs False Positive 30
Action 9: Create Intel in Cyware Intel Exchange 30

Action 10: Create Task for IOCs 32
Playbooks **36**
Installing the Playbooks **37**
Install Other Utilities for Playbook 40
Playbooks provided in the Integration **44**
Add-Remove IOC from Allowed List 45
Create IOCs on Cyware Intel Exchange 48
Manual IOC - JIRA Issue Creation 50
Dynamic Tags Classification on IOCs 52
Blocks **55**
Add-Remove IOC from Allowed List Block 55
Manual IOC - JIRA Issue Creation Input Block 57
Uninstalling the Integration 58
Limitations **58**
Known Behaviors **59**
Troubleshooting **60**
Case 1: PythonProcess Has timed out. 60
Case 2: Unknown error running Action. 62
References **63**

Overview

Cyware Intel Exchange Platform

Cyware Intel Exchange is an AI-powered threat intelligence platform that provides comprehensive security orchestration, automation, and response capabilities. The platform enables organizations to aggregate, analyze, and operationalize threat intelligence while automating security operations. Cyware Intel Exchange's vendor-neutral, low-code solution allows security teams to optimize operations, automate cross-functional workflows, and accelerate threat response across the entire security infrastructure.

Google SecOps

Google SecOps is a cybersecurity telemetry platform for threat hunting, and threat intelligence and is part of the Google Cloud Platform. Google SecOps stores log events it receives in two formats: either as the original raw log or structured Unified Data Model (UDM) log. There are two critical elements to consider for parsing, Unified Data Model (UDM) which defines the schema for parsing, and Configuration Based Normalizers (CBN) which describes how log data is transformed to the UDM schema.

Cyware Intel Exchange Integration for Google SecOps SOAR Integration

The SOAR component extends Cyware Intel Exchange capabilities with powerful automation and response features. It enables bi-directional synchronization of threat intelligence between Cyware Intel Exchange and Google SecOps, allowing security teams to operationalize threat data effectively. Through automated playbooks, security teams can implement rapid response actions such as categorizing indicators, create IOCs if they do not exist on Cyware, and add/remove indicators from allowed List.

Release Notes

V1.0.0

- This integration implements investigative and generic actions for the Cyware Intel Exchange platform on the Google SecOps SOAR Platform. It enables end-users to implement comprehensive network security use cases through a combination of the following actions:

Actions:

1. **Ping** – Validates Cyware Intel Exchange connectivity during integration setup to ensure configuration parameters are correct.
2. **Add IOCs to Allowed List** – Adds one or more indicators (type-aware) to Cyware's allowed list, with optional reasoning and entity-based targeting. Outputs per-indicator status (new/invalid/already exists).
3. **Remove IOCs from Allowed List** – Removes specified indicators from the allowed list using entity context; returns execution status.
4. **Get IOC Details** – Retrieves full IOC metadata with optional enrichment, relation data, and custom field selection. Automatically enriches matching entities inside Google SecOps cases.
5. **Add Note to IOCs** – Pushes analyst notes (plain text or JSON) to Cyware indicators with configurable note type metadata.
6. **Get Allowed IOCs** – Lists allowed indicators with filters for IOC type and creation timestamp; surfaces tabular results inside Google SecOps.
7. **Manage Tags in IOCs** – Bulk adds or removes comma-separated tags across multiple indicators via selectable operation type.
8. **Mark IOCs False Positive** – Flags indicators as false positives directly in Cyware (no parameters required).
9. **Create Intel in Cyware Intel Exchange** – Creates new intel objects with configurable IOC type, title, TLP, metadata confidence score, tags, description, and deprecation window.
10. **Create Task for IOCs** – Creates an assigned/unassigned task for an indicator object.

Playbooks and Block:

1. **Add-Remove IOC from Allowed List – Playbook**

Automates allowed-list hygiene by removing high-risk indicators and whitelisting low-risk ones using confidence-score thresholds.

2. **Create IOCs on Cyware Intel Exchange – Playbook**

Created indicators in Cyware Intel Exchange based on alert entities.

3. **Dynamic Tags Classification on IOCs – Playbook**

Classifies indicators into Low/Medium/High risk tags using IOC confidence scoring.

4. **Manual IOC – JIRA Issue Creation – Playbook**

When manual review is required (e.g., high confidence + manual flag), opens Jira tickets populated with IOC context.

5. **Manual IOC – JIRA Issue Creation Input Block**

Helper block that normalizes required inputs (IOC fields, Jira project key) and exposes them as JSON for downstream playbooks.

6. **Add-Remove IOC from Allowed List Block**

Reusable block encapsulating the allow/remove decision logic and resulting Cyware actions based on confidence thresholds.

App Installation & Configuration

Pre-Requisites

Google SecOps

- A Google SecOps SOAR Instance with an Admin role user.

Cyware Intel Exchange

- Cyware Intel Exchange platform (Access ID, Secret Key and Base URL).

Installing the Integration

1. Log in to the Google SecOps SOAR Platform.
2. From the Sidebar, click on the **Content Hub** section

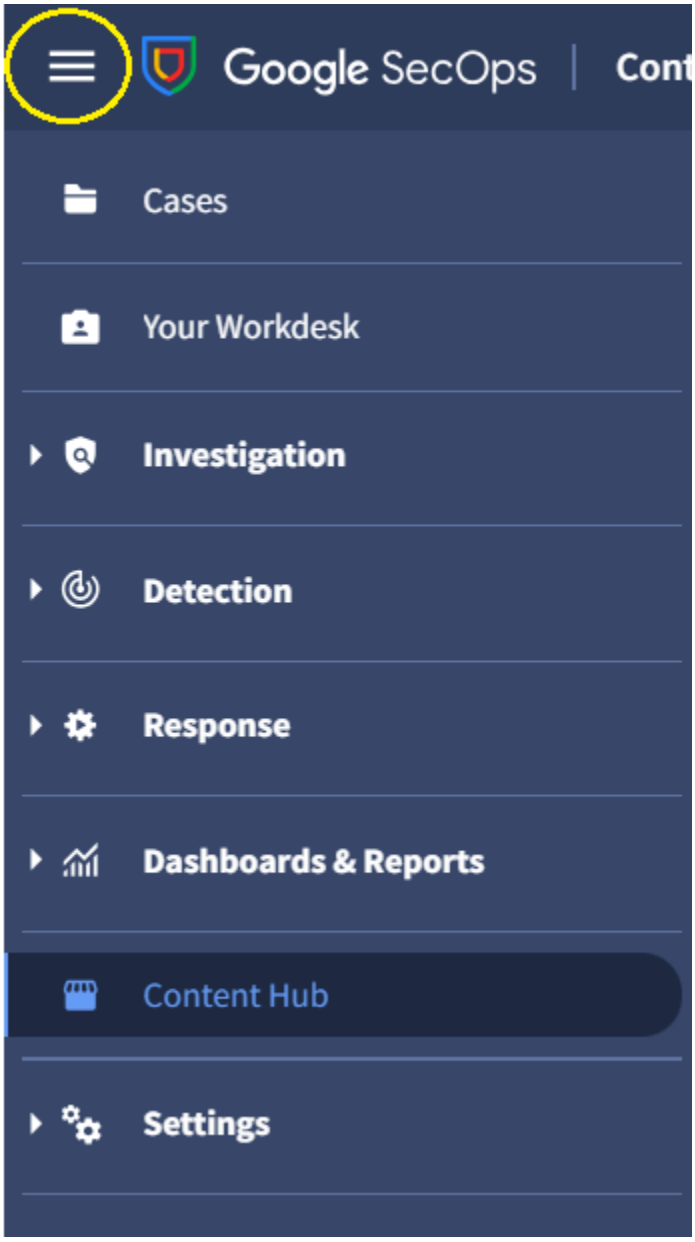

3. In the Content Hub, click on the Response Integrations tab.

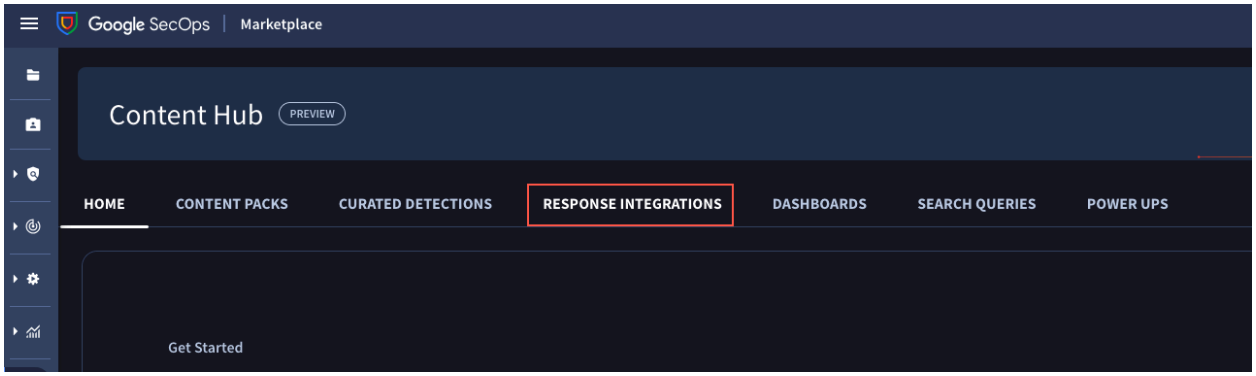

4. From the **Response Integrations** tab, search for **CywareIntelExchange**.

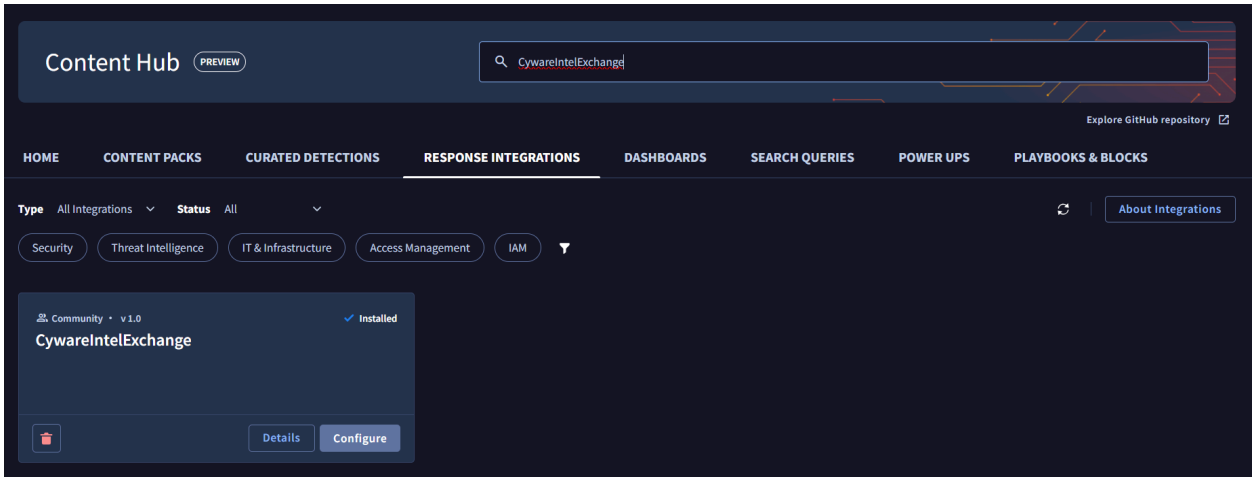

5. Click the **Install** button to install the integration.

Configuration

1. Once the integration has been installed successfully, the user needs to configure it to use the actions provided by the integration. These actions can be run manually from a case or can be used in playbooks.
2. To configure the integration, users can navigate to **Response** > **Integrations Setup**.

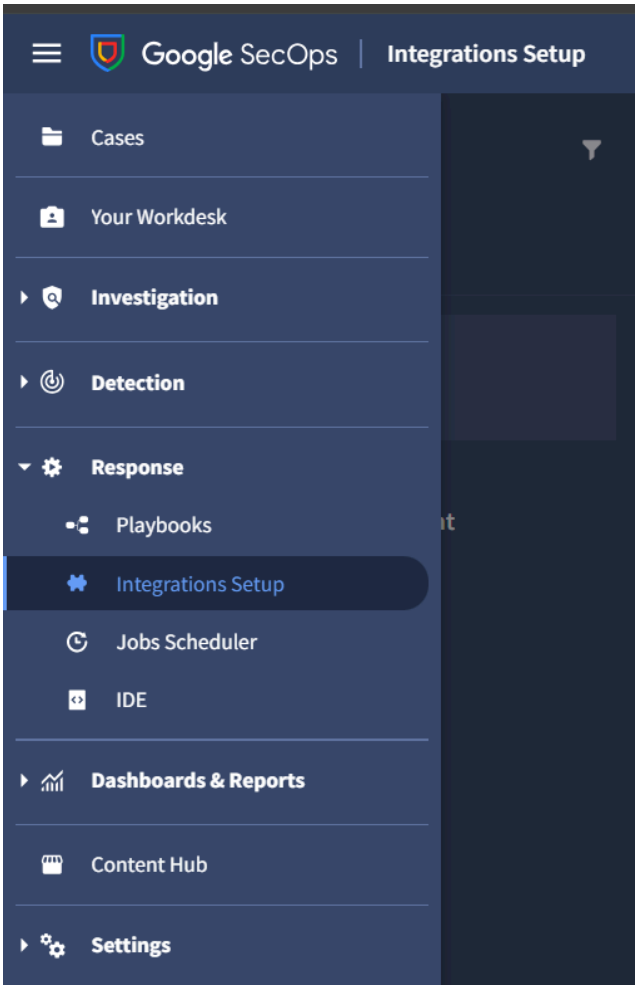

3. The integration can be configured in any of the desired environments. The integration actions can be used for playbooks and cases belonging to the environment in which the integration is configured.
4. Click on the **Plus** (**+**) button to configure the integration for the desired environment.

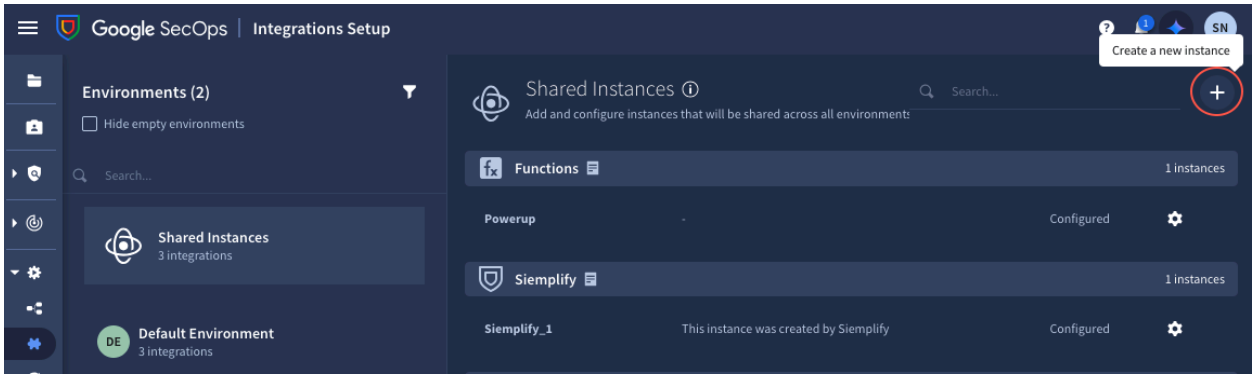

5. Search for CywareIntelExchange integration and select it. Click **Save**.
6. The instance of integration will be saved. However, in the next pop-up, users must add the necessary configuration parameters to use the actions.

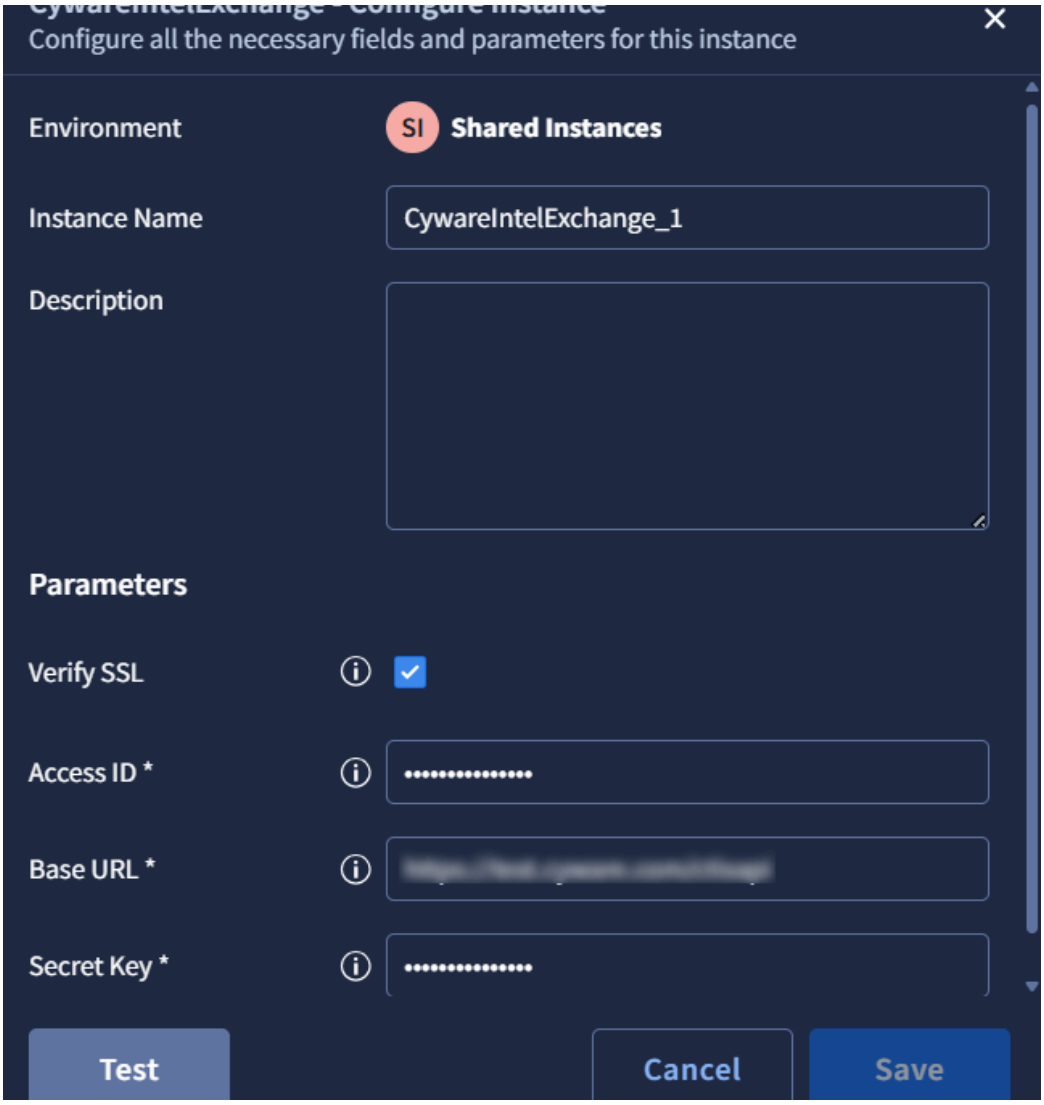

Field name	Description	Default value	Required	Type
Access ID	Cyware Intel Exchange Access ID	-	True	String
Base URL	Cyware Intel Exchange Base URL	-	True	String
Secret Key	Cyware Intel Exchange Secret Key	-	True	String
Verify SSL	Controls SSL certificate verification when making HTTPS requests to the Cyware Intel Exchange endpoint.	Checked	False	Checkbox

7. After adding the valid configuration parameters, click on the **Save** button to save the configurations. This is required to access the Cyware Intel Exchange APIs used in the actions.
8. After saving the configurations, the user can validate them using the **Test** button
    a. A green tick mark appears if the credentials provided are valid.

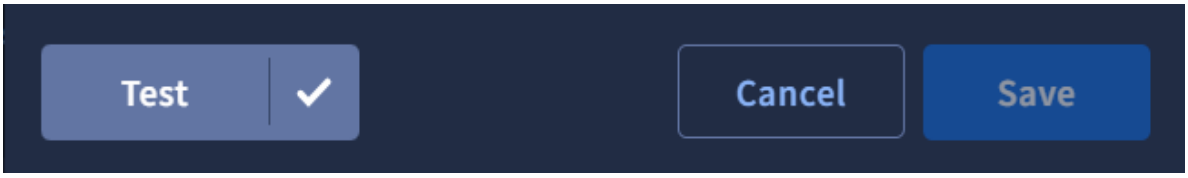

    b. If invalid credentials are provided or any internal issue is faced, a cross mark on the right side of the Test button will appear. The full error message can be displayed by clicking the cross button.

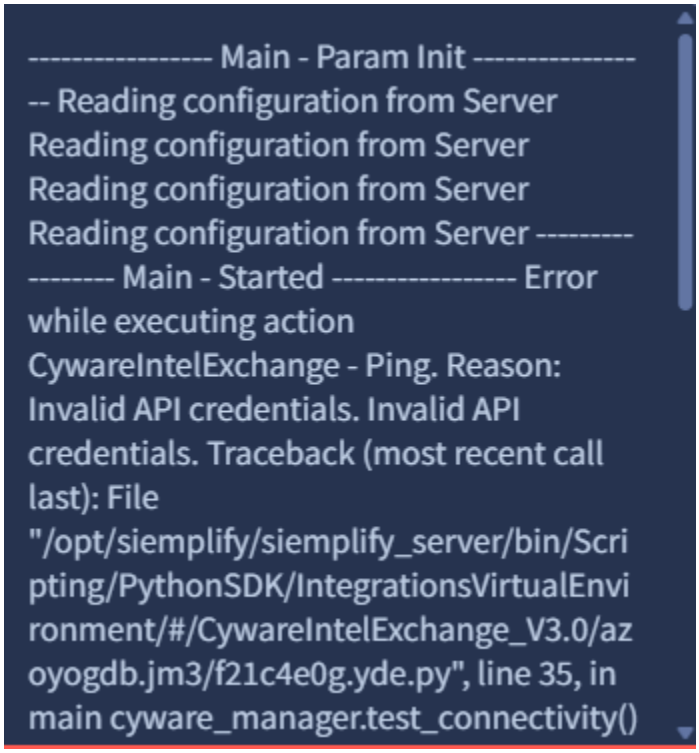

Note:

- After making any changes in the configuration parameters, the user needs to save them before testing again using the Test button.
- When updating the credentials, the user must delete the entire Password from the input first before adding the updated Password.

More information about configuring integrations in Google SecOps can be found *here*.

Actions

This integration implements generic actions for the Cyware Intel Exchange platform on the Google SecOps SOAR Platform. It enables end-users to implement comprehensive use cases on the Cyware Intel Exchange Platform through the below available actions.

Invoking Actions

Invoke Action Manually (from Case)

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action (icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.

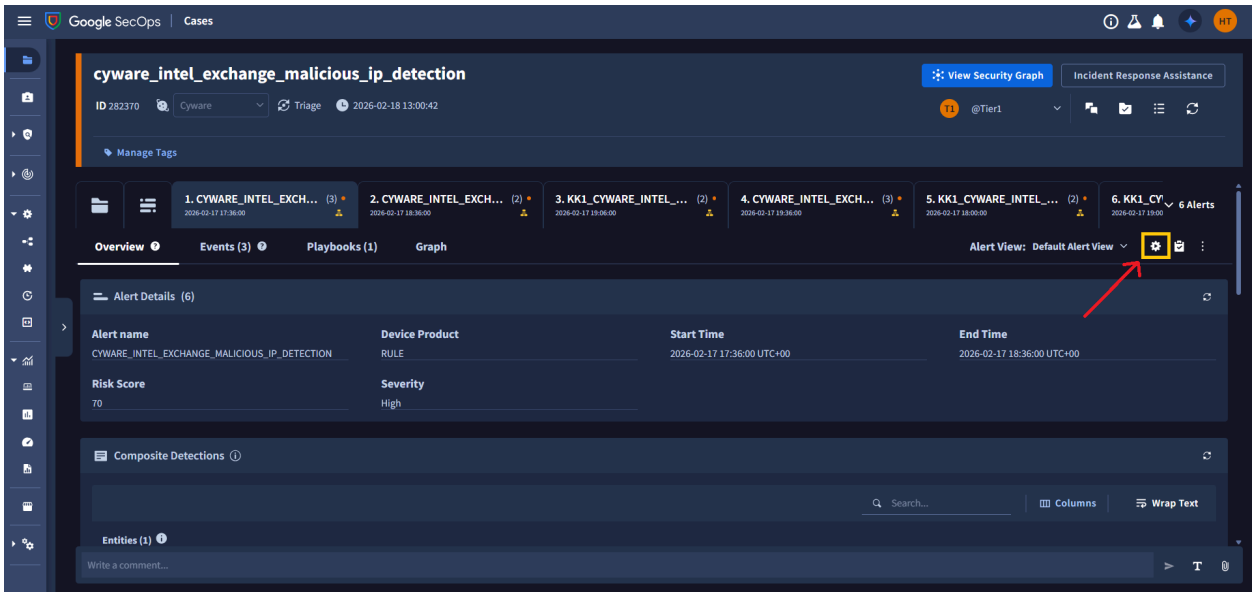

3. Select the required action: **CywareIntelExchange** > [**Action Name**]. Make sure to fill in the required information.
4. Once the information is added, click on the **Execute** button.
5. Once the action is successfully executed, the result (success or failure) will be displayed on the Case wall.
6. The result contains different JSON output and insights based on different actions.

Invoke Action Automatically (from Playbook/Block)

Actions can be added as a step in a playbook. This action will run when the playbook is executed. Playbooks, in turn, can be triggered on cases and alerts based on the conditions determined by the user.

To add an action as a part of the playbook, follow these steps:

1. Navigate to **Response** > **Playbooks**
2. Select any existing playbook or create a new one.
3. Click on the **+ Open Step Selection** button, and navigate to the Actions tab.
4. Under **CywareIntelExchange** integration, all the actions available in the integration would be visible. Simply, drag and drop the action required to the playbook step.
5. The action should now be added to the playbook. Make sure to configure the input parameters (if applicable) for the action.

Select Entities for Action

Select Specific Entities for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action ('**gear**' icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CywareIntelExchange** > [**Action Name**].
4. In the Entities section, select **Specific**, dropdown had the list of entities available select the entity.

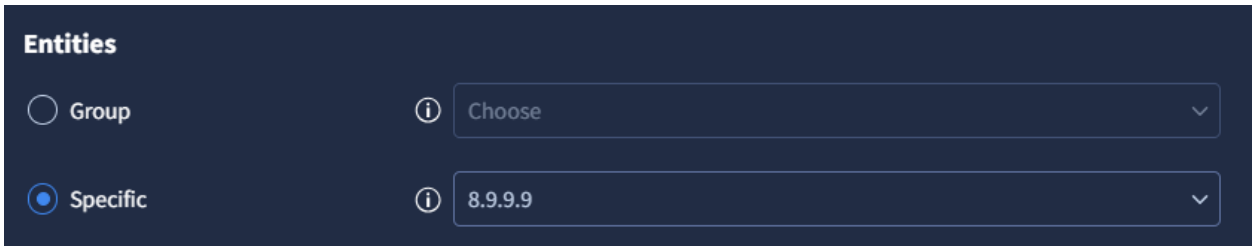

Select All Entities for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action (‘**gear**’ icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CywareIntelExchange** > [**Action Name**].
4. In Entities, select Group, select **All entities** in dropdown.

Select Entities of Specific Type for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action (‘**gear**’ icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CywareIntelExchange** > [**Action Name**].
4. In Entities, select Group, for example if the user wants to pass all entities with type domain, then select **All domains** in dropdown.

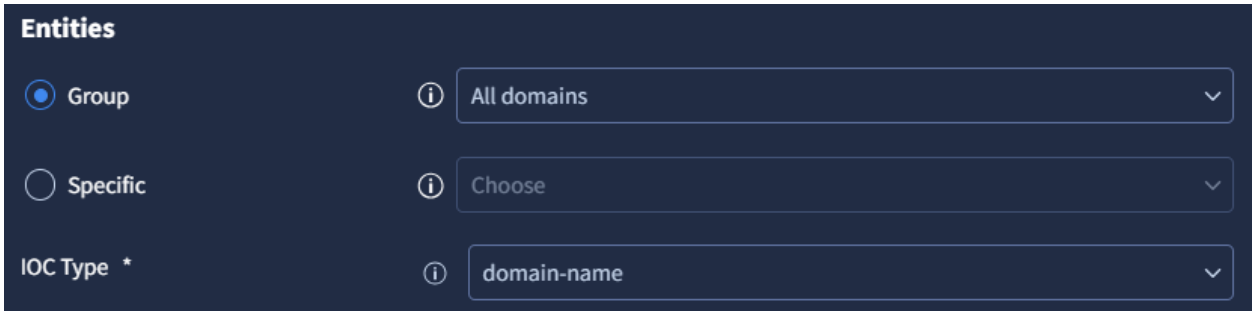

Actions provided in the Integration

Action 1: Ping

- While configuring the Cyware Intel Exchange integration, the configured inputs can be tested. This validation of the inputs is done by Ping Action. Hence, Ping Action is responsible for the validation of the configuration parameters when the Integration is configured.

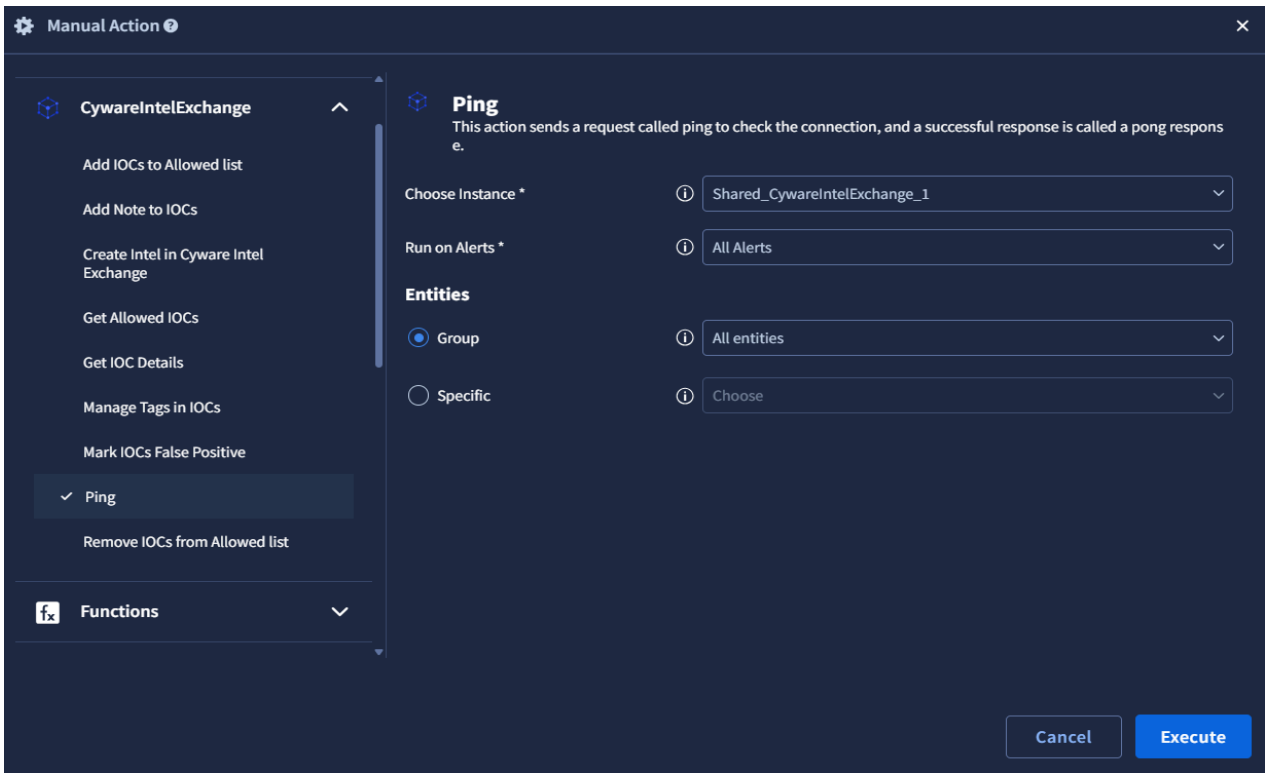

Google SecOps Cases - Ping Action dialog box

Action 2: Add IOCs to Allowed list

- Adds one or more IOCs to the allowed list in Cyware Intel Exchange. Refer to these steps to pass entities of a specific type, or these steps to pass a specific entity to the action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
IOC Type	List	Yes	ipv4-addr	Pass the type of indicator.
Reason	String	No	Allow IOCs from Google SecOps	Pass a reason for adding the indicators to the allowed list.

Note: IOC Type should match the selected types of entities.

Action Output:

Google SecOps Cases - Add IOCs to Allowed list

Output JSON:

```
{
```

```
  "details": {
    "invalid": [],
    "new_created": [
      "10.50.10.30",
      "10.1.2.3"
    ],
    "already_exists": []
  }
}
```


Action 3: Remove IOCs from Allowed list

- Removes one or more IOCs from the allowed list on Cyware Intel Exchange.

  Refer to these steps to pass entities in action.

Parameters:

No Action Parameters.

Action Output:

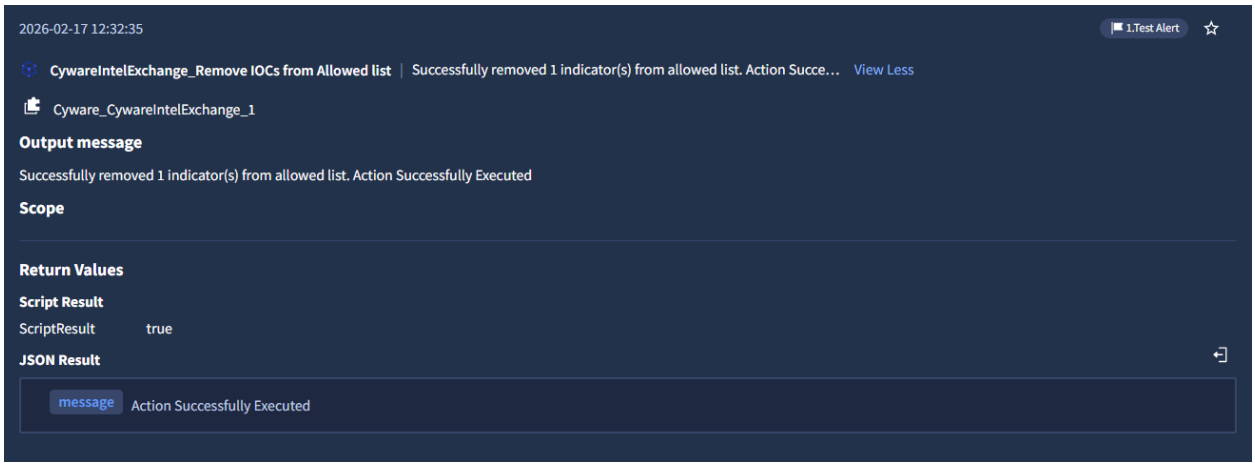

Google SecOps Cases - Remove IOCs from Allowed list

Output JSON:


```
{
  "message": "Action Successfully Executed"
}
```

Action 4: Get IOC Details

- Retrieves detailed information about IOCs with optional enrichment data. Refer to these steps to pass entities in action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
Enrichment Data	Boolean	No	False	Include enrichment data in results
Relation Data	Boolean	No	False	Include relations in results
Fields	String	No	-	Specific fields to get in the response. Eg. name,id

Action Output:

ANALYST SCORE	TAGS	IS FALSE POSITIVE	SOURCES	IOC VALUE	CONFIDENCE SCORE	ID	IOC TYPE	TLP	IS WHITELISTED
	secops-testing	No	Import	8.9.9.10	60	3ffdfdb5-b3df-4...	ipv4-addr	NONE	No
	Mandiant/PEND...	No	Mandiant Threa...	0-2345.com	0	0cc7865c-d1cc-...	domain-name	AMBER	Yes

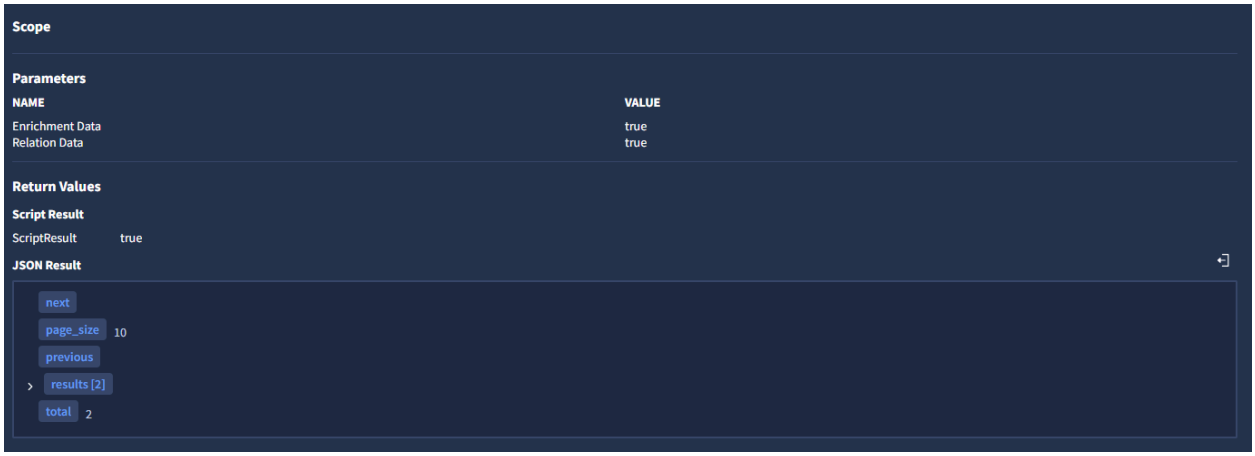

Google SecOps Cases - Get IOC Details

Enrichment of Entities:

- After this action run, Entities (IOCs) will be enriched in Google SecOps.
- Steps to view enrichment details:
  - In case wall, go to **Overview** → **Entities Highlights**
  - On the entity, click on **View Details** as shown below**.**

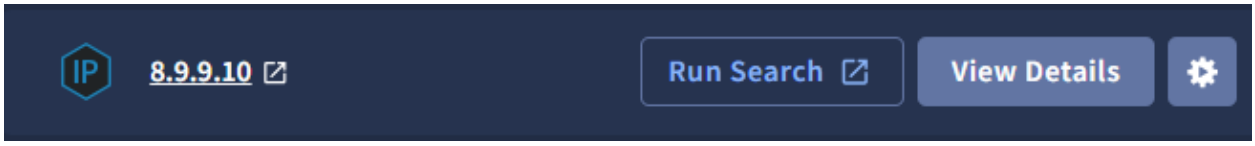

  - A detailed view with enriched fields will be listed as shown below**.**

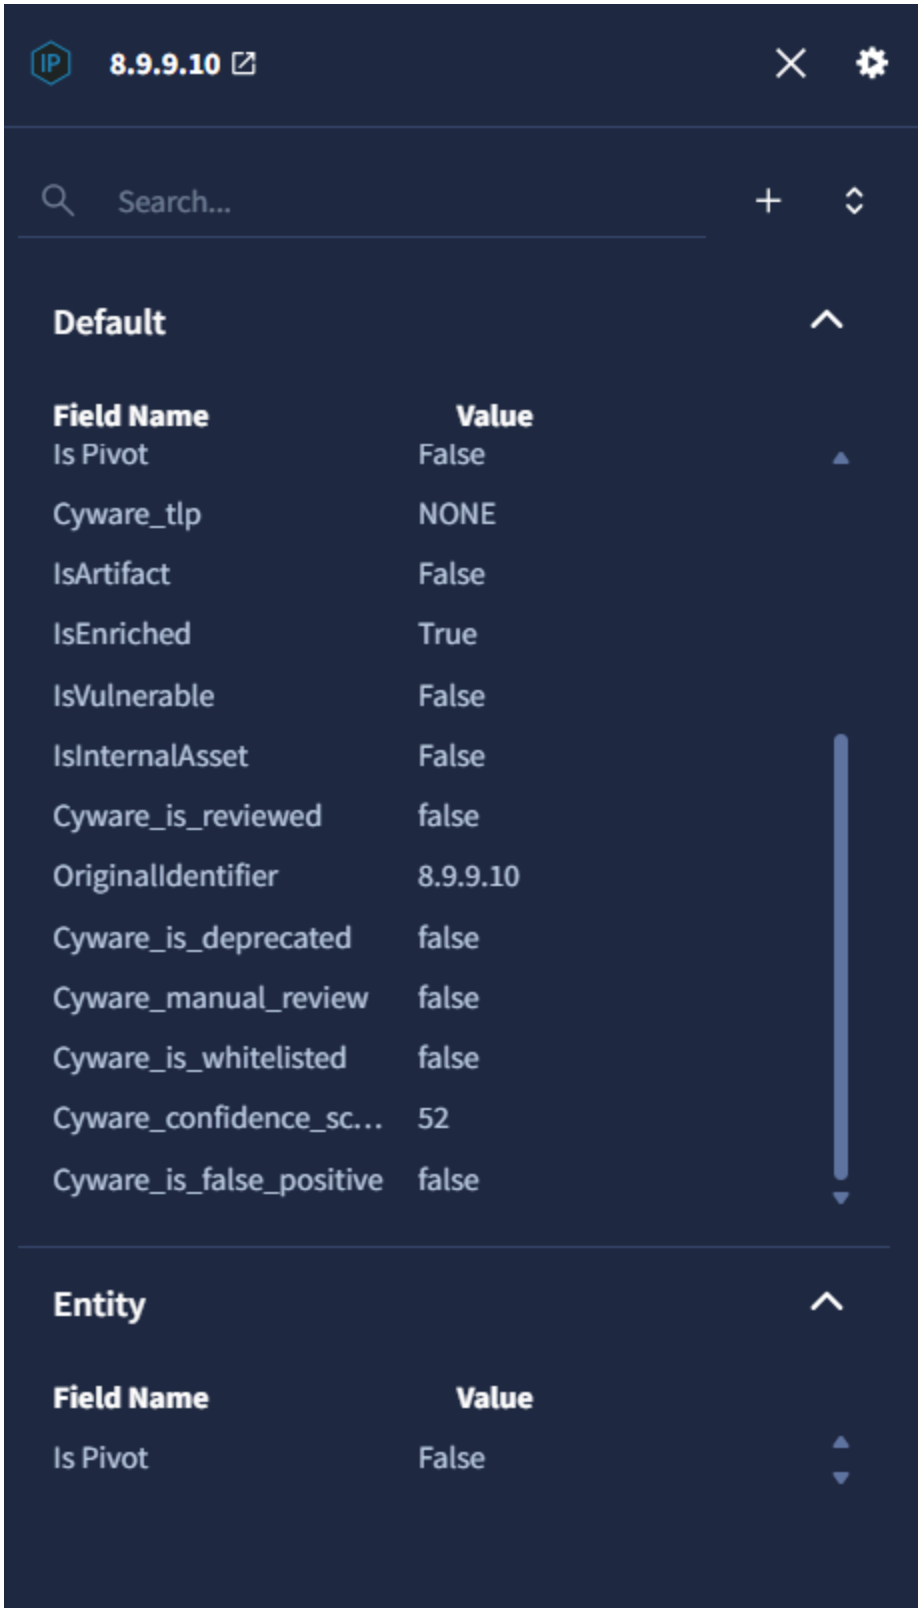
IP
8.9.9.10
Search...
Default
Field Name
Value
Is Pivot
False
Cyware_tlp
NONE
IsArtifact
False
IsEnriched
True
IsVulnerable
False
IsInternalAsset
False
Cyware_is_reviewed
false
OriginalIdentifier
8.9.9.10
Cyware_is_deprecated
false
Cyware_manual_review
false
Cyware_is_whitelisted
false
Cyware_confidence_sc...
52
Cyware_is_false_positive
false
Entity
Field Name
Value
Is Pivot
False

Output JSON:


```
{
    "next": null,
    "previous": null,
    "total": 1,
    "results": [
        {
            "analyst_score": 50,
            "analyst_tlp": "CLEAR",
            "country": "Germany",
            "created": "2025-12-04T10:32:24.000Z",
            "ctix_created": "2025-12-22T16:32:40.427Z",
            "ctix_modified": "2026-01-21T12:46:44.127459+00:00",
            "custom_attributes": null,
            "confidence_score": 81,
            "description": "<ol><li><a href=\"http://google.com\"
target=\"_blank\"><strong><u>Test Description</u></strong></a></li></ol>",
            "enrichment_data": [
                {
                    "tool": "MaxMind (GeoIP)",
                    "tool_response": "{\"Geo IP Report\": {\"country\": {\"country_code\":
\"DE\", \"country_name\": \"Germany\"}, \"city\": {\"city\": null, \"continent_code\":
\"EU\", \"continent_name\": \"Europe\", \"country_code\": \"DE\", \"country_name\":
\"Germany\", \"dma_code\": null, \"is_in_european_union\": true, \"latitude\":
51.2993, \"longitude\": 9.491, \"postal_code\": null, \"region\": null, \"time_zone\":
\"Europe/Berlin\"}}, \"updated\": 1768999603}"
                }
            ],
            "first_seen": null,
            "id": "11951246-f47f-413a-9006-b85a0fbde7cc",
            "ioc_type": "ipv4-addr",
            "is_deprecated": false,
            "is_false_positive": false,
            "is_reviewed": false,
            "is_whitelisted": false,
```

```
        "last_seen": null,
        "modified": "2025-12-22T16:18:34.565Z",
        "name": "1.2.3.4",
        "object_type": "indicator",
        "published_collections": [],
        "relations": {},
        "sources": [
          {
            "id": "22d3fd00-ed21-4200-9316-f89b79d1d00f",
            "name": "Alien Vault",
            "type": "API_FEEDS"
          }
        ],
        "sub_type": null,
        "tags": [
          "multi-stage",
          "extension",
          "remote-access-toolkit",
          "developers",
          "supply-chain"
        ],
        "tlp": "CLEAR",
        "manual_review": false,
        "valid_from": "2025-12-04T10:32:24.000Z",
        "valid_until": "2026-01-03T10:00:00.000Z"
      }
    ],
    "page_size": 10
}
```

Action 5: Add Note to IOCs

- Adds a note to the IOCs on Cyware Intel Exchange. Refer to these steps to pass entities in action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
Note	String	Yes	-	The description for the note.
Note Type	String	Yes	-	The type of the note. (Eg. threatdata)
Is the Note in Json format	boolean	No	false	Set to true, if the note is in JSON format.

Action Output:

Google SecOps Cases - Add Note to IOCs

Output JSON:


```
{
  "created": 1768904734,
```

```
    "created_by": {
        "email": "abc@gmail.com",
        "first_name": "Jhon",
        "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
        "last_name": "Morgan"
    },
    "id": "21bf89ec-cc79-4346-9e80-afe01c558f0b",
    "is_json": false,
    "meta_data": {},
    "modified": 1768904734,
    "modified_by": {
        "email": "abc@gmail.com",
        "first_name": "Jhon",
        "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
        "last_name": "Morgan"
    },
    "object_id": "a4c05484-8f08-4561-b4e3-d4b29ce13162",
    "source_id": null,
    "text": "This is a test note from secops",
    "title": null,
    "type": "threatdata"
}
```


Action 6: Get Allowed IOCs

- Retrieves a list of allowed IOCs (Indicators) from Cyware Intel Exchange based on specified filters. Refer to these steps to pass entities in action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
IOC Type	List	No	All	Pass an allowed indicator type to filter the result. Select All

				for visualizing all indicators.
Created From	Date in epoch	No	-	Pass the created from time in epoch format to filter records based on the created time. eg. 1767160932

- Note: IOC Type should match the selected types of entities.

Action Output:

- A Table will be populated with Allowed IOCs details.

Google SecOps Cases - Get Allowed IOCs

Output JSON:


```
{
    "next": null,
    "page_size": 100,
    "previous": null,
    "results": [
        {
            "created": 1768292011,
            "created_by": {
                "email": "abc@cyware.com",
                "first_name": "jhon",
                "id": "05cb4680-9f14-4f85-a89a-3ccde6ee91c6",
                "last_name": ""
            },
            "id": "ae70e3cb-0963-4616-a402-229a861319a8",
            "include_emails": false,
            "include_subdomains": false,
            "include_urls": false,
            "modified": 1768292011,
            "modified_by": {
                "email": "abc@cyware.com",
                "first_name": "jhon",
                "id": "05cb4680-9f14-4f85-a89a-3ccde6ee91c6",
                "last_name": ""
            },
            "type": "domain-name",
            "value": "example.com"
        }
    ],
    "total": 1
}
```

Action 7: Manage Tags in IOCs

- Adds/removes tags in one or more IOCs on Cyware Intel Exchange. Refer to these steps to pass entities in action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
Operation Type	List	Yes	Add tag	Select the Operation type, Add tag or Remove tag in indicators
Tags	String [List]	Yes	-	Tag names to add on each IOCs. Supports comma separated values. Eg. “test-1”, “test-2”, “test-3”

Action Output:

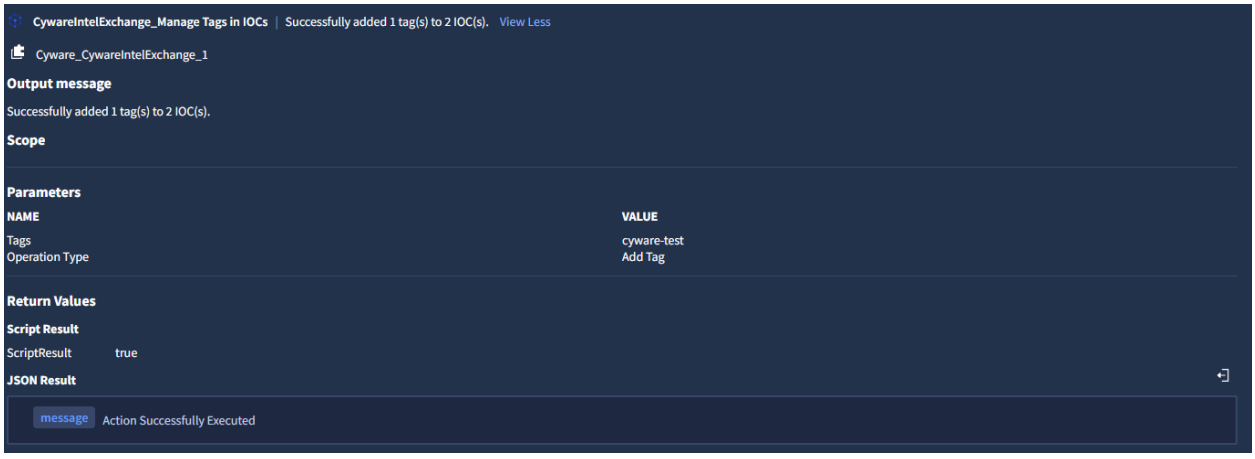

Google SecOps Cases - Manage Tags in IOCs

Output JSON:

```
{
```

```
  "message": "Action Successfully Executed"
}
```

Action 8: Mark IOCs False Positive

- Mark an IOC as false positive in Cyware Intel Exchange. Refer to these steps to pass entities in action.

Parameters:

No action parameters.

Action Output:

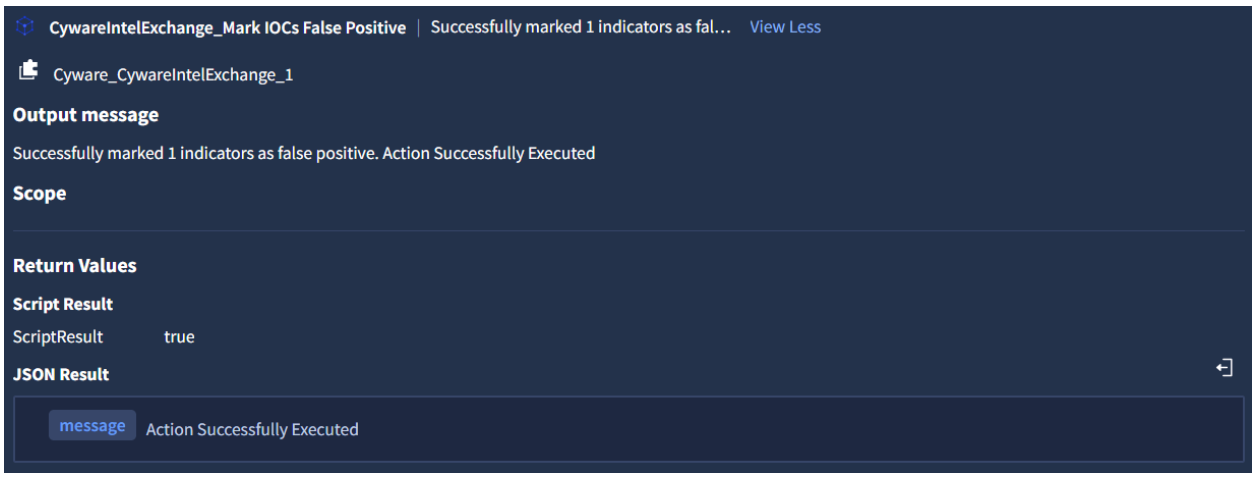

Google SecOps Cases - Mark IOCs False Positive

Output JSON:

```
{
  "message": "Action Successfully Executed"
}
```

Action 9: Create Intel in Cyware Intel Exchange

- Create an Intel on Cyware Intel Exchange. Refer to these steps to pass entities of a specific type, or these steps to pass a specific entity to the action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
IOC Type	List	Yes	ipv4-addr	Pass the type of indicator
Title	String	Yes	[Alert.Name]	Pass a title for the intel within 100 characters. The title is added to the report object that is created as part of the quick add intel submission.
TLP	List	No	NONE	Pass the TLP value for the intel.
Metadata Confidence Score	String	No		Pass a Source Confidence Score for the intel between 0 and 100.
Tags	String	No		Pass Comma Separated Tag names to add to the intel
Description	String	No		Pass a description for the intel within 1000 characters.
Deprecates After	String	No	180	Provide the expiration time of the indicator in Days. Maximum value is 1000 days

Action Output:

Google SecOps Cases - Create Intel in Cyware Intel Exchange

Output JSON:


```
[
  {
    "indicator": "8.9.9.9",
    "creation_response": {
      "details": "You will be notified once the STIX is created",
      "task_id": "111b3a7b-c480-4bcc-8206-b721831e7479"
    },
    "status_response": {
      "report_id": "1117107a-9df5-41df-873f-93f1108744d3",
      "report_status": "CREATED"
    }
  }
]
```


Action 10: Create Task for IOCs

- Create a task for IOCs. Refer to these steps to pass entities of a specific type, or these steps to pass a specific entity to the action.

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
Text	String	Yes		Pass the description of the task to be performed. (Max limit - 2000)
Priority	List	Yes	medium	Select the priority of the task.
Status	List	Yes	not_started	Select the status of the task.
Deadline	String	Yes	30	Provide the deadline of the task in Days. Maximum value is 365 days
Assignee Email ID	String	No		Pass the Email ID of a valid user to assign the task. If not provided, then it will create an unassigned task.

Action Output:

Google SecOps Cases - Create Task for IOCs

Output JSON:


```
[
  {
    "indicator": "45.77.31.210",
    "indicator_id": "1bdc83ec-81f2-4b25-8dc8-042b3fddf7c4",
    "task": {
      "assignee": {
        "email": "anish.jain@crestdata.ai",
        "first_name": "Anish",
        "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
        "last_name": "Jain"
      },
      "closure_comment": null,
      "completed_on": null,
      "created": 1772012073,
      "created_by": {
        "email": "anish.jain@crestdata.ai",
        "first_name": "Anish",
        "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
        "last_name": "Jain"
      },
      "deadline": 1774604072,
      "id": "c753de92-a042-4613-b7ba-f1951a20d1ee",
      "is_removed": 0,
      "meta_data": {},
      "modified": 1772012073,
      "object_id": "1bdc83ec-81f2-4b25-8dc8-042b3fddf7c4",
      "priority": "low",
      "status": "in_progress",
      "text": "Secops case low in_progress",
      "type": "indicator"
    }
  },
  {
    "indicator": "14.12.14.12",
```

```
      "indicator_id": "d7bbd281-9219-4499-a4bf-8c7fdd2480a4",
      "task": {
        "assignee": {
          "email": "anish.jain@crestdata.ai",
          "first_name": "Anish",
          "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
          "last_name": "Jain"
        },
        "closure_comment": null,
        "completed_on": null,
        "created": 1772012073,
        "created_by": {
          "email": "anish.jain@crestdata.ai",
          "first_name": "Anish",
          "id": "8095d3e5-07b8-4478-b89f-4e75af497173",
          "last_name": "Jain"
        },
        "deadline": 1774604072,
        "id": "3994e088-67c0-442d-adc6-1acb2094ce41",
        "is_removed": 0,
        "meta_data": {},
        "modified": 1772012073,
        "object_id": "d7bbd281-9219-4499-a4bf-8c7fdd2480a4",
        "priority": "low",
        "status": "in_progress",
        "text": "Secops case low in_progress",
        "type": "indicator"
      }
    }
]
```

Playbooks

As part of the Integration, four playbooks and two blocks have been created to help the user get started. Users can use and refer to the sample playbook provided in Github Repo.

The Playbooks & block included are:

1. Cyware Intel Exchange - Add-Remove IOC from Allowed List
2. Cyware Intel Exchange - Create IOCs on Cyware Intel Exchange
3. Cyware Intel Exchange - Dynamic Tags Classification on IOCs
4. Cyware Intel Exchange - Manual IOC - JIRA Issue Creation
5. Cyware Intel Exchange - Manual IOC - JIRA Issue Creation Input Block
6. Cyware Intel Exchange - Add-Remove IOC from Allowed List Block

Notes:

- Each playbook requires a trigger, which decides when the playbook would run. Users can update the Trigger conditions based on the requirements.
- As the trigger of every playbook is set to run on all ingested alerts into SecOps instance, the added playbooks are disabled by default. Added Playbooks and a block can be found in the **Content Hub Playbooks** folder. These playbooks and blocks can be moved to any other folder of User's choice. Users can easily enable any playbook by simply clicking on the toggle button beside the playbook name. *(Reference)*

Installing the Playbooks

1. Log in to the Google SecOps SOAR Platform.
2. From the Sidebar, click on the **Content Hub** section

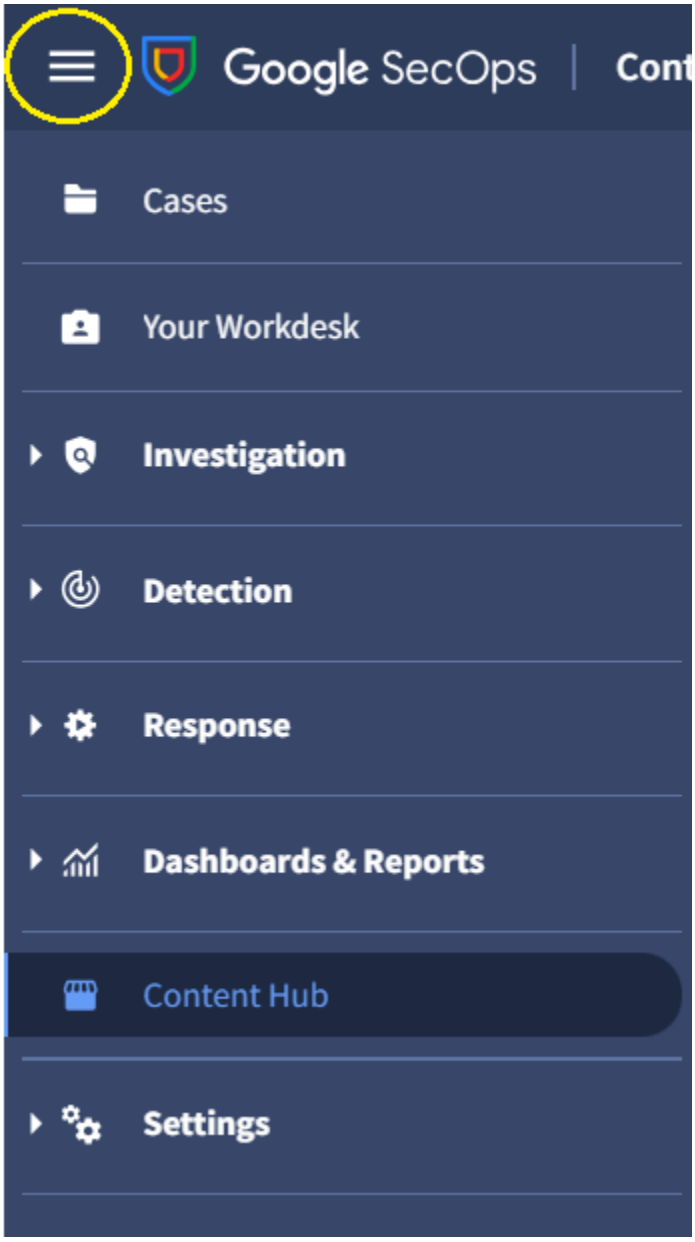

3. In the Content Hub, click on the Playbooks & Blocks tab.

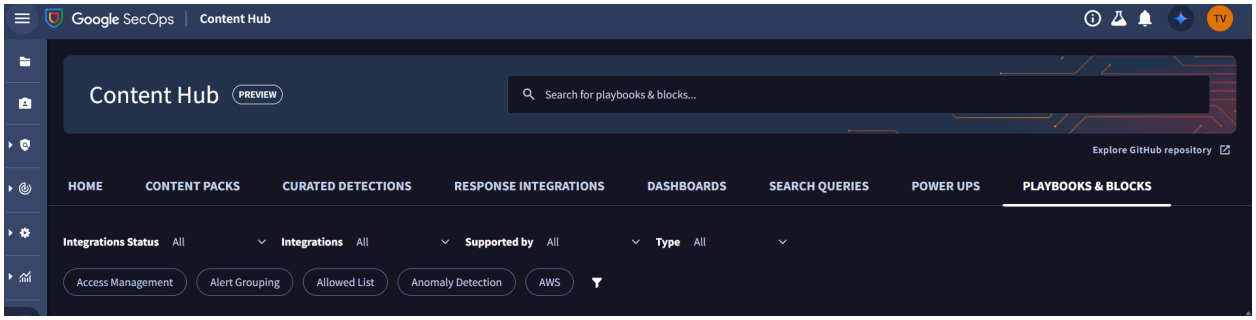

4. From the **Playbooks & Blocks** tab, search for **Cyware Intel Exchange**.

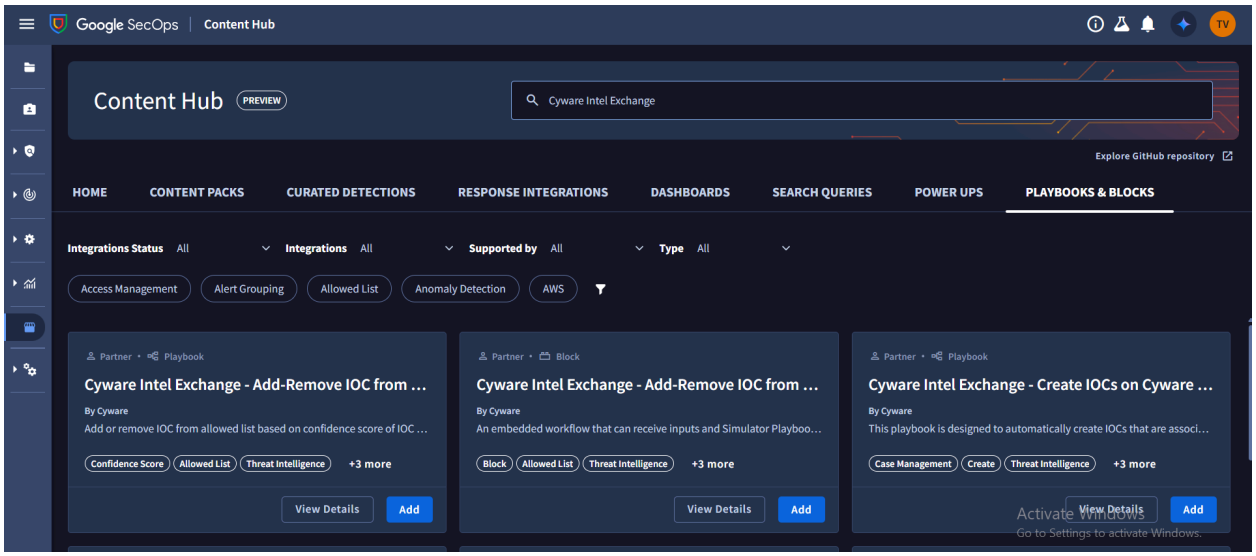

5. There will be 4 Playbooks and 2 Blocks, click on **Add** Button in-order to install them.
6. Select the **All Environments** option to save the playbook and click on save.

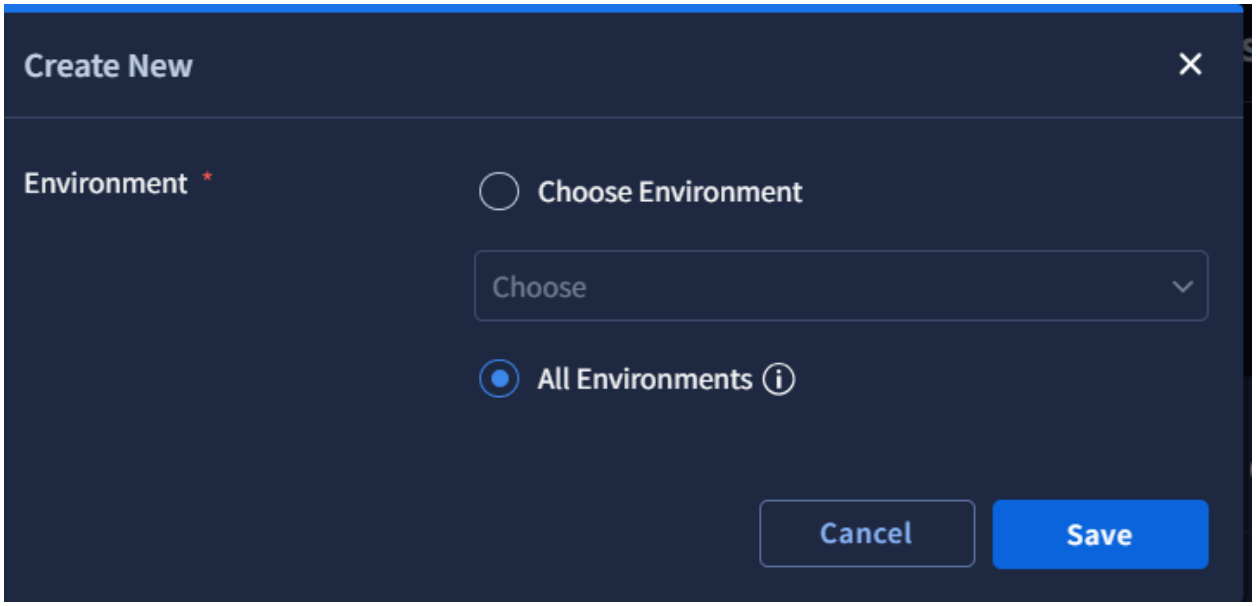

7. Navigate to **Response** > **Playbooks**. Find added playbooks in **Content Hub Playbooks** Folder.

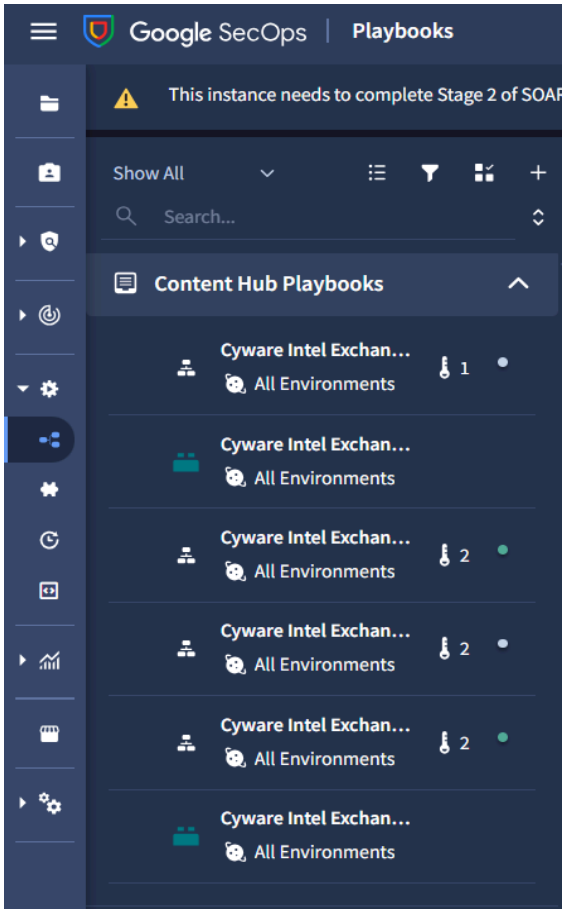

8. By default, playbooks will be disabled in order to use them, enable the playbooks by clicking on any playbook and enabling the toggle button as shown below. Then, click on **Save**.

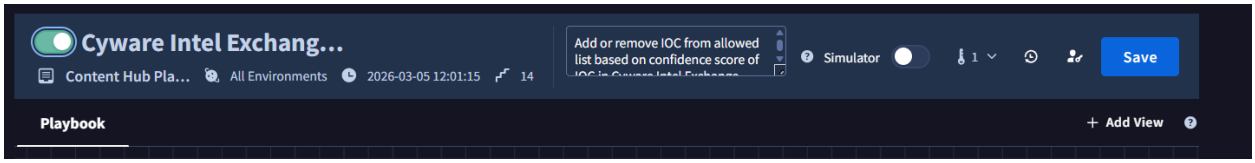

Note: *Before using any playbook with an alert, review its default settings (triggers, action parameters, etc.) to ensure they align with your needs. If attaching playbook to alert manually, then the trigger section of the playbook will not be applied. And also Install other utilities required for the playbooks.*

Install Other Utilities for Playbook

- Go to **Content Hub**.

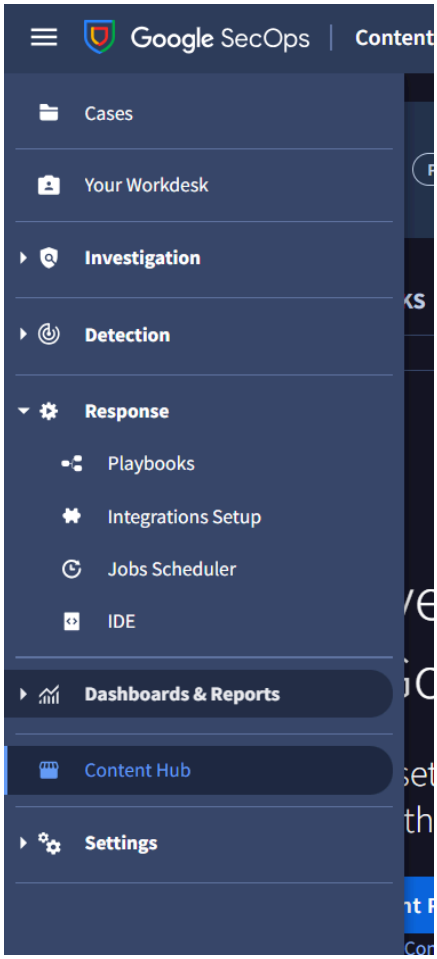

- Click on **Power-Ups**.

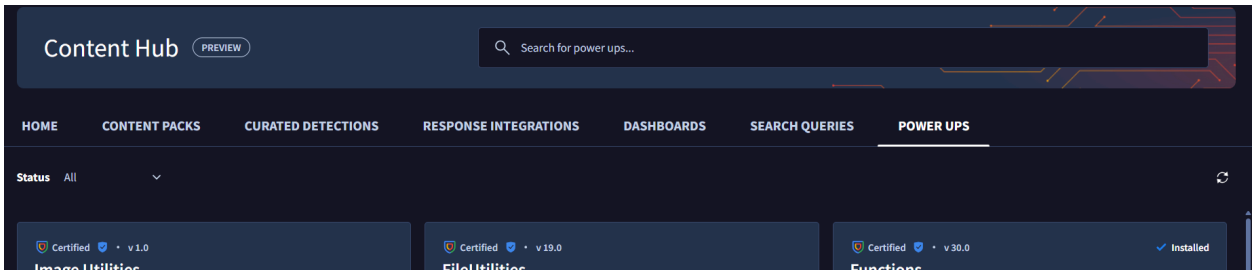

- Search for Functions and click on **Install**.

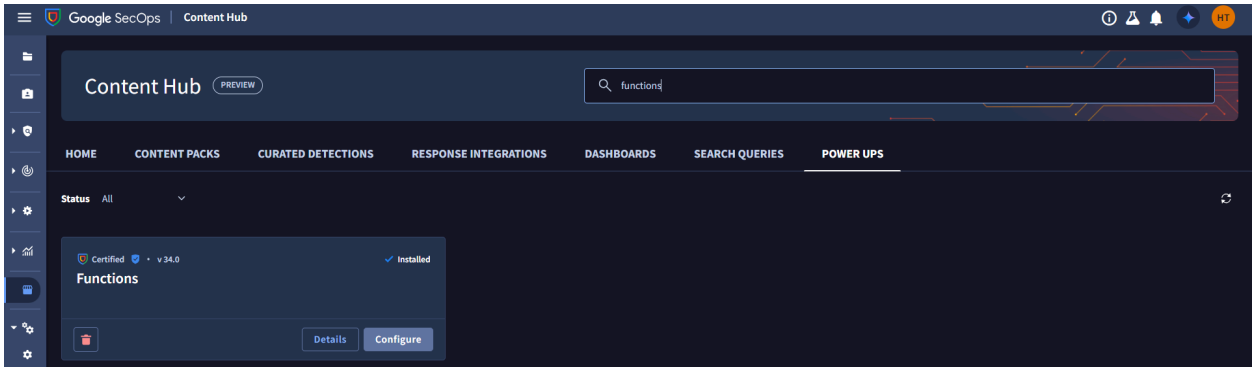

- Configure Functions by clicking on the **Configure** button.

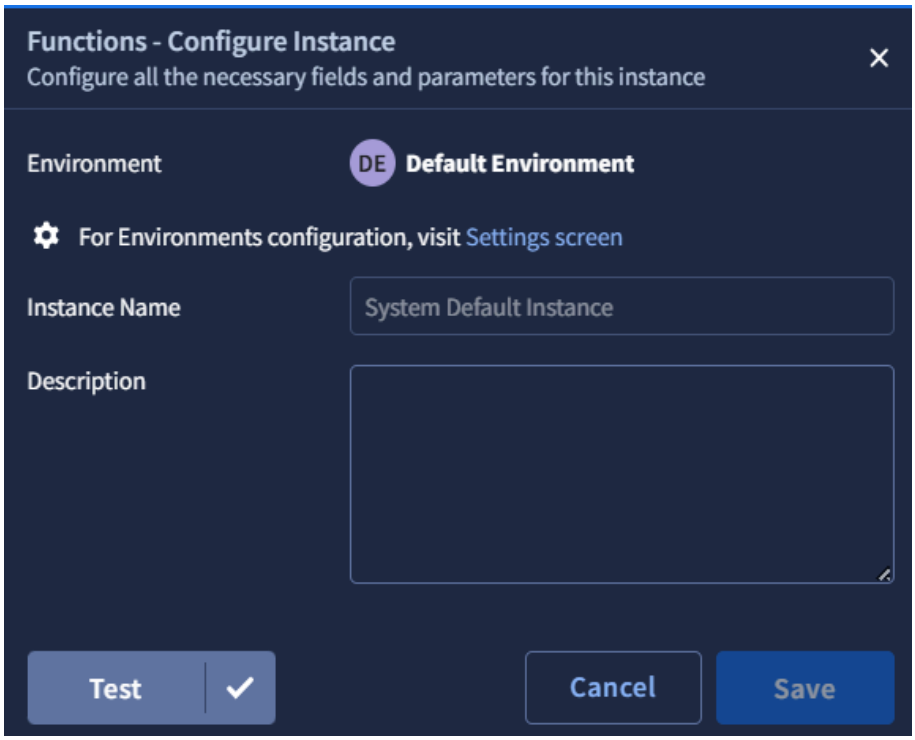

- Go to **Response Integrations**
- Search for **Siemplify** and click on **Install**.

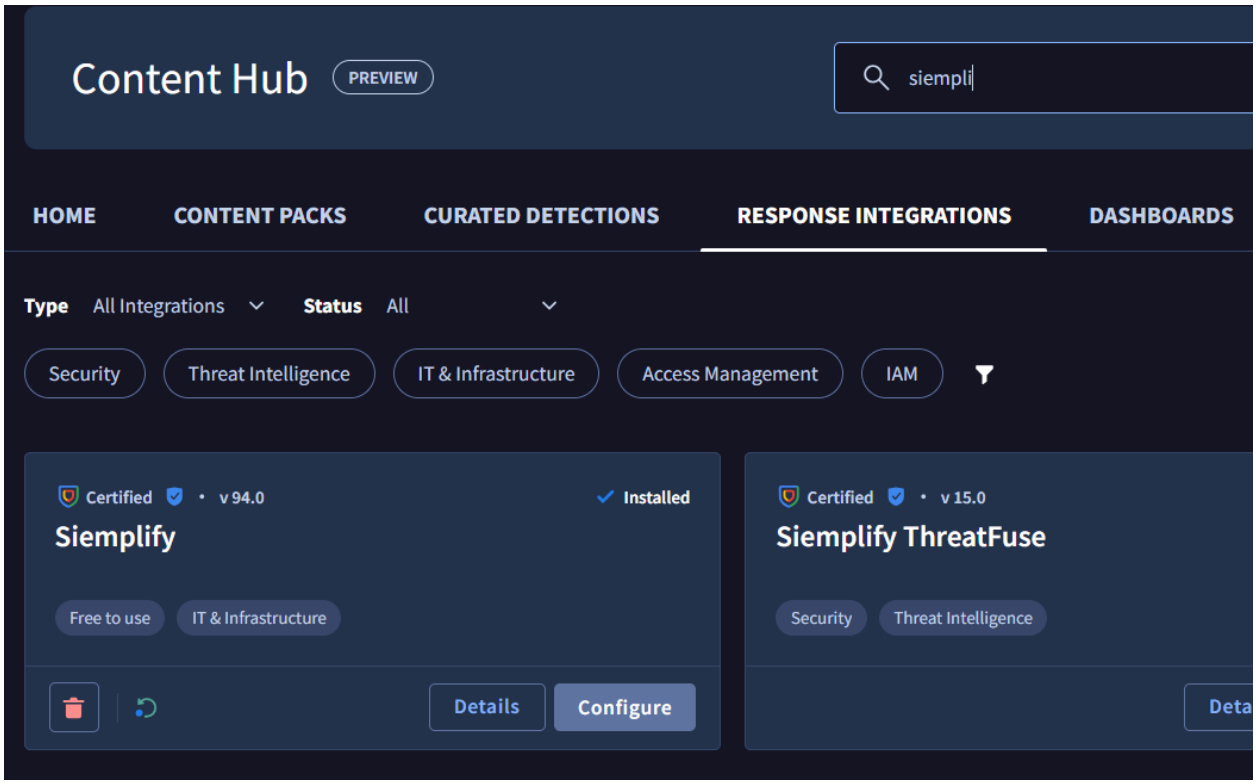

- Configure **Siemplify**.

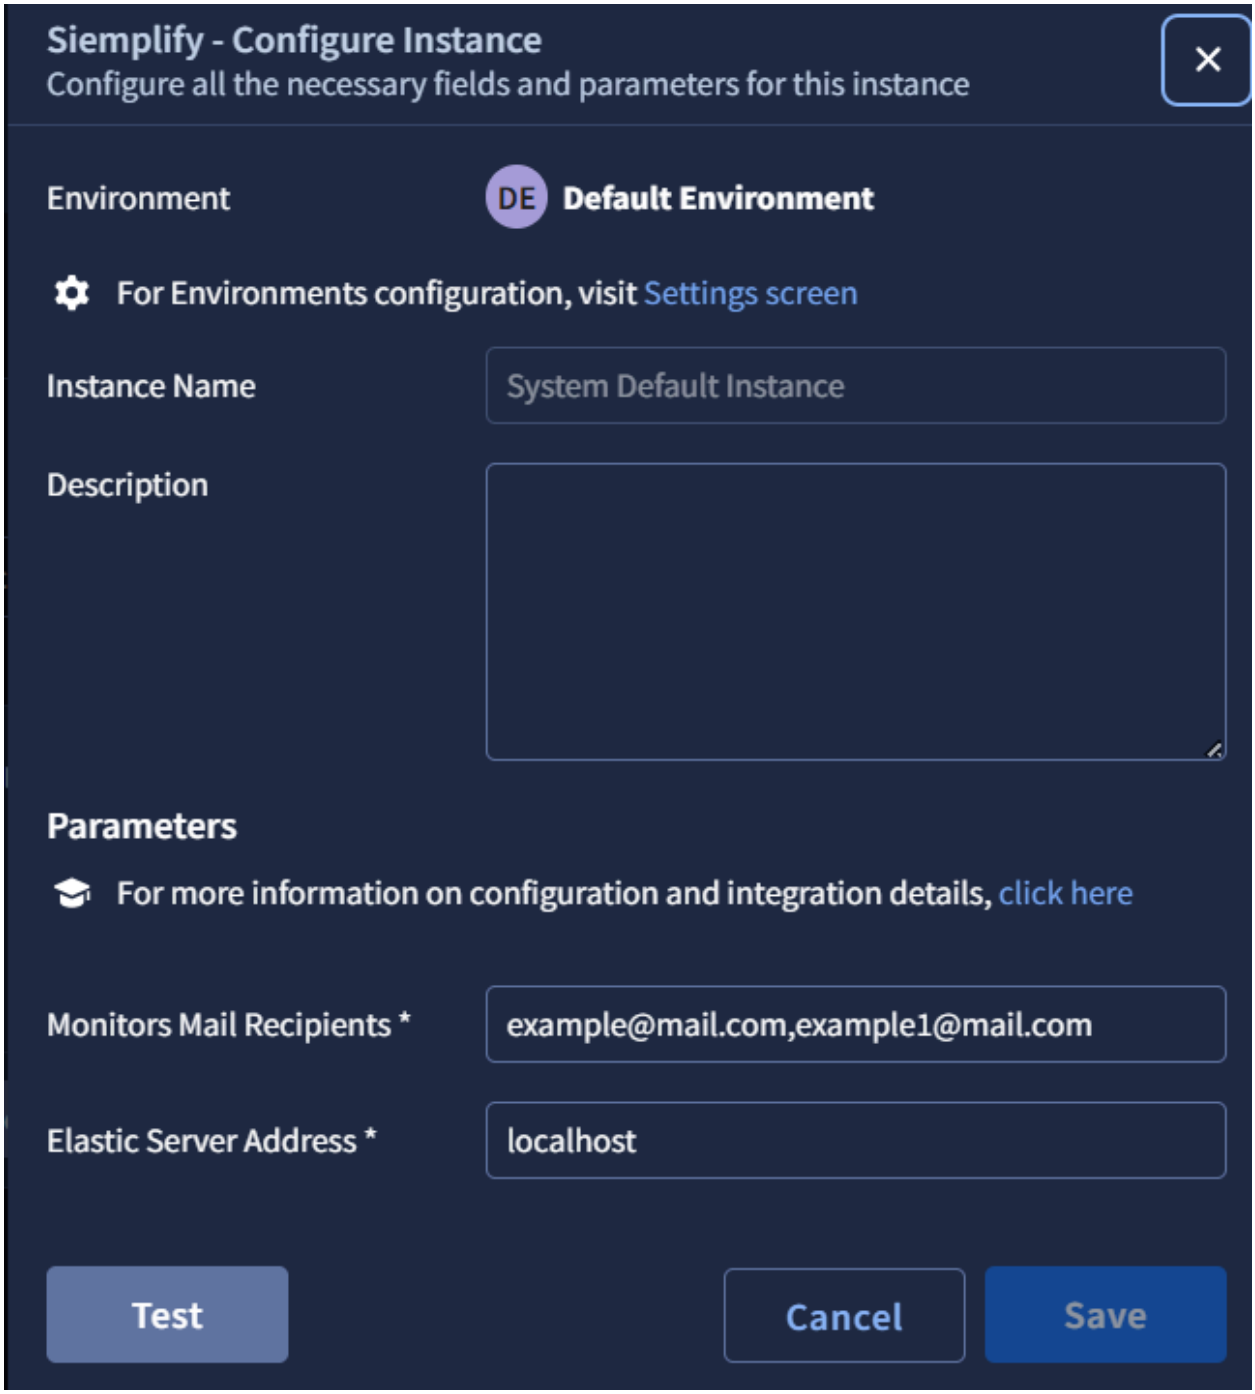

- Search for **Jira** and click on **Install**.

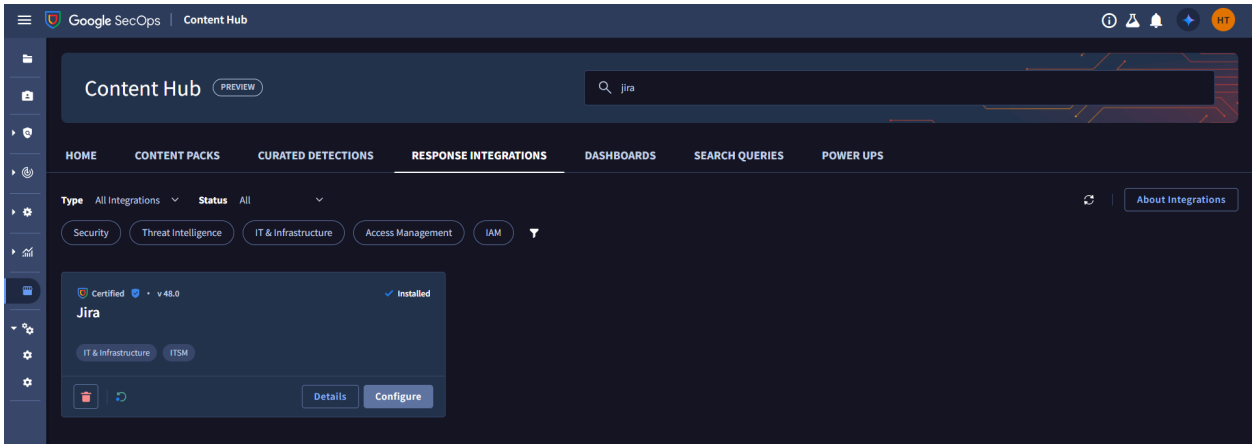

- Configure **Jira**.

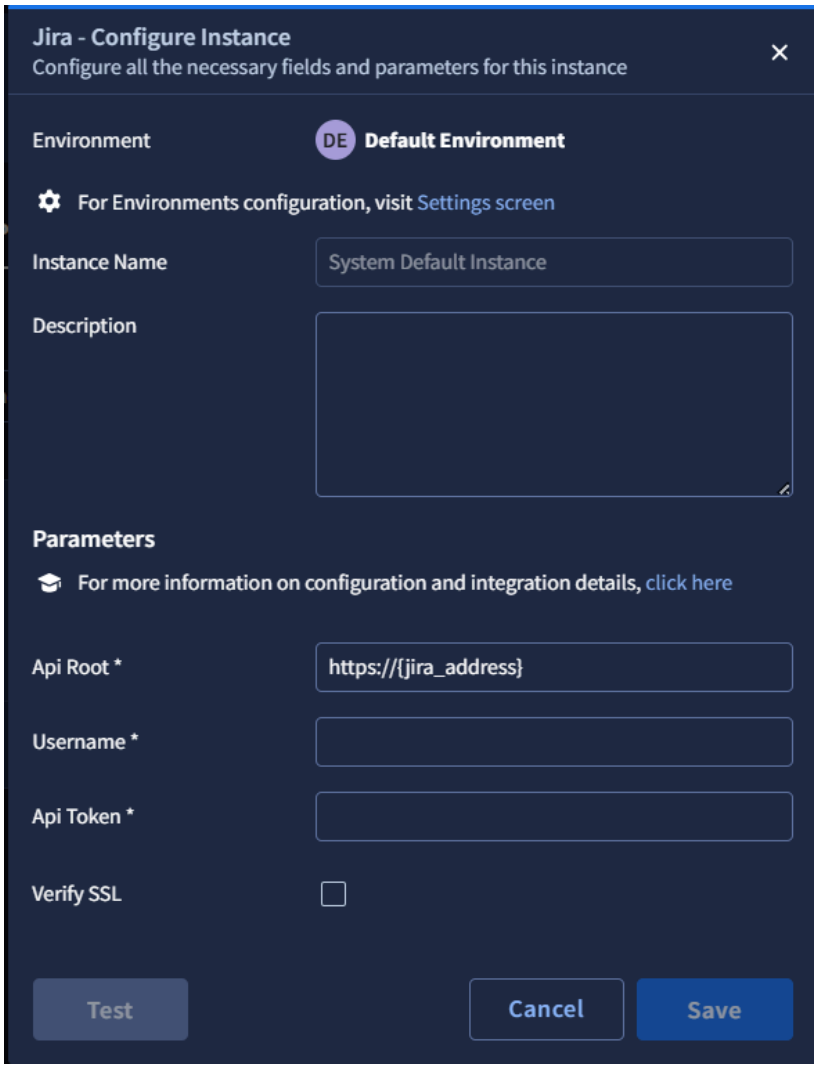

Playbooks provided in the Integration

Add-Remove IOC from Allowed List

This playbook automatically manages IOCs across security controls based on IOC confidence levels. It removes high-confidence IOCs from allowed lists and adds low-risk IOCs to allowed lists.

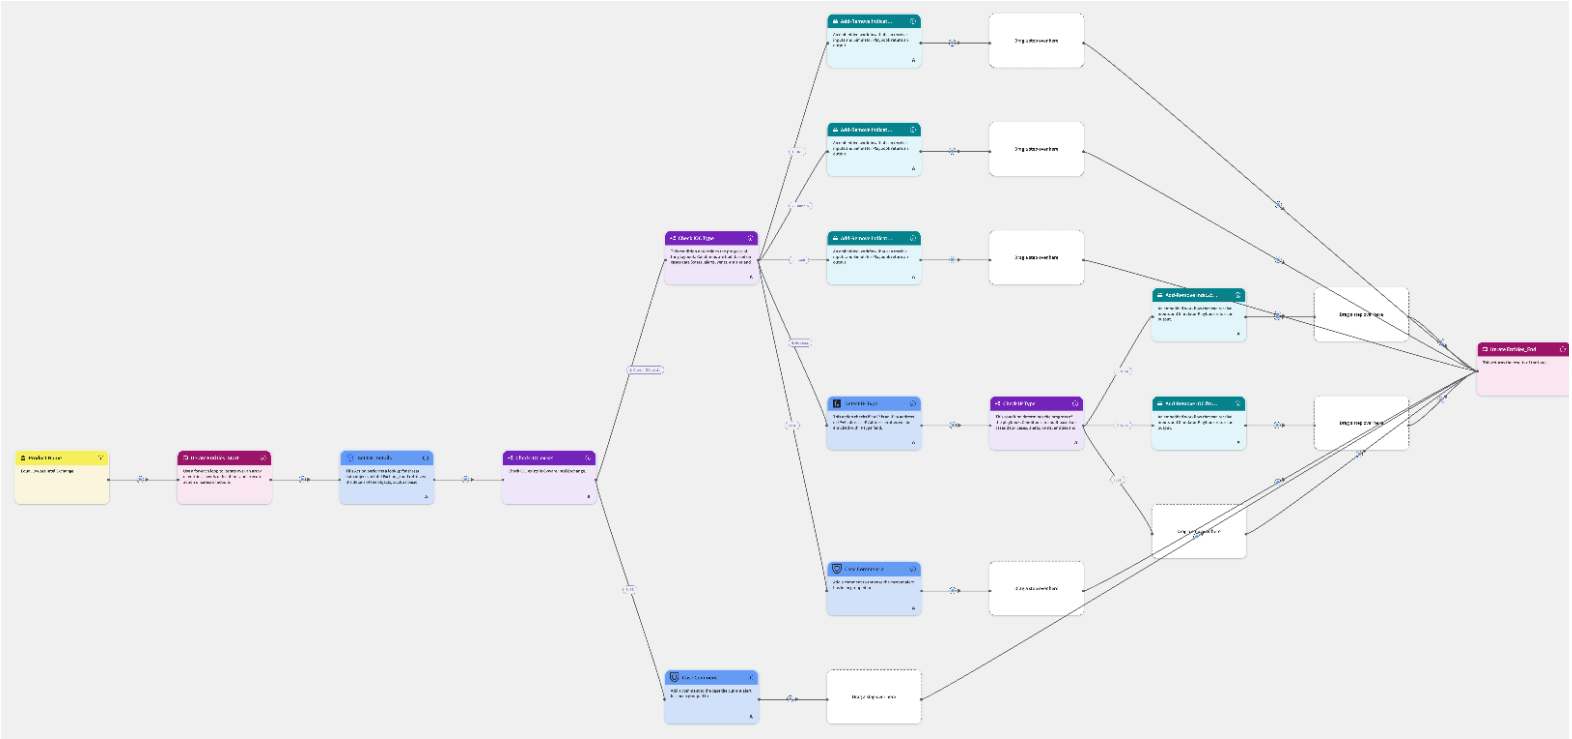

(View image link for details)

Supported IOC Types:

- IPV4
- IPV6
- Domain
- URL
- Email

Usecase:

This playbook automatically removes IOCs present in case of high confidence—including IPs, domains, URLs, and Emails—from allowed lists across security controls when a high-confidence threat is identified with a confidence score greater than 69 and adds it to allowed List if the confidence score is less than 30.

Trigger:

Playbook will be triggered if the case has the product name - Cyware Intel Exchange. And it can be triggered manually also.

Actions in Use:

1. **Get IOC Details**
    - Extracts IOC details including confidence scores from Cyware Intel Exchange using the Bulk IOC endpoint.
2. **Remove IOCs from Allowed list**
    - Based on the IOC value received from the previous action, this action removes the IOC from the allowed list if the confidence score is greater than 69.
3. **Add IOCs to Allowed list**
    - Adds IOCs to the allowed IOC list if the confidence score is less than 30, since the IOC has low risk.

Flow:

- **Add-Remove IOC from Allowed List Block**
    - Collects entity information from the alert and processes IOCs based on confidence scores.
- **Get IOC Details (action)**
    - Retrieves detailed information about IOCs including confidence scores using the Bulk IOC endpoint.
- **Check IOC exists**
    - If IOC is not returned by the bulk IOC endpoint, a comment will be added that IOC does not exist on Cyware Intel Exchange.

    - If an unsupported IOC type is provided, a comment will be added in the case clarifying that the IOC type is not supported for this playbook.
- **Conditional Processing**
    - **High Risk (confidence_score > 69):** Removes IOCs from allowed lists. A comment will be added in case for that.
    - **Medium Risk (30 ≤ confidence_score ≤ 69):** No action is taken. A comment will be added in case that IOC has not been added to the allowed list.
    - **Low Risk (confidence_score < 30):** Adds IOCs to allowed lists. A comment will be added with the following possible outcomes:
        - **Added:** IOC is added to allowed list on Cyware Intel Exchange.
        - **Invalid:** IOC is invalid to add in allowed list on Cyware Intel Exchange.
        - **Already Exists:** IOC already exists in the allowed list on Cyware Intel Exchange.

Create IOCs on Cyware Intel Exchange

This playbook is designed to automatically create IOCs on the Cyware platform that are not already present, ensuring comprehensive threat intelligence coverage.

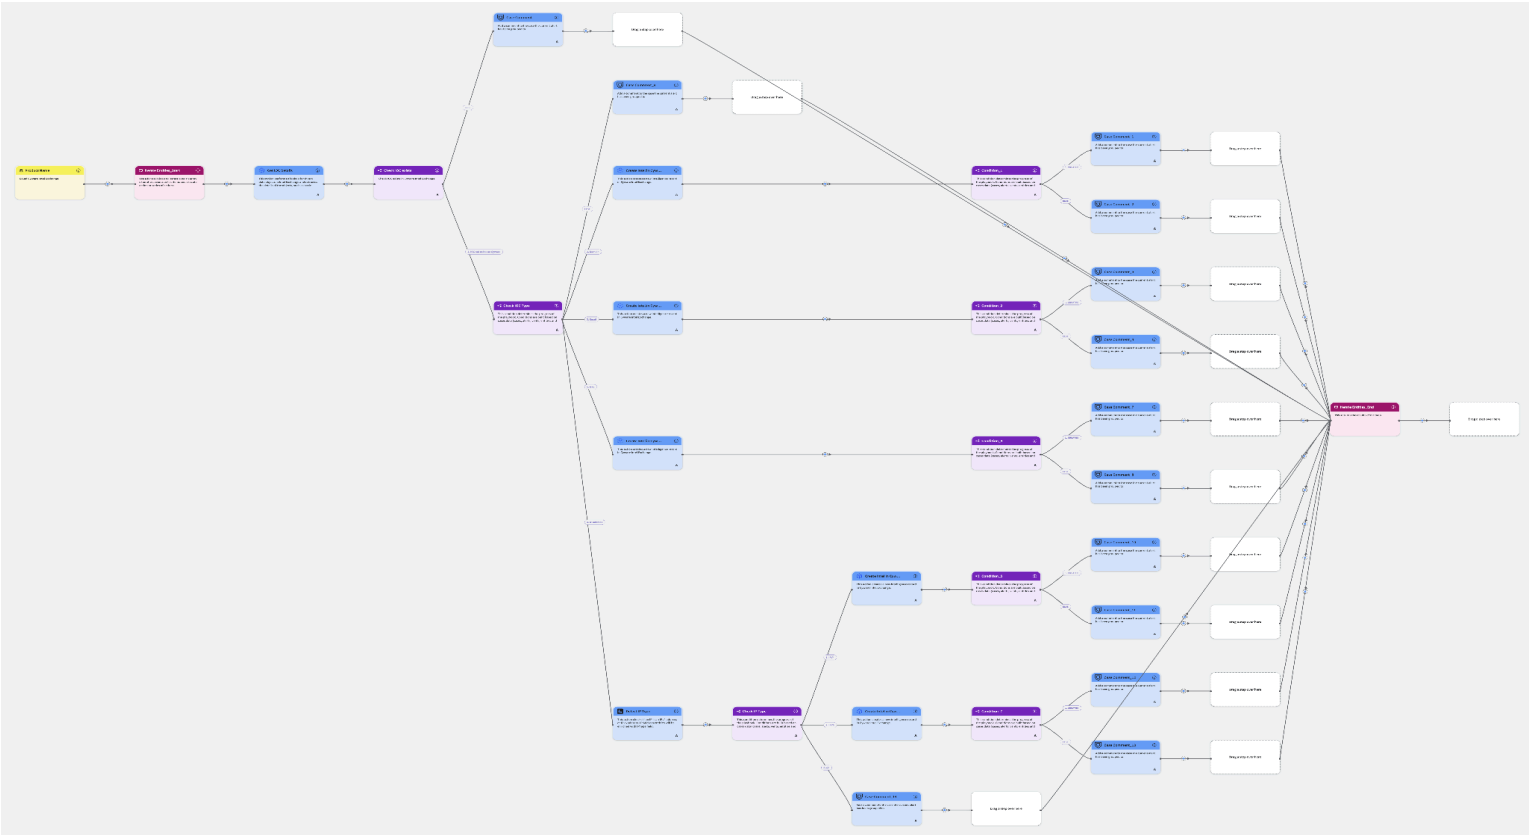

(View image link for details)

Supported IOC Types:

- IPV4
- IPV6
- Domain
- URL
- Email

Usecase:

This playbook creates IOCs not present on the Cyware Intel Exchange platform by checking if the IOC exists or not from the Bulk IOC endpoint response.

Trigger:

Playbook will be triggered if the case has the product name - Cyware Intel Exchange. And it can be triggered manually also.

Actions in Use:

1. **Get IOC Details**
    - Extracts the IOC details from Cyware Intel Exchange for every IOC using the Bulk IOC endpoint.
2. **Create Intel in Cyware Intel Exchange**
    - Creates an IOC on the Cyware Intel Exchange platform.

Flow:

- **Entity Collection**
    - gathers all entities (IPs, domains, URLs, emails) from the case and iterates over each.
- **Get IOC Details (action)**
    - Retrieves detailed information about IOCs including confidence scores using the Bulk IOC endpoint.
- **Check IOC exists**
    - Identifies IOCs that don't exist in the response, meaning they don't exist in Cyware Intel Exchange. So, it will be created. If IOC is returned by the bulk IOC endpoint, a comment will be added that IOC already exists on Cyware Intel Exchange. So, the IOC will not be created.
    - If an unsupported IOC type is provided, a comment will be added in the case clarifying that the IOC type is not supported for this playbook.
- **Create Intel in Cyware Intel Exchange (action)**
    - Creates new IOC entries on the Cyware platform for non-existing IOCs.

Manual IOC - JIRA Issue Creation

This playbook automates the creation of Jira tickets for high-confidence IOCs that require manual review, streamlining the analyst workflow.

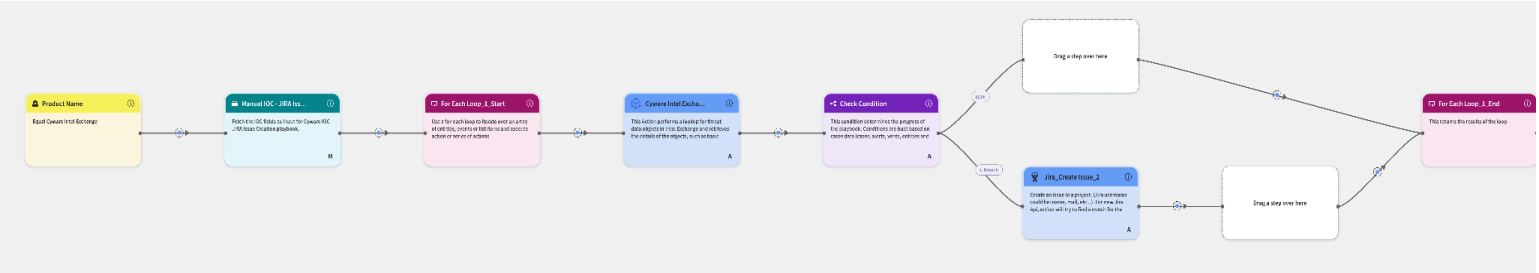

(View image link for details)

Usecase:

This playbook triggers the creation of a Jira ticket for IOCs where manual review is set as true and the confidence score from the Bulk IOC endpoint is greater than 69. And it can be triggered manually also.

Trigger:

Playbook will be triggered if the case has the product name - Cyware Intel Exchange.

Actions in Use:

1. **Get IOC Details**
    - Retrieves IOC fields from Cyware Intel Exchange including the specified "IOC fields" from input along with id, confidence_score, name, and manual_review.
2. **Create Jira Issue**
    - Generates a Jira ticket with the specified project key containing:
        - IOC ID
        - IOC Value

Flow:

- **Manual IOC - JIRA Issue Creation Input Block**
  - Collects entity information and prepares data for Jira ticket creation.
- **Get IOC Details (action)**
  - Retrieves IOC fields from Cyware Intel Exchange including the specified "IOC fields" from input along with id, confidence_score, name, and manual_review.
- **Check Condition**
  - Identifies IOCs where:
    - manual_review = true
    - confidence_score > 69
- **Create Jira Issue (action)**
  - Generates a Jira ticket with the specified project key containing:
    - IOC ID
    - IOC Value

Dynamic Tags Classification on IOCs

This playbook ensures that IOCs are automatically categorized using Cyware tag names in the Cyware Intel Exchange platform to enable structured threat intelligence management and enhanced reporting.

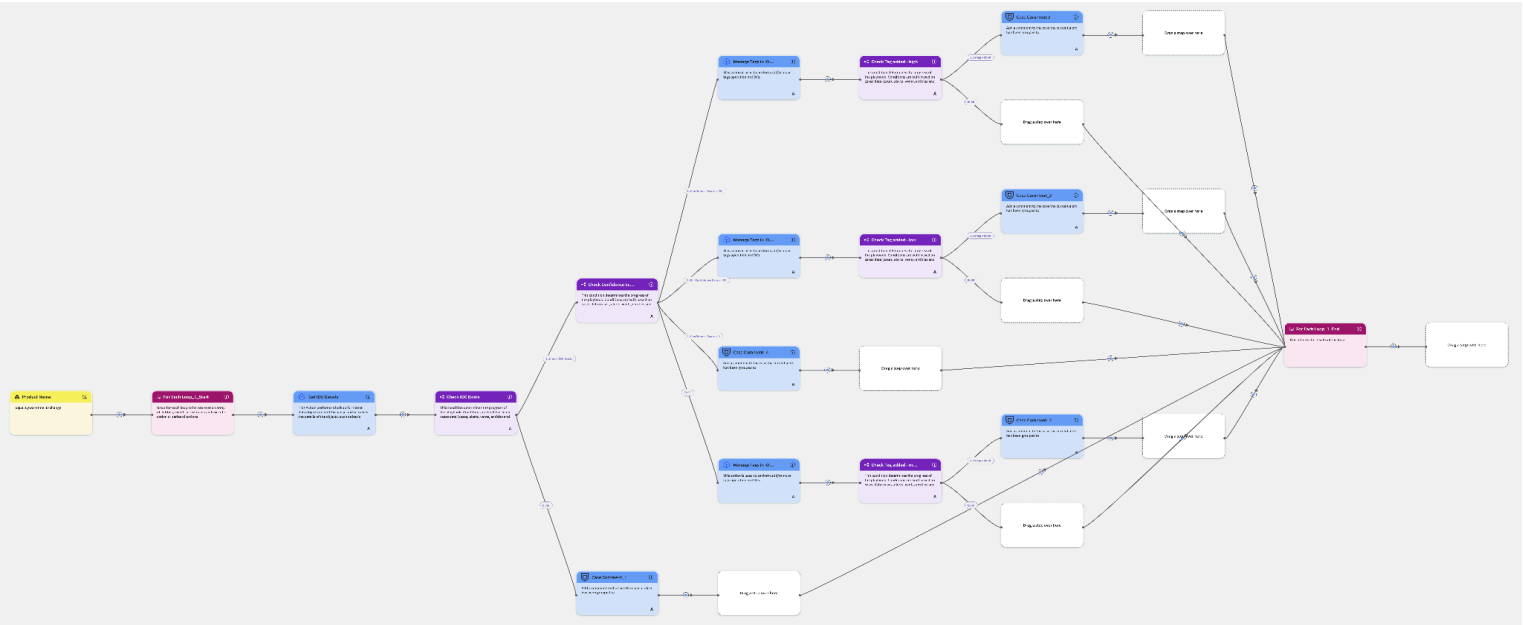

(View image link for details)

Usecase:

This playbook categorizes and tags IOCs based on their confidence scores, enabling better organization and risk-based filtering in Cyware Intel Exchange.

Trigger:

Playbook will be triggered if the case has the product name - Cyware Intel Exchange. And it can be triggered manually also.

Tags according to Confidence Score ranges:

Confidence Score Range	Tag

1-29	Low Risk - Google SecOps
30-69	Medium Risk - Google SecOps
> 69	High Risk - Google SecOps
0	No Tag will be added

Actions in Use:

1. **Get IOC Details**
    - Extracts the IOC details including id and confidence_score from Cyware for every IOC.
2. **Add Tags to IOC**
    - Adds the appropriate risk-based tags to the IOCs based on their confidence scores.

Flow:

- **Entity Collection**
    - gathers all entities from the case.
- **Get IOC Details (action)**
    - Retrieves detailed information about IOCs including confidence scores using the Bulk IOC endpoint. If IOC is not returned by the bulk IOC endpoint, a comment will be added that IOC does not exist on Cyware Intel Exchange.

- **Tag Classification Logic**
    - **Low Risk (1 ≤ confidence_score ≤ 29):** Assigns "Low Risk - Google SecOps" tag
    - **Medium Risk (30 ≤ confidence_score ≤ 69):** Assigns "Medium Risk - Google SecOps" tag
    - **High Risk (confidence_score > 69):** Assigns "High Risk - Google SecOps" tag
    - **No Tag will be added (confidence_score = 0):** No tag will be added
- **Add Tags to IOC (action)**
    - Applies the classified tags to IOCs in Cyware Intel Exchange.

Blocks

A block is a re-usable set of actions and conditions that can be used in multiple playbooks. This acts as a wrapper for performing some set of actions that are often performed in multiple playbooks.

Add-Remove IOC from Allowed List Block

This block manages the logic for adding or removing IOCs from allowed lists based on confidence scores.

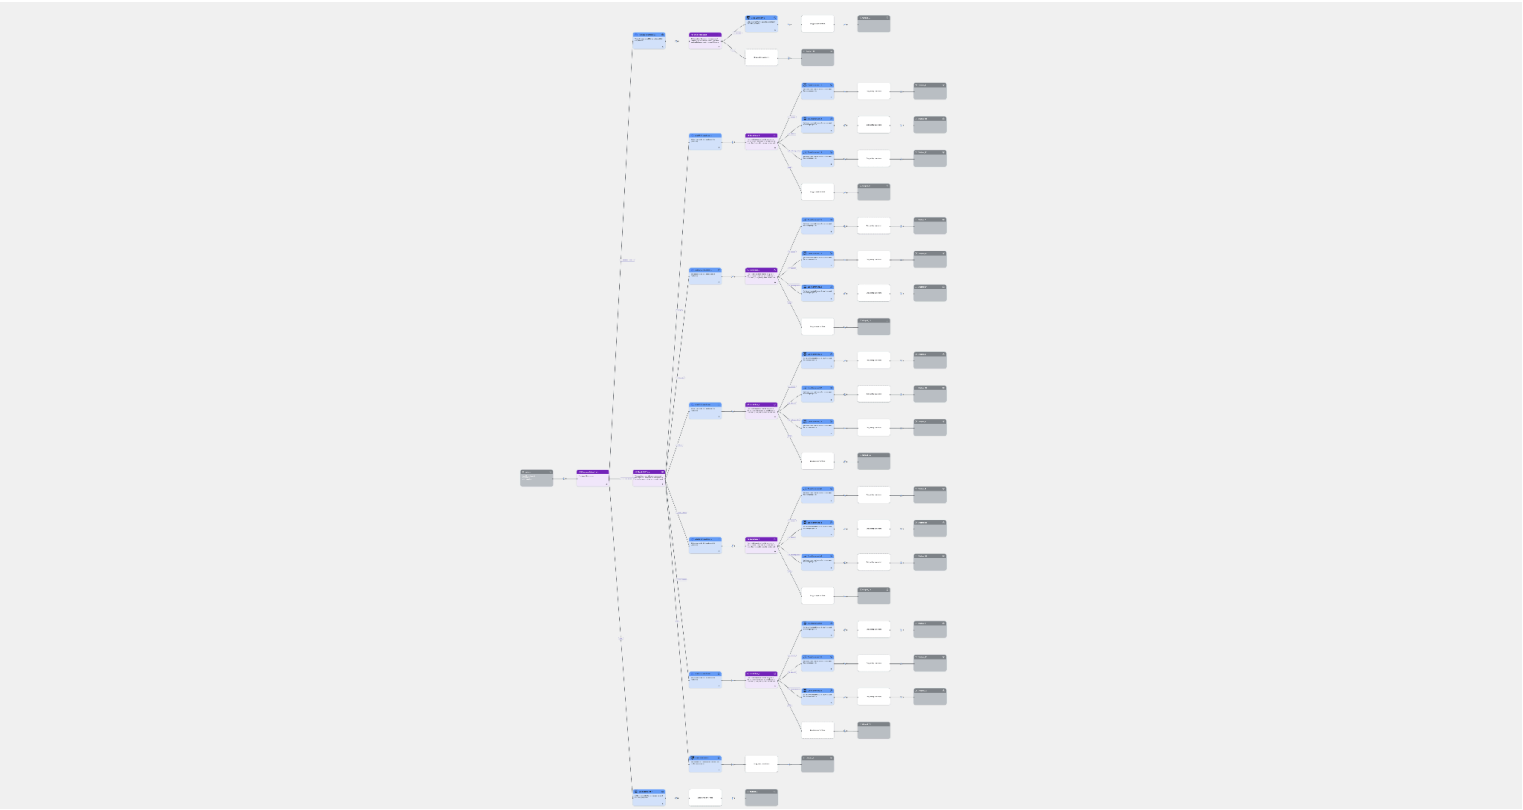

(View image link for details)

Input:

- IOC Value
- IOC Type (IPV4, IPV6, Domain, URL, Email)
- Confidence score

Flow:

- **Check Confidence Score**
    - **Conditional Processing**
        - **High Risk (confidence_score > 69):** Removes IOCs from allowed lists. A comment will be added in case for that.
        - **Medium Risk (30 ≤ confidence_score ≤ 69):** No action is taken. A comment will be added in case that IOC has not been added to the allowed list.
        - **Low Risk (confidence_score < 30):** Adds IOCs to allowed lists. A comment will be added with the following possible outcomes:
            - **Added:** IOC is added to allowed list on Cyware Intel Exchange.
            - **Invalid:** IOC is invalid to add in allowed list on Cyware Intel Exchange.
            - **Already Exists:** IOC already exists in the allowed list on Cyware Intel Exchange.
- **Remove IOCs from Allowed list (action)**
    - Based on the IOC value received from the previous action, this action removes the IOC from the allowed list if the confidence score is greater than 69.
- **Add IOCs to Allowed list (action)**
    - Adds IOCs to the allowed IOC list if the confidence score is less than 30, since the IOC has low risk.

Output:

- A comment will be added in Case.

Manual IOC - JIRA Issue Creation Input Block

This block collects and prepares input data for creating Jira tickets for IOCs requiring manual review.

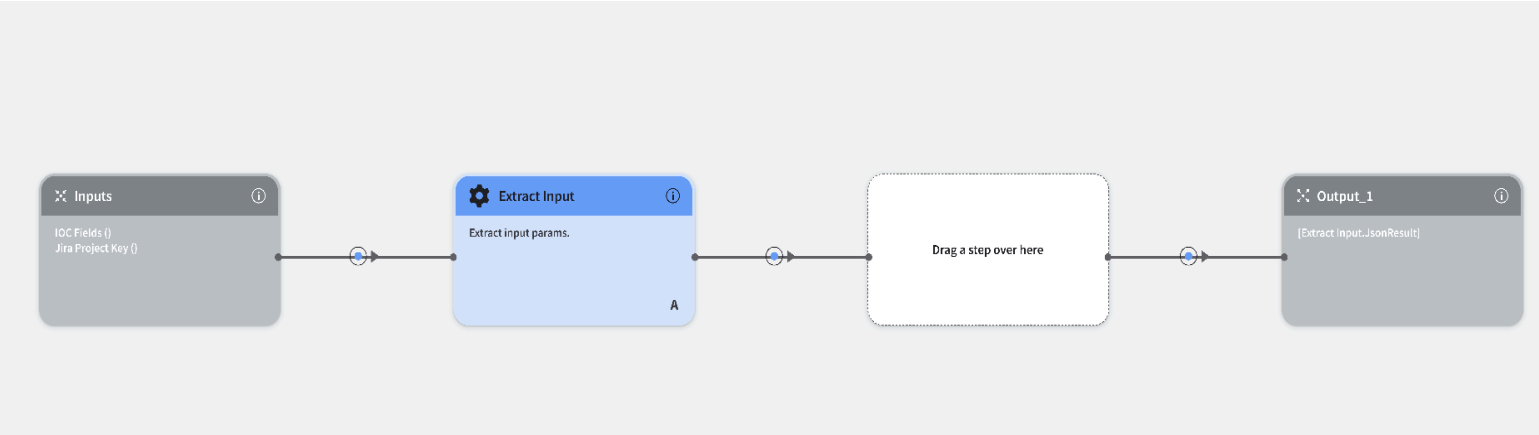

(View image link for details)

Input:

- **IOC fields:** IOC fields to retrieve from get IOC details. By default it will fetch id, confidence_score, name, manual_review.
- **Jira Project Key:** Project key to create on Jira.

Flow:

- **Extract Input Params (action)**
    - This action collects the input values and converts it to JSON, which is then used in other actions.

Output:

- Returns the generated JSON output containing all the input values.

Uninstalling the Integration

To uninstall the integration, the user must perform the following steps:

1. From the SecOps SOAR platform, navigate to the **Marketplace** section.
2. Search for the **CywareIntelExchange** Integration.
3. In the bottom left of the CywareIntelExchange Integration, click on the **Bin** icon to uninstall the integration.
4. Confirmation will be requested from the user to uninstall the integration.

Limitations

- For Add-Remove IOC from Allowed List and Create IOCs on Cyware Intel Exchange playbooks, there are limited IOC types to support IPV4, IPV6, Domain, URL and Email due to Google SecOps limitation. While executing the playbooks, for unsupported IOC type entities, a case comment will be added indicating the limitation.

Known Behaviors

- In case of any failures when running any playbook, user can debug the same by running the playbook in the Simulator Mode. For more details, please refer to this guide: Google SecOps playbooks - Simulator.
- The script timeout might not work as expected. It has been observed that when specifying the timeout to 10 seconds, the action script would timeout after around 39 seconds. The platform adds ~29 seconds of operation. This behavior differs for every SecOps SOAR instance.
  Reference: Solved: Facing inconsistencies in Script Timeout for Actio... - Google Cloud Community

Troubleshooting

Case 1: PythonProcess Has timed out.

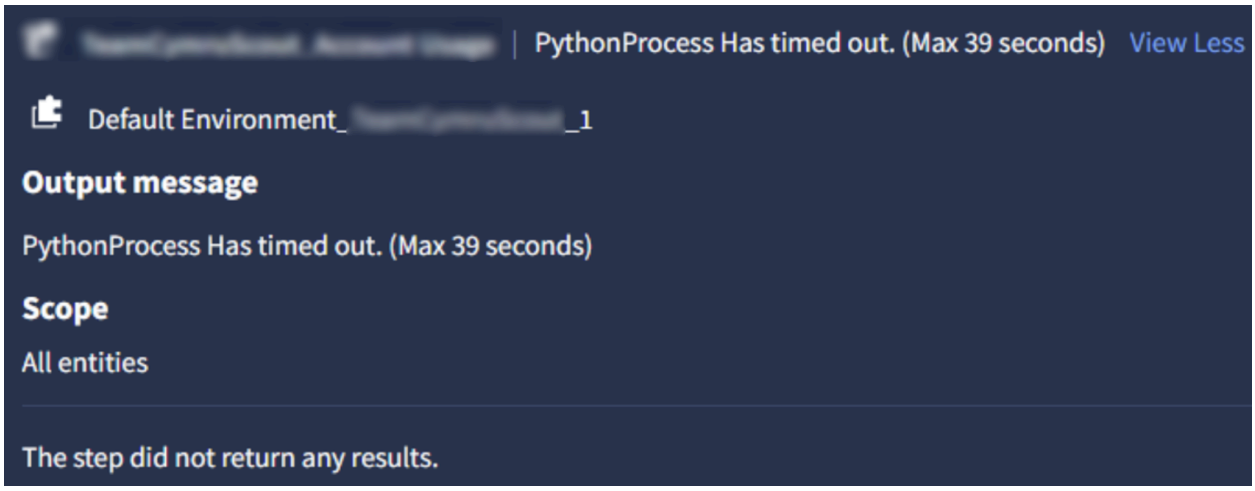

Solution :

1. Increase the script timeout from the Timeout Configuration of an action
    a. From the Sidebar, navigate to **Response** > **IDE**

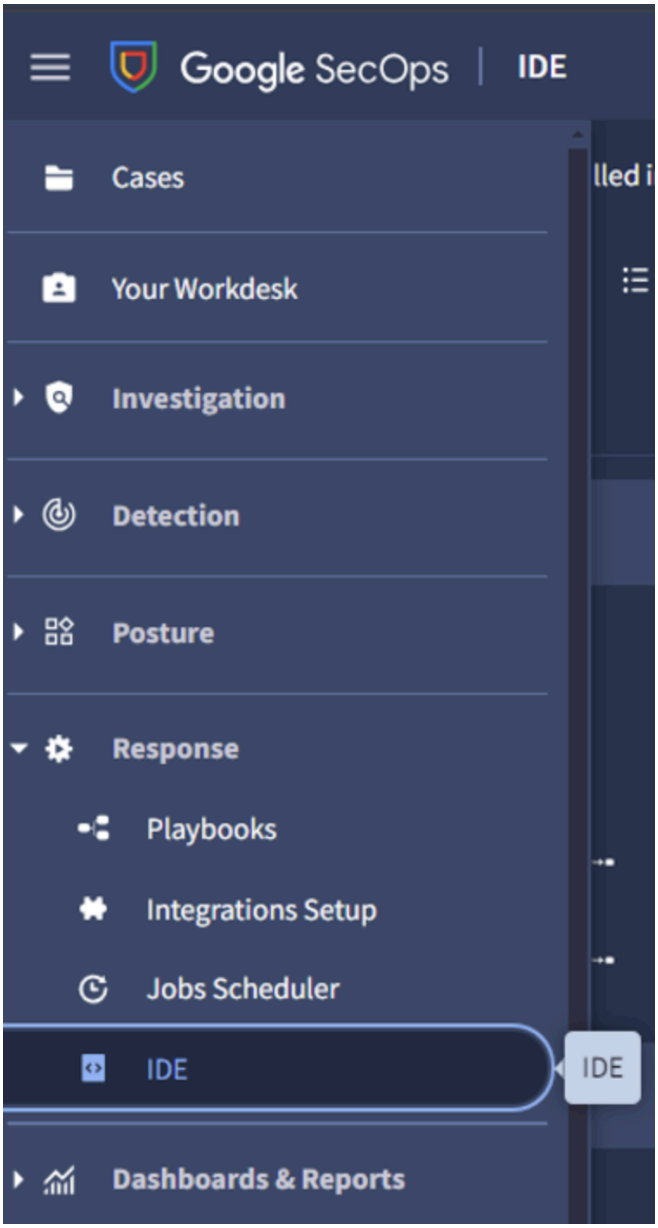

b. Search for the action script and select it. Users will be able to see the codebase of the action, and on the right side, there should be an input field named Timeout Configuration under the details tab. Update the value of Script Timeout based on user's requirement, and Save the action

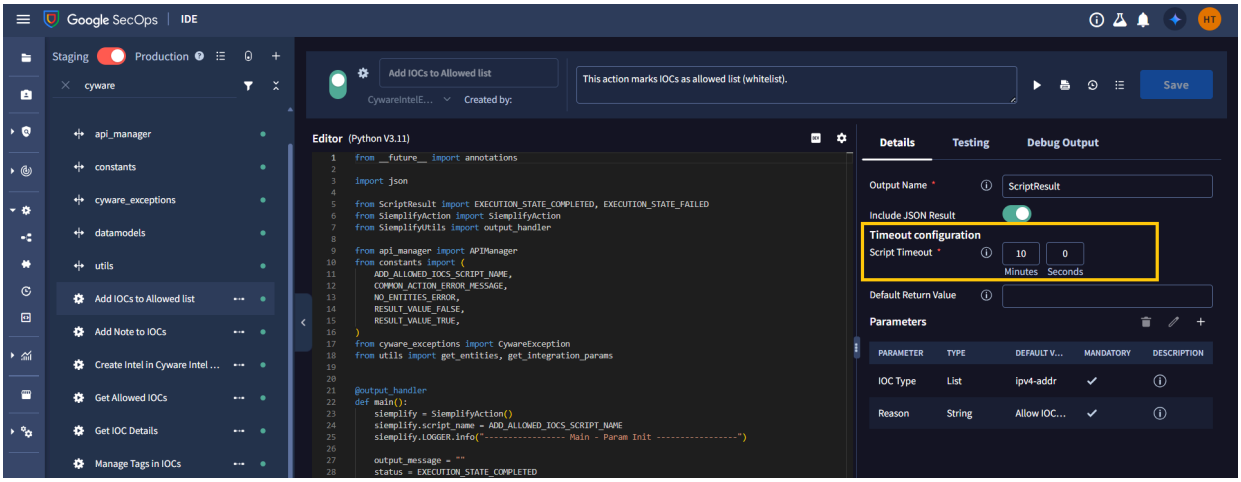

Google SecOps IDE - Action Editor

2. Another way to increase the execution speed of the action is to tweak the query parameters of the API call by reducing the time frame to search and retrieve only filtered subsets instead of all results

Case 2: Unknown error running Action.

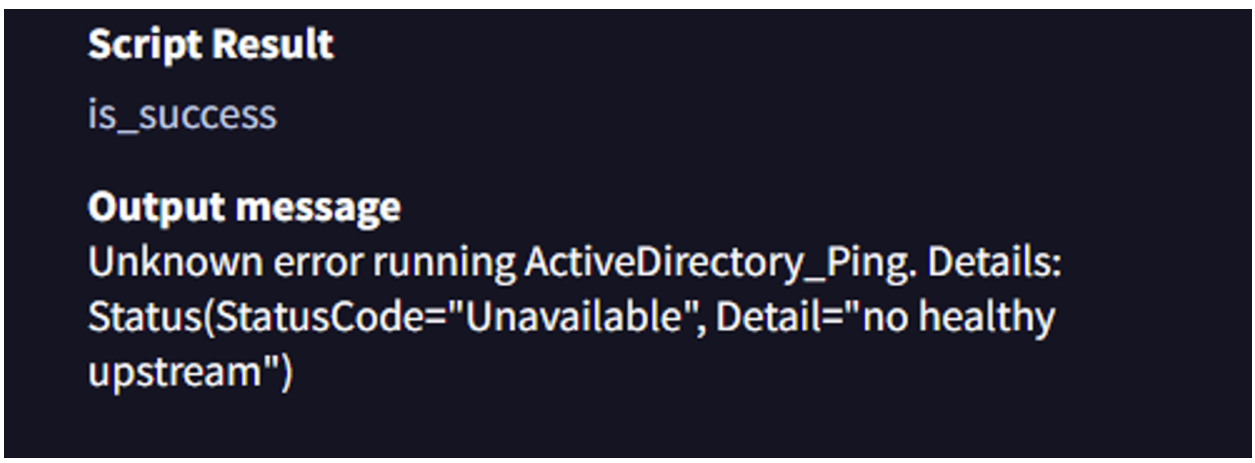

Google SecOps IDE - Running Action

Solution:

The "**no healthy upstream**" error indicates an internal system issue. The most common cause is that all backend servers are currently unavailable or unresponsive. To resolve this problem, users need to contact their system administrator for assistance.

References

- Cyware Intel Exchange Documentation
- Google SecOps Playbooks Documentation

For questions or support, please contact your Cyware or Google SecOps administrator.