


Time-conditioned gated forecaster

the per-sample gate weights $g(t)$ are the explanation

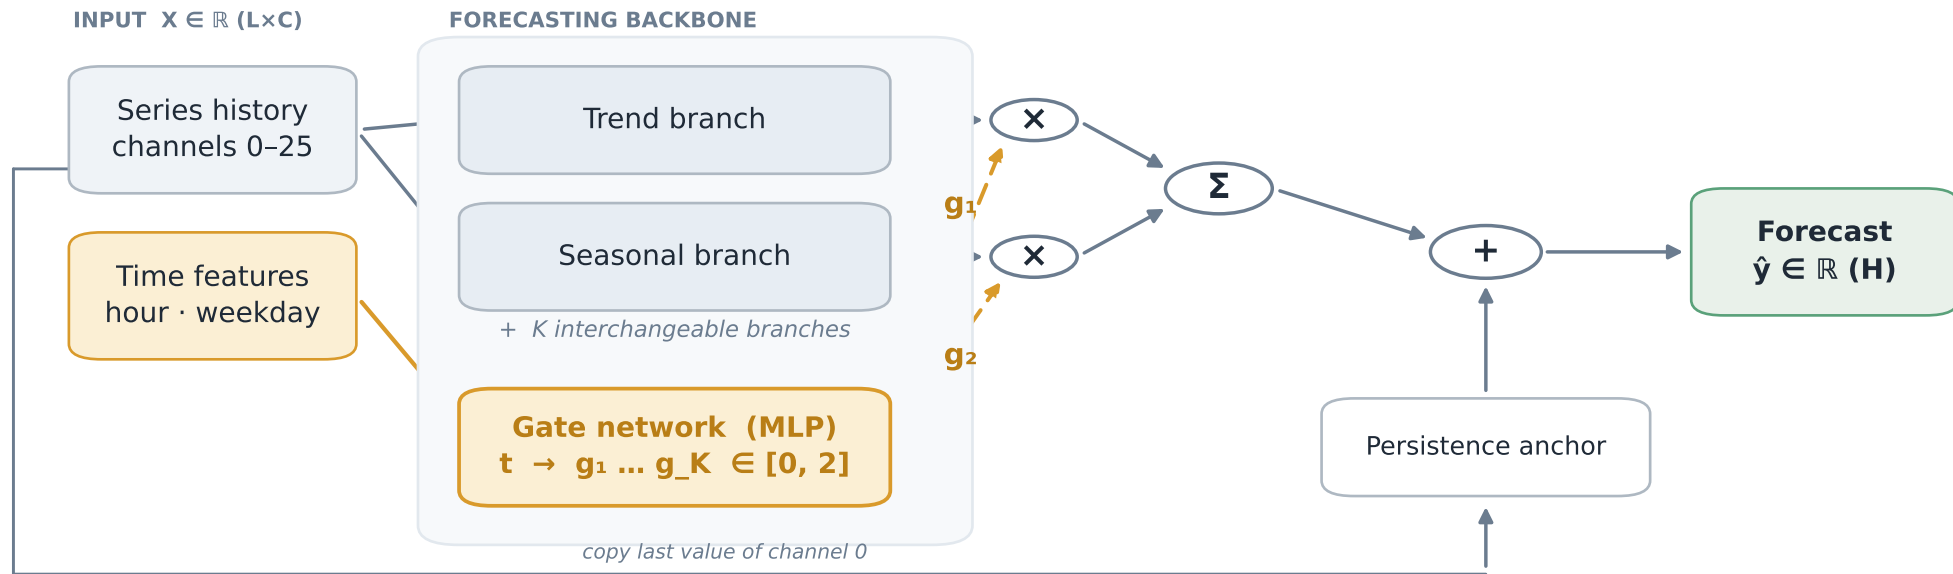

$g(t)$ depends only on the time inputs and is computed per sample—plotting it shows which pattern the model trusts at each hour. The same gate plugs into different branch families (DLinear, DPMixer), so it is a reusable mechanism rather than a single-model trick.