
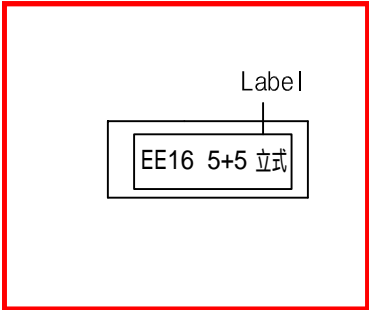



1		2		3		4	
				REVISIONS			
ZONE		REV.		DESCRIPTION		DATE	

1.OUTLINE DIMENSION: (UNITS:mm)

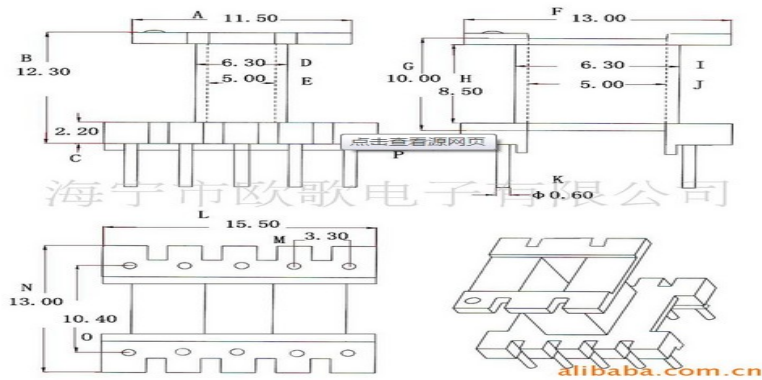

NOTE: 1. CUT OFF PIN 2.7.8.9

2.SCHEMATIC AND WINDING: 生产时一定要和这个图的同名端对应

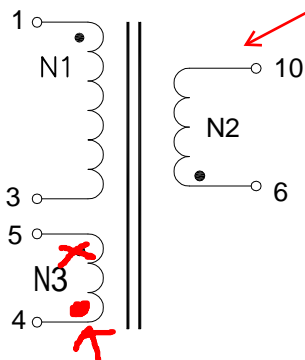


这里是同名端

N3	4--5	2uewΦ0.15 mm × 1P × 20 Ts	均匀散绕
N2	6--10	2uew Φ0.45mm × 2P × 8 Ts	密绕1层
N1	1--3	2uewΦ0.25 mm × 1P × 120 Ts	密绕4层

4. ELECTRICAL CHARACTERISTICS:

Inductance: 1--3 1.0 mH ± 7% Test condition 1KHz/0.25V
 Leakage inductance: 1--3 ≤ 100uH Test condition 10KHz/0.25V (SHORT SEC WINDING)
 High Voltage Test:
 Insulation Resistance:

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	DO NOT SCALE DRAWING			TITLE: EE16 5+5变压器					MATERIAL: ROHS		
		NAME	DATE	5V2A							
	DRAWN		2016.07.29								
	CHK'D										
	APPV'D			SCALE	SIZE	UNIT		DRAWING NO.			
				FULL	A4	mm	THIRD ANGLE PROJECTION	CLIENT NO.		ORDER NO.	
								PART NO.		REV NO. A	