
# Revision

## ① What do you remember ?


Ragas → wednesday , langgraph

query transformations.




## ② Langchain vs langgraph ?

→ multi agents

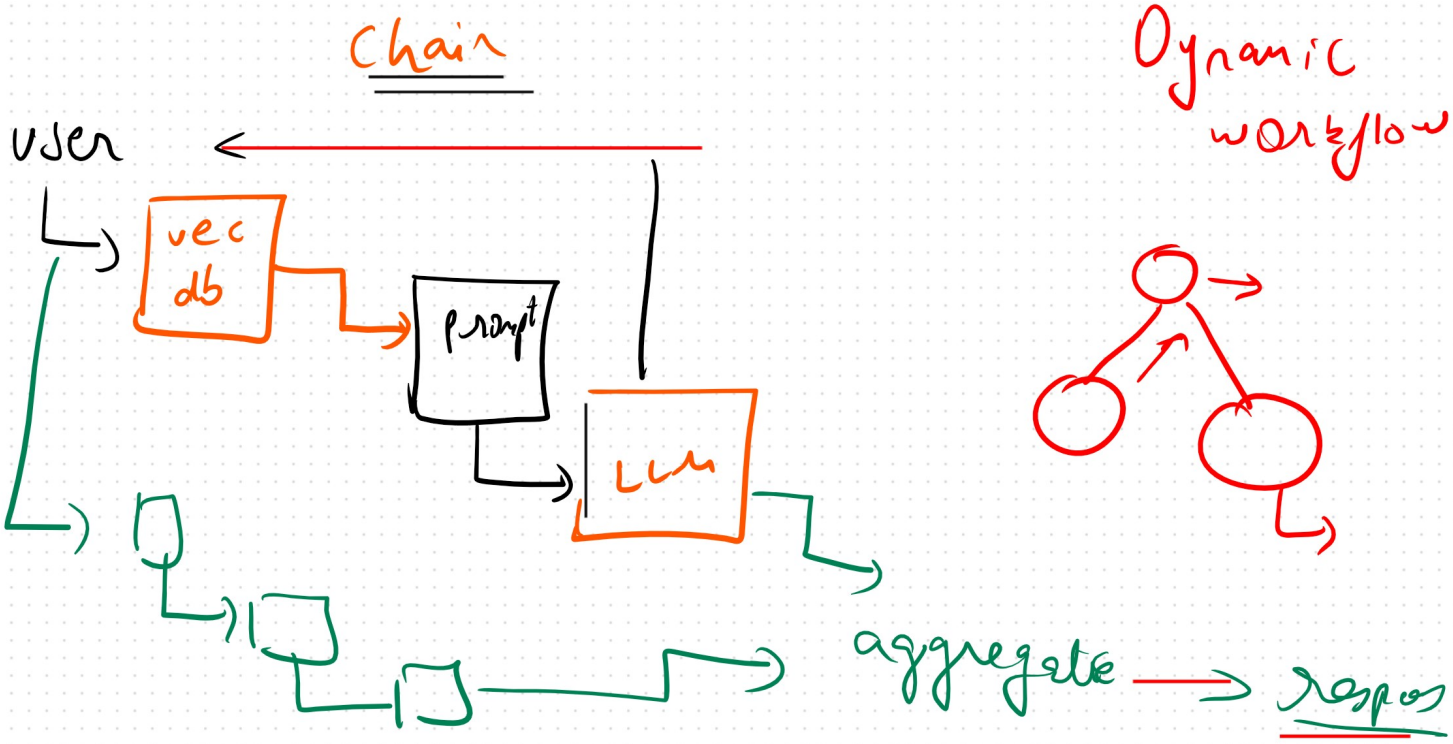


# ③ How do you evaluate a RAG ?


golden ?

Experiment ? 3


Datasets ?

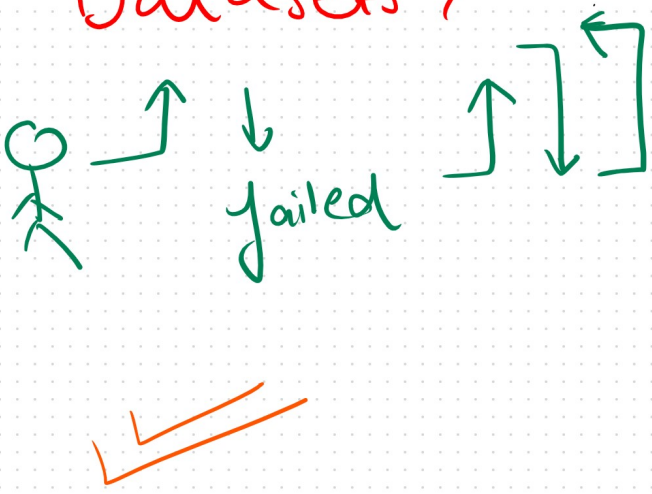


Metrics

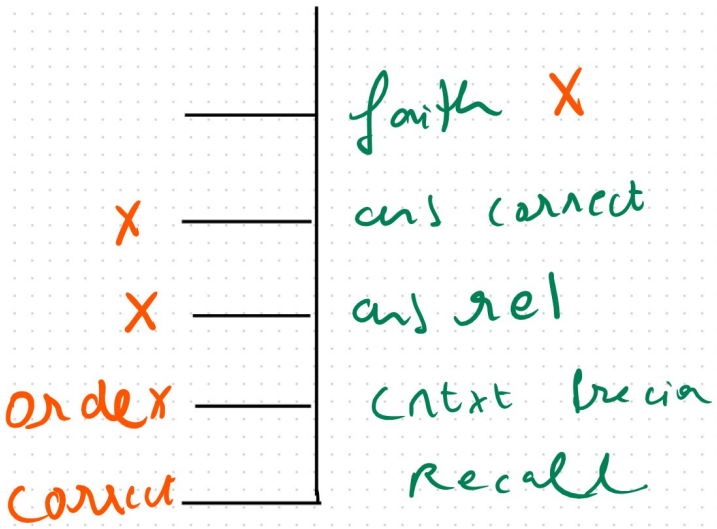



## Lets Langgraph



**design AI agent workflows using a graph-based structure instead of a straight-line sequence**

nodes

edges

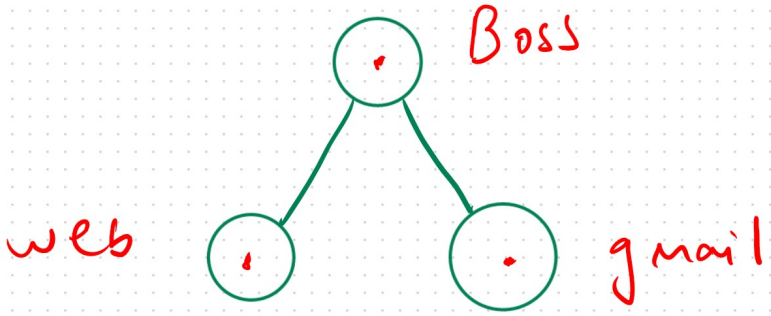

Social network

↳ map friends




Notes :- github → notion

Diversh

↳ qT → — — —


↳


↳

ppt

State :-

Pizza

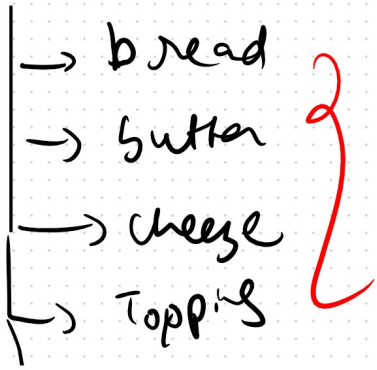


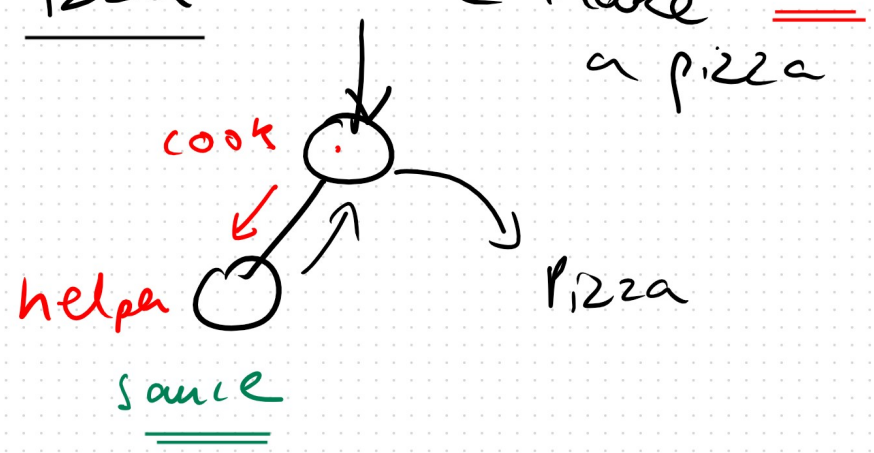↳ Same ✓


State

↳ Stateful agent.

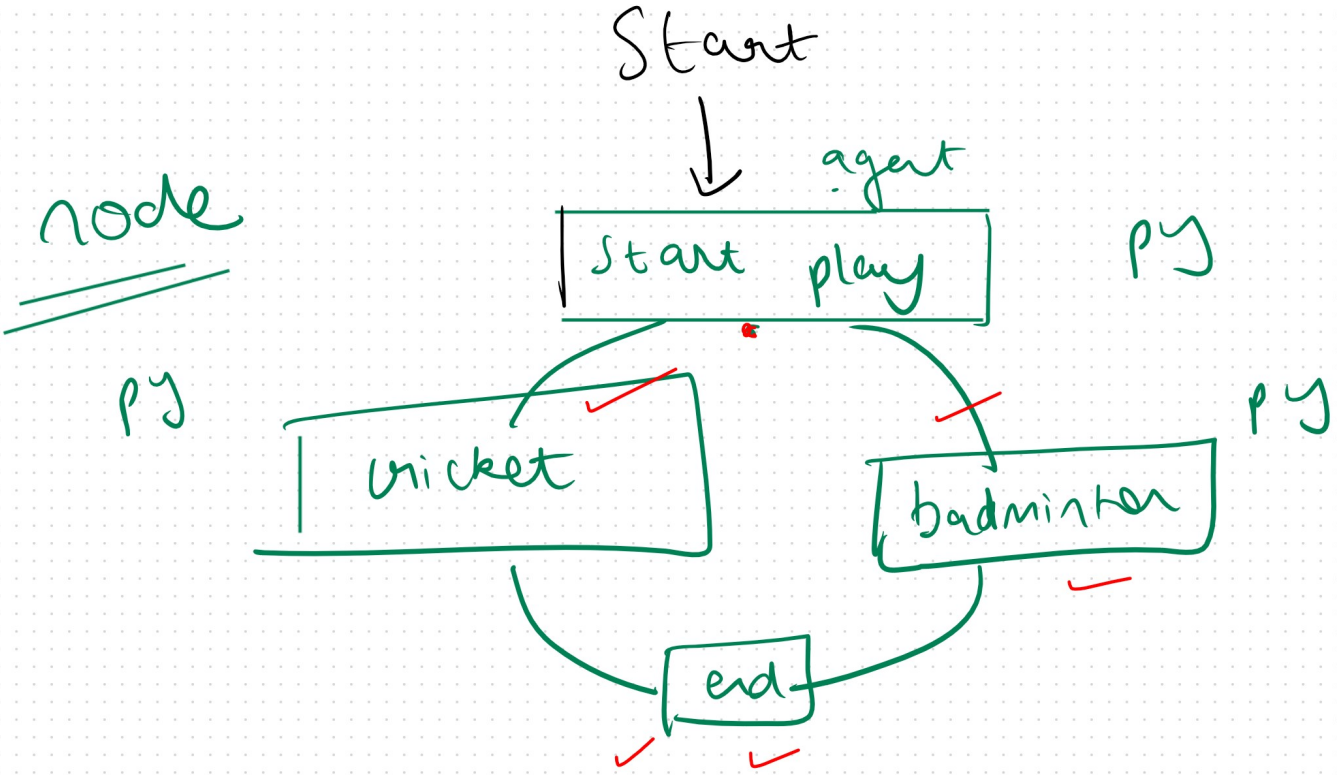


Conditional edge

↳ Routing

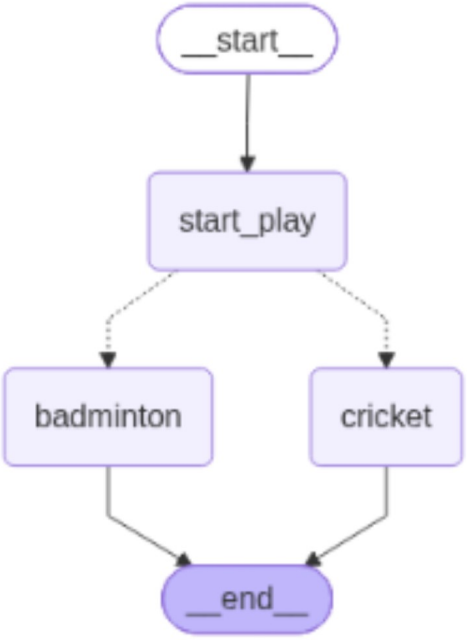



```
graph_builder.invoke(
    {
        "graph_info":"what to play today"
    }
)
```

```
from typing_extensions imp
class State(TypedDict):
    graph_info:str
```

```
{'graph_info': 'what to play today I am planning to play
```

```
{'graph_info': 'what to play today I am planning to play Cricket'}
```

# Agentic workflow

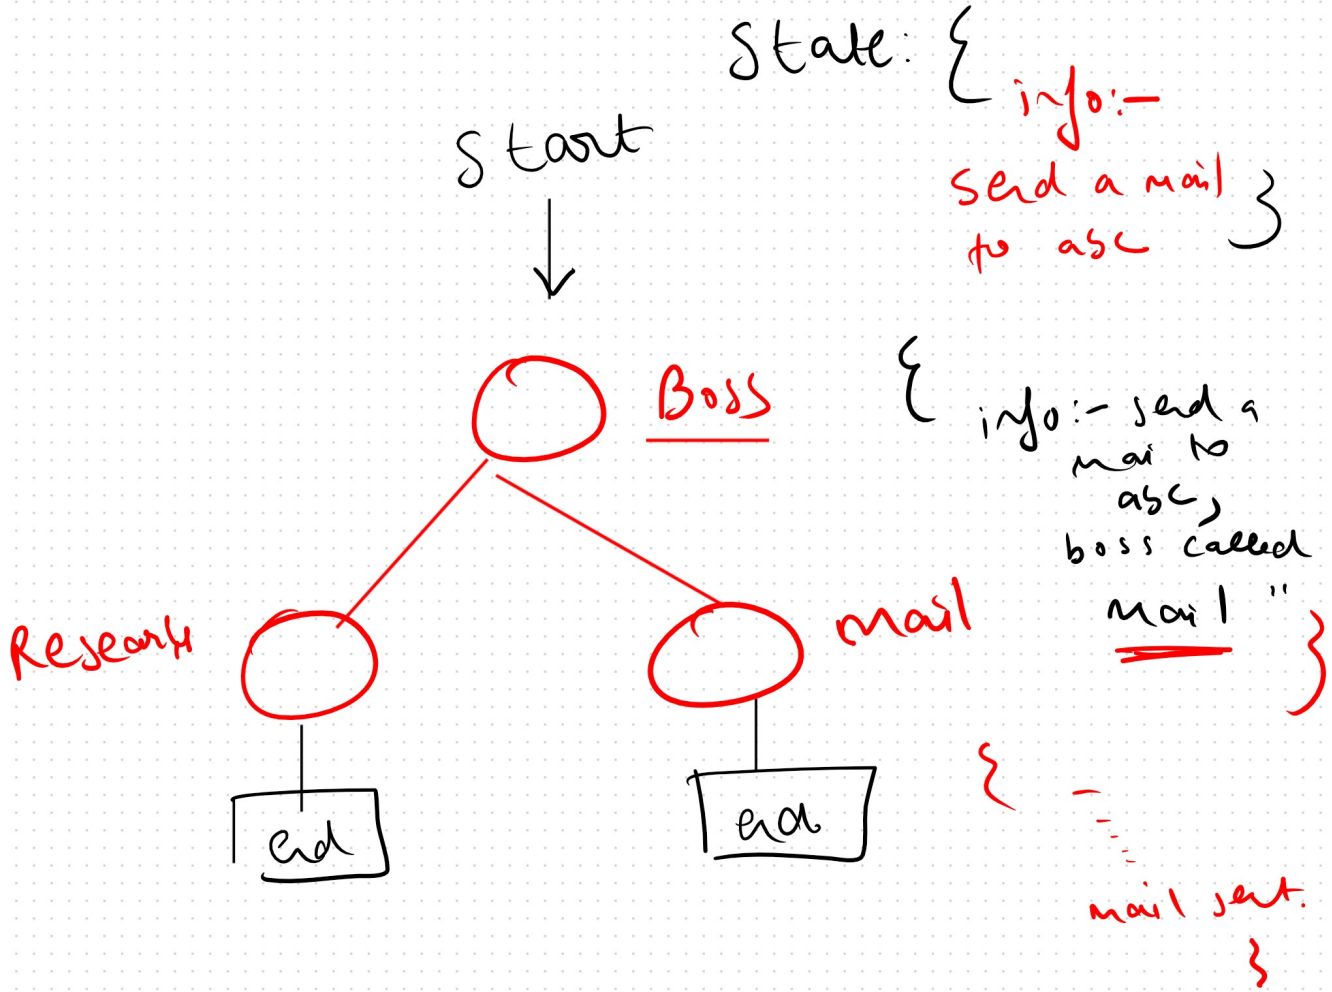

4 msg :- Ai → Response
sys → prompt
user → question
Tool → add,

dict :- state { append message


messages :- [ user :- —
ai : —

(+) - add_message ]

3

memory :- list of turns.

[ user :-
ai :- sys, tool. ]

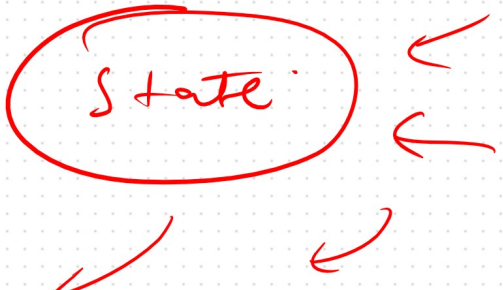


[ langmem ] [ ]