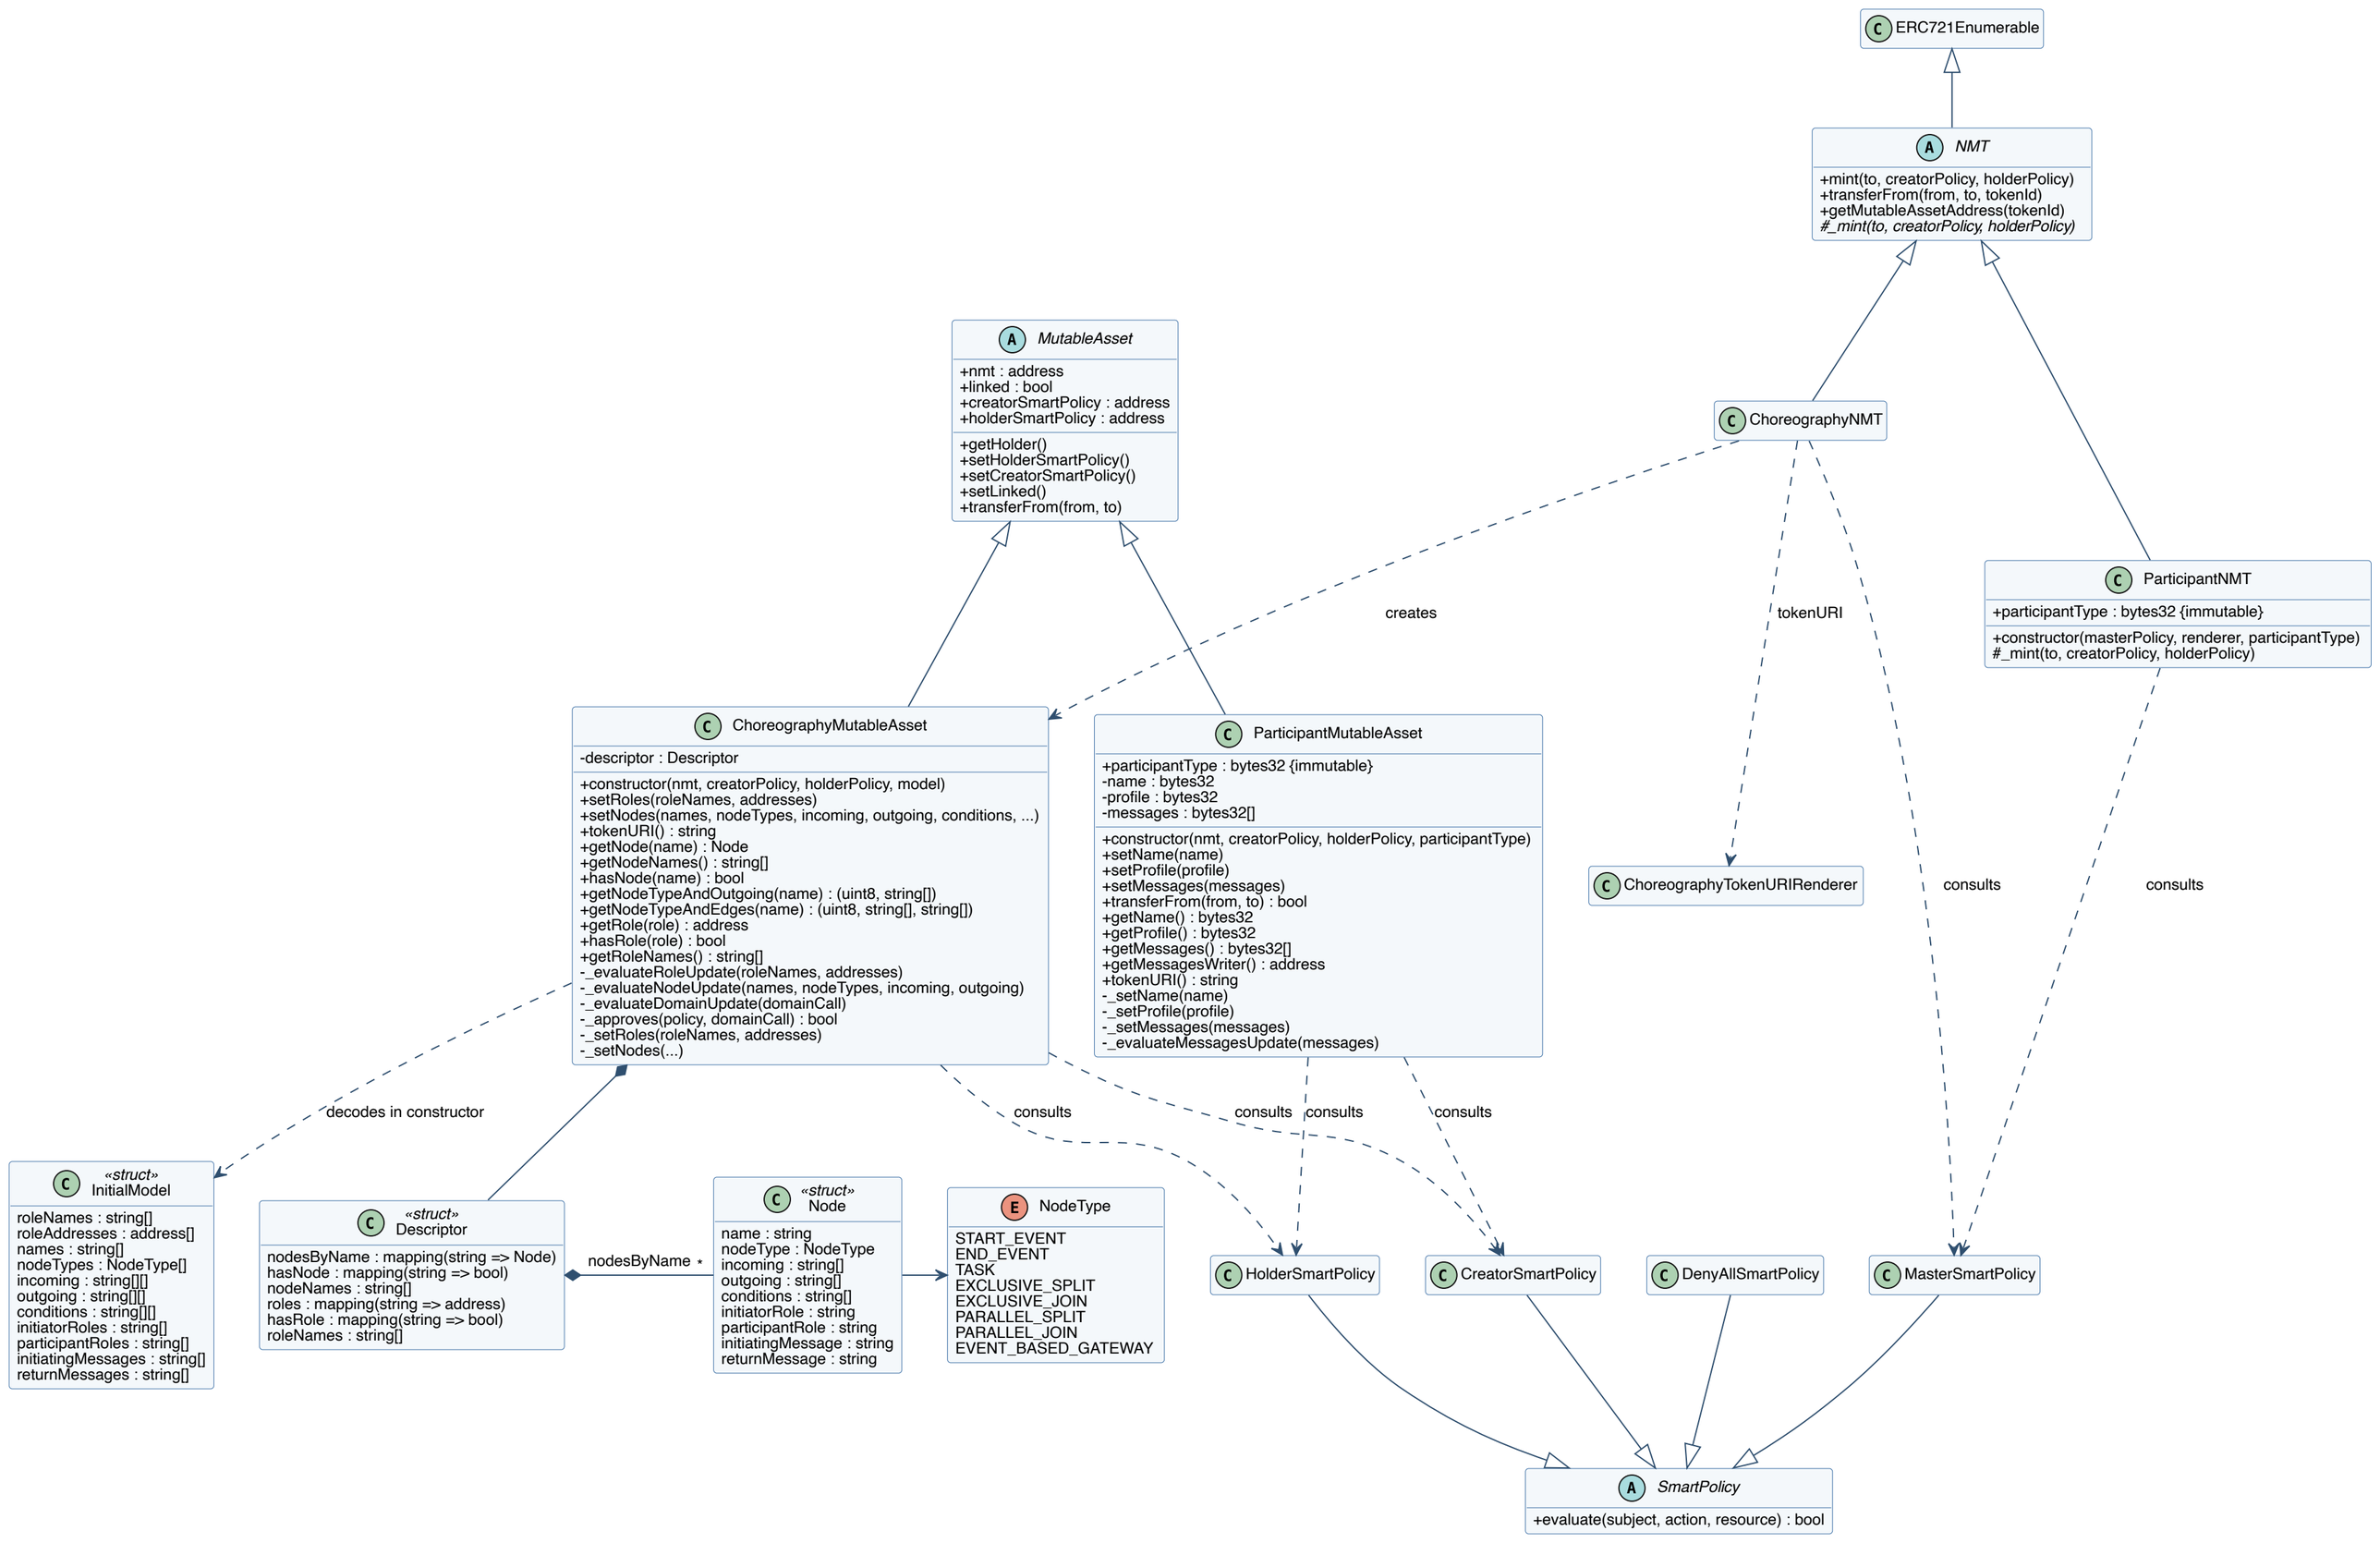
ERC721Enumerable
NMT
+mint(to, creatorPolicy, holderPolicy)
+transferFrom(from, to, tokenId)
+getMutableAssetAddress(tokenId)
#_mint(to, creatorPolicy, holderPolicy)
MutableAsset
+nmt : address
+linked : bool
+creatorSmartPolicy : address
+holderSmartPolicy : address
+getHolder()
+setHolderSmartPolicy()
+setCreatorSmartPolicy()
+setLinked()
+transferFrom(from, to)
ChoreographyNMT
creates
tokenURI
ParticipantNMT
+participantType : bytes32 {immutable}
+constructor(masterPolicy, renderer, participantType)
#_mint(to, creatorPolicy, holderPolicy)
ChoreographyMutableAsset
-descriptor : Descriptor
+constructor(nmt, creatorPolicy, holderPolicy, model)
+setRoles(roleNames, addresses)
+setNodes(names, nodeTypes, incoming, outgoing, conditions, ...)
+tokenURI() : string
+getNode(name) : Node
+getNodeNames() : string[]
+hasNode(name) : bool
+getNodeTypeAndOutgoing(name) : (uint8, string[])
+getNodeTypeAndEdges(name) : (uint8, string[], string[])
+getRole(role) : address
+hasRole(role) : bool
+getRoleNames() : string[]
-_evaluateRoleUpdate(roleNames, addresses)
-_evaluateNodeUpdate(names, nodeTypes, incoming, outgoing)
-_evaluateDomainUpdate(domainCall)
-_approves(policy, domainCall) : bool
-_setRoles(roleNames, addresses)
-_setNodes(...)
ParticipantMutableAsset
+participantType : bytes32 {immutable}
-name : bytes32
-profile : bytes32
-messages : bytes32[]
+constructor(nmt, creatorPolicy, holderPolicy, participantType)
+setName(name)
+setProfile(profile)
+setMessages(messages)
+transferFrom(from, to) : bool
+getName() : bytes32
+getProfile() : bytes32
+getMessages() : bytes32[]
+getMessagesWriter() : address
+tokenURI() : string
-_setName(name)
-_setProfile(profile)
-_setMessages(messages)
-_evaluateMessagesUpdate(messages)
ChoreographyTokenURIRenderer
consults
consults
decodes in constructor
consults
consults
consults
consults
«struct»
InitialModel
roleNames : string[]
roleAddresses : address[]
names : string[]
nodeTypes : NodeType[]
incoming : string[][]
outgoing : string[][]
conditions : string[][]
initiatorRoles : string[]
participantRoles : string[]
initiatingMessages : string[]
returnMessages : string[]
«struct»
Descriptor
nodesByName : mapping(string => Node)
hasNode : mapping(string => bool)
nodeNames : string[]
roles : mapping(string => address)
hasRole : mapping(string => bool)
roleNames : string[]
nodesByName *
«struct»
Node
name : string
nodeType : NodeType
incoming : string[]
outgoing : string[]
conditions : string[]
initiatorRole : string
participantRole : string
initiatingMessage : string
returnMessage : string
NodeType
START_EVENT
END_EVENT
TASK
EXCLUSIVE_SPLIT
EXCLUSIVE_JOIN
PARALLEL_SPLIT
PARALLEL_JOIN
EVENT_BASED_GATEWAY
HolderSmartPolicy
CreatorSmartPolicy
DenyAllSmartPolicy
MasterSmartPolicy
SmartPolicy
+evaluate(subject, action, resource) : bool