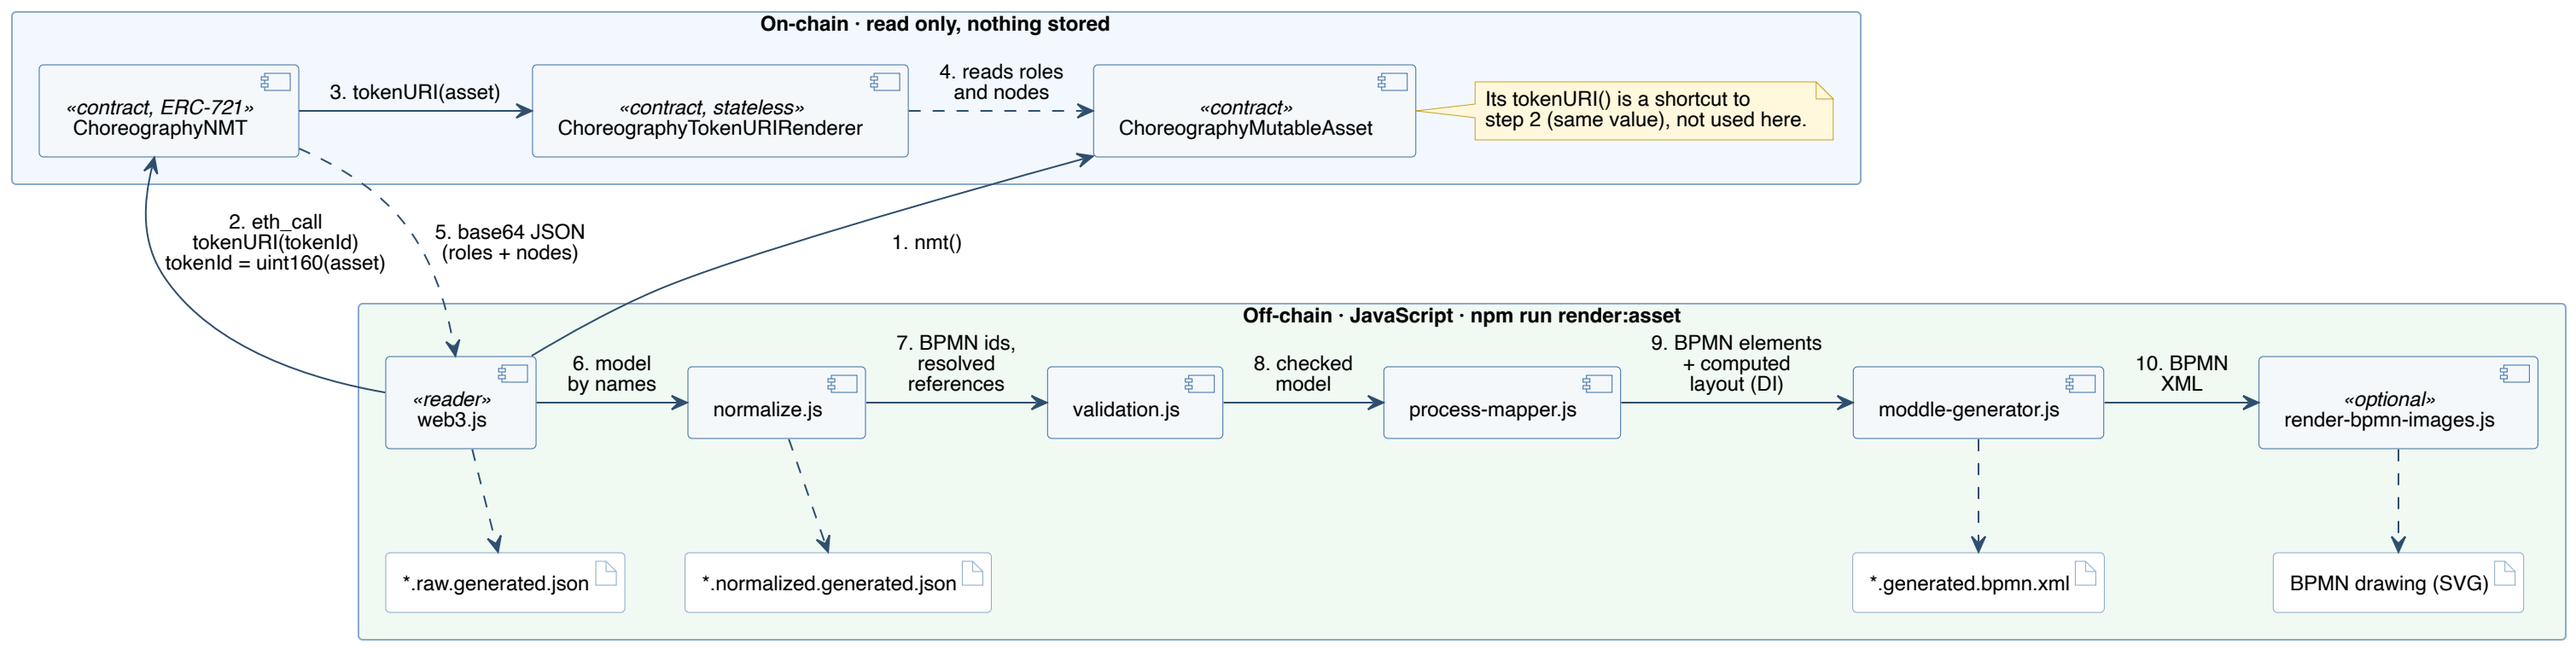
On-chain · read only, nothing stored
«contract, ERC-721»
ChoreographyNMT
3. tokenURI(asset)
«contract, stateless»
ChoreographyTokenURIRenderer
4. reads roles
and nodes
«contract»
ChoreographyMutableAsset
Its tokenURI() is a shortcut to
step 2 (same value), not used here.
2. eth_call
tokenURI(tokenId)
tokenId = uint160(asset)
5. base64 JSON
(roles + nodes)
1. nmt()
Off-chain · JavaScript · npm run render:asset
«reader»
web3.js
6. model
by names
normalize.js
7. BPMN ids,
resolved
references
validation.js
8. checked
model
process-mapper.js
9. BPMN elements
+ computed
layout (DI)
moddle-generator.js
10. BPMN
XML
«optional»
render-bpmn-images.js
*.raw.generated.json
*.normalized.generated.json
*.generated.bpmn.xml
BPMN drawing (SVG)