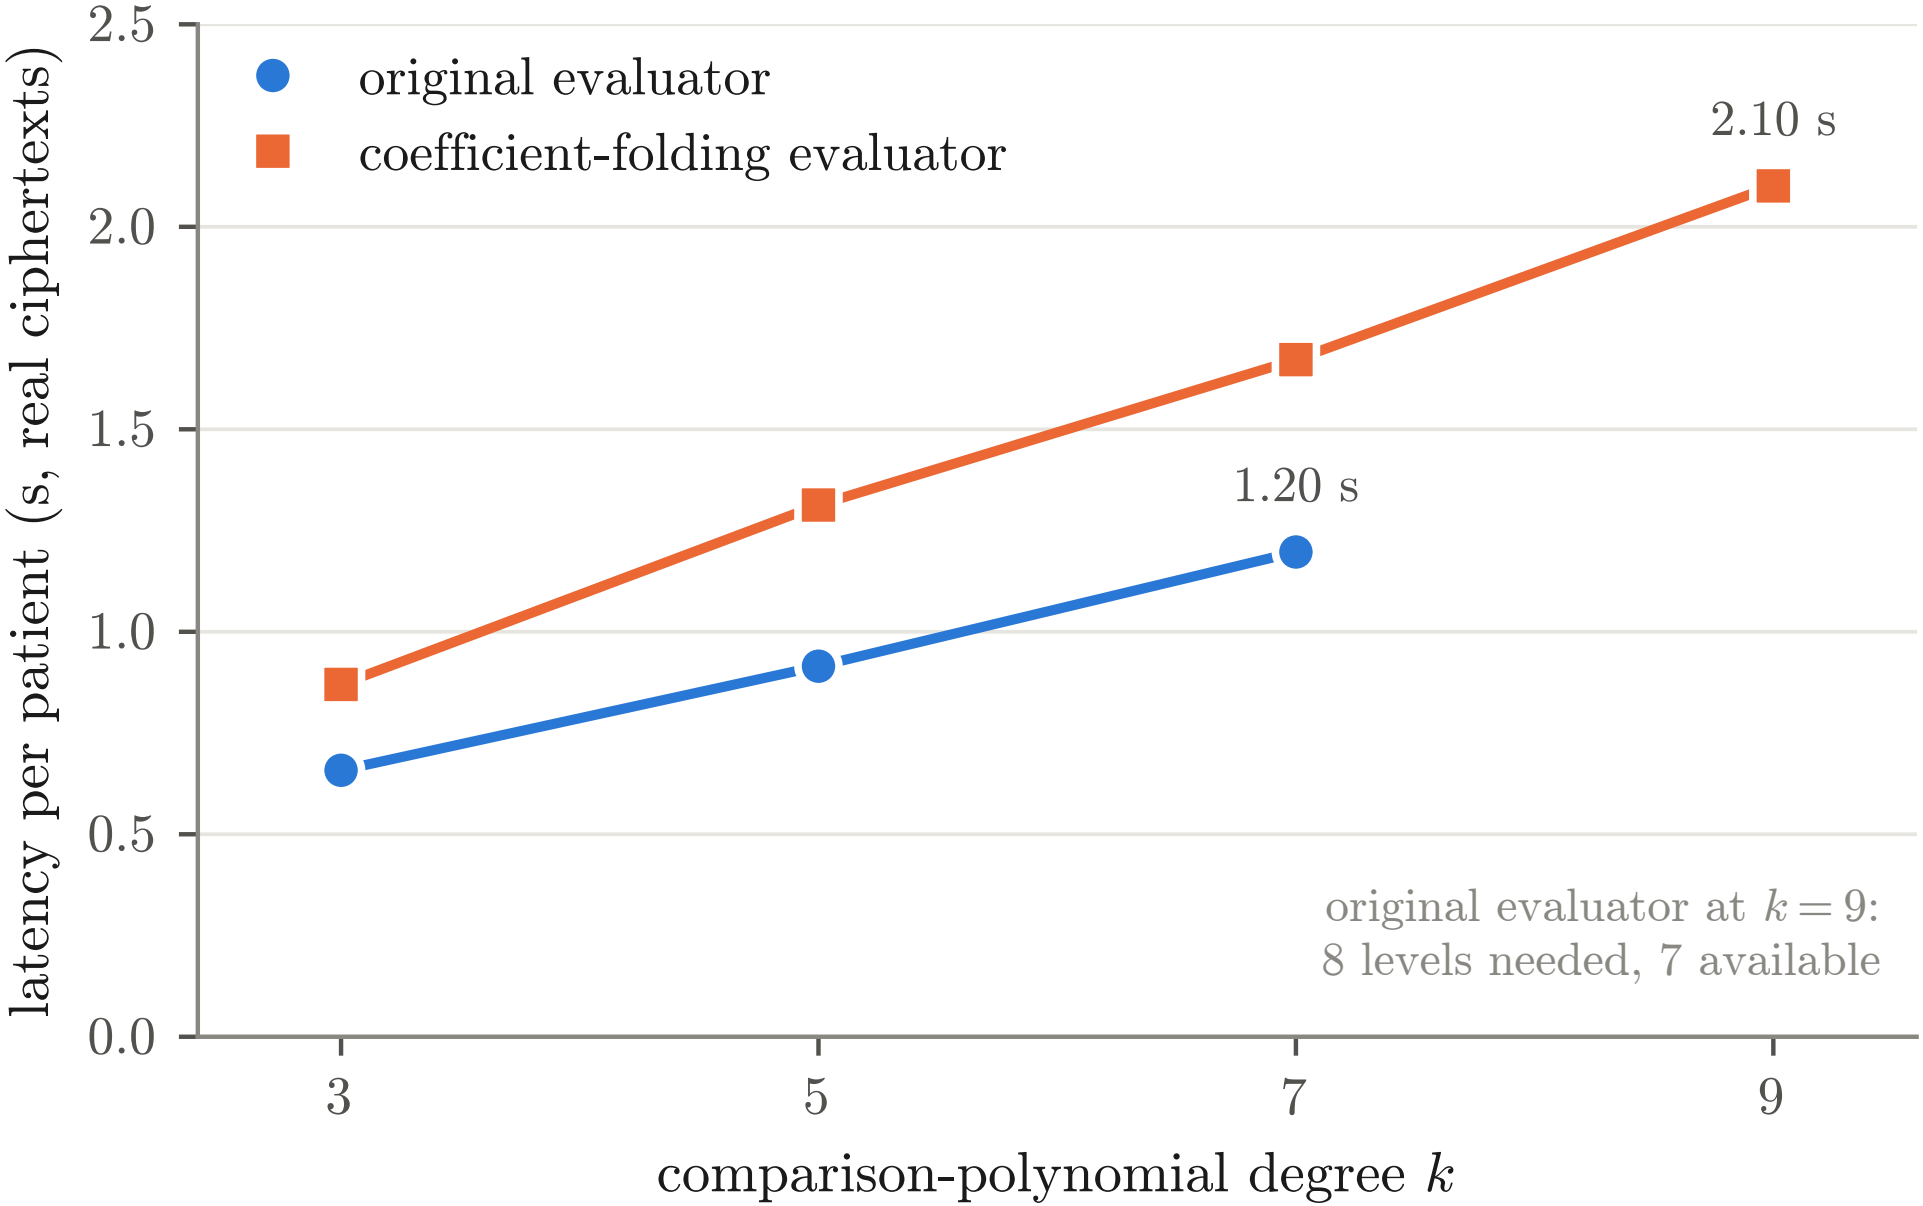
original evaluator
coefficient-folding evaluator
2.10 s
1.20 s
original evaluator at $k = 9$:
8 levels needed, 7 available
latency per patient (s, real ciphertexts)
2.5
2.0
1.5
1.0
0.5
0.0
3
5
7
9
comparison-polynomial degree k