

## Система расчета заработной платы

## Диаграмма классов клиента

© 1 Profile		
35 ≜	serialVersionUID	long
<b>●</b>	name	String
f û	id	Integer
f ú	id_user	Integer
♠	fam	String
<b>f</b> ≜	otch	String
f ú	emailUser	String
<b>⊕</b> #	phone	Integer
m 🚡	equals(Object)	ooolean
m 🚡	getEmailUser()	String
m 🚡	getFam()	String
m 🚡	getId()	Integer
m 🚡	getId_user()	Integer
m 🚡	getName()	String
m 🚡	getOtch()	String
m 1	getPhone()	Integer
m 🚡	hashCode()	int
m 🚡	setEmailUser(String	) void
m '=	setFam(String)	void
m =	setId(Integer)	void
m 🚡	setId_user(Integer)	void
m '=	setName(String)	void
m =	setOtch(String)	void
m 🚡	setPhone(Integer)	void
m 1	toString()	String

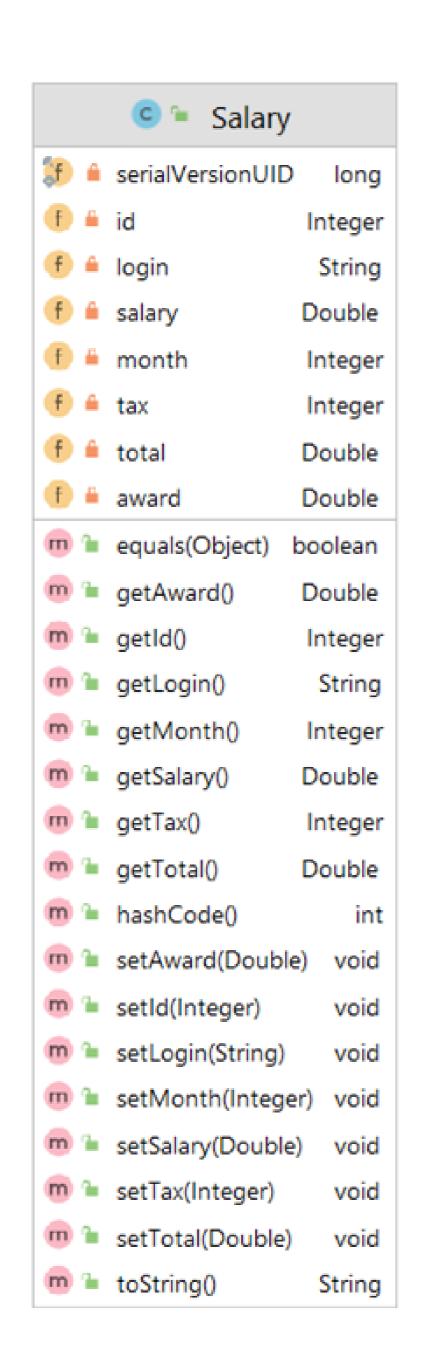

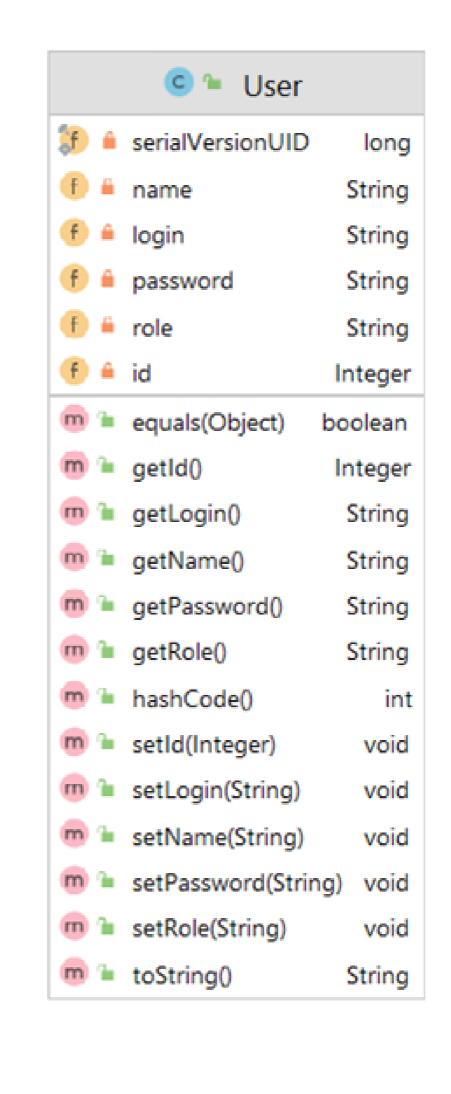

## Диаграмма классов сервера

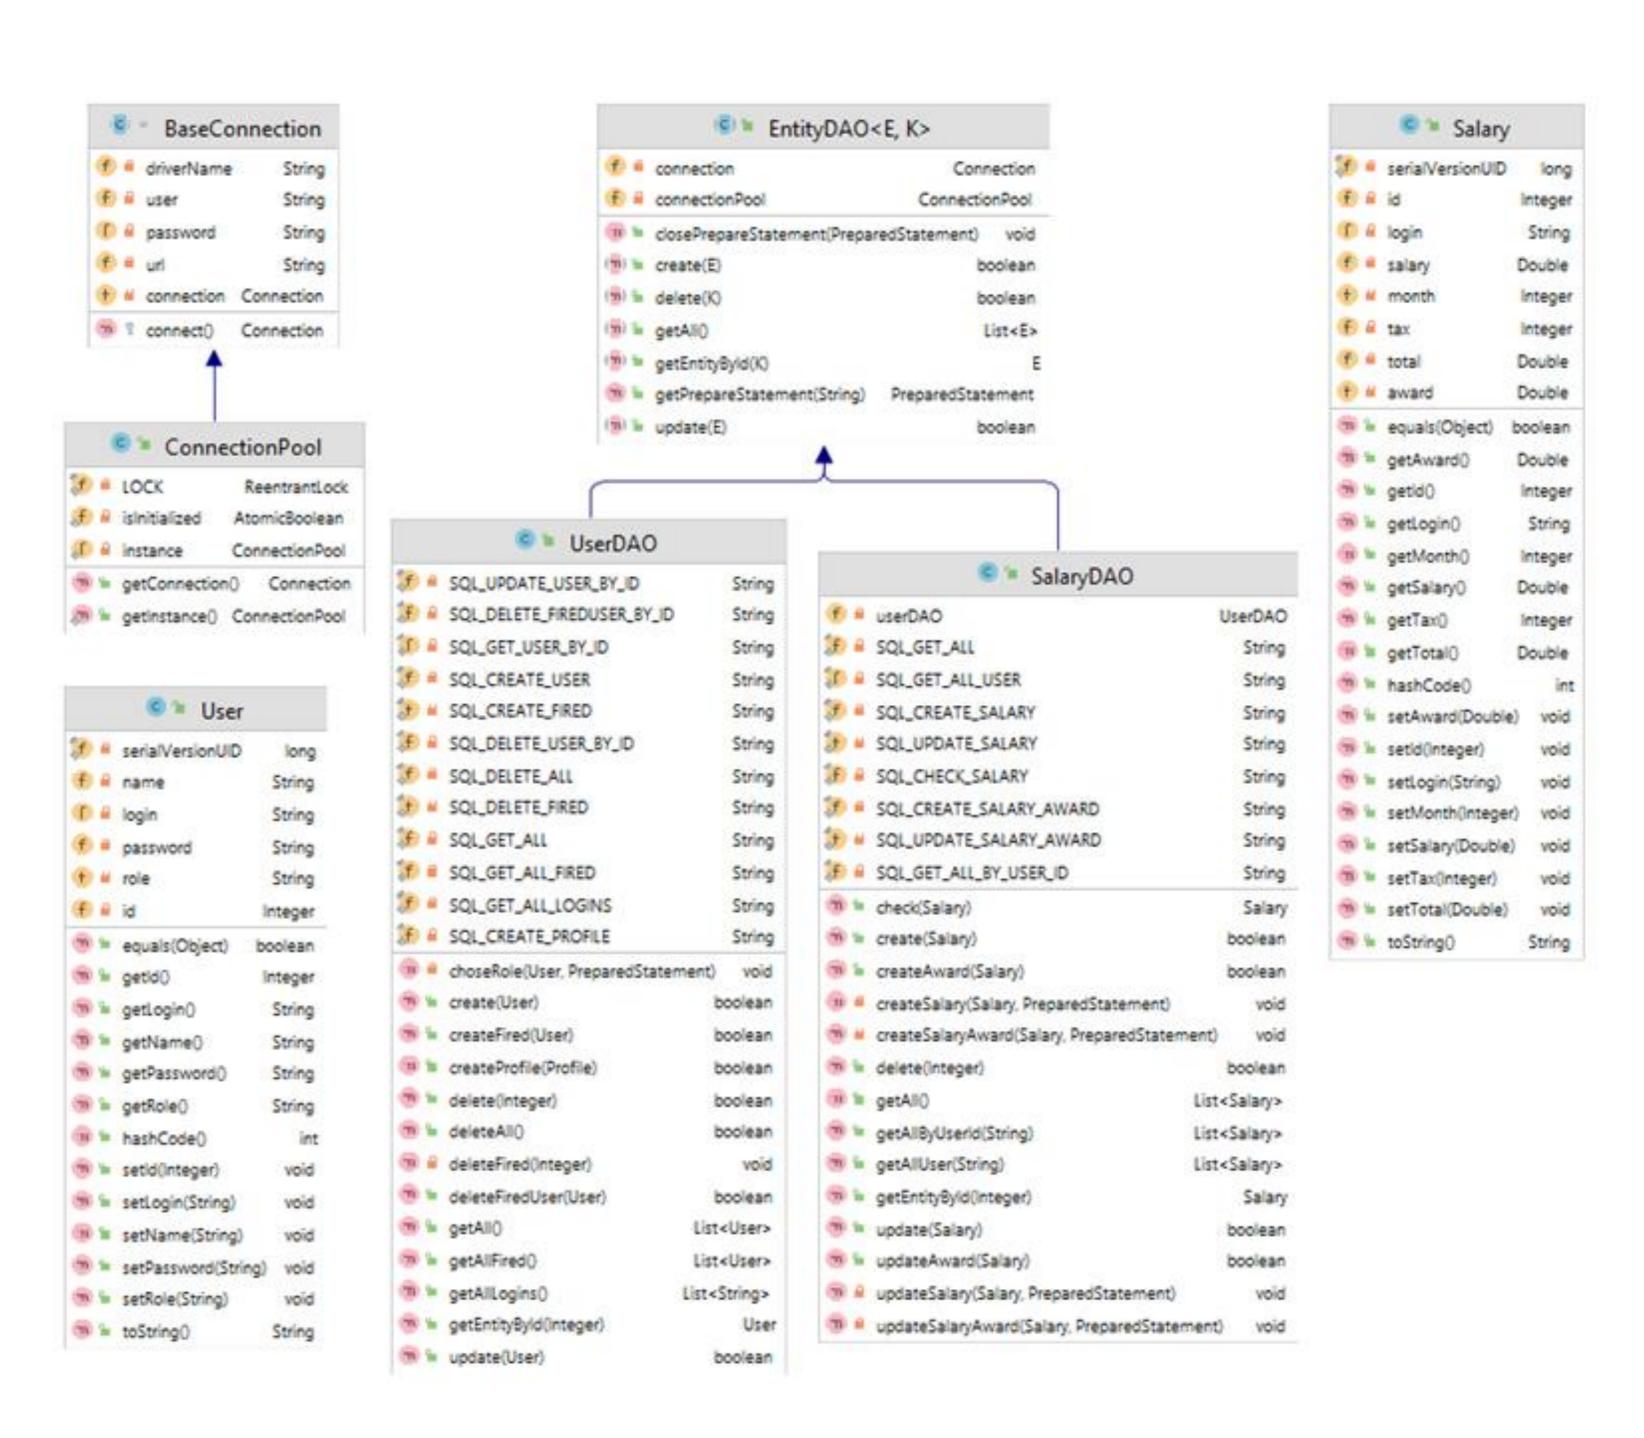


Рисунок 1

