

Namefi — Keyword Volume Tool, Design Document

Keyword Volume Tool — Design Document

Namefi · internal editorial and campaign planning tool · 2026-09-02

1. What this tool is

Namefi (namefi.io) is an **ICANN-accredited domain name registrar** — IANA Registrar ID **4337**, listed by IANA as *D3Serve Labs Inc. dba Namefi*, status *Accredited*. We advertise our own products on Google Ads.

This tool is an **internal script**, run from our own code repository by our marketing and content team. It will retrieve keyword search volume from the Google Ads API and write it to a local JSON file, which our team will use to plan campaigns and the pages those campaigns point to.

It is not a product, not a service, and not accessible to anyone outside the company.

2. Why we need the API

We will use it for two connected parts of running our Google Ads campaigns.

Campaign planning. Which search terms to bid on, how to group them into ad groups, and how to write ad copy in the language customers actually use.


Landing pages. Each ad group points at a relevant set of pages — a product feature, or an explainer answering the industry question behind that group's keywords — so that the page a user arrives on answers what they searched for. This improves ad relevance and landing page experience, and lifts conversion.

The second part is why keyword data will reach our editorial process: search terms tell us which questions prospective customers are actually asking, and those questions determine which pages we write and how we structure them. The pages exist to serve users who arrive from our ads; they are not written to be redirects, and each carries original content that stands on its own.

3. Which services we call

Service	Method	What we read
KeywordPlanIdeaService	GenerateKeywordIdeas	keyword ideas for a seed set
KeywordPlanIdeaService	GenerateKeywordHistoricalMetrics	average monthly searches, monthly history

4. Architecture

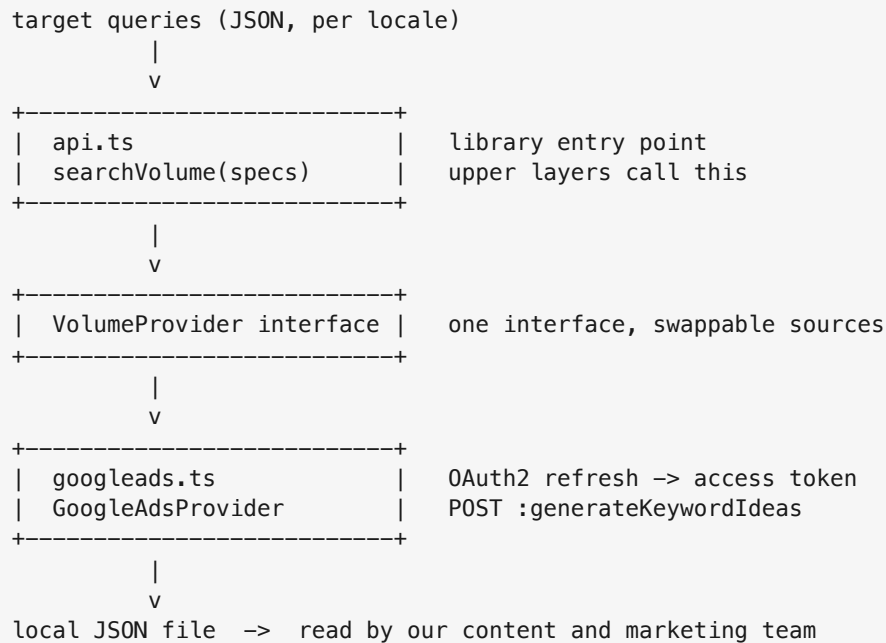

Four files, roughly 500 lines in total:

- `provider.ts` — the interface every source implements, the locale-to-market map, and the result shape.
- `googleads.ts` — the Google Ads provider: token exchange, request building, response mapping.
- `api.ts` — the library entry point (`searchVolume`, `activeProvider`, `toSpecs`). This is what upper layers import.
- `index.ts` — a thin command-line wrapper over `api.ts`.

5. Call volume

Small and bursty, not a polling loop. Our full editorial backlog is 100 candidate topics carrying 640 unique (query, locale) pairs, which groups into **two requests** — one per market. We will run this when the backlog is re-planned, on the order of once a month, not continuously.

There is no scheduled job, no retry storm and no per-user traffic: a person runs the script, it makes its requests, and it exits.

6. Who has access

Internal users only — our own employees on the marketing and content team.

The tool is not sold, not offered to clients, and not exposed to the public. There is no user interface, no hosted endpoint and no multi-tenant behaviour. It runs on a team member's own machine against Google Ads accounts we own, under our own manager account.

7. Credentials and security

Five values are required: developer token, OAuth2 client ID and secret, refresh token, and the manager account ID.

They are read from the process environment and **never logged, never printed and never committed**. On developer machines they are held in a local encrypted secrets broker and injected into the process for the duration of one run. The repository contains no credential and no credential file; `.env.local` is outside the repository tree.

8. Data handling

- **Storage.** Results will be written to a local JSON file used by our own team.
- **Retention.** Superseded on each run; we will keep only the current planning cycle.
- **Sharing.** We will **not** display, redistribute, resell or otherwise expose Google Ads data to any third party. It will never be rendered on our website, sent to another service, or included in anything we publish.
- **No invented figures.** A failed request, a keyword absent from the response, and an unconfigured provider are three distinct states, and all three are recorded as `null` with a stated reason. None of them is recorded as a zero. Nothing downstream ever reports a number the API did not return.

9. Compliance notes

- The tool falls under the API's "**researching keywords and recommendations**" permissible use: it will access `KeywordPlanIdeaService` to obtain suggestions that facilitate the creation and management of our own Google Ads campaigns.
- **Required Minimum Functionality does not apply:** RMF governs Standard access and tools serving external users. This is an internal tool on our own accounts requesting Basic access.
- Landing pages built with this research carry original content and are not designed to send users elsewhere, consistent with Google's destination requirements. Our editorial standards — every claim cited, each page useful on its own — are what keep that true in practice.

10. Contact

API contact: dev-team@namefi.io · Manager account: 350-597-6042 · Google Cloud project: 86583255333 · IANA Registrar ID: 4337