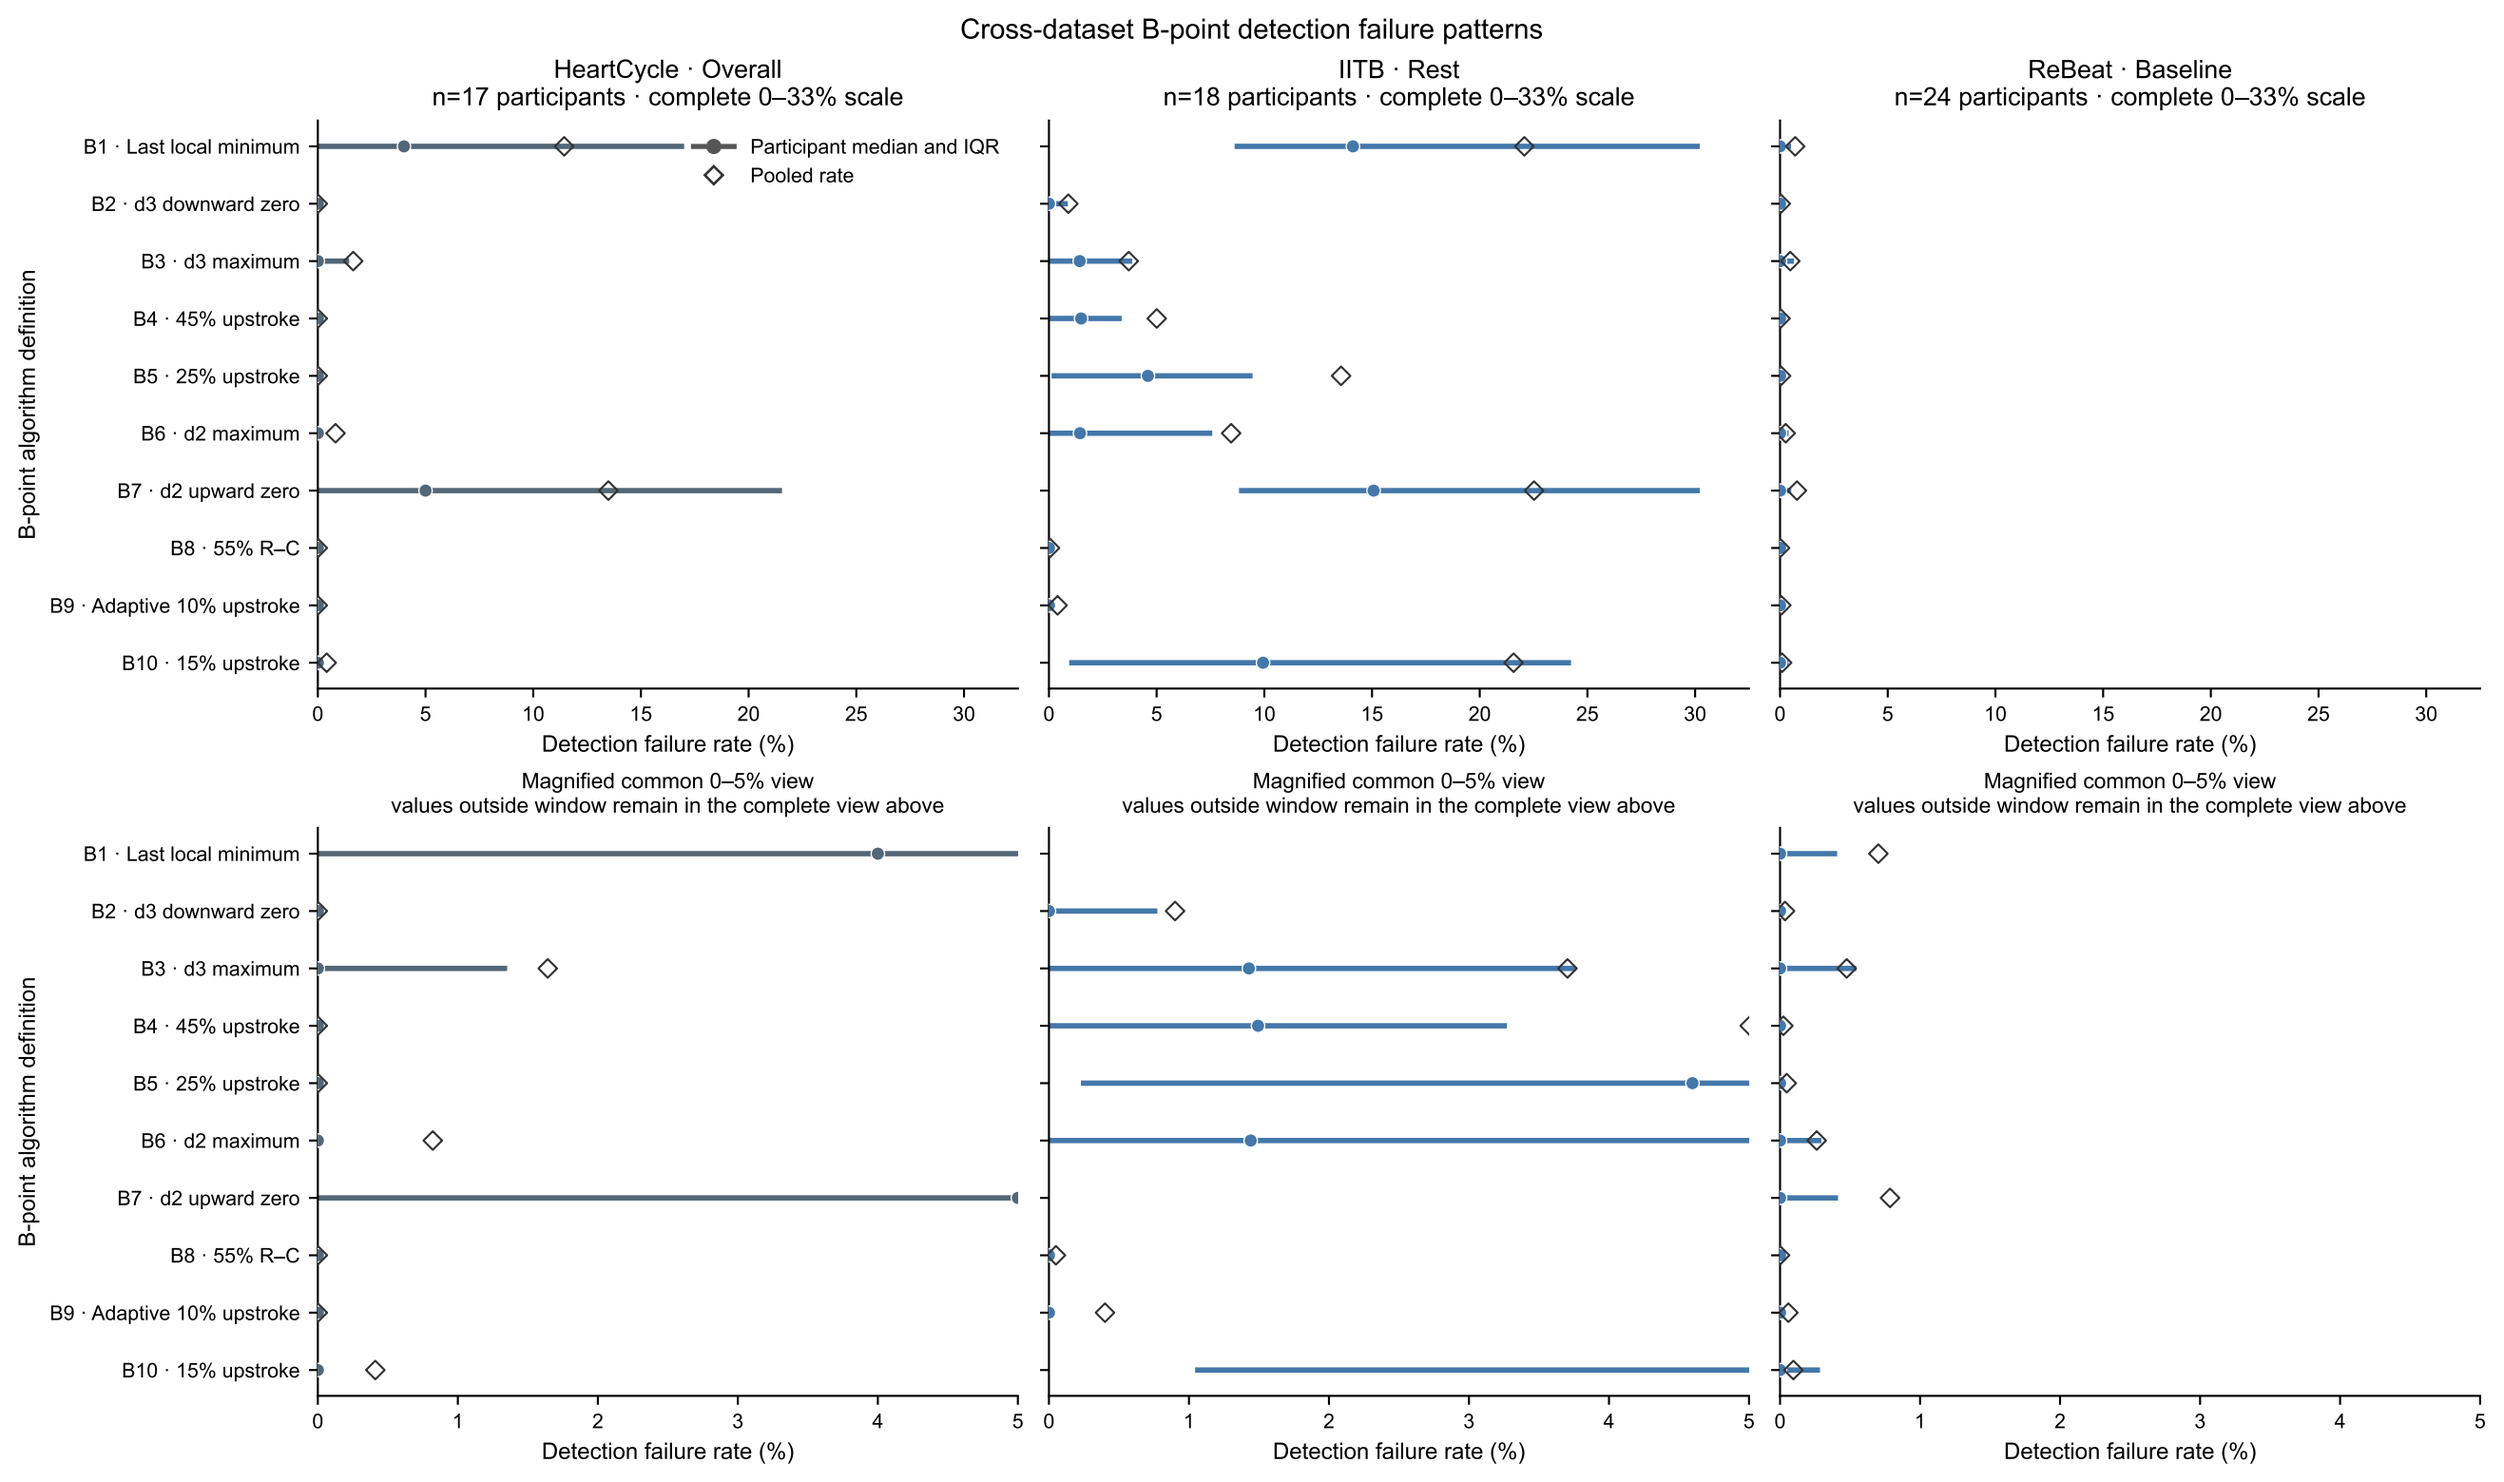
Cross-dataset B-point detection failure patterns
HeartCycle · Overall
n=17 participants · complete 0–33% scale
IITB · Rest
n=18 participants · complete 0–33% scale
ReBeat · Baseline
n=24 participants · complete 0–33% scale
Participant median and IQR
Pooled rate
B-point algorithm definition
B1 · Last local minimum
B2 · d3 downward zero
B3 · d3 maximum
B4 · 45% upstroke
B5 · 25% upstroke
B6 · d2 maximum
B7 · d2 upward zero
B8 · 55% R–C
B9 · Adaptive 10% upstroke
B10 · 15% upstroke
Detection failure rate (%)
Magnified common 0–5% view
values outside window remain in the complete view above