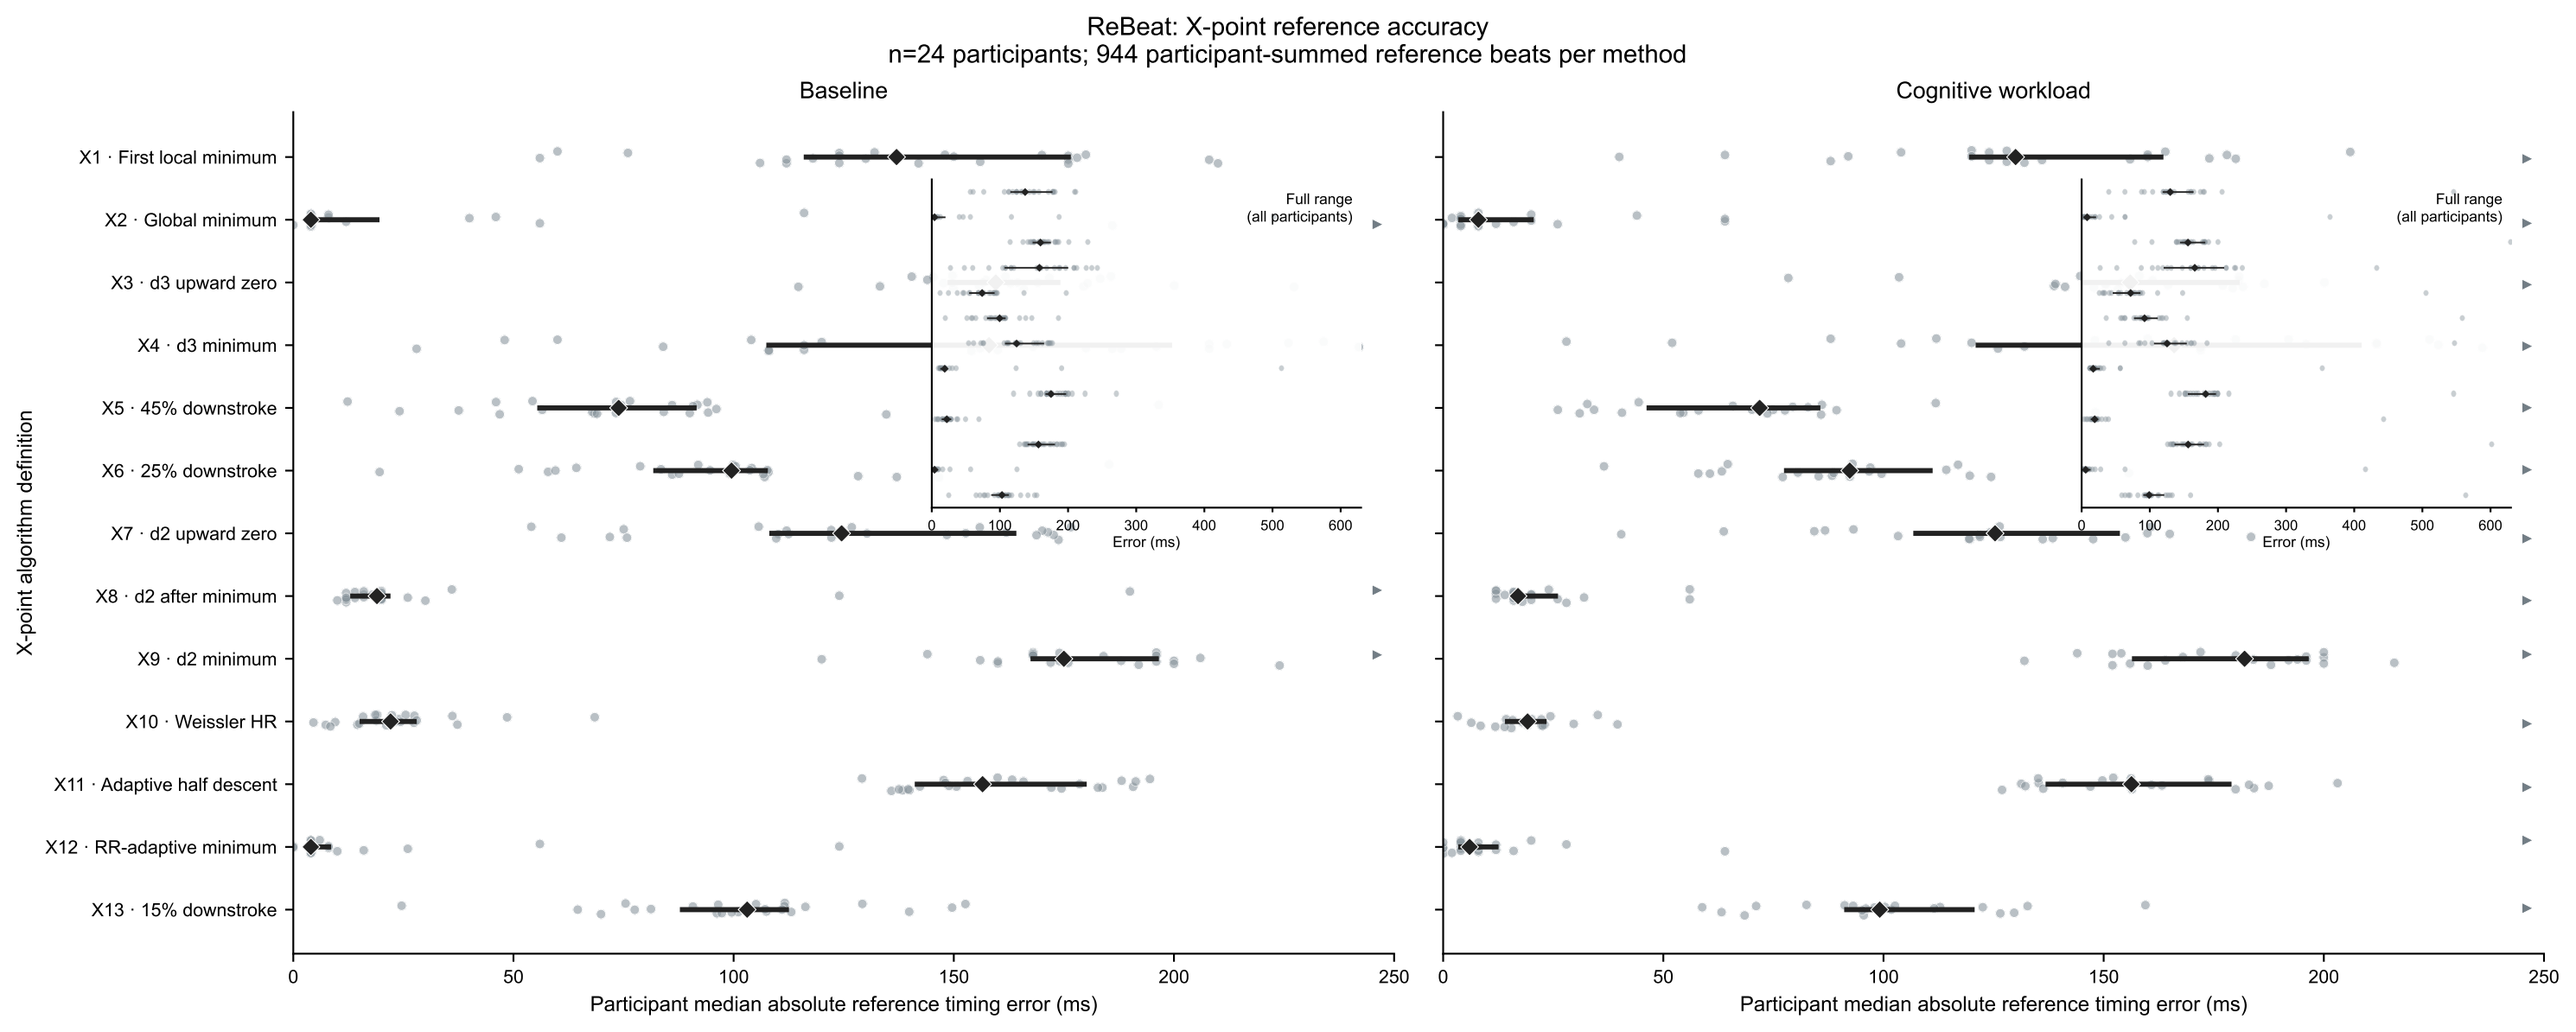

ReBeat: X-point reference accuracy
n=24 participants; 944 participant-summed reference beats per method
Baseline
Cognitive workload
X-point algorithm definition
X1 · First local minimum
X2 · Global minimum
X3 · d3 upward zero
X4 · d3 minimum
X5 · 45% downstroke
X6 · 25% downstroke
X7 · d2 upward zero
X8 · d2 after minimum
X9 · d2 minimum
X10 · Weissler HR
X11 · Adaptive half descent
X12 · RR-adaptive minimum
X13 · 15% downstroke
Full range
(all participants)
0
100
200
300
400
500
600
Error (ms)
0
50
100
150
200
250
Participant median absolute reference timing error (ms)