

CPSC 126 SAMPLE FINAL EXAMINATION
April, 2003

Name: _____
Student ID: _____
Lab Section: _____

- You have 2 hours 45 minutes to write the 8 questions on this examination. A total of 105 marks are available.
- No notes, calculators, cellular phone, or other electronic equipment is allowed.
- Keeps your answers short. If you run out of space for a question, you have written too much.
- The number in square brackets to the left of the question number indicates the number of marks allocated for that question. Use these to help you determine how much time you should spend on each question.
- Use the back of the pages for your rough work.
- **Good luck!**

| Question | Marks |
|----------|-------|
| 1 | |
| 2 | |
| 3 | |
| 4 | |
| 5 | |
| 6 | |
| 7 | |
| 8 | |
| Total | |

UNIVERSITY REGULATIONS:

- No candidate shall be permitted to enter the examination room after the expiration of one half hour, or to leave during the first half hour of the examination.
- CAUTION: candidates guilty of any of the following, or similar, dishonest practices shall be immediately dismissed from the examination and shall be liable to disciplinary action.
 1. Making use of any books, papers or memoranda, electronic equipment, or other memory aid devices, other than those authorised by the examiners.
 2. Speaking or communicating with other candidates.
 3. Purposely exposing written papers to the view of other candidates. The plea of accident or forgetfulness shall not be received.
- Smoking is not permitted during examinations.

[10] 1. Short Answers

[2] a. *Briefly* describe the difference between a vector and an array:

[2] b. *Briefly* describe the difference between a class and an object.

[6] c. Here is a function prototype:

```
void foo(double *x, string & y, list<Robot> a);
```

Describe *in words* the types of each input argument, and what kind of values will each argument contain.

```
double *x
```

```
string & y
```

```
list<Robot> a
```

[10] 2. Representing values inside the computer

[2] a. Convert the (decimal) number 58 to an 8-bit binary number. **HINT:** $58/2 = 29$ and $29/2 = 14 + 1/2$

[3] b. Calculate the 8-bit binary representation of 61 by adding 3 in binary (00000011) to your answer for (a). Show your work. Do not simply convert 61 to binary like you did for 58 in the part (a).

[2] c. Give the 8-bit binary two's complement representation of -61. Show your work

[3] d. Give the hexadecimal representation for 61, and for 58

- [8] 3. The R2D2 Robot Company Inc. has a new line of coffee delivery robots. These robots understand a simple programming language as specified by this EBNF:

```

robot-program: motion-commands buy-command motion-commands "(deliver-coffee)"
motion-commands: motion-command { motion-command }
motion-command: "(" (move-command | turn-command) digit { digit } ")"
move-command: "move" ("forward" | "backward")
turn-command: "turn" ("right" | "left")
buy-command: "(buy-coffee" coffee-type size [ "cream" digit ] [ "sugar" digit ] ")"
coffee-type: "dark" | "light"
size: "S" | "L"
digit: "0" | "1" | "2" | "3" | "4" | "5" | "6" | "7" | "8" | "9"

```

For each of the following programs, write either *valid* if its a valid program *according to the EBNF given above*, or *invalid* if it is not. If you write *invalid*, also give a reason. Don't worry about spaces or newlines. Remember that [a] means *optional*, { ... } means *zero or more repetitions*, | means *or and* "... means *as-is*.

----- (a) -----

```

(move forward 10)
(turn left 30)
(buy-coffee dark L)
(turn right 20)
(move backward 300)
(deliver-coffee)
(jump-out-of-window)

```

----- (b) -----

```

(turn right 200)
(turn left 200)
(buy-coffee dark S cream 2)
(move forward 20)
(deliver-coffee)

```

----- (c) -----

```

(move forward 20)
(buy-coffee light L sugar 12)
(move backward 20)
(deliver-coffee)

```

----- (d) -----

```

(turn left 20)
(move forward 300)
(turn right 30)
(move forward 10)
(buy-coffee dark S 2)
(deliver-coffee)

```

- [15] 4. A program for a day at the horse races at the Blue Bonnets race track might look like the following

```
Race 1 9:30 am Fillies 3/4mi 4
    14 32:1 H: C rules          O: G. Lee   J: R. St-Aubin
    34 16:1 H: Assembly so cool O: B. Dow
...
Race 2 1:40 pm 1 yr olds 1 1/4mi $10,000
    14 100:1 H: Schemers Delight O: P. Belleville
    34 14:1 H: Prolog Clause     O: D. Poole   J: M. Horsch
...
```


A program consists of 1 to 5 races. Each race starts with the word “Race” and the race number. Then comes the time of the race (in 12-hour format: hh:mm where hh ranges from 1-12 and mm from 0-59 and the morning/afternoon indicator). This is followed by the type of horse and the length of the race, which is in miles (is followed by “mi”), and can be a number (like 1) or a fraction (like 3/4) or a combination of both (like 1 3/4). The longest race possible is 9 miles, and fractions are always in 1/4 mile increments. At the end of the line comes either the purse (the amount the winner gets), or the number of a race for which this is the qualifying race. Purses can be any sum greater than 0 preceded by a “\$”, but must be in the notation with sets of three digits separated by commas, and must not include any leading zeros. Thus, \$10,900 and \$9,999,999 are valid purses, but 10,990 and \$01,393 are not. Following the header comes a list of 2 or more horses, each of which is a number, the odds (number “:” number), followed by the horse name (preceded by “H:”), the owner name (preceded by “O:”) and the jockey name (preceded by “J:”). The jockey name is left out if the owner is the jockey. Write the EBNF for a horse race program at Blue Bonnets. Some of the categories you might want to use have been defined already.

```
horse-type: ‘Fillies’ | ‘1 yr olds’ | ‘2 yr old mares’
horse-name: ‘C rules’ | ‘Assembly so cool’ | ‘Schemers Delight’ | ‘Prolog Clause’
owner-name: ‘G. Lee’ | ‘B. Dow’ | ‘P. Belleville’ | ‘D. Poole’
jockey-name: ‘R. St-Aubin’ | ‘M. Horsch’ | ‘R. Dearden’
one3: ‘1’ | ‘2’ | ‘3’
one5: one3 | ‘4’ | ‘5’
six9: ‘6’ | ‘7’ | ‘8’ | ‘9’
one9: one5 | six9
one12: one9 | ‘10’ | ‘11’ | ‘12’
digit: ‘0’ | one9
number: one9 {digit}
```

- [12] 5. A drawing program can display a variety of shapes including points, lines, circles and rectangles. A point represents the X and Y coordinates of a pixel (picture element) on the screen (coordinates are integer valued). A line is represented by a starting point and an ending point. A circle is represented by the center point, and the radius in pixels (which may be a fractional value). A rectangle is represented by four points, one for each corner. All shapes have a border colour. Colours are made up from a red, a green and a blue 2-digit hexadecimal number.

Use the Object Oriented Design technique discussed in class to design the classes for this program. For each class, draw a circle labeled with the name of the class. Then, link the circles up with arrows labeled with the type of relationship between the classes (has-a or is-a). Finally, look at each has-a relationship, and write inside each circle what the member variables and their types will be for each object of that class. If you use a predefined C++ class, you do not need to specify its member variables or their types.

- [15] 6. A **Trie** is a data structure for storing a list of words. A **Trie** is a graph which is structured like a tree, and in which every node is a character. Every path from the root of the Trie to a leaf is a word preceded by a \$ and followed by a #. A word will only appear in a Trie once. For example, here is a Trie which stores the list of words "DOG", "GOAT", "GOLF" and "DO":

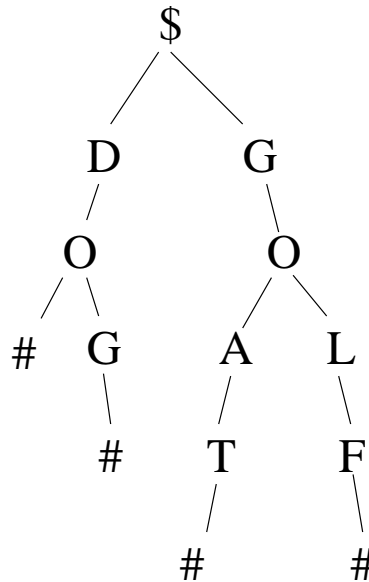

Tries are described by the following class:

```

class Trie {
private:
    // omitted

public:
    // returns the character at the root of the Trie
    char root();

    // returns a list of Tries which are the
    // subTries of this Trie. If called on a leaf Trie,
    // this returns an empty list.
    list<Trie> subtrees();
};

```

Write a function `trie_search` which takes a reference to a `Trie` and a string as arguments, and returns the boolean result of checking if the string is in the Trie. Thus, if `t` is the Trie shown above, `trie_search(t, "DO")` will return `true`, while `trie_search(t, "GOLFER")` will return `false`. **HINT:** Your function can be recursive. Note that the empty string is in any Trie with a '#' at the root of one of

its subtree, and that a string s is in a trie if (1) the first character of the string is at the root of one of the subtrees and (2) the rest of the string is in that subtree whose root is the first character.

[25] 7. This question deals with vectors of integers.

[5] a. It is easy to remove the last element from a STL `vector` using the `pop_back()` method. If we don't care about the order of the elements in the vector, we can remove an element at an arbitrary position, `pos`, as follows: (1) move the value at the end of the `vector` into position `pos` (2) remove the last element of the vector. Write a function `removeFromMiddle` which takes a reference to a `vector<int>`, and an integer position, `pos`, and removes **and returns** the element of the vector at position `pos` using this method.

[5] b. Write a function, `shuffle`, which takes a reference to a vector of `int`, and rearranges the elements of the vector in a random order. You **should not** do this by simply swapping random values in the vector some number of times, as this will not guarantee a good shuffle. Use the function `int random(int mx)`, which generates a random integer between 0 and `mx` (including 0 and `mx`). **HINT:** Use your function `removeFromMiddle` from the first part of this question (even if you haven't written it).

[8] c. Write a function `sorted`, which takes a reference to a vector of `int`, and

returns true if the vector is sorted in ascending order, false otherwise.

- [4] d. “Ridiculous Sort”, invented by Yoshe J. Reeds, is a ridiculous method of sorting a vector of integers which works as follows:

- (1) shuffle the vector,
- (2) check if its sorted. If it is, then stop, otherwise go back to (1).

Yoshe cannot program in C++, and so has asked you to implement his sorting method. Write a function `ridiculousSort`, which takes a reference to a vector of `int`, and sorts the vector using Yoshe’s method. Your function should return the number of shuffles that were used to sort the vector.

- [3] e. What is the worst-case time complexity of `ridiculousSort`?

- [10] 8. Consider the following LinkedList and Node classes, which are similar to (but not identical to) classes discussed in the lectures and tutorials:

```
class Node
{
    public:
        Node(string elem, Node* next);
        string element();
        Node* next();

    private:
        string currentElement;
        Node* nextNode;
};
```

```
class LinkedList
{
    public:
        int size();
        Node* first();
        void deleteFirst();
        void insertInFront(string s);

    private:
        Node* firstNode;
        int numberElements;
};
```

Write a function *isRepeated* that takes a `LinkedList` object as parameter, and returns `true` if the `LinkedList` consists of x strings followed by the same x strings in backwards order. For instance, your function should return `true` for the `LinkedList` containing the words ("I" "am" "hungry" "hungry" "am" "I"), and for the `LinkedList` containing the words ("stutter" "stutter"), but it should return `false` for the `LinkedList` containing the words ("I" "am" "I"), or the `LinkedList` containing the words ("I" "hate" "hate" "exams").

The marks given for this question will depend on the efficiency of your algorithm. To obtain full marks, you need to write a solution that runs in $O(n)$ time, where n is the size of the input list. **You are not allowed to modify the `LinkedList` object passed as parameter to your function.** Hint: use a stack.