
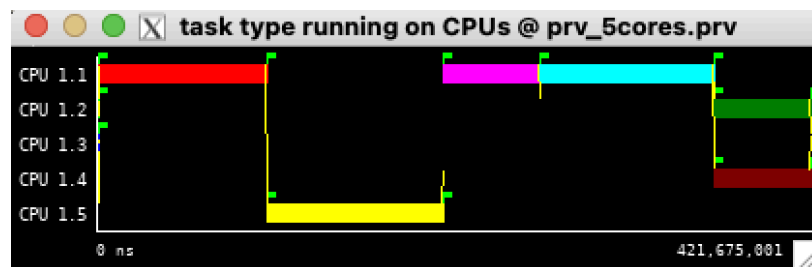


Examina el código 3dfft_tar.c y busca las llamadas a la API de Tareador:


C/C++

```
paco1114@boada-12:~/lab1/3dfft$ less 3dfft_tar.c | grep tareador
#include "tareador.h"
tareador_ON ();
tareador_start_task("start_plan_forward");
tareador_end_task("start_plan_forward");
tareador_start_task("init_complex_grid");
tareador_end_task("init_complex_grid");
tareador_start_task("ffts1_and_transpositions");
tareador_end_task("ffts1_and_transpositions");
tareador_OFF ();
```


v1:

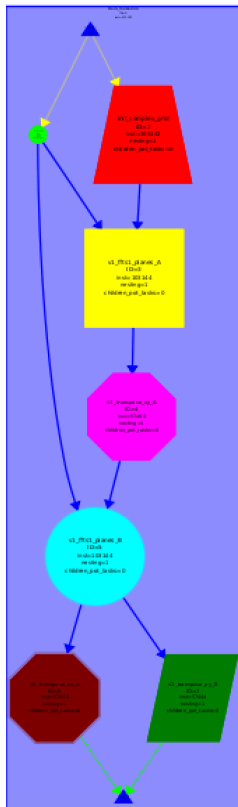

v2:

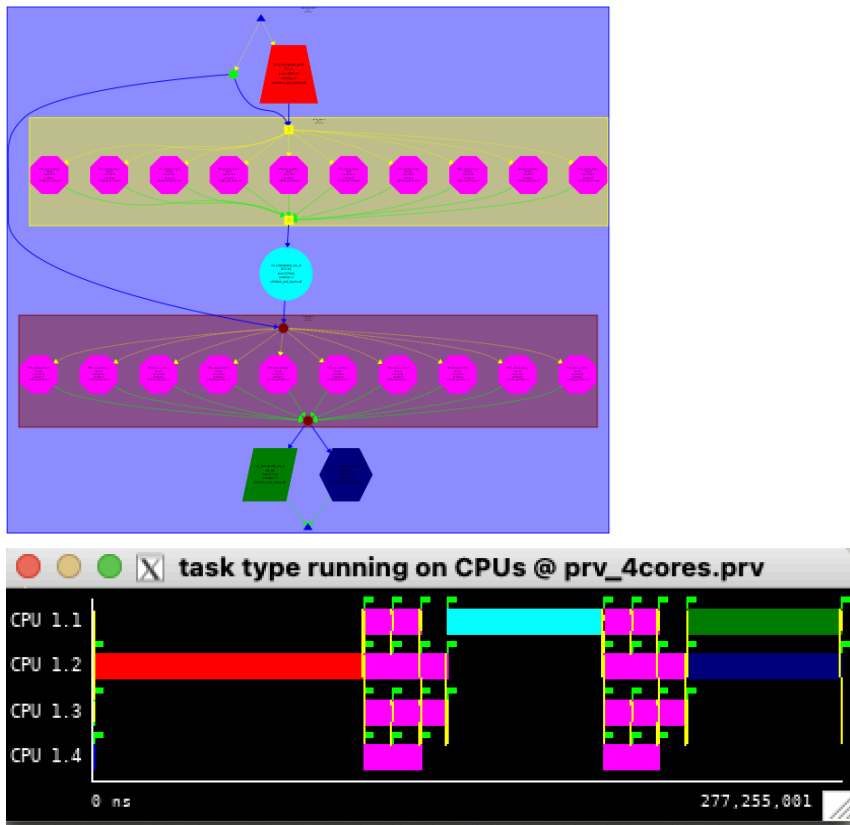


v3:

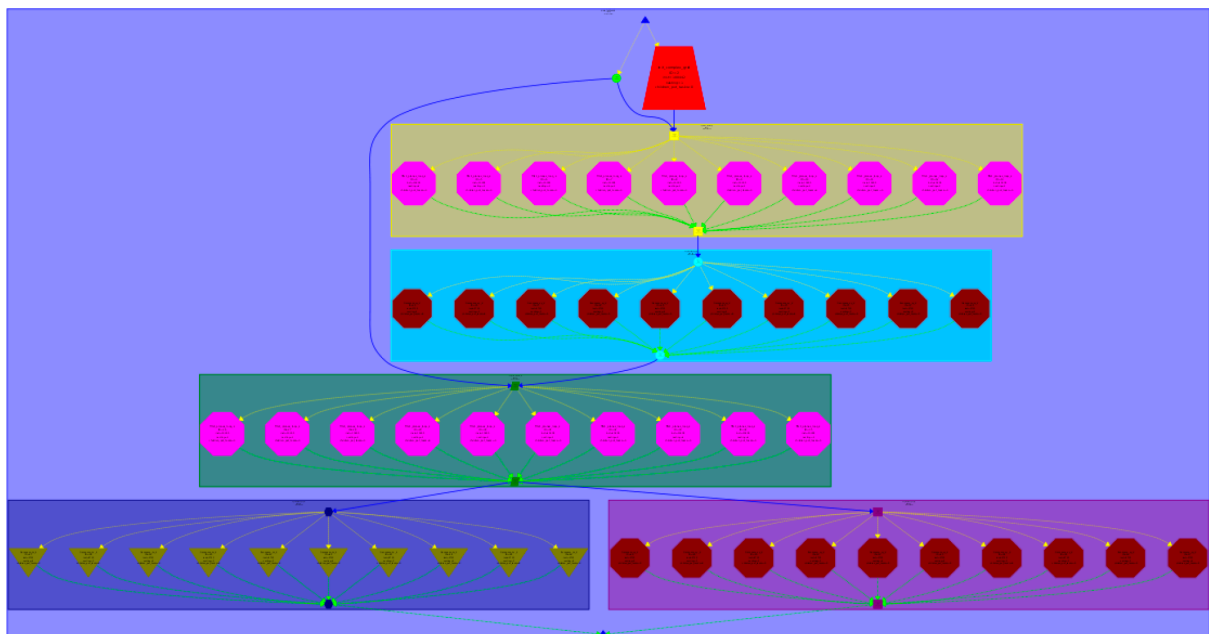




v4:

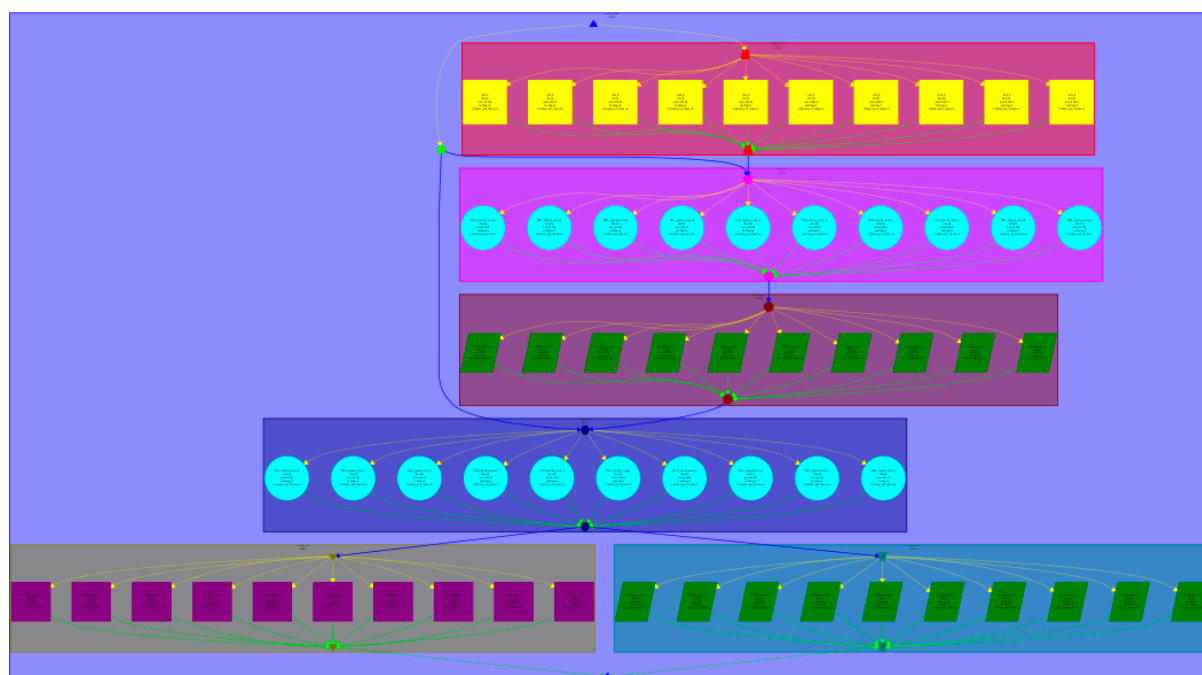


Procesadores:


1-

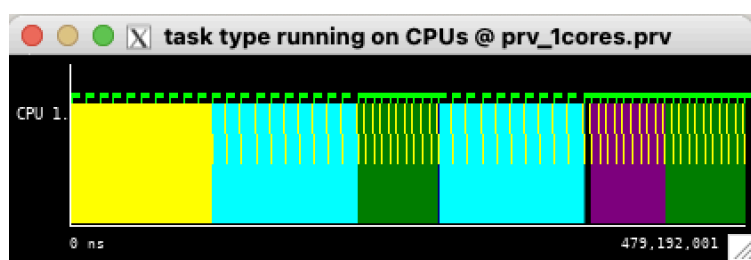


2-

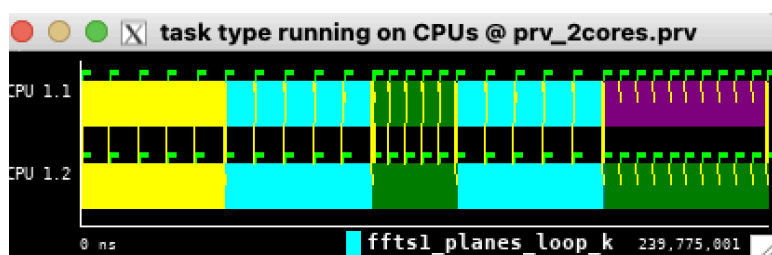


4-

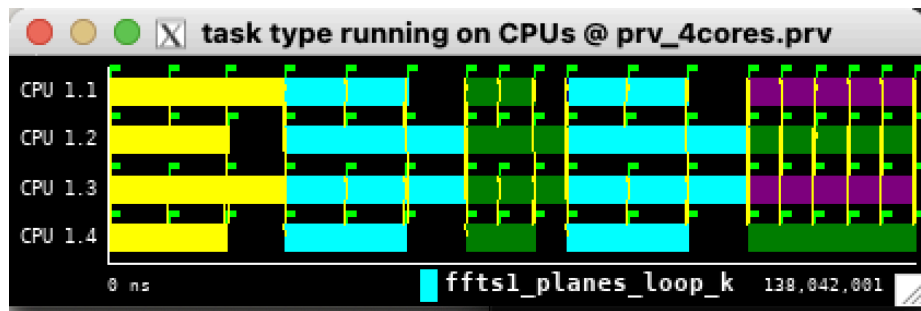


8-

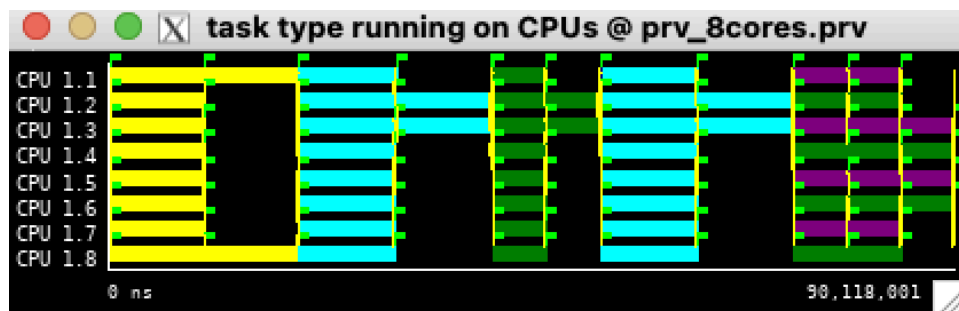


16-

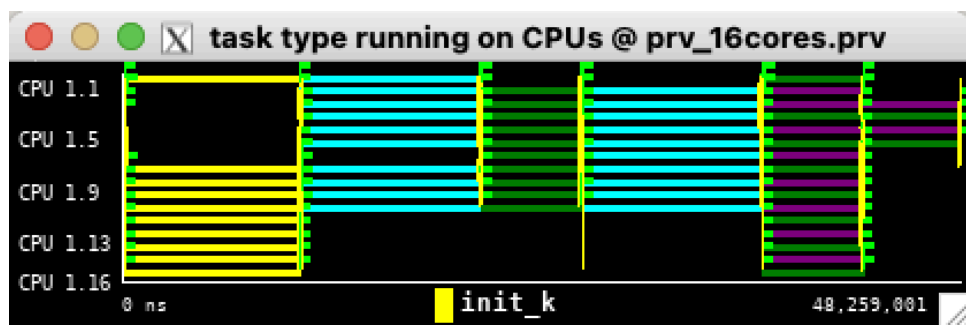


32-

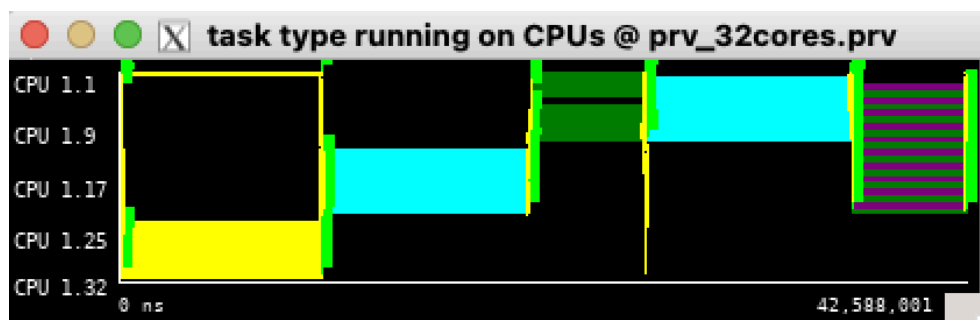


v5:




4p

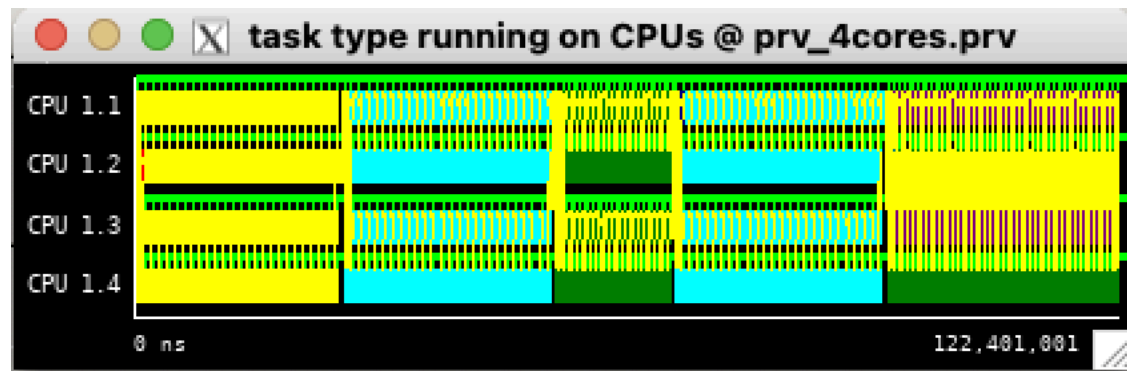

16p

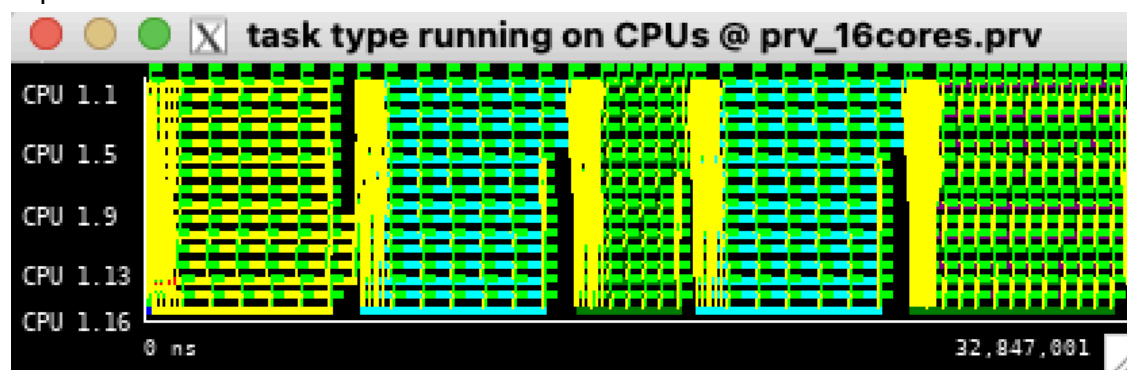

32p

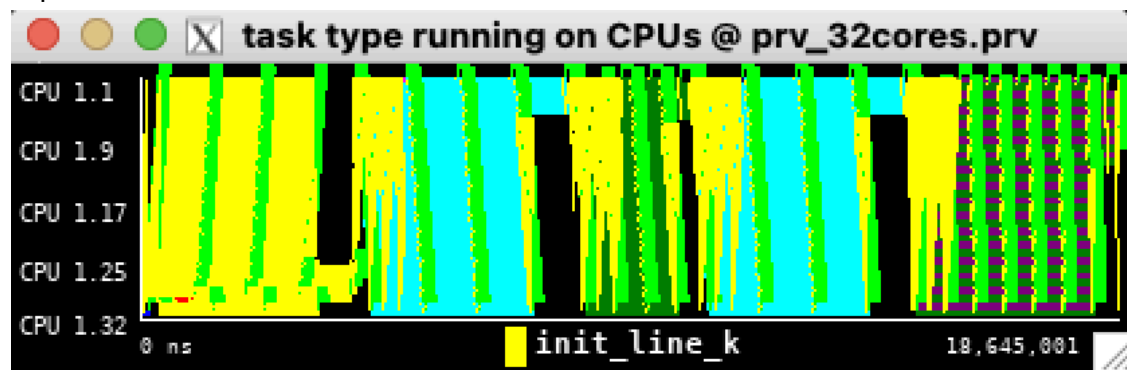

128p

