

CS 486/686

Dissecting a Small Language Model

Yuntian Deng

Lecture 21

Opening the hood on Qwen3-0.6B

Search ›

Uncertainty ›

Decisions ›

Learning

Learning goals

- Load or inspect a **small causal LM**.
- Trace one generated token at a time.
- See how **decoding** and **prompting** change behavior.
- Recognize limitations and failure modes.

From L20 to L21



L20 taught the pipeline. Today we watch it run.

The model we will dissect

Qwen3-0.6B

a real small causal language model

0.6B

parameters

28

layers

32k

context

~151k

vocab

GQA

16 Q / 8 KV

BBPE

tokenizer

A "small" LM is still a serious learned system.

What gets loaded?

tokenizer

text ↔
token IDs

config

layers,
heads, vocab

weights

learned
parameters

settings

temperature,
max tokens

Demo path and fallback

optional live path

Transformers.js +
ONNX + WebGPU

reliable path

precomputed traces
embedded here

The concepts do not depend on a live GPU demo working.

Optional browser inference

```
import { pipeline, TextStreamer } from "@huggingface/transformers";  
  
const generator = await pipeline(  
  "text-generation",  
  "onnx-community/Qwen3-0.6B-ONNX",  
  { device: "webgpu", dtype: "q4f16" },  
);
```

This loads a web-ready tokenizer and quantized model weights.

The same pipeline in Python

```
tok = AutoTokenizer.from_pretrained("Qwen/Qwen3-0.6B")
model = AutoModelForCausalLM.from_pretrained(
    "Qwen/Qwen3-0.6B",
    torch_dtype="auto",
    device_map="auto",
)
```

Browser and Python paths expose the same conceptual pieces.

Start with a prompt

Explain gradient descent in one sentence.

Inference begins as human-readable text.

The model sees a chat template

system

You are a helpful assistant.

user

Explain gradient descent in one sentence.

assista
nt

The model's actual input is usually not exactly what the user typed.

What the model actually receives LIVE

The chat template wraps your text in roles and special tokens.

What the user types vs. what the model actually receives: roles and special tokens added by the chat template.

"Explain gradient descent in one sentence."

"Who won the 2031 Turing Award?"

thinking: OFF

```
<|im_start|>user
Explain gradient descent in one sentence.<|im_end|>
<|im_start|>assistant
<think>

</think>
```

Thinking mode adds a reasoning section the model fills in before its answer.

Prompt to tokens

Explain

gradient

descent

in


one

sentence

.

token	illustrative id
Explain	8493
gradient	33497
descent	41184

Tokens become embeddings

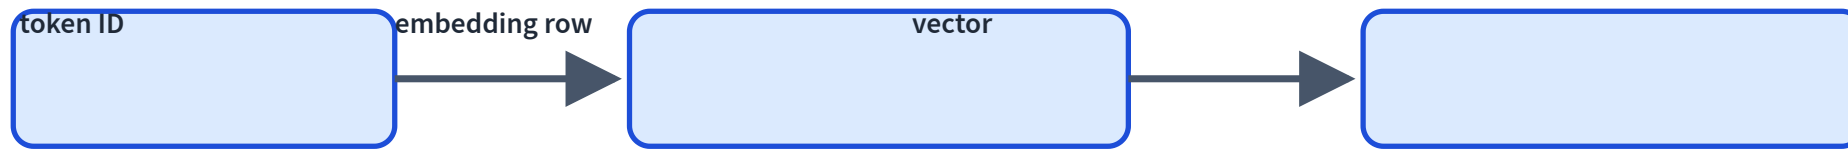

Each token begins generation as a learned vector.

Through 28 transformer blocks



Attention: communicate across context.

Feed-forward: per-token computation.

Residuals and normalization
keep the deep stack stable.

Inside the blocks: real attention

LIVE MODEL


Actual Qwen3-0.6B attention — pick a head, click a query token.

Real attention from inside **Qwen3-0.6B** (28 layers, 16 heads). Different layer/head pairs specialize.

L11 H1: it → robot

L15 H3: previous token

L0 H6: broad context

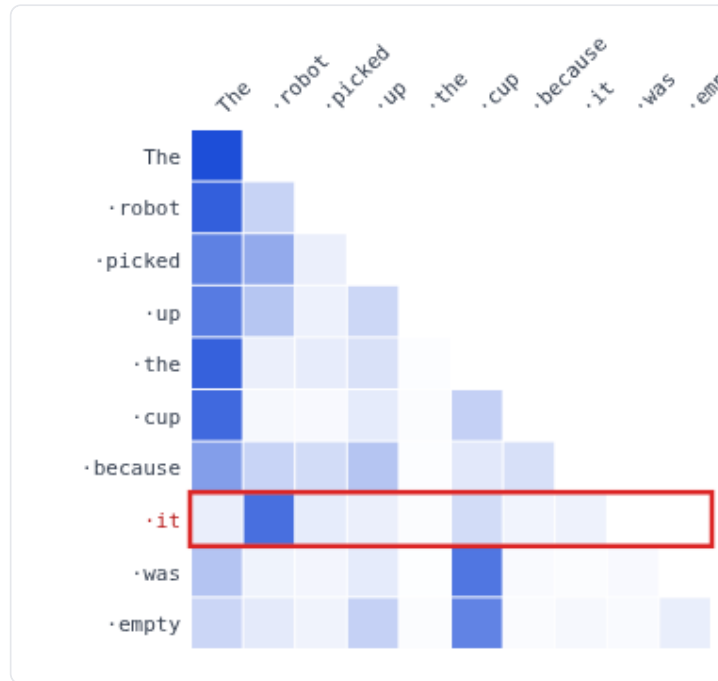

query: **it** attends to...

robot 0.74

cup 0.10


picked 0.04

The 0.03

up 0.03

it 0.03

The last position predicts next

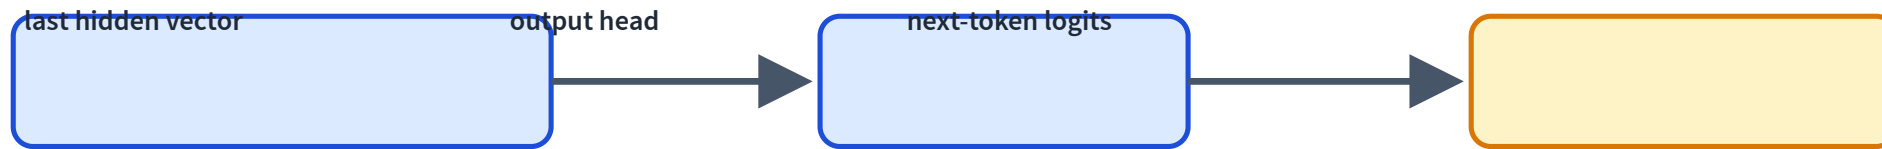

For generation, the next distribution comes from the final prompt position.

Logits: top candidates


Illustrative trace after the prompt: Explain
gradient descent in one sentence.

candidate token	logit	interpretation
Gradient	8.4	high
It	6.8	medium
A	6.3	medium
zq	-2.5	very low

The exact values here are a teaching trace, not a live benchmark.

Softmax and decoding choice

Gradient



0.54

It



0.21

A



0.16

zq



0.00

Decoding turns scores into one actual next token.

Watch it run

LIVE MODEL

A real Qwen3-0.6B answer (precomputed); temperature and thinking are yours to change, then run it live.

"Explain gradient descent in one sentence."

"Who won the 2031 Turing Award?"

temperature  0.7

thinking: OFF


run (real model)

prompt: Explain gradient descent in one sentence.

Gradient		0.99
The		0.00
A		0.00
Gr		0.00
Grad		0.00
In		0.00


Gradient descent
is a method used
to minimize a
function by
iteratively
adjusting the
parameters of a
model in the

Append and repeat

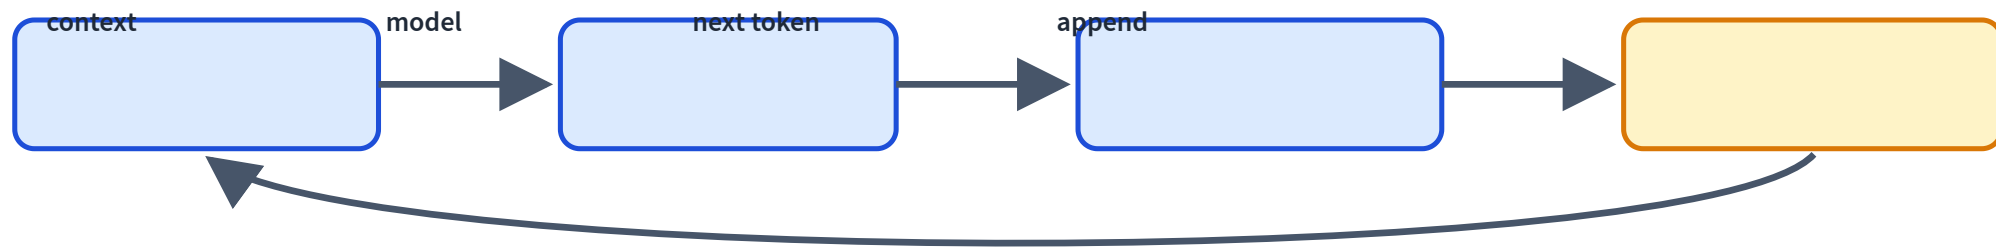

Generation is autoregressive and sequential at inference time.

KV cache: do not recompute everything

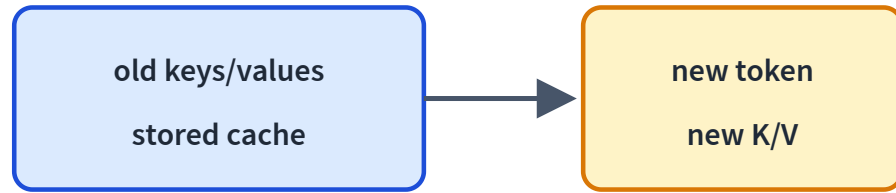


Generated tokens
keep their keys/values.

The next step computes
only the new token's pieces.

This is why long
context costs memory.

Context length is working memory



For Qwen3-0.6B: up to about **32k tokens**.

It is not permanent memory; it is the current working context.

Decoding changes behavior

greedy

deterministic, safe, repetitive

sampling

varied, sometimes
better, sometimes worse

Weights stay fixed; only the token selection rule changes.

Temperature controls randomness

low T

Gradi
nt



It



A



high T


Gradi
nt



It



A



Top-k and top-p trim the tail

top-k

sample from the k
most likely tokens

top-p

sample from tokens whose
cumulative mass reaches p

Keep randomness inside plausible choices.

Prompting is inference-time conditioning

Prompt A

Explain gradient descent.

Prompt B

Explain gradient descent to a 10-year-old.

The context changes. The weights do not.

Few-shot prompting specifies a pattern

```
tiny → small  
huge → big  
rapid → fast
```

Examples in the prompt can define a task without training.

Chain-of-thought-style prompting

direct

Answer the question.

reasoning style

Think step by step, then answer.

Reasoning traces can help behavior, but are not guaranteed faithful explanations of internal computation.

Some models expose thinking modes

non-thinking

answer directly

thinking

produce intermediate
reasoning text

For Qwen-style models, special chat-template controls can change this behavior.

Failure mode: hallucination

Who won the 2031 Turing Award?

A model may answer fluently anyway.

Next-token likelihood is not truth verification.

Failure mode: prompt sensitivity

Prompt 1

Give a concise answer.

Prompt 2

Be creative and speculate.

The model is conditioned by text; small changes can matter.

Failure mode: context and cost

context

long prompts
consume the window

latency

generation is
token-by-token

browser

hardware
support varies

What did not change today?

no fine-tuning

weights unchanged

no LoRA

no adapters

no retrieval

no external documents

We steered behavior only through inputs and decoding.

Next question

When is prompting not enough, and when do we update weights or add external knowledge?

Can another model **build those new weights** for us?

L22: this same Qwen3-0.6B becomes a frozen interpreter for compiled functions.

Recap

- ✓ Loaded tokenizer, config, weights, and generation settings.
- ✓ Tokenized a prompt and traced it into embeddings.
- ✓ Ran a causal LM to produce logits.
- ✓ Decoded one token at a time.
- ✓ Used prompting and decoding without updating weights.
- ✓ Identified common failure modes.