

# Lecture 17: The spherical Earth

*David Al-Attar*

*Michaelmas Term, 2026*

## Outline and motivation

In this lecture we apply ray theory to explain how quantitative properties of earthquakes and the Earth's internal structure can be determined from observations of seismic waves. Most of the methods and results we describe are more than seventy years old, and are not representative of current research in seismology. They are, nonetheless, still of great value, and later developments in the field have been built on these foundations. Indeed, it is really quite remarkable that most of the knowledge about the Earth and earthquakes contained within this lecture was determined at a time before digital seismometers and electronic computers.

## Hypocentre location using high-frequency waves

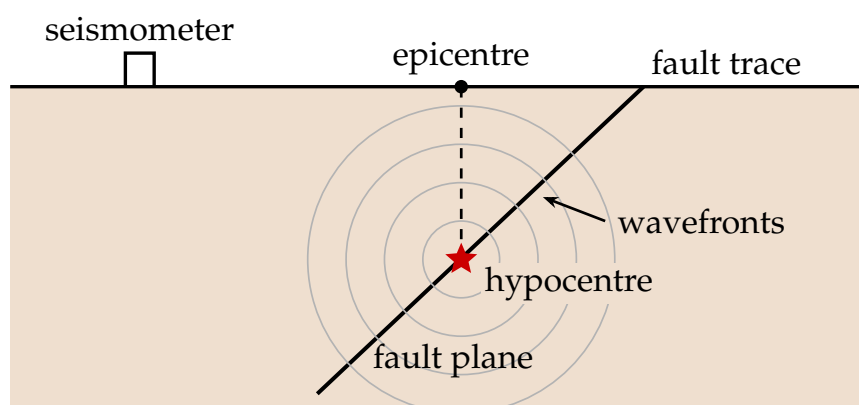


Fig. 1: A diagram showing an idealised planar fault. The hypocentre is the point on the fault where rupture initiates, while the epicentre is simply the projection of this point onto the Earth's surface. It is the hypocentre location that can be estimated by looking at the arrival times of high-frequency seismic waves recorded on seismometers.

Natural earthquakes occur due to rupture on faults within the Earth, and the point on the fault at which this rupture initiates is known as the earthquake's **hypocentre**. Fracture mechanics tells us that the speed of rupture propagation on the fault must be less than the fastest elastic wave speed of the medium (e.g. the P-wave speed in

isotropic bodies), and it follows that the **first waves to be recorded at distant seismometers are generated at the hypocentre**. Using the recorded **arrival times** of the first seismic waves at a large number of seismometers, it is possible to estimate the hypocentre location.

We shall focus on the case of an earthquake recorded at a large number of seismometers around the globe, and assume that the Earth's elastic properties are isotropic, which is a reasonable **first approximation**. On a global scale, seismic waves can be recorded at frequencies up to about **2 Hz**. The reason for this upper frequency limit is two-fold: (i) earthquakes generate energy at a whole range of frequencies, but the spectrum tends to be biased towards lower frequencies, and (ii) attenuation mechanisms for seismic waves (which we have not discussed) act more strongly at higher frequencies, and so higher frequency components of the wavefield are removed more quickly as they propagate through the Earth. At the highest observed frequencies, the first arriving waves on seismograms are usually quite sharp, and so their arrival times can be measured to **the accuracy of a few fractions within a fraction** of a second.

Given an accurate model of the Earth's seismic velocity structure, and having guessed the hypocentre location  $\mathbf{x}_h$  and hypocentre time  $t_h$  for the earthquake, then it is possible to calculate the arrival times we would expect at each of the seismometers using ray theory. The use of ray theory is justified here so long as velocity variations within the Earth are smooth over the **length-scale** of the observed seismic waves. At frequencies of about **2 Hz**, this is probably a reasonable approximation, but the real reason ray theory is used for these calculations is that it is computationally efficient. Indeed, calculation of the travel time from the source to receiver only requires the integration of the ordinary differential equations described in Lecture 17. Let us write  $t_i$  for the measured arrival time of the first seismic wave at the  **$i$ th seismometer**, which has position  $\mathbf{x}_i$ . We can then relate this observation to the true source location by

$$\begin{aligned} t_i &= t_h + T(\mathbf{x}_i, \mathbf{x}_h) + e_i \\ t_i &= t_h + T(\mathbf{x}_i, \mathbf{x}_h) + e_i, \end{aligned} \quad (1)$$

where  $T(\mathbf{x}_i, \mathbf{x}_h)$  is the ray theoretic travel time of the fastest ray from  $\mathbf{x}_h$  to  $\mathbf{x}_i$ , and  $e_i$  denotes a random measurement error which we assume to have zero mean and known variance  $\sigma_i^2$  (not to be confused with the ray parameter  $\sigma$  introduced below). To estimate the four unknown parameters  $(\mathbf{x}_h, t_h)$ , we minimise the following **least-squares misfit**

$$\begin{aligned} J(\mathbf{x}_h, t_h) &= \sum_{i=1}^{N_s} \frac{[t_h + T(\mathbf{x}_i, \mathbf{x}_h) - t_i]^2}{\sigma_i^2} \\ J(\mathbf{x}_h, t_h) &= \sum_{i=1}^{N_s} \frac{[t_h + T(\mathbf{x}_i, \mathbf{x}_h) - t_i]^2}{\sigma_i^2}, \end{aligned} \quad (2)$$

where  $N_s$  is the total number of seismometers from which we have measurements. The dependence of the calculated travel times on the hypocentre location  $\mathbf{x}_h$  is non-linear, but we can apply iterative optimisation methods to find the best-fitting solution given an initial guess. To do this, we need to differentiate the misfit  $J$  with respect to the model parameters  $(\mathbf{x}_h, t_h)$ , but we will not enter into the details.

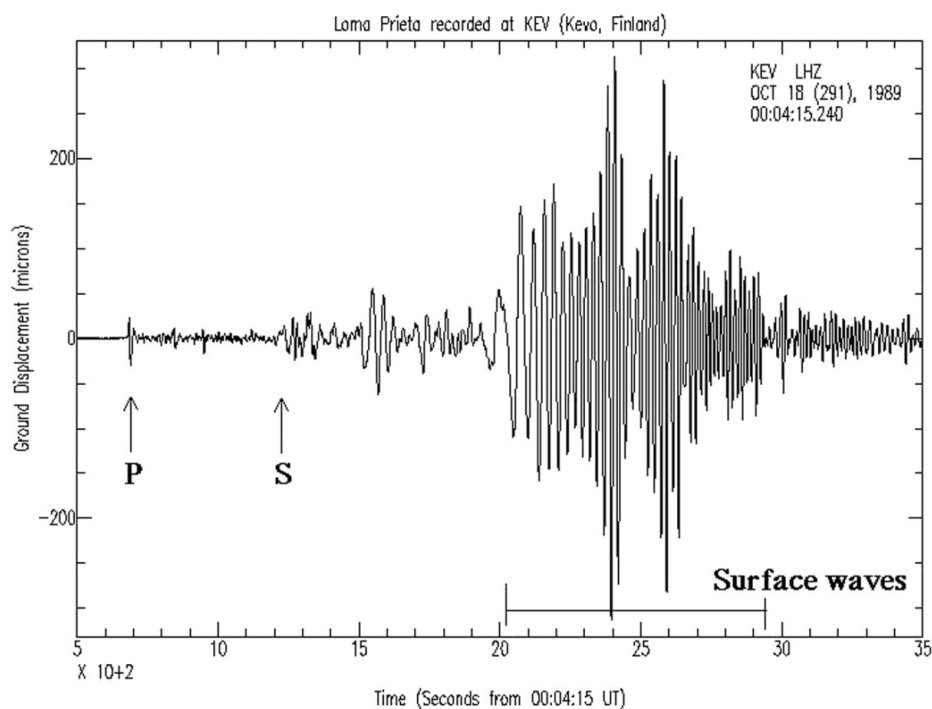


Fig. 2: A vertical component seismogram recorded in Finland following an earthquake in California ([the 1989 Loma Prieta earthquake recorded at station KEV](#)). The P-wave arrival can be seen very clearly, while later arriving phases are significantly harder to identify.

The accuracy to which earthquake hypocentres can be located depends on a number of things. Clearly errors in the measured arrival times lead to uncertainties in the solution, but this can be assessed using standard error-propagation techniques. Next, the limited frequency content of observed seismic waves sets a fundamental limit on the accuracy of location estimates. If we record waves at a maximum frequency of  $2\text{ Hz}$ , then using a typical P-wave velocity of about  $5\text{ km s}^{-1}$  for shallow parts of the Earth, we see that the shortest wavelengths present in the data are about  $2.5\text{ km}$ . Such waves cannot distinguish sources separated by more than about one half or one quarter of their minimum wavelength<sup>1</sup>. The accuracy is also dependent on the relative locations of the seismometers relative to the source. Ideally we would like a fairly even spatial distribution in terms of both azimuth and distance from the hypocentre. If, however, there are strong biases in the spatial distribution of the seismometers, then large uncertainties in some of the recovered parameters can be introduced. Finally, any uncertainty in the assumed Earth structure will clearly map onto errors in the hypocentre location. In the above discussion we have only considered the arrival times of the first waves seen on the seismograms. It is, however, often possible to identify and measure the arrival times of other seismic phases, and these additional measurements can be used within the above procedure to produce better results.

<sup>1</sup> The precise fraction isn't well-defined nor is it important.

<sup>1</sup> The precise fraction isn't well-defined, nor is it important.

## The spherically averaged velocity structure of the Earth

In the remainder of this lecture we consider how the Earth's spherically averaged velocity structure has been determined. The basic idea is very simple. After an earthquake, seismic waves propagate through the Earth's interior and are recorded at various locations around the globe. The observed seismograms depend on (i) the earthquake source, and (ii) the material that the waves have travelled through. And so, in principle, it is possible to work backwards from such observations to make inferences about both the earthquake source and the structure of the Earth's interior.

Studies of ~~earthquake and~~ earthquakes and of Earth structure are fundamentally linked, and we cannot learn about one without considering the other. For example, to locate an earthquake accurately we must know the Earth's velocity structure, and yet these earthquake locations are required if we wish to determine the velocity structure! ~~To proceed it is necessary to either~~ It is necessary either to consider these problems simultaneously, or to proceed in an iterative manner with one part of the problem being considered solved (i.e. that earthquake locations are known) while the other parameters are refined.

## Ray theory in spherically symmetric earth models

To learn about the Earth's velocity structure from travel times, we will use ray theory as discussed in the last lecture. For simplicity we restrict attention to isotropic earth models, in which case we need to consider either P-waves or S-waves, along with a whole range of converted phases that can arise at internal or external boundaries. For definiteness, we will focus on P-waves, but the ideas generalise easily.

The eikonal equation for P-waves in such a model is given by

$$\begin{aligned} \underline{H(\mathbf{x}, \mathbf{p})} &= \frac{1}{2}, \\ \underline{H(\mathbf{x}, \mathbf{p})} &= \frac{1}{2}, \end{aligned} \tag{3}$$

where  $\mathbf{x}$  is a position vector on a ray,  $\mathbf{p}$  is the local slowness vector, and the P-wave Hamiltonian is given by

$$\begin{aligned} \underline{H(\mathbf{x}, \mathbf{p})} &= \frac{1}{2} \alpha(\mathbf{x})^2 \|\mathbf{p}\|^2, \\ \underline{H(\mathbf{x}, \mathbf{p})} &= \frac{1}{2} \alpha(\mathbf{x})^2 \|\mathbf{p}\|^2, \end{aligned} \tag{4}$$

with  $\alpha(\mathbf{x})$  the P-wave speed at a point  $\mathbf{x}$ . The geometry of the ray paths is determined by solving Hamilton's canonical equations

$$\begin{aligned} \underline{\frac{d\mathbf{x}}{d\sigma} = \frac{\partial H}{\partial \mathbf{p}}, \quad \frac{d\mathbf{p}}{d\sigma} = -\frac{\partial H}{\partial \mathbf{x}}}, \\ \underline{\frac{d\mathbf{x}}{d\sigma} = \frac{\partial H}{\partial \mathbf{p}}, \quad \frac{d\mathbf{p}}{d\sigma} = -\frac{\partial H}{\partial \mathbf{x}}}, \end{aligned} \tag{5}$$

and the travel time  $T$  along a ray is simply given by  $T[\mathbf{x}(\sigma)] = \sigma$ . Because the earth model under consideration is spherically symmetric, the P-wave speed,  $\alpha$ , only depends on the radial distance  $r = \|\mathbf{x}\|$  from the centre of the model. Using this fact, we will show that this problem can be solved using quadratures. This situation is analogous to that for a single particle in a central potential, and to other **integrable systems** which having have sufficiently many conserved quantities.

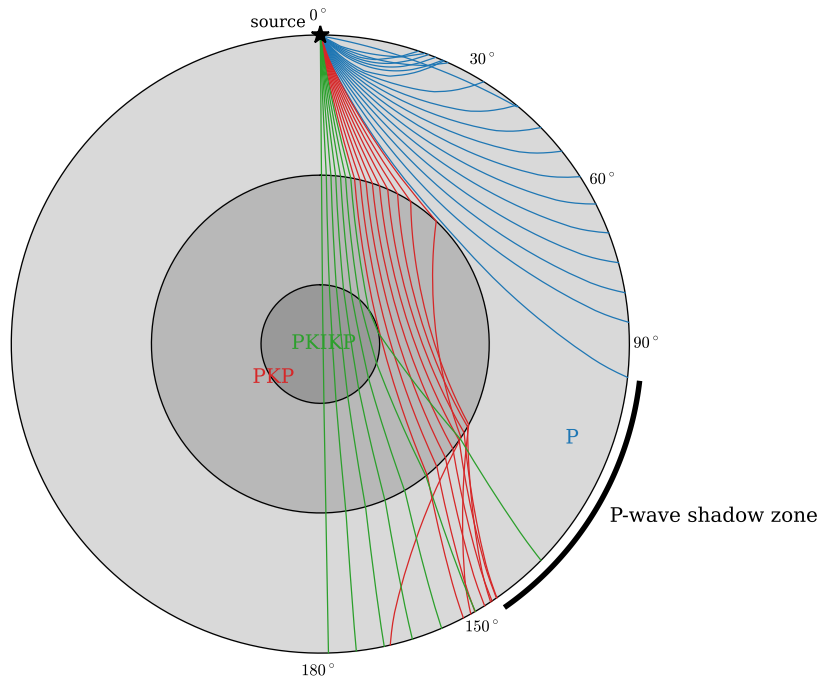


Fig. 3: A diagram showing some of the many possible P-wave ray paths within the Earth model PREM for a source at the surface, calculated using the ray equations of this lecture. Note in particular Rays that turn within the mantle (blue) emerge at epicentral angles up to about 98°. PKP rays (red), which turn within the outer core, emerge beyond about 145°, while PKIKP rays (green), which pass through the inner core, can emerge within the shadow zone. The sudden reduction in P-wave velocity when on entering the fluid outer core thus leads to the so-called “P-wave shadow zone”, while no S-waves are able to propagate within this region the outer core at all.

Making use of the P-wave Hamiltonian, we find that the ray equations in eq. (5) in a spherically symmetric earth model take the specific form

$$\frac{d\mathbf{x}}{d\sigma} = \alpha \hat{\mathbf{p}}, \quad \frac{d\mathbf{p}}{d\sigma} = -\frac{1}{\alpha} \frac{d\alpha}{dr} \hat{\mathbf{x}},$$

$$\frac{d\mathbf{x}}{d\sigma} = \alpha \hat{\mathbf{p}}, \quad \frac{d\mathbf{p}}{d\sigma} = -\frac{1}{\alpha} \frac{d\alpha}{dr} \hat{\mathbf{x}}, \quad (6)$$

where we have used the eikonal equations equation to simplify the form of the right hand right-hand sides, and where “hats” are used to denote unit vectors. If we

define  $\mathbf{q} = \mathbf{x} \times \mathbf{p}$ , then a simple calculation shows that

$$\begin{aligned} \frac{d}{d\sigma}(\mathbf{x} \times \mathbf{p}) &= \frac{d\mathbf{x}}{d\sigma} \times \mathbf{p} + \mathbf{x} \times \frac{d\mathbf{p}}{d\sigma} = \alpha \hat{\mathbf{p}} \times \mathbf{p} - \frac{1}{\alpha} \frac{d\alpha}{dr} \mathbf{x} \times \hat{\mathbf{x}} = \mathbf{0}. \\ \frac{d}{d\sigma}(\mathbf{x} \times \mathbf{p}) &= \frac{d\mathbf{x}}{d\sigma} \times \mathbf{p} + \mathbf{x} \times \frac{d\mathbf{p}}{d\sigma} = \alpha \hat{\mathbf{p}} \times \mathbf{p} - \frac{1}{\alpha} \frac{d\alpha}{dr} \mathbf{x} \times \hat{\mathbf{x}} = \mathbf{0}. \end{aligned} \quad (7)$$

It follows that  $\mathbf{q}$  is constant along solutions to these equations, and we mention in passing that this is precisely the conserved quantity associated with the spherical symmetry through ~~Noether~~ Noether's theorem. ~~Noting from eq.(6) that  $d\mathbf{x}/d\sigma$  is always parallel to  $\mathbf{x}$  and  $\mathbf{p}$ , it follows that~~ Since  $\mathbf{x}$  and  $\mathbf{p}$  are both orthogonal to the constant vector  $\mathbf{q}$ , rays always remain within the plane spanned by the initial values of  $\mathbf{x}$  and  $\mathbf{p}$ . Furthermore,  $q = \|\mathbf{q}\|$  is constant along a ray, and that this can be written

$$\begin{aligned} q &= \frac{r \sin \theta}{\alpha} \\ q &= \frac{r \sin \theta}{\alpha}, \end{aligned} \quad (8)$$

where  $\theta \in [0, \pi]$  is the angle between  $\mathbf{x}$  and  $\mathbf{p}$  ~~measured positively clockwise~~. Because  $\mathbf{x}$  and  $\mathbf{p}$  remain within their initial plane, we can write

$$\begin{aligned} \hat{\mathbf{p}} &= \cos[\theta(\mathbf{x})] \hat{\mathbf{x}} + \sin[\theta(\mathbf{x})] \hat{\Delta}(\mathbf{x}), \\ \hat{\mathbf{p}} &= \cos[\theta(\mathbf{x})] \hat{\mathbf{x}} + \sin[\theta(\mathbf{x})] \hat{\Delta}(\mathbf{x}), \end{aligned} \quad (9)$$

where the epicentral angle  $\Delta$  is that subtended between  $\mathbf{x}$  and its initial value, and  $\hat{\Delta}(\mathbf{x})$  the unit vector in the direction of increasing  $\Delta$  about the point  $\mathbf{x}$ . Making use of eq.(8), we can then write

$$\begin{aligned} \sin \theta &= \frac{\alpha q}{r}, \quad \cos \theta = \pm \sqrt{1 - \frac{\alpha^2 q^2}{r^2}}, \\ \sin \theta &= \frac{\alpha q}{r}, \quad \cos \theta = \pm \sqrt{1 - \frac{\alpha^2 q^2}{r^2}}, \end{aligned} \quad (10)$$

where the sign ~~of the second term in the second expression~~ is determined by whether the ray is ~~up-going (+) or down-going (-)~~ up-going (+) or down-going (-). For definiteness, we consider an initially ~~down-going~~ down-going ray, and using the first of the equations in eq.(6) we find

$$\begin{aligned} \frac{d\mathbf{x}}{d\sigma} &= -\alpha \sqrt{1 - \frac{\alpha^2 q^2}{r^2}} \hat{\mathbf{x}} + \frac{\alpha^2 q}{r} \hat{\Delta}. \\ \frac{d\mathbf{x}}{d\sigma} &= -\alpha \sqrt{1 - \frac{\alpha^2 q^2}{r^2}} \hat{\mathbf{x}} + \frac{\alpha^2 q}{r} \hat{\Delta}. \end{aligned} \quad (11)$$

In this manner, we have eliminated the local slowness vector from the problem, and are left with a single equation for the position vector along the ray. To proceed, we calculate

$$\begin{aligned} \frac{d}{d\sigma} r[\mathbf{x}(\sigma)] &= \frac{\partial r}{\partial x_i} \frac{dx_i}{d\sigma} = -\alpha \sqrt{1 - \frac{\alpha^2 q^2}{r^2}}, \\ \frac{d}{d\sigma} r[\mathbf{x}(\sigma)] &= \frac{\partial r}{\partial x_i} \frac{dx_i}{d\sigma} = -\alpha \sqrt{1 - \frac{\alpha^2 q^2}{r^2}}, \end{aligned} \quad (12)$$

where we have used the familiar relation  $\frac{\partial r}{\partial x_i} = \hat{x}_i$ . In the same way, we find

$$\begin{aligned} \frac{d}{d\sigma} \Delta[\mathbf{x}(\sigma)] &= \frac{\partial \Delta}{\partial x_i} \frac{dx_i}{d\sigma} = \frac{\alpha^2 q}{r^2}, \\ \frac{d}{d\sigma} \Delta[\mathbf{x}(\sigma)] &= \frac{\partial \Delta}{\partial x_i} \frac{dx_i}{d\sigma} = \frac{\alpha^2 q}{r^2}, \end{aligned} \quad (13)$$

where we have used the identity  $\frac{\partial \Delta}{\partial x_i} = \frac{1}{r} \hat{\Delta}_i$  which is readily established. Combining eq.(12) and eq.(13), we have now shown that along a ray we can write

$$\begin{aligned} \frac{d\Delta}{dr} &= \frac{d\Delta}{d\sigma} \left( \frac{dr}{d\sigma} \right)^{-1} = \frac{-\alpha q}{r \sqrt{r^2 - \alpha^2 q^2}}, \\ \frac{d\Delta}{dr} &= \frac{d\Delta}{d\sigma} \left( \frac{dr}{d\sigma} \right)^{-1} = \frac{-\alpha q}{r \sqrt{r^2 - \alpha^2 q^2}}. \end{aligned} \quad (14)$$

Similarly, using the fact that  $dT/d\sigma = 1$  along a ray, we find

$$\begin{aligned} \frac{dT}{dr} &= \frac{dT}{d\sigma} \left( \frac{dr}{d\sigma} \right)^{-1} = \frac{-r}{\alpha \sqrt{r^2 - \alpha^2 q^2}}, \\ \frac{dT}{dr} &= \frac{dT}{d\sigma} \left( \frac{dr}{d\sigma} \right)^{-1} = \frac{-r}{\alpha \sqrt{r^2 - \alpha^2 q^2}}. \end{aligned} \quad (15)$$

It is important to note that these equations are only valid in portions of the ray in which the epicentral angle  $\Delta$  or and the travel time  $T$  are single-valued functions of the radius  $r$ .

Let us now suppose that the P-wave speed,  $\alpha$ , increases monotonically with depth into the earth model. Consider a ray starting at the surface  $r = a$   $r = b$  that is initially travelling into the earth model in a non-vertical direction (i.e.  $\pi/2 < \theta < \pi$  initially). The fact that  $q = \frac{r \sin \theta}{\alpha}$  is conserved implies that this ray will travel monotonically downwards into the earth model with  $\Delta$  monotonically increasing until it reaches a **turning point**  $r_t$  such that

$$q = \frac{r_t}{\alpha(r_t)}$$

$$q = \frac{r_t}{\alpha(r_t)}. \quad (16)$$

Beyond this turning point, the ray moves up towards the surface, with  $r$  monotonically increasing, and  $\Delta$  continuing to monotonically increase. Furthermore, the ~~up and down going~~ up- and down-going legs of the ray's path are symmetric about the radial line passing through the turning point. Using eq. (14), which is valid throughout the down-going leg, we obtain

$$\Delta = \int_{r_t}^a \frac{2\alpha(r)q}{r\sqrt{r^2 - \alpha(r)^2q^2}} dr; \quad (17)$$

$$\Delta = \int_{r_t}^b \frac{2\alpha(r)q}{r\sqrt{r^2 - \alpha(r)^2q^2}} dr,$$

for the total epicentral angle subtended by the ray as it travels from the surface to the turning point and then up to the surface again. Using eq. (15), we similarly write the travel time along this ray path as

$$T = \int_{r_t}^a \frac{2r}{\alpha(r)\sqrt{r^2 - \alpha(r)^2q^2}} dr. \quad (18)$$

$$T = \int_{r_t}^b \frac{2r}{\alpha(r)\sqrt{r^2 - \alpha(r)^2q^2}} dr.$$

In this manner, we see that the travel time along a ray path in such a spherical model can be obtained through a simple integral over the velocity structure (the integrands are singular at the turning point, but these are integrable singularities, point, but this is an integrable singularity). The extension of these results to models having more complicated velocity structures is straightforward in principle, but takes a little effort.

## Travel time inversions for spherical velocity structure

As we have just seen, ray theory can be used to efficiently determine the travel times of various seismic phases within a spherically symmetric earth model. At a given epicentral angle, there will generally be many distinct seismic phases that arrive at different times and correspond to different ray paths, as well as non-geometric phases such as surface waves, head waves, and diffracted waves that are not predicted by ray theory. The use of the word “phase” here refers to a distinct waveform on a seismogram, and should not be confused with other uses of “phase” within these lectures or elsewhere.

Assuming that we know an earthquake's location and origin time, it is possible to measure the travel times of various seismic phases to different seismometers. By repeating this process for many many events, global events, globally averaged travel time curves have been constructed. Given a radial velocity structure, we know how to calculate travel times for the different phases, and we aim to find an earth model that is consistent with our observations. This is another example of an inverse problem in which we must work backwards from observations to learn about a set of model parameters.

We will have more to say about inverse problems ~~later in the course~~ in the next lecture, but historically speaking, the determination of the Earth's spherically symmetric velocity structure largely pre-dates the introduction of inverse theory, and early studies used ~~more-or-less~~ more or less ad hoc methods. In this field, the most important figures are Richard Oldham (~~1858-1936~~ 1858-1936), Beno Gutenberg (~~1889-1960~~ 1889-1960), Harold Jeffreys (~~1891-1989~~ 1891-1989), and Inge Lehmann (~~1888-1993~~ 1888-1993). In particular, it was Oldham ~~who first identified~~ (1906) who first argued for the existence of the Earth's core ~~by noting the absence of~~, from the anomalously late arrivals of waves at large epicentral angles, while it was Gutenberg (1914) who explained the P-wave arrivals within a certain range of epicentral angles ~~shadow zone illustrated in Fig. 3 and used it to determine the depth of the core-mantle boundary to within a few tens of kilometres of its modern value~~. Jeffreys first convincingly argued that the core of the Earth must be at least partially fluid, though here the relevant observations were of solid-Earth tides, and not seismic waves. Finally, Lehmann later realised that there exists a solid inner core through careful study of waves travelling through the Earth's central region. There is a famous quote from Oldham's (1906) paper on the Earth's core that is worth repeating:

"Of all regions of the Earth none invites speculation more than that which lies beneath our feet, and in none is speculation more dangerous; yet, apart from speculation, it is little that we can say regarding the constitution of the interior of the earth. Many theories of the earth have been propounded at different times: the central substance of the earth has been supposed to be fiery, fluid, solid, and gaseous in turn, till geologists have turned in despair from the subject, and become inclined to confine their attention to the outermost crust of the Earth, leaving its centre as a playground for mathematicians."

We shall not consider the determination of the spherically symmetric velocity structure further, but will instead turn to discussing ~~the broad features that have been learnt about the spherically symmetric velocity structure~~ its broad features.

## An overview of the Earth's spherically averaged velocity structure

~~The model PREM by Dziewonski & Anderson (1981)~~ Figure 5 shows the variation of P-wave and S-wave velocity with ~~depth in the earth~~ radius in the Earth according to the Preliminary Reference Earth Model (PREM) of Dziewonski & Anderson (1981). This model was obtained by fitting travel times of seismic waves, as well as further constraints obtained from observations of the Earth's free oscillations that will be the focus of a later lecture. As a first observation, there is a general tendency for the velocity to increase gradually downwards, though there are also a number of sharp discontinuities within the structure. The P-wave velocity  $\alpha$  and S-wave velocity  $\beta$  are given by

$$\alpha = \sqrt{\frac{\kappa + \frac{4}{3}\mu}{\rho}}, \quad \beta = \sqrt{\frac{\mu}{\rho}},$$


---


$$\alpha = \sqrt{\frac{\kappa + \frac{4}{3}\mu}{\rho}}, \quad \beta = \sqrt{\frac{\mu}{\rho}}, \quad (19)$$

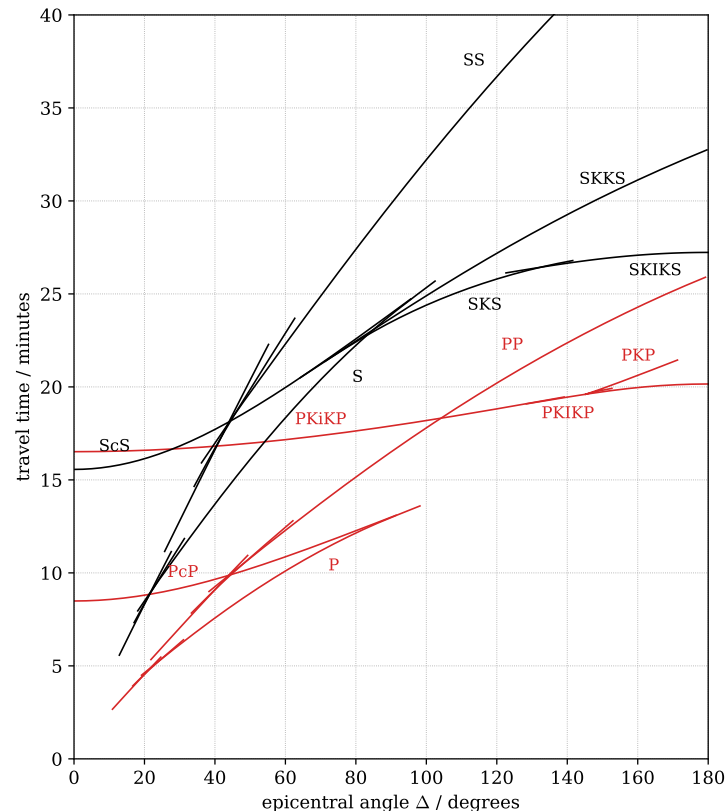


Fig. 4: Travel time curves ~~determined for the main body-wave phases within the earth model PREM, for a large number source at the surface, calculated using the ray equations of seismic this lecture (phases within travelling as P-waves in the Earth mantle in red, and as S-waves in black). Only rays whose turning or reflection point lies below 220 km depth are shown.~~ The nomenclature for the different phases can be ignored.

where  $\kappa$  is the bulk modulus,  $\mu$  the shear modulus, and  $\rho$  the density. As we go deeper into the Earth, things are increasingly compressed, and this tends to increase both the elastic ~~modulii~~ moduli and the density, ~~though the combined effect is typically for wave velocities to~~ the former effect dominates, so that wave speeds typically increase.

Discontinuities in the seismic velocity are identified principally by the occurrence of reflected seismic waves, and their presence must be due either ~~either the composition or through composition or to~~ a phase change within the same material. Note here that “sharp” is always defined relative to the wavelength of the seismic waves used to image the Earth, and so these boundaries may, in reality, be somewhat diffuse. The most notable discontinuities within the Earth are at the ~~core mantle~~ core-mantle boundary (CMB), which is thought to represent a change from the rocky mantle to a fluid iron core, and at the inner core boundary (ICB), which is explained by a fluid to solid phase change within the iron core. It is worth emphasising that we do not actually know that the core is made of iron (and likely a few additional minor components). The reasons for thinking this is likely are: (i) iron at the appropriate pressures and temperatures has the right sort of density and wave speeds, (ii) iron is very abundant in the solar system due to its high ~~binding energy~~ nuclear binding energy per nucleon, (iii) there exist iron meteorites that are interpreted as fragments

from the cores of “proto-planets”, and (iv) such a composition is consistent with the generation of the geodynamo in a convecting conductor.

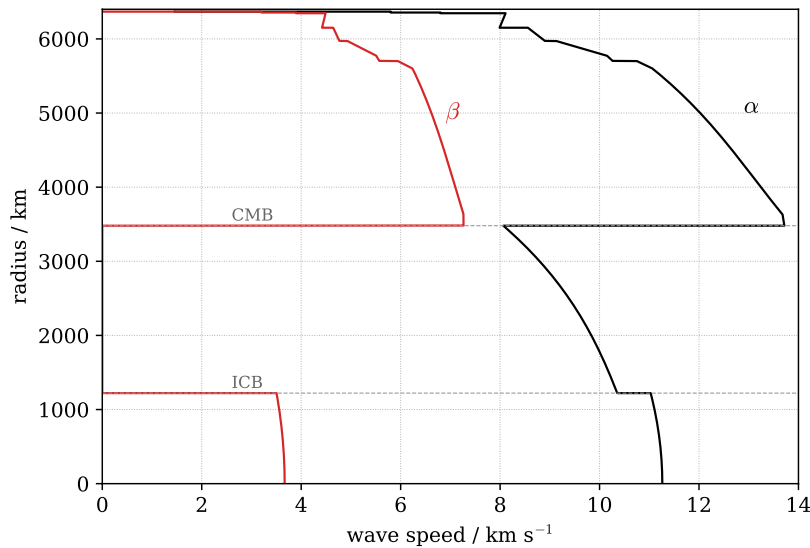


Fig. 5: Variation of P-wave velocity (black curve) and S-wave velocity (red curve) with radius in the model PREM of Dziewonski & Anderson (1981). Here we can see that both wave speeds generally increase with depth, but this increase is interrupted by a number of sharp velocity discontinuities. Such discontinuities are associated with compositional or phase changes within the Earth. The most notable boundaries within the Earth are between the ~~the~~ rocky mantle and the fluid iron outer core where the S-wave velocity becomes equal to zero, and at the inner core boundary where the iron of the core undergoes a fluid to solid phase transformation.

That the outer core is a fluid is strongly suggested by (i) observations of solid-Earth tides, (ii) the absence of S-waves propagating through this region ( $\mu = 0$  in a fluid), and (iii) ~~is also the fact that a fluid core is~~ required for the generation of the geodynamo. The likely solidity of the inner core has been deduced by a number of arguments. Firstly, it does not seem plausible that there could be a sharp jump in velocity within a purely fluid region. There is also compelling evidence derived from the observed free oscillation periods (Dziewonski & Gilbert 1975). ~~And lastly~~ 1971). Lastly, some studies ~~that have identify~~ have identified inner core S-waves produced by conversion from a P-wave at the ICB (e.g. Deuss et al. 2000). Such core phases have very small amplitudes, and the robustness of such observations ~~are~~ is still debated.

As well as the velocity discontinuities at the CMB and ICB, there are a number of other discontinuities within the shallower Earth. Those within the crust and ~~upper most uppermost~~ mantle are almost certainly due to compositional changes. There are then additional discontinuities at around ~~410 km and 670 km~~ 410 km and 670 km that are not readily explained in terms of composition. Instead these discontinuities are thought to represent solid-state phase transformations within the minerals making up the Earth’s mantle that result from radial changes in both pressure and temperature. The occurrence of such phase transformations within this part of the mantle is consistent with both laboratory experiments and quantum mechanical calculations. The

region between the ~~410 km and 670 km~~ 410 km and 670 km discontinuities is known as the transition zone, and can be regarded as separating the upper and lower parts of the mantle. Other properties such as viscosity are believed to also be discontinuous across these phase boundaries, with the lower mantle seeming to be significantly more viscous. The viscosity contrast between the upper and lower mantle has important implications for mantle convection, and may lead to some ~~"decoupling"~~ "decoupling" of the two regions.

## What you need to know and be able to do

- (i) Know what the hypocentre of an earthquake is, and how the hypocentral location and time can be determined using observations of seismic waves.
- (ii) Understand how the Hamiltonian ray tracing equations within a spherically symmetric earth model can be reduced to the calculation of appropriate radial integrals. ~~Within~~ In the second problem set ~~, you will work through similar calculations in a horizontally stratified earth model~~ you will see how such travel time integrals can be inverted for the velocity structure.
- (iii) Understand in outline the observations and methods that were used to constrain the Earth's spherically symmetric velocity structure. You should also know the basic properties of this spherically symmetric velocity structure, and the physical interpretation of its major features.