

Recycling of Rare Earth Elements

Marcus Dahlström
Chalmers University of Technology
at Technische Universität Wien
Vienna, Austria, 2025-01
Student ID: 12402525

Abstract—Rare earth elements (REEs) are critical components in modern technology. They play a role in everything from decarbonization to medical devices. This report examines what REEs are, where they are used, and how they are recycled. The focus is on the environmental effects of acquisition through mining, which is mostly related to land disturbance and pollution, as well as the different recycling processes, such as hydro and pyrometallurgy. The geopolitical aspects of REEs, which China is the largest supplier of, are also discussed. Lastly, there will be a look at the remaining supply of REEs and some alternative sources. The report concludes that **TODO**

Index Terms—rare earths elements, electronic waste, recycling

I. BACKGROUND

The following report on *rare earth elements* (hereinafter referred to as *REEs*), is aimed at individuals who are looking for an introduction to REEs from an environmental and recycling point of view. An introduction will be given to what REEs are, the different categories of REEs, some of their properties, where they are used, and why they are called *rare*. Following the introduction, there will be an overview of the global aspects of REEs, where they are mined, in which sectors they are used, and the different political aspects that are connected to them. After that comes the main two chapters of the report; namely the environmental aspects of acquisition, refinement, and their afterlife; followed by *if* and *how* they are recycled. The report will end with an overview of the future of REEs, specifically looking at the remaining supply and alternative acquisition pathways.

A. Topics that will be left out

As the main focus of the report is on the environmental and recycling aspects of REEs, the specifics of the chemical, mechanical, thermal, and electrical properties of REEs will be left out. Also, the ethical discussion regarding acquisition, pollution, etc. will be held briefly so as not to make the report too long.

II. INTRODUCTION

The following chapter will introduce REEs for individuals who are only vaguely or not at all familiar with REEs. As electronic waste, also called *e-waste*, and recycling of REEs are tightly connected, there will also be a short introduction to the topic of e-waste.

A. What are REEs?

Metals are usually divided into base, precious, and rare earth elements **javed2024**. REEs are a group of 17 elements from the periodic table **USDoE2024**. They were first discovered in the 18th century in a village called *Ytterby* located in Sweden, by army lieutenant Carl Axel Arrhenius **britannica2024**. Four elements in the periodic table have been named after Ytterby, namely *yttrium*, *ytterbium*, *terbium*, and *erbium* **sciencehistory2024**. The first REE to be isolated was *cerium* in 1803 **britannica2024**.

B. Why they are called rare

The word *rare* in *rare earth elements* comes from the historical name, when they were once thought to be rare **sciencehistory2024**. REEs belong to the 50th percentile of most abundant elements in the earth's crust **britannica2024**. This means that they are more abundant than e.g. diamonds in the earth's crust **diamonds**. REEs are distributed throughout the earth's crust, but due to their geological properties, they are dispersed mostly in low quantities, too low for there to be any economic value in mining and refining them **REEDistribution**. The average quantity throughout the earth's crust is 60-70 ppm **REEDistribution**. Most of the time, REEs have to be mined together with other minerals for there to be any economic value in mining them **REEDistribution**.

C. Applications of REEs

The use cases for REEs are wide, from the probably most well-known being neodymium magnets **USDoE2024** to lesser-known ones such as mirrors **britannica2024**. The many different magnetic **USDoE2024**, electric **britannica2024**, thermal **britannica2024**, and catalytic **britannica2024** properties make them usable in many areas. They have a role in applications within national security, as many modern defence systems rely on the use of REEs **USDoE2024**. They are also used in the production of batteries, phosphors, and catalysts **USDoE2024**. Their use in these low-level applications makes them a critical part of many modern technologies, in everything from healthcare and transportation to energy generation and consumer electronics **USDoE2024**. In electronics, between 0.1-5% of the total weight of the product is REEs. But for magnets, this can be as high as 25% **britannica2024**. REEs have also found new uses in additive manufacturing, where they have been shown to increase the durability of the materials **additive2022**. REEs can also be used in cement,

where they improve durability and therefore reduce the need for repair and replacement **cement2009**. REEs can be used in cleaning soil, in a similar way as they're used in cleaning exhaust gases, by binding to heavy metals and removing them from the soil **soil2017b**. For the same reason, they can also be used to filter water **water2024**.

III. GLOBAL ASPECTS

The following chapter will cover the global aspects of REEs, such as the worldwide yearly usage, economic value, global branch distribution, how and where they are mined, and political aspects. As the acquisition of REEs is a global issue, it is heavily dependent on geopolitical and geoeconomic factors **politics2022**.

A. Worldwide yearly usage and supply

In the 1950s, the worldwide production of *ROEs*, which are REE oxides, was below 5000 mt **REEPrediction**. In 2023, the production was up 70-fold to 350'000 mt **REEPrediction**. Recent forecasts predict that the demand will increase to 450'000 mt by 2035 **REEPrediction**.

While REEs are to some degree acquired through recycling, the main acquisition pathway is predominately mining **britannica2024REELandscape**. There are currently 160 mineral sources of REEs, however, only 4 of them are mined: *bastnasite*, *laterite*, *monazite*, and *loparzite* **britannica2024**. There are also other nonmineral sources of REEs, such as deep-sea clays outside of the *Minamitori Islands* in Japan, but they have not yet been exploited **britannica2024**. 80% of the global supply is mined by China, mostly in the Inner Mongolia region (**britannica2024**). However, extraction takes place in many countries **britannica2024**. Other major deposits worldwide are US, Canada, Australia, Russia, South Africa, Southeast Asia, and India **britannica2024**.

The graph below shows an overview of where REEs are mined (TODO). China is believed to have a black market for REEs, which is not included in the official numbers but is believed to add an additional 25% to their production **britannica2024**. Demand for REEs increases at a rate of 10% every year. Both the EU and the US have REEs on their lists of critical raw materials **EU2014US2018**.

(TODO INSERT GRAPH HERE)

B. Economic value

For there to be any economic value in mining for REEs, the concentration has to be 5% or higher **britannica2024**. If mined together with other minerals, it can be economically viable to mine down to 0.5% concentrations (**britannica2024**). Advancements in acquisition and recycling **REELandscape**, together with export regulations, tariffs, and trade agreements **politics2022**, all affect the price of REEs.

The push for decarbonization has increased the demand for REEs, as they are a critical component in e.g. electric vehicles and wind turbines, where they are used predominantly in the permanent magnets of the motors and generators **windturbines2022**.

C. Political aspects

China is the world's largest producer of REEs, largely because they have the world's largest refining capabilities **ChinaRefining**, with 80% of the global supply produced in 2017 **britannica2024**, and 70% of the market share in 2023 **ChinaRefining**. Due to this, there are reasons for mentioning the political aspects of REEs **britannica2024**. One example where China used their dominance as a supplier was in the years 2009-2011, when China imposed export quotas and drove up the market price of REEs by several hundred percent **britannica2024**.

IV. ENVIRONMENTAL ASPECTS AT AQUISION

The main source of REEs is by exploitation of mining operations **REELandscape**. The first steps in acquiring REEs are finding deposits of high concentration, mining the ores followed by crushing and grinding, and then using different extraction techniques to get the different REEs out of the powdered ore **REELandscape**. The processing step is the most technical one, as the chemical properties of REEs make them difficult to separate from each other **britannica2024**.

A. Mining

One issue in mining is unregulated mining operations and illegal mining operations, especially since mining already involves significant disturbance to the land **unregulatedMining**. Illegal mining operations typically cause more damage due to a complete lack of regulation and the use of non-compliant mining practices **unregulatedMining**. One less land invasive technique is called *in-situ leaching*, where processing chemicals are pumped through the deposits to extract the REEs without removing the ore from the ground **REELandscape**. While this method may be less damaging for the land, it does have a much higher risk of environmental damage due to the chemicals involved **unregulatedMining**. This method is often used because it's cheaper and produces less mining waste **unregulatedMining**.

B. Processing

There are heavy REEs, called *HREEs*, and light REEs, called *LREEs*, and one difficulty in processing is separating the two, as they have similar chemical properties, requiring intricate and precise techniques **HREELREE**. The presence of radioactive elements such as *thorium* and *uranium* adds more complexity to the extraction **radioactive**. Different acids are often used when processing the ore, such as *sulfuric acid* when leaching from *bastnaesite*, or *sodium hydroxide* when leaching from *monazite* and *xenotime* **REELandscape**. The issue with using these acids is that they also dissolve other impurities, which then requires further purification steps **radioactive**. Electrochemical processing is a more environmentally friendly technique that involves fewer chemicals **radioactive**.

C. Environmental aspects at end-of-life

Landfills filled with e-waste release toxic chemicals such as flame retardants, heavy metals such as mercury, REEs, and other materials such as plastics that pollute the soil, water, air, and ultimately human and animal health **javed2024**. The Basel Convention prohibits the export of hazardous waste from developed to developing countries **baselconv**. Therefore e-waste management has become a large area of research **javed2024**. Switzerland and the Netherlands are currently the leading countries in e-waste management **javed2024**. However, only about 9.33 million mt out of 53.6 million mt that were generated in 2019 were documented and recycled properly **javed2024**. From refrigerators only it is estimated that 98 million mt of CO_2 equivalents were released due to the lack of proper recycling **javed2024**. That is 0.3% of the global CO_2 emissions from energy sources, or as much as the country xxx released in xxx. TODO

V. DEFINING E-WASTE

E-waste, also known as *Waste Electrical and Electronic Equipment* (WEEE), includes most electronics that require an electric current or a battery to function **WEEE**. In 2019 the global generation of e-waste was 53.6 million mt **sanchez2024**. This number is predicted to increase to 74.7 metric tons by 2030 and does not include solar panels **javed2024**. Looking at only solar panels, it is predicted that they will contribute to 4-14% of the e-waste in 2030 and over 50% (78 million tons) in 2050 **javed2024**. The e-waste market is expected to grow to \$145 million by 2030 **ewastemarket**. Recovering REEs from e-waste is driven by environmental (avoiding new exploitation and having circular *tech-economy*), geopolitical (reducing dependency on single suppliers), and economical (reducing costs when traditional supply is dwindling and stabilizing global supply) factors **sanchez2024**.

The world's leading countries for the generation of e-waste are China (10.1 million tons), the US (6.9 million tons), and India (3.2 million tons) **javed2024**. One paper estimates that recycling Nd-Fe-B magnets from old hard drives in the US only, could supply 5.2% of the global (excluding China) demand for those REEs **hdds**.

The composition of e-waste is 65% metals, 21% plastics, and 16% other materials **javed2024**. The metals are 50% ferrous metals such as iron and steel, and 13% non-ferrous metals such as copper, aluminium, precious metals, and rare-earth elements.

1 million cell phones equal 16,000 kg of copper, 350 kg of Ag, 34 kg of Au, and 15 kg of palladium **javed2024**.

VI. RECYCLING AND RECOVERY

The recovery of REEs from end-of-life (EOL) products is a challenge that is gaining more attention as the demand for REEs increases **USDoE2024**. Another reason for the increase in interest in recycling REEs is the environmental impact of mining and processing REEs **REELandscape**.

Presently it is mostly phosphors and catalysts that are recycled **britannica2024**. However, batteries such as nickel-metal hydride (*NiMH*) batteries and some permanent magnets hold 25-30% of their weight in REEs, which is more than any ore deposit **britannica2024**. Recycling aligns with a circular economy approach **circular2016**, but recovery is difficult for many reasons, including the mixture of materials and metals in the products and the use of glass, polymers, and other non-metals.

Traditional methods involve using chemicals to dissolve the REEs from the product, and then precipitate them out of the solution **sanchez2024**. Other methods also involve using heat or electricity to extract the REEs **sanchez2024**. The similarities between the different extraction techniques are that they try to exploit the different chemical and physical properties of the REEs to separate them from each other and the ore or e-waste **sanchez2024**. What makes this process difficult is that the REEs are chemically and physically similar to each other **britannica2024**, which requires a high degree of precision and accuracy in the separation process.

A. Hydrometallurgical recycling

The hydrometallurgical process is a chemical process, where different chemicals, acids or bases, are used to leach, i.e. dissolve, the REEs **javed2024**. As seen in Figure 2, there are different categories of hydrometallurgical processes. The main three are chemical leaching, acid/alkali leaching, and bio-hydrometallurgical approach. Although the most used industrial process with a good recovery rate, its heavy use of chemicals comes with an environmental footprint.

1) *Chemical leaching*: The four sub-categories of chemical leaching are *cyanide leaching*, *thio-sulphate leaching*, *thio-urea leaching*, and *halide leaching* **javed2024**. The latter three can all be grouped as *non-cyanide leaching*. As can be expected, the major drawback of cyanide leaching is that it is highly toxic and also highly corrosive **cyanide**. The reason for using cyanide is that it is cheap to use and effective at extracting Au and Ag **cyanidejaved2024**.

The non-cyanide group all have the advantages that they are less toxic than cyanide, less corrosive (except halide), and thio-urea is also classified as environmentally friendly **thiourea**. Which one to choose depends on which metal is to be extracted, even though all methods are mostly used to extract precious metals **javed2024**. Thio-sulfate leaching has the issue that it is not as effective as cyanide, with about 93% leaching rate for Au, and is also more expensive **javed2024**. Thio-urea leaching has a 99% leaching rate for Au and works faster **thiourea**. Halide leaching includes *chloride*, *bromide*, and *iodide* leaching, and has an Au leaching rate of around 90% **javed2024**.

2) *Acid/alkali leaching*: Acid leaching is the most common approach for metal recovery from electronic waste **javed2024**. The process is well-studied, flexible, and inexpensive. Different acids are used depending on which metal is to be recovered. Within acid leaching, there are three different approaches: acid only, acid and oxidiser agent, or multi-stage

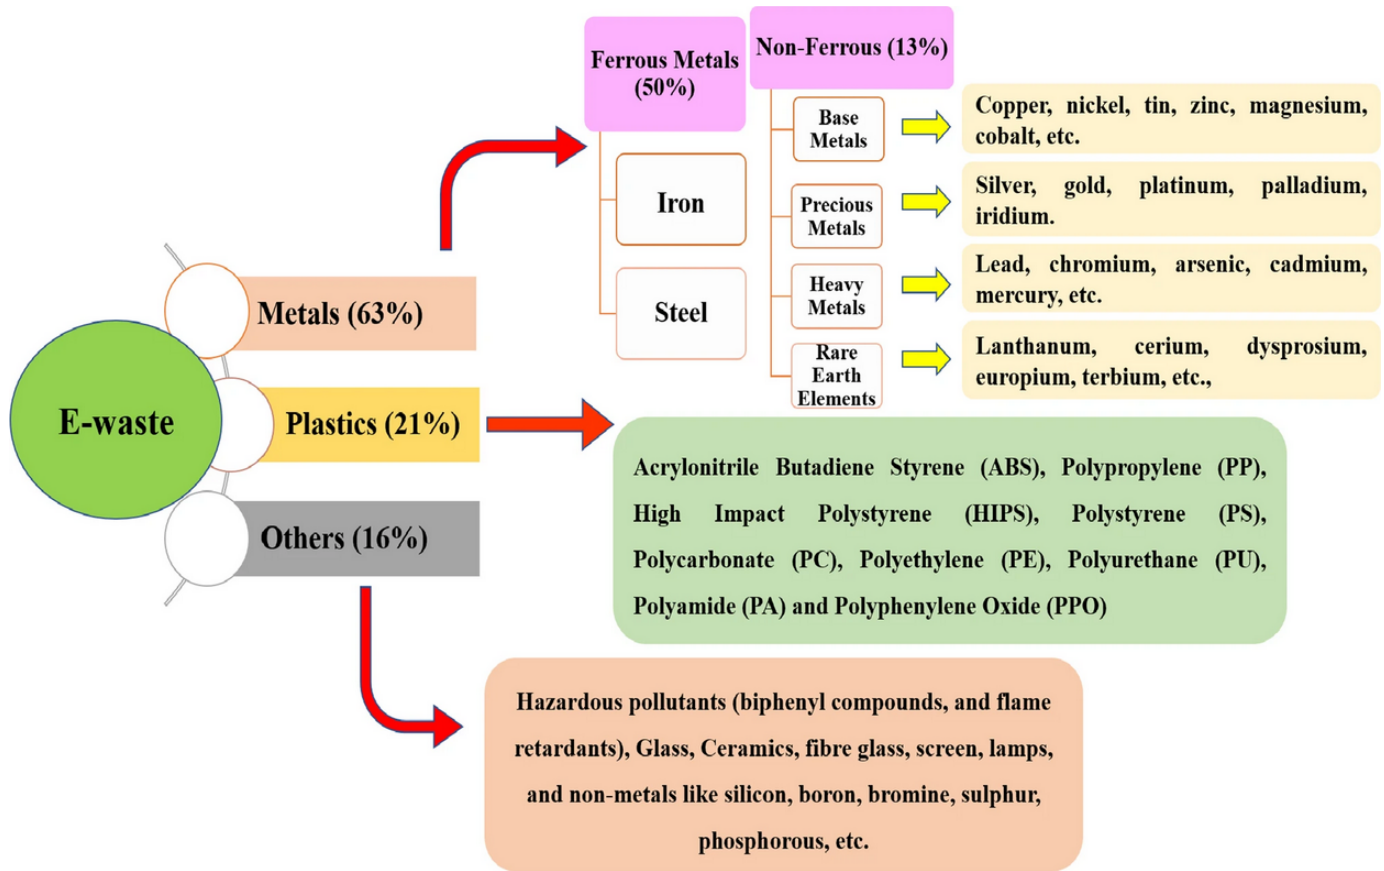


Fig. 1. Composition of materials in e-waste. Source **javed2024**.

acid leaching. Depending on the method used and the metal type, the recovery rate is between 6-90% **javed2024**.

3) *Bio-hydrometallurgical approach*: The use of bacteria or fungi is gaining attention as an alternative to traditional hydro- and pyrometallurgical methods **javed2024**. In one study it was found that the bacteria *Pseudomonas chlororaphis* was able to dissolve Ag, Au, and Cu at rates of 8.2%, 12.1%, and 52.3% respectively **bioleaching**.

Another study looked at the fungi *A. niger*, also known as *black mold*, and found that in a two-step chemo-bioleaching process, a recovery rate of 70.6% of Cu was achieved **ANiger**. The use of biological agents is still new, and many variables have to be controlled to make the process reliable (pH, temperature, contamination, etc.) **javed2024**.

Ionic liquids (*ILs*) can potentially play a role in the future of metal extraction **javed2024**. *ILs* are often hydrophobic and can therefore also extract other hydrophobic materials. They do however come with the downside of being toxic and having poor biodegradability. Another future candidate is deep eutectic solvents (*DES*), which overcome these problems of *ILs* **javed2024**.

Another compound that has been explored is glycine **glycine**. It has shown to be effective at dissolving Cu at a rate of 98% after 48 h. However, it does struggle with solving other metals such as Au and Ag **javed2024**.

Chelating, which is the chemical process of binding a metal ion to a chemical compound, has also gained popularity in recent years **javed2024**. By using biodegradable chemicals such as *DTPA* or *NTA*, metals such as Cr, Cu, Zn, and Pb can be removed from polluted soils **javed2024**.

B. Pyrometallurgical recycling

Also called *thermal extraction*, pyrometallurgy is a method that uses high heat to extract materials by melting and incineration **javed2024**. One important downside of pyrometallurgy is the hazardous fumes that are released during the process and the high energy usage required to reach the needed temperatures **pyro**. It involves melting in a blast furnace, often a *plasma arc furnace* or *copper melter*, as well as incineration and high-heat roasting **pyro**. Metals can be recovered from the gas, the melted product, or from the slag. It has about a 70% recovery rate, where it's mostly Cu that is recovered **REEMerging**. However, pyrometallurgy does not adhere to the UN sustainability goals, as it releases dioxins, uses a high amount of energy, and can create toxic slag. Some REEs can not be recovered this way and will be lost from the circular economy by being discarded together with the toxic slag. Another drawback is that it is also a highly advanced process, as it requires an advanced control system for accurate temperature control and extraction **REEMerging**.

Hydrometallurgical Techniques for Metal Extraction From E-waste

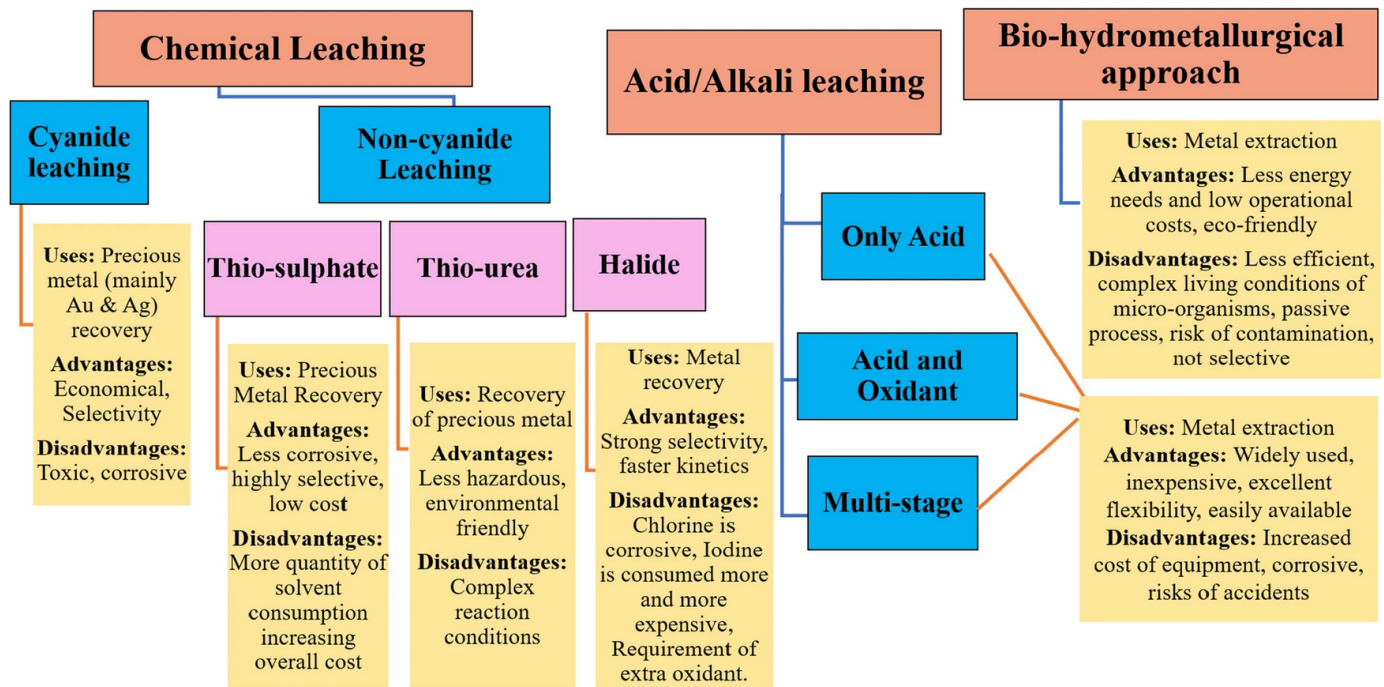


Fig. 2. Overview of the different hydrometallurgical processes. Source [javed2024](#).

By combining the pyrometallurgical process with vacuum, sublimation, and distillation, more REEs such as Sb, Pb, and Bi can be recovered as well **REERemerging**.

VII. FUTURE OUTLOOK

REEs can be divided into three groups based on their demand and supply: critical (Nd, Eu, Tb, Dy, Y, and Er), uncritical (La, Pr, Sm, and Gd), and excessive (Ce, Ho, Tm, Yb, and Lu) **coalPoland**. With the current demand and known sources, the REE reserves would last for another 900 years **britannica2024**. But since the demand is increasing at a rate of around 10% every year, the reserves would only be enough until the mid-21st century **britannica2024**, or another 314 years **coalPoland**. This is without taking recycling into account. The estimated reserves do however change due to more exploration, advancements in exploration techniques, and advancements in refining making previously uneconomical deposits profitable, and of course by improvements in recycling **REERechnology**.

A. Alternative sources

Outside of traditional mining and recycling sources, there are other sources of REEs that are being researched. A short overview of some of these sources is presented below.

1) *Extraction from coal byproducts*: Recovery of REEs from hard coal plants in Poland **USDoE2024**. The content of REEs of the coal that is being burned is between tens of ppm up to 1% **coalPoland**. *Fly ash* and *bottom ash* are

both byproducts of the burning of coal **ashPalmer**. Fly ash is the light particle ash that is carried upward by smoke and heat, while bottom ash is the heavy ash that falls downward to the bottom of the furnace. The REE content of the bottom ashes in one study was lower than what is usually required for mining, 199-286 ppm **coalPoland**. However, since it is a byproduct that is already heavily processed into powder, and readily available for processing, it could still be a viable source of REE as long as the coal plants are in operation.

2) *Extraction from urban sources*: Extraction from urban sources, i.e., urban mining, uses 17 times less energy according to the Norwegian research institute **javed2024**. The concentration of REEs is higher in urban sources (i.e. garbage dumps and landfills) than in traditional mines **javed2024**. These *urban mines* would not only be a good source of REEs, but by processing the disposed of electronics, it would also reduce the amount of e-waste that is lying in the environment **javed2024**.

3) *Not using rare earths*: One alternative to using REEs is to *not use them at all*. The previously well-known *3R rule* - reduce, reuse, recycle - can be expanded to also include *redesign*. Redesigning can include making it easier to separate and recycle precious metals and REEs from e-waste, but also to design products that do not require REEs at all **motorNoREE**.

VIII. SUMMARY

The use of bio-leaching processes could be a good environmentally friendly alternative when they reach a higher

efficiency and broader industrial usage. By improving e-waste streams we can make use of the REE that is already in circulation. By being smarter with how products are designed we can increase the recyclability and need for REEs.

IX. AI STATEMENT

Microsoft Copilot and Grammarly have been used in the writing of this report. Both AI tools have been used to aid with grammatical errors, sentence structure, and spelling. Copilot has been used to help improve the text by asking review-like questions such as "Are there any conflicting statements in the text?" and "Is the text clear and concise?". It was also used to structure the references into the correct $\LaTeX$ format. Grammarly has been used to help with spelling, grammar, and to suggest alternative words or phrases. Both tools have been used to help improve the quality of the text and to make sure that the text is clear and accurate. The final text reflects the author's views, opinions, and knowledge.