

Práctica 1. Crear y publicar nuestra primera web con Apache

1. Preparar y actualizar Ubuntu

Actualizarla información disponible con (*sudo apt update*)

```
david@Despliegue:~$ sudo apt update
[sudo: authenticate] Password:
Hit:1 http://es.archive.ubuntu.com/ubuntu resolute InRelease
Get:2 http://es.archive.ubuntu.com/ubuntu resolute-updates InRelease [137 kB]
Get:3 http://es.archive.ubuntu.com/ubuntu resolute-backports InRelease [137 kB]
Get:4 http://es.archive.ubuntu.com/ubuntu resolute-updates/main amd64 Packages [714 kB]
Get:5 http://es.archive.ubuntu.com/ubuntu resolute-updates/main Translation-en [167 kB]
Get:6 http://es.archive.ubuntu.com/ubuntu resolute-updates/main amd64 Components [98.4 kB]
Get:7 http://es.archive.ubuntu.com/ubuntu resolute-updates/restricted amd64 Packages
Get:8 http://es.archive.ubuntu.com/ubuntu resolute-updates/restricted Translation-en
Get:9 http://es.archive.ubuntu.com/ubuntu resolute-updates/universe amd64 Packages [3
```

2. Instalar Apache2

Instalar el Apache2 con (*sudo apt install apache2 -y*)

```
david@Despliegue:~$ sudo apt install apache2 -y
[sudo: authenticate] Password:
sudo: Authentication failed, try again.
[sudo: authenticate] Password:
The following packages were automatically installed and are no longer required:
  linux-headers-7.0.0-30      linux-image-unsigned-7.0.0-30-generic  linux-modules-
  linux-headers-7.0.0-30-generic  linux-main-modules-zfs-7.0.0-30-generic  linux-tools-7.
Use 'sudo apt autoremove' to remove them.

Installing:
  apache2

Installing dependencies:
  apache2-bin  apache2-data  apache2-utils  libapr1t64  libaprutil1-dbd-sqlite3  libaprutil1

Suggested packages:
  apache2-doc  apache2-suexec-pristine | apache2-suexec-custom  www-browser

Summary:
  Upgrading: 0, Installing: 10, Removing: 0, Not Upgrading: 125
  Download size: 2,119 kB
  Space needed: 8,218 kB / 21.1 GB available
```

3. Comprobar que Apache funciona

Con (*sudo systemctl status apache2*) comprobar el estado del servicio

```
david@Despliegue:~$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-10-01 16:56:32 UTC; 1min 49s ago
 Invocation: 72734ad682644d3d8e563c21b244fe16
    Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 2028 (apache2)
   Status: "Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served/sec: 0"
   Tasks: 55 (limit: 4894)
  Memory: 5.8M (peak: 6.1M)
     CPU: 74ms
   CGroup: /system.slice/apache2.service
           └─2028 /usr/sbin/apache2 -k start -DFOREGROUND
             └─2044 /usr/sbin/apache2 -k start -DFOREGROUND
               └─2045 /usr/sbin/apache2 -k start -DFOREGROUND


Oct 01 16:56:32 Despliegue systemd[1]: Starting apache2.service - The Apache HTTP Server.
Oct 01 16:56:32 Despliegue apache2ctl[2028]: AH00558: apache2: Could not reliably determine the server's fully qualified domain name, please add the 'ServerName' line to the configuration file to suppress this error message.
Oct 01 16:56:32 Despliegue systemd[1]: Started apache2.service - The Apache HTTP Server.
lines 1-18/18 (END)
```

4. Probar Apache desde el navegador

Con (*ip a*) compruebo la ip de la máquina virtual q es:

```
david@Despliegue:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:97:47:ba brd ff:ff:ff:ff:ff:ff
    altname enx0800279747ba
    inet 192.168.88.76/24 metric 100 brd 192.168.88.255 scope global dynamic enp0s3
        valid_lft 477sec preferred_lft 477sec
    inet6 fe80::a00:27ff:fe97:47ba/64 scope link proto kernel_l1
        valid_lft forever preferred_lft forever
david@Despliegue:~$ _
```

Luego en la maquina virtual cambiar la red a adaptador puente

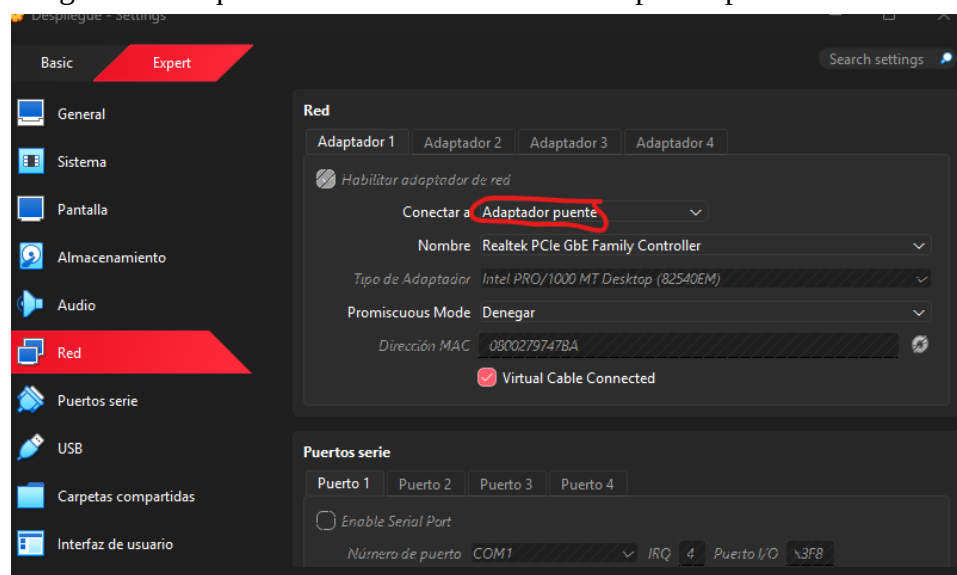

Para terminar poner en el navegador (<http://192.168.88.99>)



Apache2 Default Page

Ubuntu

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   |-- ports.conf
|-- mods-enabled
|   |-- *.load
|   |-- *.conf
|-- conf-enabled
|   |-- *.conf
|-- sites-enabled
|   |-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.
- `ports.conf` is always included from the main configuration file. It is used to determine the listening ports for incoming connections, and this file can be customized anytime.
- Configuration files in the `mods-enabled/`, `conf-enabled/` and `sites-enabled/` directories contain particular configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.
- They are activated by symlinking available configuration files from their respective `*-available/` counterparts. These should be managed by using our helpers `a2enmod`, `a2dismod`, `a2ensite`,

5. Crear una página web propia

Compruebo el contenido de `/var/www/html/` que es la carpeta habitual para el sitio web predeterminado

```
david@Despliegue:~$ ls -l /var/www/html
total 12
-rw-r--r-- 1 root root 10672 Oct  1 16:56 index.html
david@Despliegue:~$ _
```

6. Crear nuestra página

Despues abrir (*sudo nano /var/www/html/index.html*)

```
david@Despliegue:~$ sudo nano /var/www/html/index.html_
```

```
GNU nano 8.7.1 /var/www/html/index.html
<!DOCTYPE html>
<html lang="es">
<head>
  <meta charset="UTF-8">
  <title>Mi primer despliegue</title>
</head>
<body>
  <h1>Mi primera aplicación desplegada</h1>
  <p>Esta página está siendo servida por apache</p>
</body>
</html>
```

Resultado esperado

