

LABORATORIO NRO 06

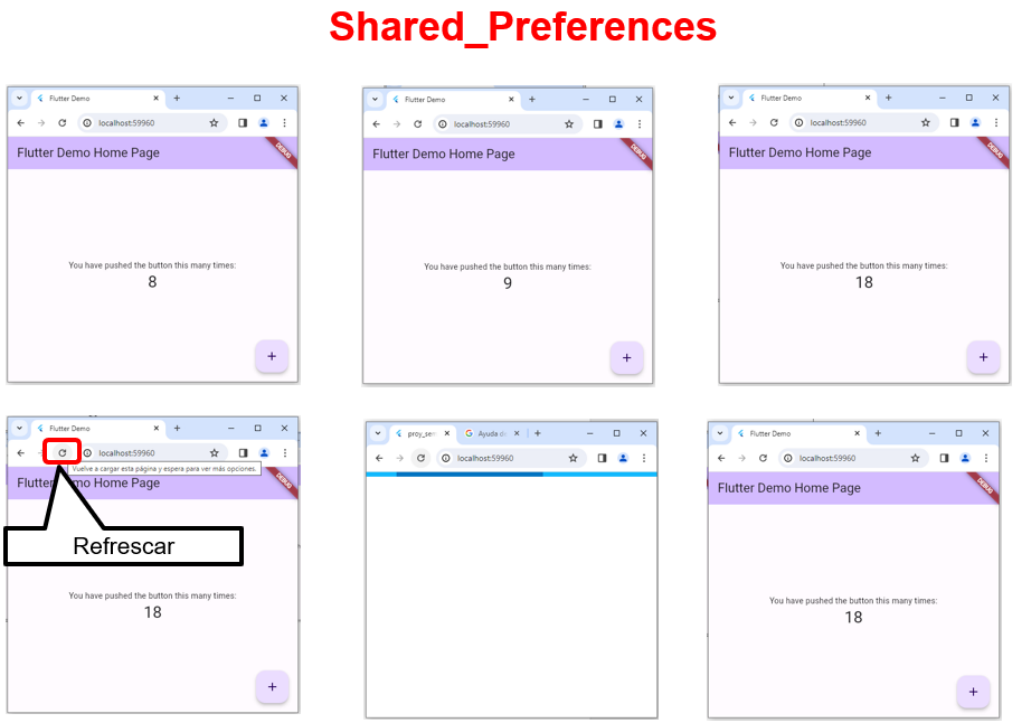
TEMA: SHARED PREFERENCAS

DR. IVAN CARLO PETRLIK AZABACHE

LIMA-PERU

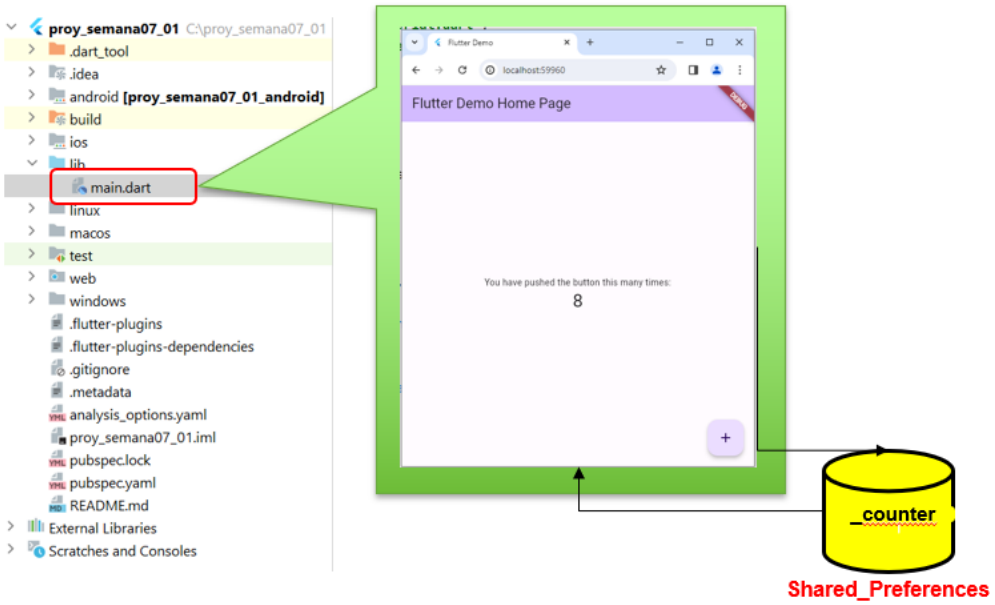
2026

1. Desarrollar la siguiente aplicación



SOLUCION

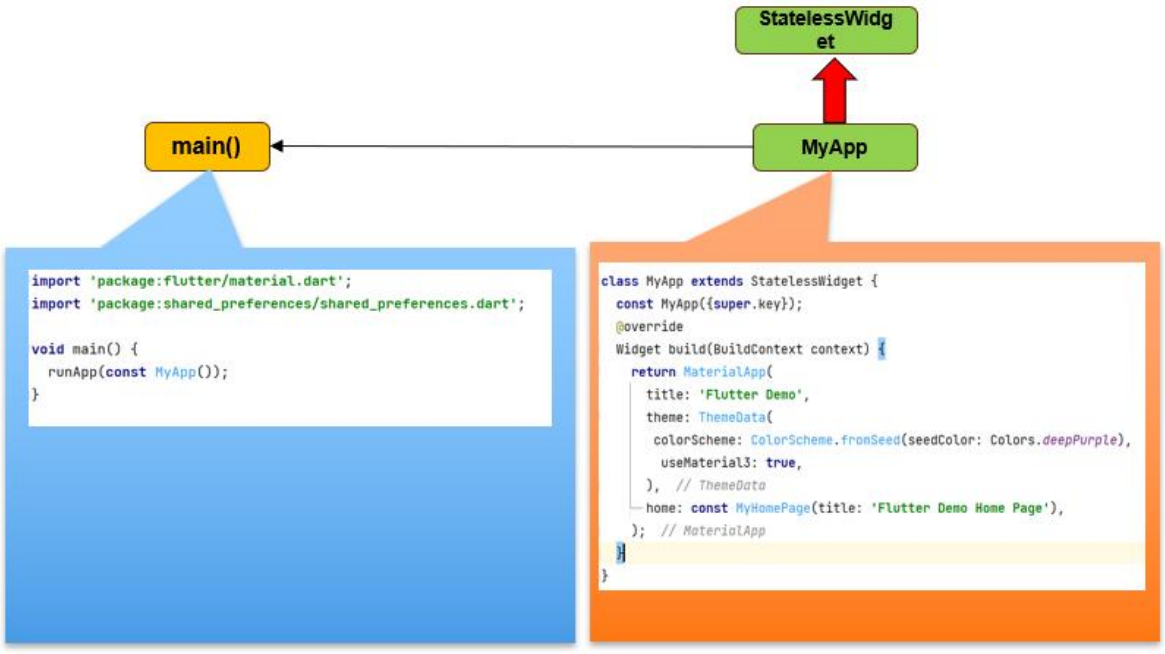
Paso 1



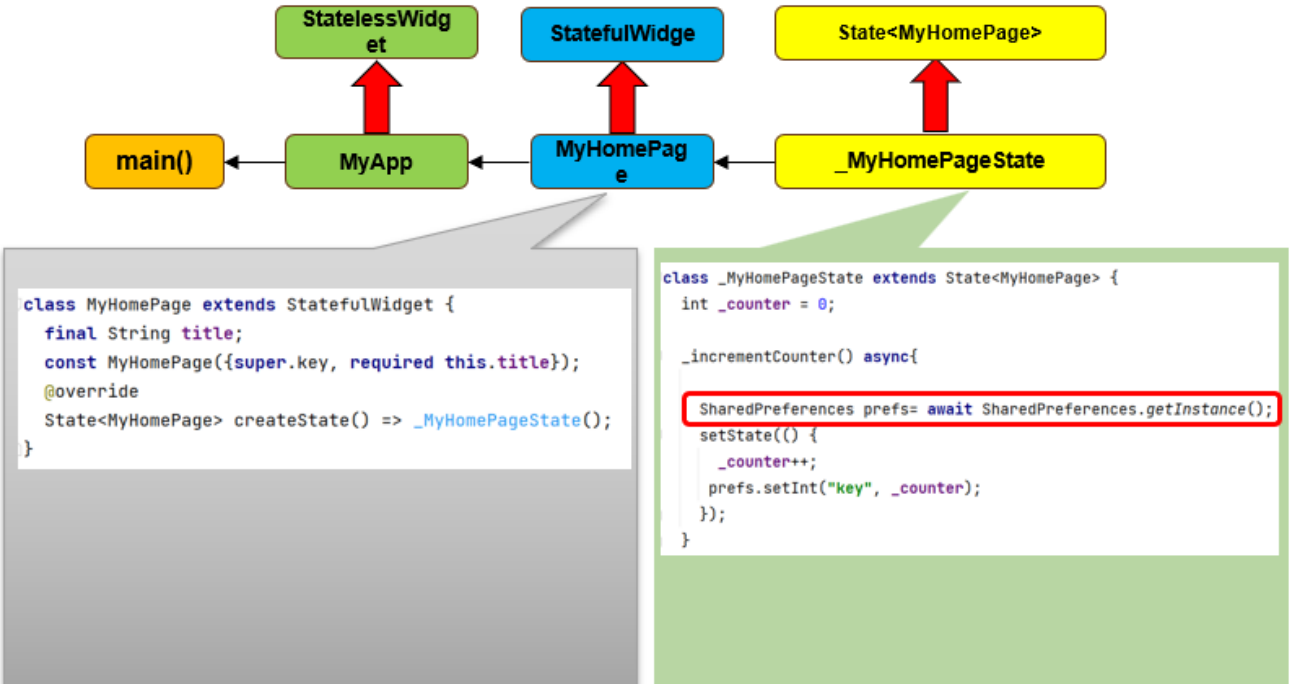
paso 2.


proy_semana07_01 C:\proy_semana07_01
.dart_tool
.idea
android [proy_semana07_01_android]
build
ios
lib
main.dart
linux
macos
test
web
windows
.flutter-plugins
.flutter-plugins-dependencies
.gitignore
.metadata
analysis_options.yaml
proy_semana07_01.iml
pubspec.lock
pubspec.yaml
README.md
External Libraries
Scratches and Consoles
name: proy_semana07_01
description: A new Flutter project.
publish_to: 'none' # Remove this line if y
version: 1.0.0+1
environment:
sdk: '>=3.1.2 <4.0.0'
dependencies:
flutter:
sdk: flutter
shared_preferences: ^2.0.13
cupertino_icons: ^1.0.2
dev_dependencies:
flutter_test:
sdk: flutter
flutter_lints: ^2.0.0
flutter:
uses-material-design: true

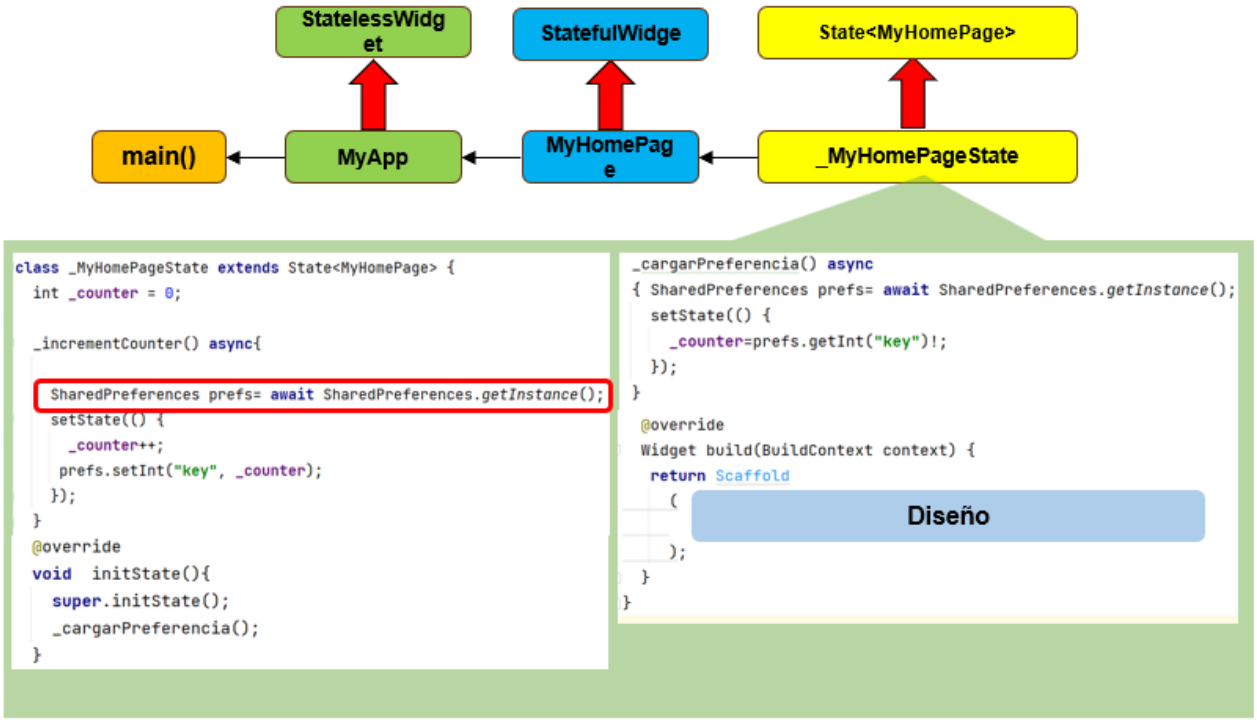
Paso 3.


StatelessWidg
et
main()
MyApp
import 'package:flutter/material.dart';
import 'package:shared_preferences/shared_preferences.dart';
void main() {
runApp(const MyApp());
}
class MyApp extends StatelessWidget {
const MyApp({super.key});
@override
Widget build(BuildContext context) {
return MaterialApp(
title: 'Flutter Demo',
theme: ThemeData(
colorScheme: ColorScheme.fromSeed(seedColor: Colors.deepPurple),
useMaterial3: true,
), // ThemeData
home: const MyHomePage(title: 'Flutter Demo Home Page'),
); // MaterialApp
}
}

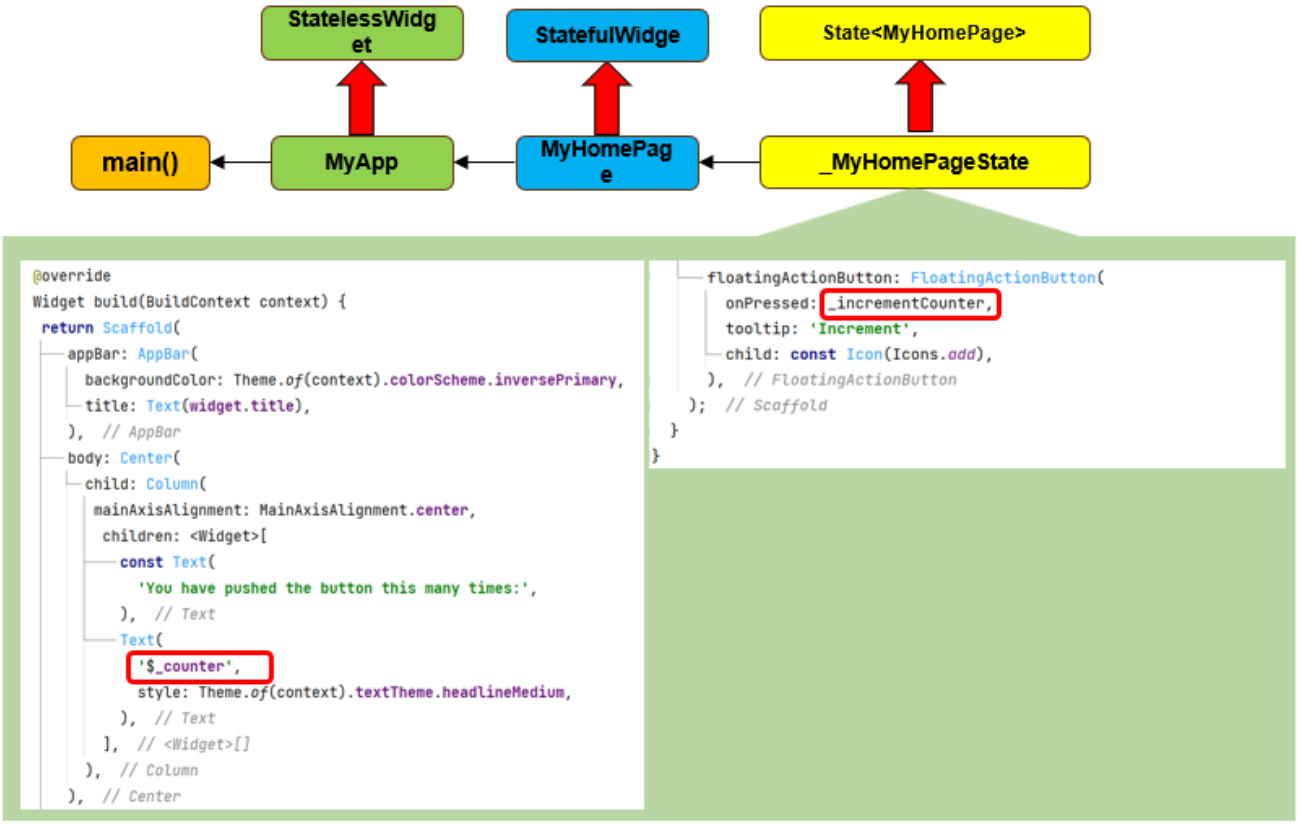
Paso 4.


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
MyApp
MyHomePage
_MyHomePageState
class MyHomePage extends StatefulWidget {
final String title;
const MyHomePage({super.key, required this.title});
@override
State<MyHomePage> createState() => _MyHomePageState();
}
class _MyHomePageState extends State<MyHomePage> {
int _counter = 0;
_incrementCounter() async{
SharedPreferences prefs= await SharedPreferences.getInstance();
setState(() {
_counter++;
prefs.setInt("key", _counter);
});
}

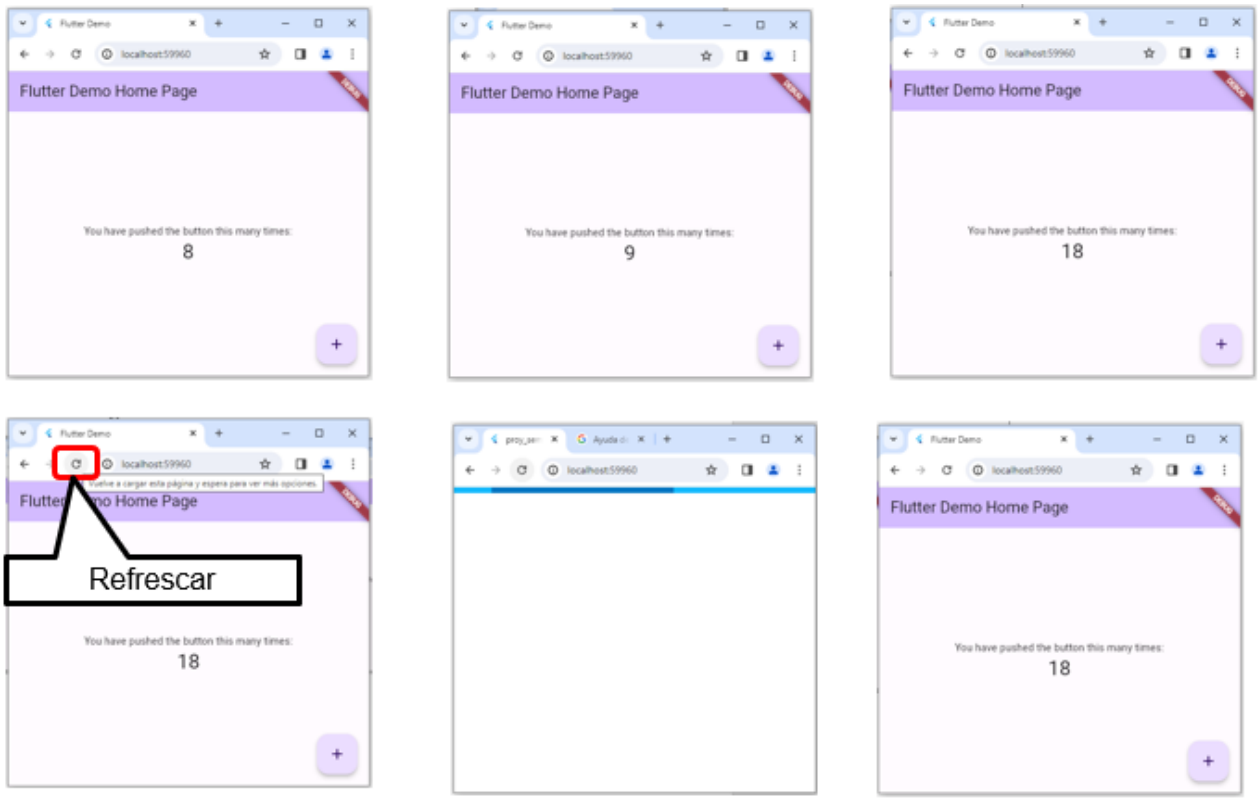
Paso 5.


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
MyApp
MyHomePage
_MyHomePageState
class _MyHomePageState extends State<MyHomePage> {
int _counter = 0;
_incrementCounter() async{
SharedPreferences prefs= await SharedPreferences.getInstance();
setState(() {
_counter++;
prefs.setInt("key", _counter);
});
}
@override
void initState(){
super.initState();
_cargarPreferencia();
}
_cargarPreferencia() async
{ SharedPreferences prefs= await SharedPreferences.getInstance();
setState(() {
_counter=prefs.getInt("key")!;
});
}
@override
Widget build(BuildContext context) {
return Scaffold
(
Diseño
);
}
}

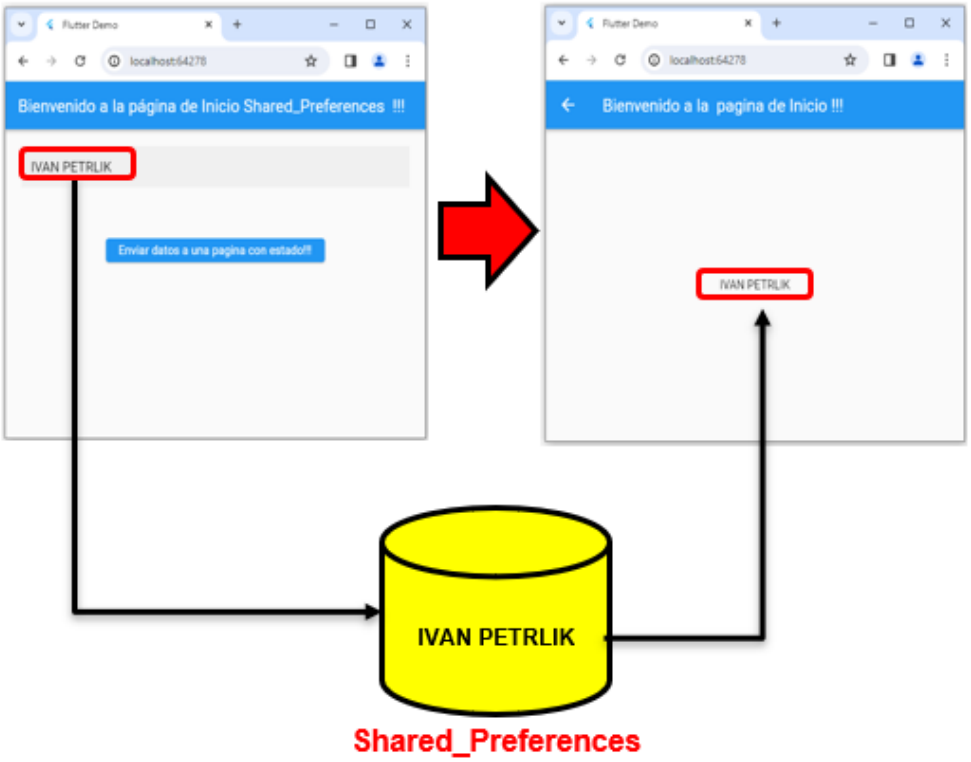
Paso 6.


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
MyApp
MyHomePage
_MyHomePageState
@override
Widget build(BuildContext context) {
return Scaffold(
appBar: AppBar(
backgroundColor: Theme.of(context).colorScheme.inversePrimary,
title: Text(widget.title),
), // AppBar
body: Center(
child: Column(
mainAxisAlignment: MainAxisAlignment.center,
children: <Widget>[
const Text(
'You have pushed the button this many times:',
), // Text
Text(
'$_counter',
style: Theme.of(context).textTheme.headlineMedium,
), // Text
], // <Widget>[]
), // Column
), // Center
floatingActionButton: FloatingActionButton(
onPressed: _incrementCounter,
tooltip: 'Increment',
child: const Icon(Icons.add),
), // FloatingActionButton
); // Scaffold
}
}

Paso 7.

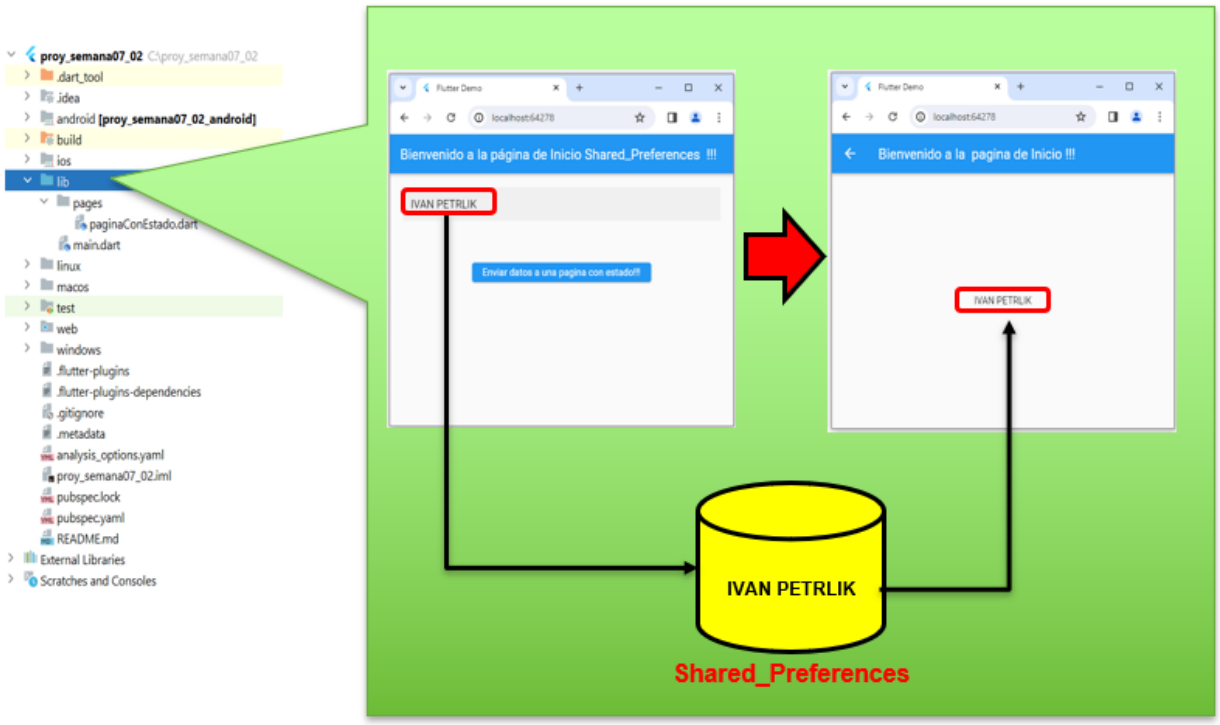

Flutter Demo Home Page
You have pushed the button this many times:
8
Flutter Demo Home Page
You have pushed the button this many times:
9
Flutter Demo Home Page
You have pushed the button this many times:
18
Refrescar
Flutter Demo Home Page
You have pushed the button this many times:
18
Flutter Demo Home Page
You have pushed the button this many times:
18

2. Desarrollar la siguiente aplicación

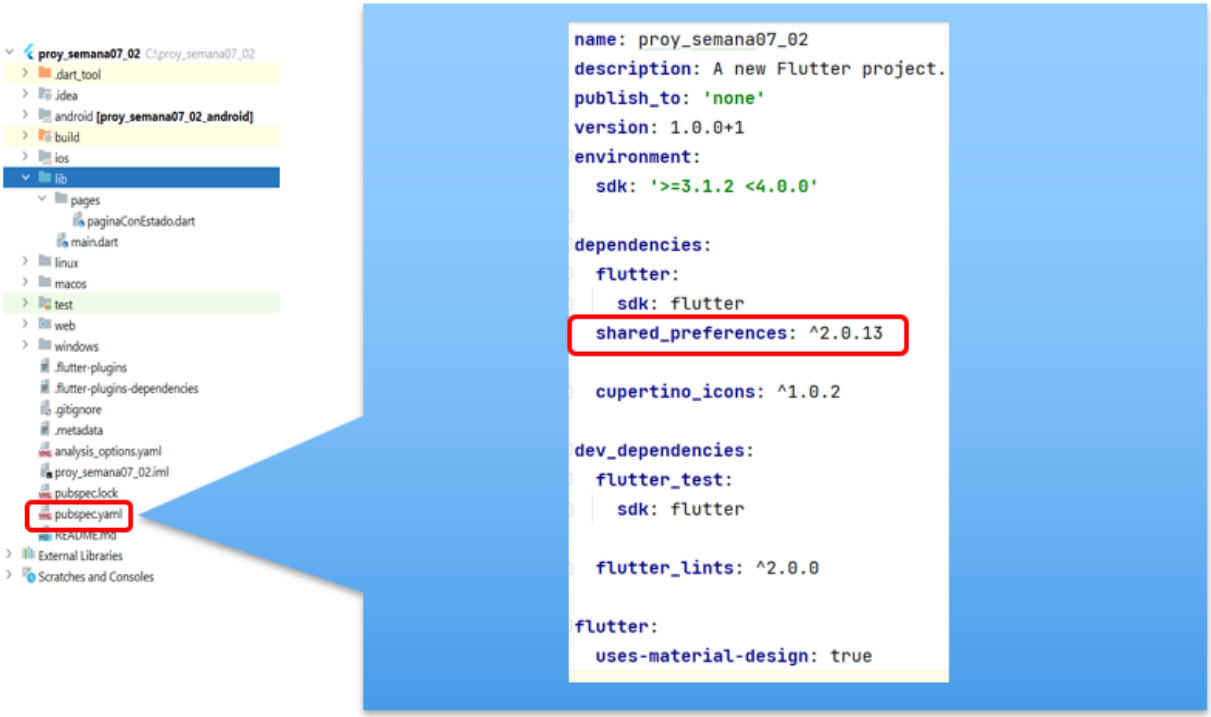


SOLUCION

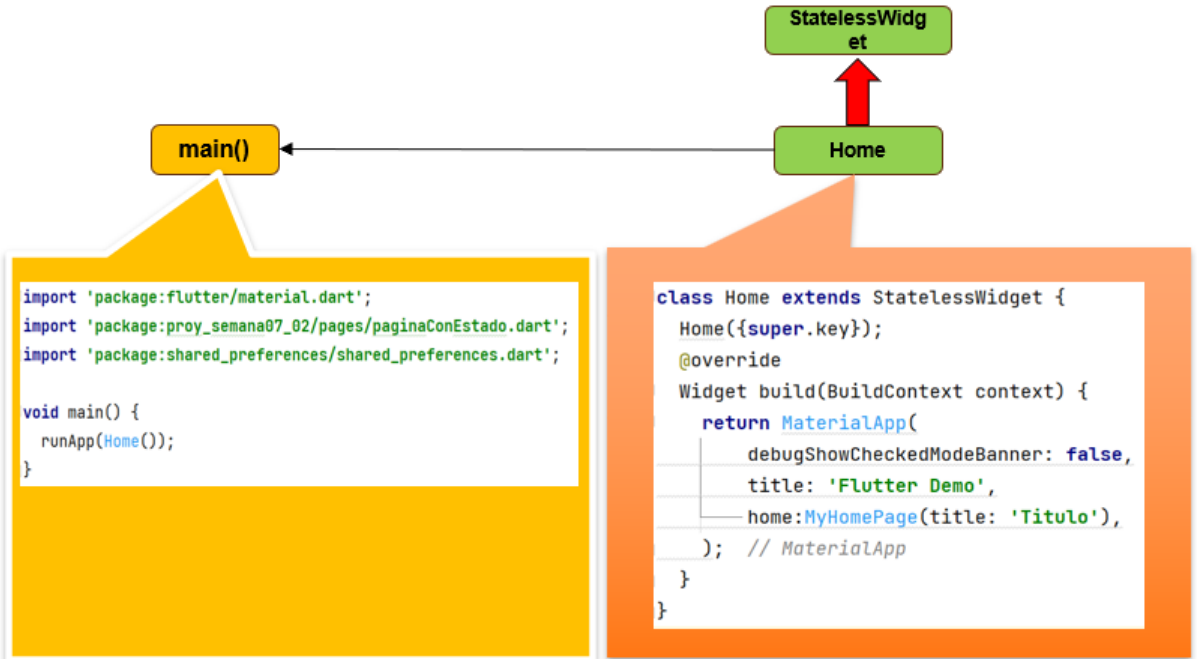
Paso 1.



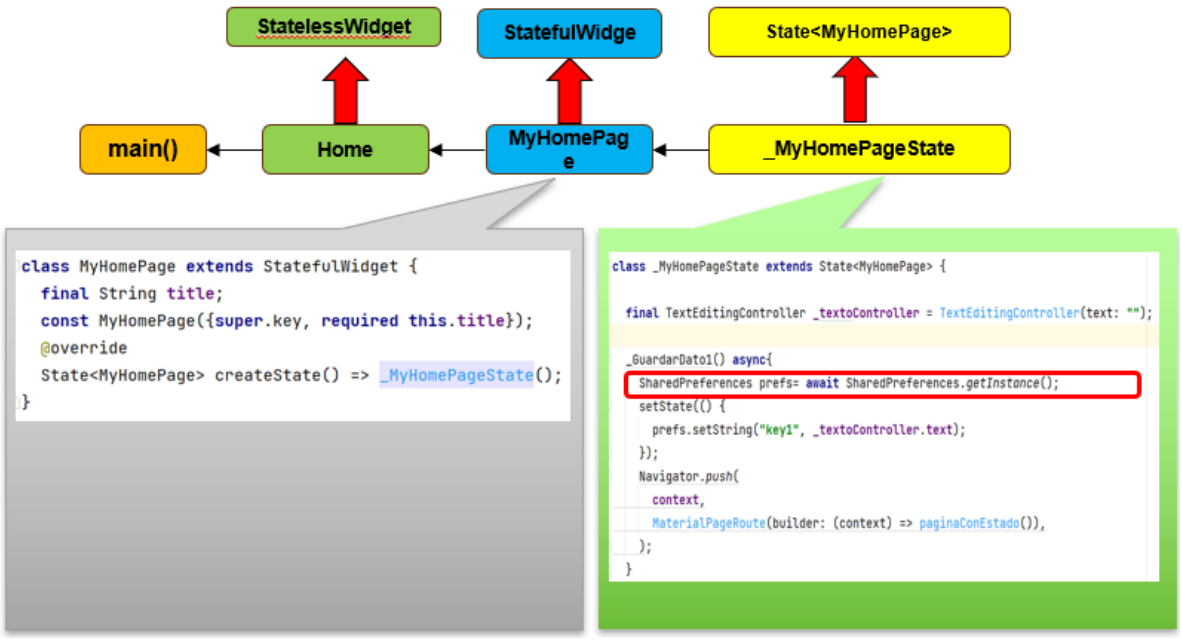
Paso 2.


proy_semana07_02 C:\proy_semana07_02
.dart_tool
.idea
android [proy_semana07_02_android]
build
ios
lib
pages
paginaConEstado.dart
main.dart
linux
macos
test
web
windows
.flutter-plugins
.flutter-plugins-dependencies
.gitignore
.metadata
analysis_options.yaml
proy_semana07_02.iml
pubspec.lock
pubspec.yaml
README.md
External Libraries
Scratches and Consoles
name: proy_semana07_02
description: A new Flutter project.
publish_to: 'none'
version: 1.0.0+1
environment:
sdk: '>=3.1.2 <4.0.0'
dependencies:
flutter:
sdk: flutter
shared_preferences: ^2.0.13
cupertino_icons: ^1.0.2
dev_dependencies:
flutter_test:
sdk: flutter
flutter_lints: ^2.0.0
flutter:
uses-material-design: true

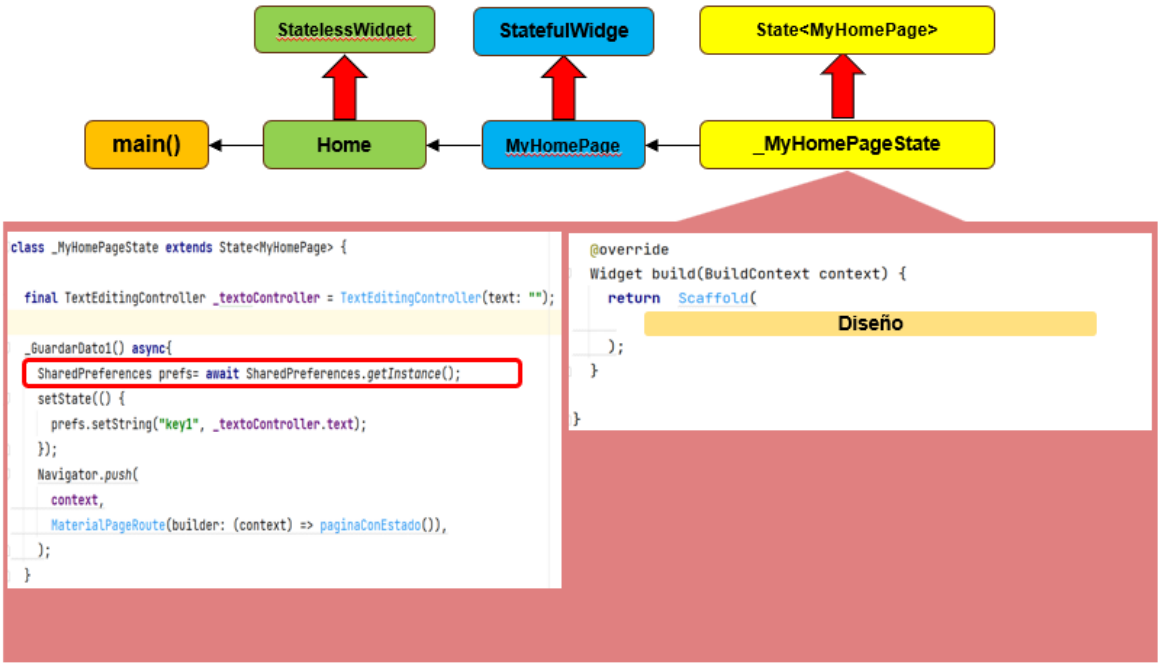
Paso 3.


StatelessWidget
main()
Home
import 'package:flutter/material.dart';
import 'package:proy_semana07_02/pages/paginaConEstado.dart';
import 'package:shared_preferences/shared_preferences.dart';
void main() {
runApp(Home());
}
class Home extends StatelessWidget {
Home({super.key});
@override
Widget build(BuildContext context) {
return MaterialApp(
debugShowCheckedModeBanner: false,
title: 'Flutter Demo',
home:MyHomePage(title: 'Titulo'),
); // MaterialApp
}
}

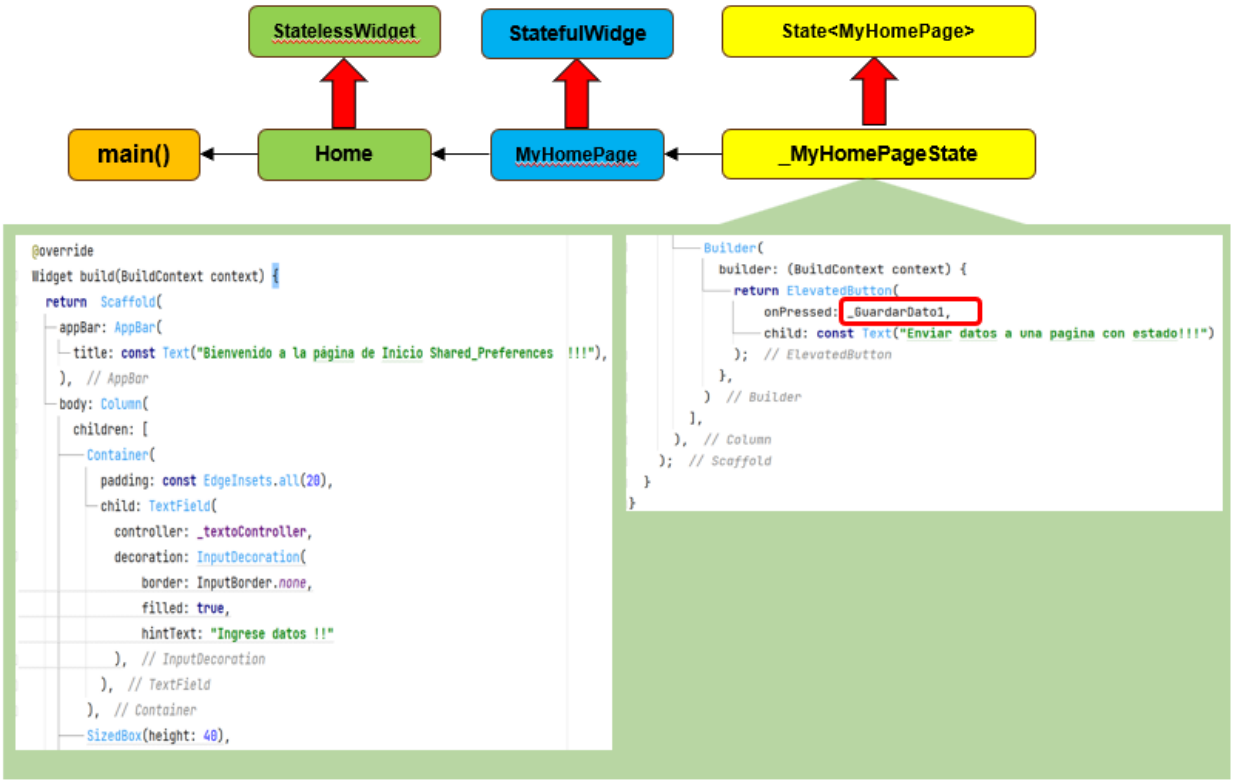
Paso 4.


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
Home
MyHomePag e
_MyHomePageState
class MyHomePage extends StatefulWidget {
final String title;
const MyHomePage({super.key, required this.title});
@override
State<MyHomePage> createState() => _MyHomePageState();
}
class _MyHomePageState extends State<MyHomePage> {
final TextEditingController _textoController = TextEditingController(text: "");
_GuardarDato1() async{
SharedPreferences prefs= await SharedPreferences.getInstance();
setState(() {
prefs.setString("key1", _textoController.text);
});
Navigator.push(
context,
MaterialPageRoute(builder: (context) => paginaConEstado()),
);
}

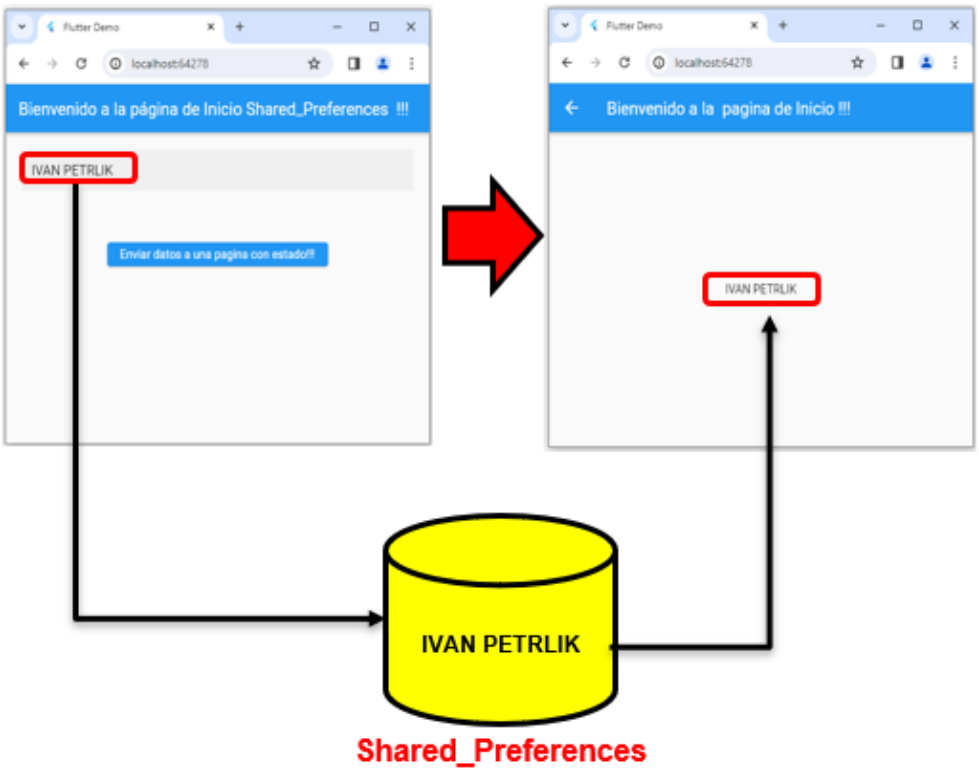
Paso 5.


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
Home
MyHomePage
_MyHomePageState
class _MyHomePageState extends State<MyHomePage> {
final TextEditingController _textoController = TextEditingController(text: "");
_GuardarDato1() async{
SharedPreferences prefs= await SharedPreferences.getInstance();
setState(() {
prefs.setString("key1", _textoController.text);
});
Navigator.push(
context,
MaterialPageRoute(builder: (context) => paginaConEstado()),
);
}
@override
Widget build(BuildContext context) {
return Scaffold(
Diseño
);
}
}

Paso 6


StatelessWidget
StatefulWidge
State<MyHomePage>
main()
Home
MyHomePage
_MyHomePageState
@override
Widget build(BuildContext context) {
return Scaffold(
appBar: AppBar(
title: const Text("Bienvenido a la página de Inicio Shared_Preferences !!!"),
), // AppBar
body: Column(
children: [
Container(
padding: const EdgeInsets.all(20),
child: TextField(
controller: _textoController,
decoration: InputDecoration(
border: InputBorder.none,
filled: true,
hintText: "Ingrese datos !!"
), // InputDecoration
), // TextField
), // Container
SizedBox(height: 40),
Builder(
builder: (BuildContext context) {
return ElevatedButton(
onPressed: _GuardarDato1,
child: const Text("Enviar datos a una pagina con estado!!!")
); // ElevatedButton
},
) // Builder
],
), // Column
); // Scaffold
}
}

Paso 7.


Flutter Demo
localhost:64278
Bienvenido a la página de Inicio Shared_Preferences !!!
IVAN PETRLIK
Enviar datos a una pagina con estado!!!
Flutter Demo
localhost:64278
Bienvenido a la pagina de Inicio !!!
IVAN PETRLIK
IVAN PETRLIK
Shared_Preferences

EJERCICIO PROPUESTO

IMPLEMENTAR SHARED PREFERENCES EN ALGUNA PARTE DEL PROYECTO GRUPAL Y EVIDENCIARLO