


What we are building

A temporal workspace graph that connects intent, code, actions, verification, and Git checkpoints.

The system records what a person or agent does between Git commits. Each intermediate workspace state is projected into a spec graph and a code graph, then joined with its action history. Git remains the publication and interoperability layer.

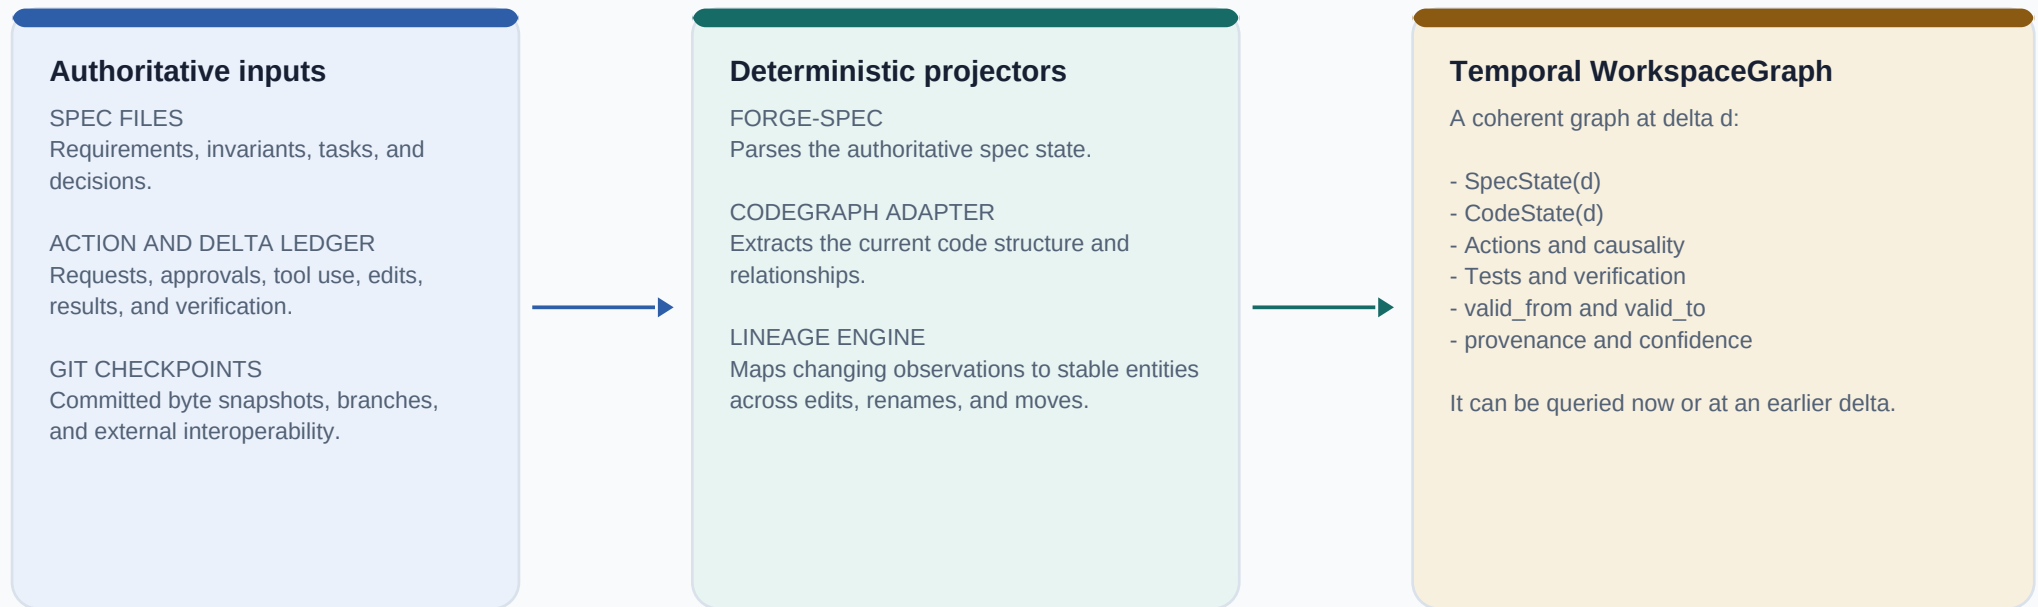

THREE KINDS OF TRUTH

Authoritative

Specs, Git checkpoints, and the append-only action ledger.

Derived


Code relationships and other projections that can be rebuilt.

Queryable

A time-specific view that joins the authoritative and derived layers.

State exists between commits

A commit anchors a range of intermediate deltas; it does not erase them.

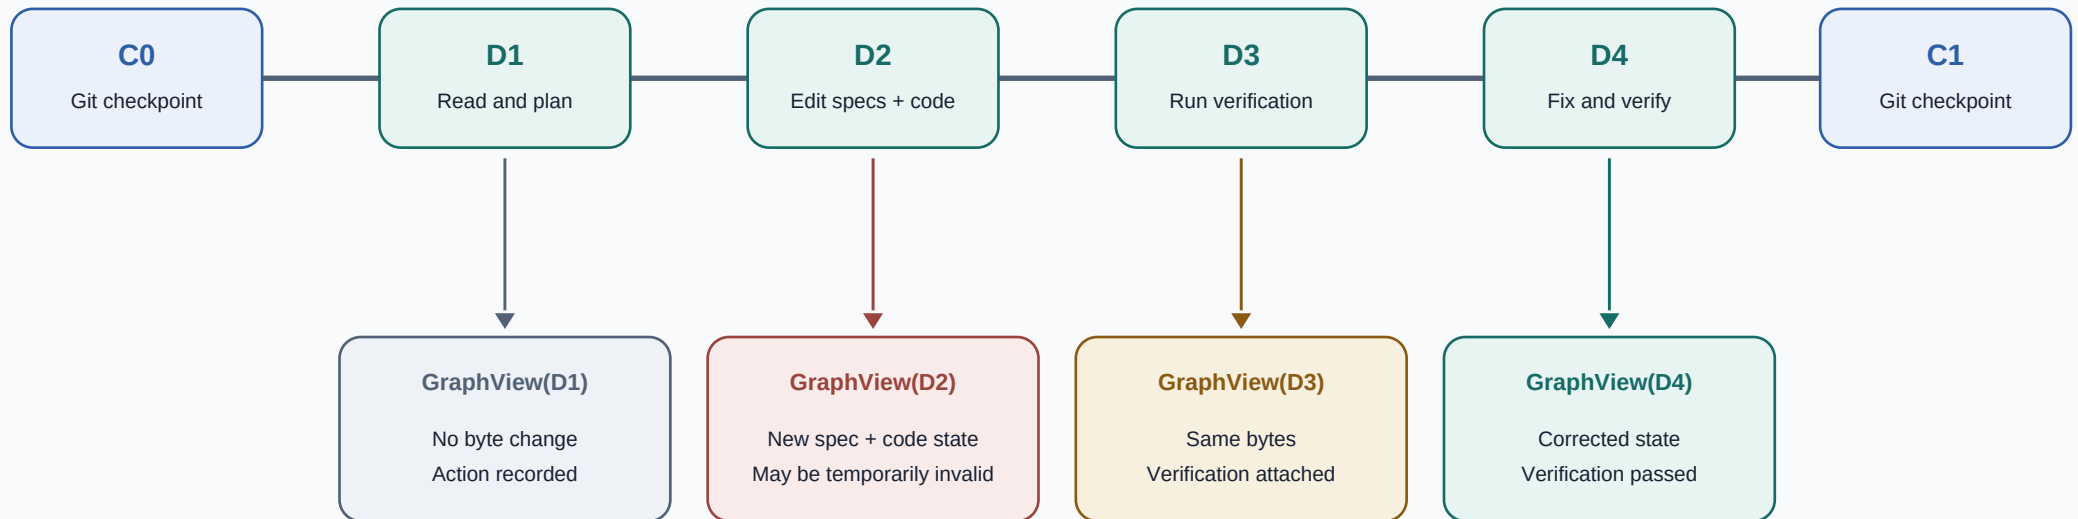

TERMS

Action

An operation by a person or agent. Reads, queries, failures, and approvals are actions even when no files change.

Delta


An atomic workspace transition. It records changed bytes and links them to the action that caused them.

GraphView

The coherent semantic state at one delta. It may be complete, degraded, invalid, or stale - but never ambiguous.


How one action becomes accountable state

The byte change, semantic projections, verification, and publication remain causally linked.

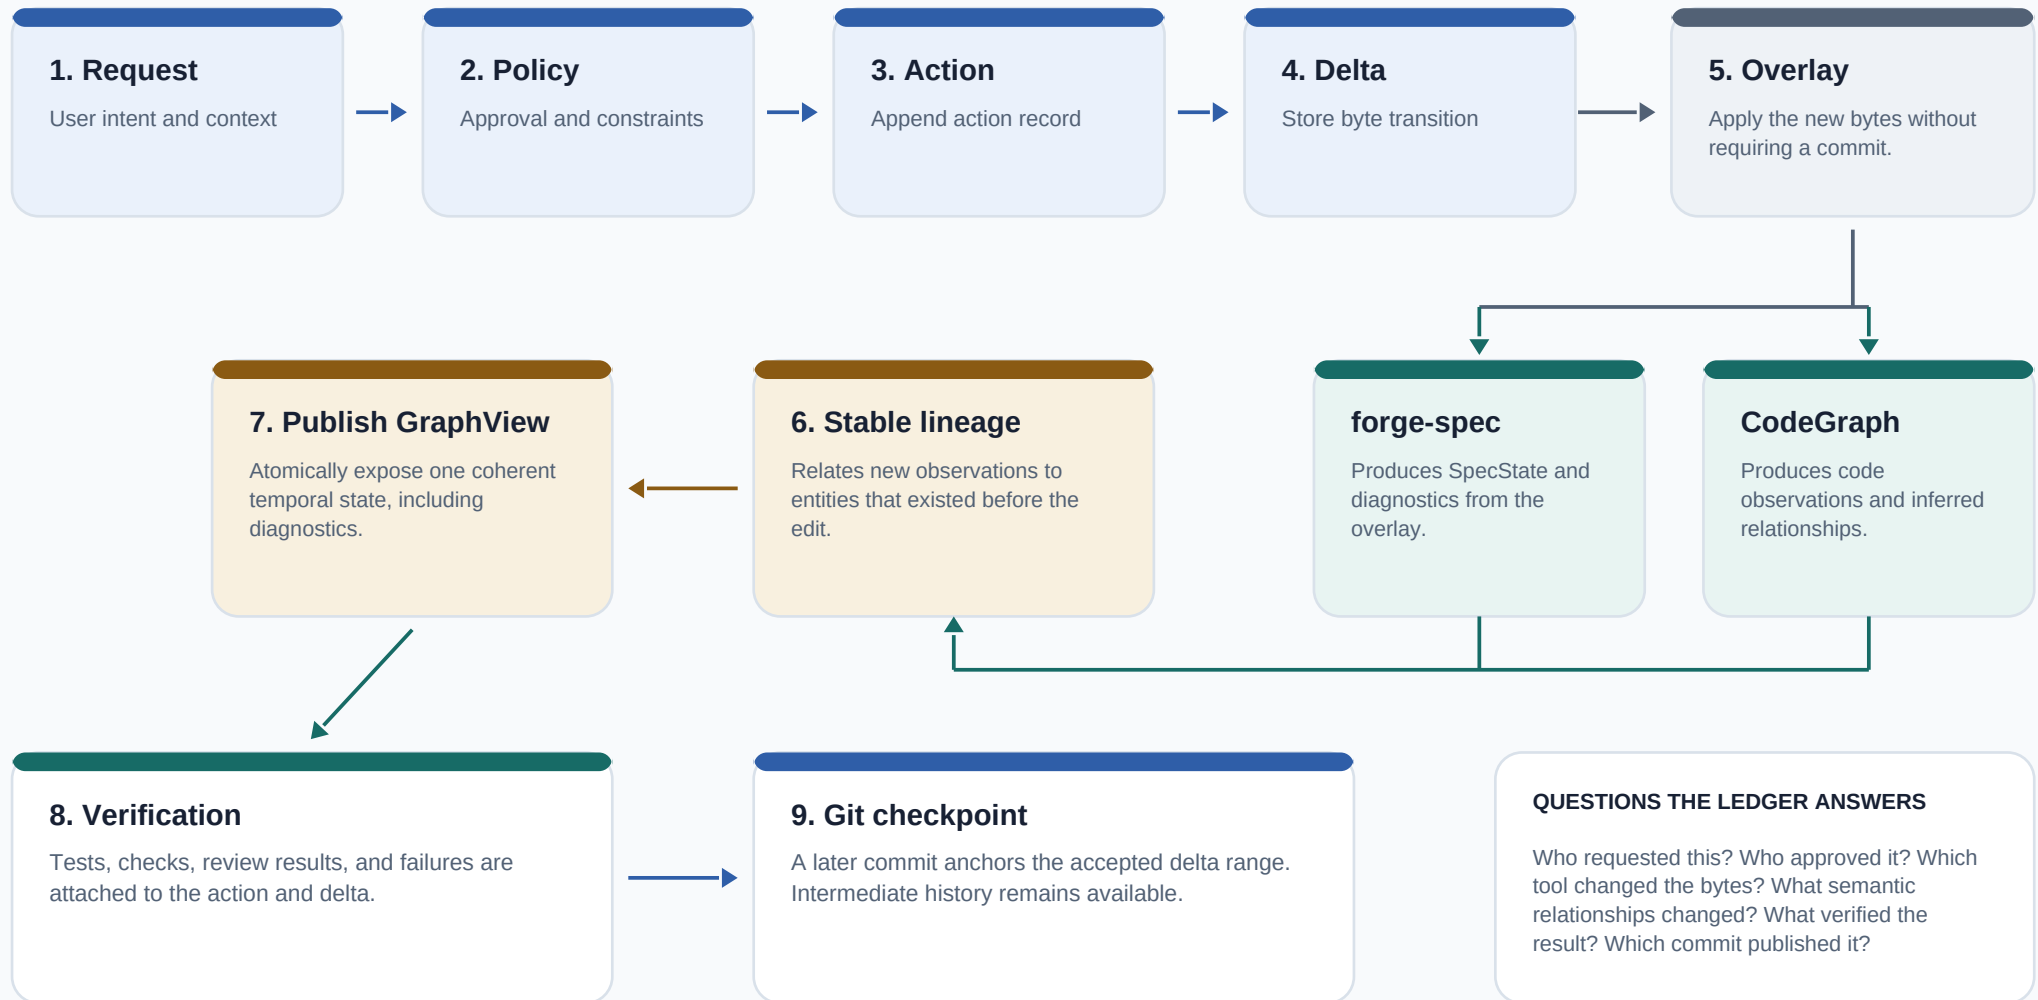

Reuse boundary and first implementation slice

CodeGraph supplies code intelligence. The temporal and accountability model remains independent.

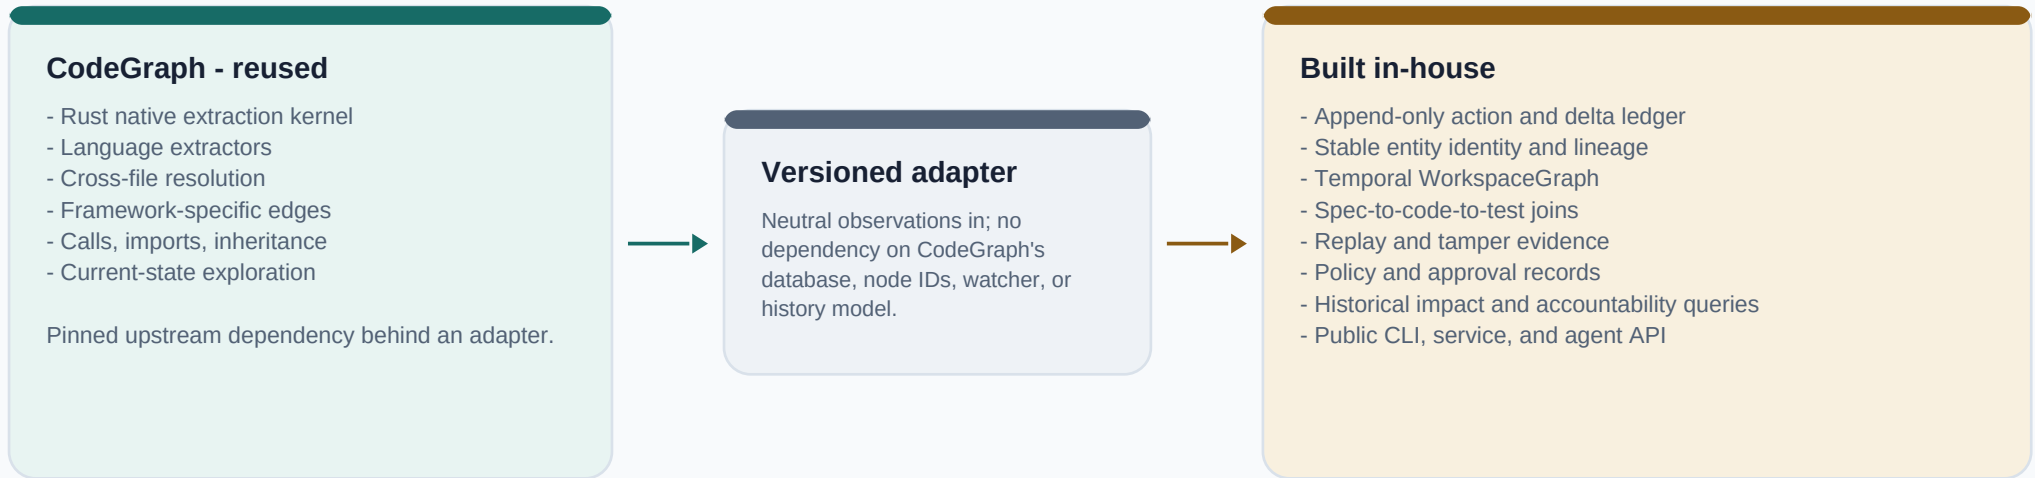

FIRST END-TO-END PROOF



Acceptance test: delete every derived projection and reproduce G1 from C0 plus the ledger. Fork CodeGraph only if the adapter cannot support transactional unsaved overlays or deterministic graph deltas.

CodeGraph source audit: commit c6aaa203; project license MIT. Third-party license review remains required before distribution.