



Politecnico di Milano

## PowerEnjoy Service - Integration Test Plan Document

January 17, 2017

### **Version 1.2**

Authors:

- Domenico FAVARO (Mat. 837995)
- Matheus FIM (Mat. 876069)
- Caio ZULIANI (Mat. 877266)

Prof. Elisabetta DI NITTO

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Revision History . . . . .	2
1.2	Purpose and Scope . . . . .	2
1.3	Definitions and Abbreviations . . . . .	2
1.4	Reference Documents . . . . .	3
<b>2</b>	<b>Integration Strategy</b>	<b>4</b>
2.1	Entry Criteria . . . . .	4
2.2	Elements to be Integrated . . . . .	4
2.3	Integration Testing Strategy . . . . .	5
2.4	Sequence of Component/Function Integration . . . . .	5
2.4.1	Software Integration Sequence . . . . .	5
2.4.2	Subsystem Integration Sequence . . . . .	9
<b>3</b>	<b>Individual Steps and Test Description</b>	<b>10</b>
3.1	Location Helper . . . . .	10
3.2	Email Helper . . . . .	11
3.3	Chat Service . . . . .	11
3.4	Car Controller . . . . .	12
3.5	Payment Controller . . . . .	13
3.6	Ride Controller . . . . .	13
3.7	Reservation Controller . . . . .	14
3.8	User Report Controller . . . . .	15
3.9	User Controller . . . . .	15
3.10	CRM Controller . . . . .	17
3.11	User Component . . . . .	18
3.12	CRM Component . . . . .	20
3.13	Car Component . . . . .	21
<b>4</b>	<b>Performance Analysis</b>	<b>23</b>
<b>5</b>	<b>Required Tools and Test Equipment</b>	<b>24</b>
5.1	Tools . . . . .	24
5.2	Test Equipment . . . . .	25
<b>6</b>	<b>Required Program Stubs and Test Data</b>	<b>26</b>
6.1	Program Stubs and Drivers . . . . .	26
6.2	Test Data . . . . .	28
<b>7</b>	<b>Effort Spent</b>	<b>29</b>
<b>8</b>	<b>Changelog</b>	<b>30</b>

# 1 Introduction

## 1.1 Revision History

This section records all revisions to the Document.

Version	Date	Authors	Summary
1.1	15/01/16	Domenico Favaro, Caio Zuliani, Matheus Fim	Initial Release
1.2	17/01/16	Domenico Favaro, Caio Zuliani, Matheus Fim	Second Release

## 1.2 Purpose and Scope

The Integration Test Plan Document (ITPD) serves to present the integration sequence and testing for all Subsystems and Components that conform PowerEnjoy Car Sharing Service. This is a key part to guarantee the functioning and quality of the software. The Document will present the division of the System in Subsystems and Components that will endure individual testing as independent modules and then be subject to integration on the whole System.

## 1.3 Definitions and Abbreviations

- **RASD:** Requirements And Specifications Document.
- **DD:** Design Document.
- **ITPD:** Integration Test Plan Document.
- **SDK:** Software Development Kit
- **App:** Application, referring to Web or Mobile App.
- **Subsystem:** Part of the system the generally encapsulates one or more features.
- **Component:** Self sustained part of the System that provides with functionalities and is part of one or more subsystems.
- **Bottom-up:** Referring to Bottom-up testing. Each component at lower hierarchy is tested individually and then the components that rely upon these components are tested.
- **Top-down:** Top-down integration testing is an integration testing technique used in order to mock or simulate the behaviour of the lower-level modules that are not yet integrated.

- **Mock:** Simulation that mimic the behavior of certain objects and fuctions in controlled ways, done to test the behavior of some other object.

For other concepts concerning the Service definition look in the **Glossary** section of the RASD and DD.

## 1.4 Reference Documents

- Specification Document: Assignments AA 2016-2017.pdf
- PowerEnjoy Requirements And Specifications Document (RASD)
- PowerEnjoy Design Document (DD)
- Example Document - Integration testing example document.pdf
- Testing Tools Documentation:
  - JUnit User Guide - <http://junit.org/junit5/docs/current/user-guide/>
  - Arquillian Guides - <http://arquillian.org/guides/>
  - JMeter User Manual - <http://jmeter.apache.org/usermanual/>

## 2 Integration Strategy

### 2.1 Entry Criteria

We define the criteria that must be met before integration testing of the system components. We consider Integration a part of the production development. In order for production to start all documentation must first be written and up to date, including RASD and DD, to have a clear and full scope of the system components functionalities and importance. Once in production, the integration of a single component can be done when the following criteria is met:

- The Component feature must be 100% complete, that is all classes and functions must have been implemented.
- No tickets must be opened for the Component, no bugs or considered missing features must be present.
- Individual component testing must have been performed, using JUnit to test its classes and functions.
- All the interfaces the Component has to communicate to have to be present or at least mocked to be able to test its coupling.

### 2.2 Elements to be Integrated

As stated in the Design Document, our system is composed by several High level Components presented in 3 tiers. Specifically these components are:

- Client Tier:
  - User Client Component
  - CRM Client Component
  - Car Component
- Server Tier:
  - User Controller
  - CRM Controller
  - Car Controller
  - Reservation Controller
  - Ride Controller
  - Payment Controller
  - User Report Controller

- Email Helper
- Location Helper
- Chat Service
- EIS Tier:
  - Database

## 2.3 Integration Testing Strategy

Our approach following the 3-tiered structure will follow a **Bottom-up** strategy, working on components that do not depend on others to function first.

This implies following the next tier order: EIS -> Server -> Client for development and testing.

Inside each Tier, Bottom-up strategy will be used again to integrate independent modules first and then those that depend on others. This strategy will help in contrast to Top-down to minimize the mock-up testing to be done, testing will be done on top of already deployed modules. The order in which the 'Bottom' modules will be picked will follow a Critical-Module-First Integration Strategy, giving priority to those that will have dependencies of other modules, this will help not only to spot any error on critical modules first but also to unblock the integration of dependant modules earlier on.

## 2.4 Sequence of Component/Function Integration

Following the Bottom-up strategy we'll integrate the components that have no dependencies on other modules. First we'll present the component integration within each subsystem and then the subsystems integration order.

### 2.4.1 Software Integration Sequence

For each subsystem, we'll identify the sequence in which the software components will be integrated within the subsystem.

**EIS Tier - DBMS:** As shown in the DD our DBMS is not dependent on any module and even if it's a System already present for some structures (Cars, CRM) we have to add the entities that we'll serve the purpose of our System, that is Users, Reservations, Rides, Payments, User Reports. These will be entities that will be added by our System, specifically by the Controllers so this module has to be integrated first to answer the queries for the rest of the subsystems.

**Server Tier:** In the DD we present the High level Component structure. Based on the dependencies shown in this structure we'll select the order to test and deploy these components. The Helper Components de-

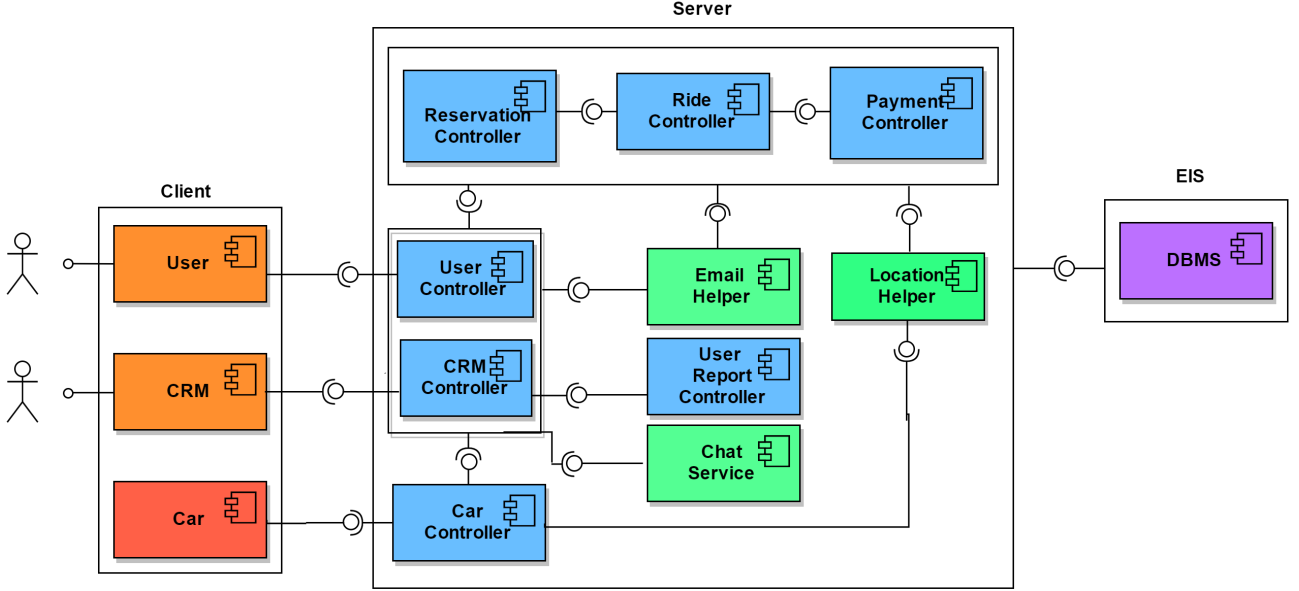


Figure 1: Component Structure

pend on no other components so according to the Bottom-up strategy they will be the first ones to integration. However not all Helpers are critical to other components so we'll prioritize the Critical Helper Components first, that is Location Helper as User, Car and Ride Controllers depend on it.

For each controller we have to implement Entity and Session Beans that will contain the methods and functions for managing the corresponding entites and logic so everyone of them will have Data Access Utilities to communicate with the DBMS. Their Integration order will then depend on the other controllers they depend on, meaning the other controllers they have to interface with.

An arrow suggest the Component on the right depends on the one on the left and will be integrated after all the previous one have been integrated.

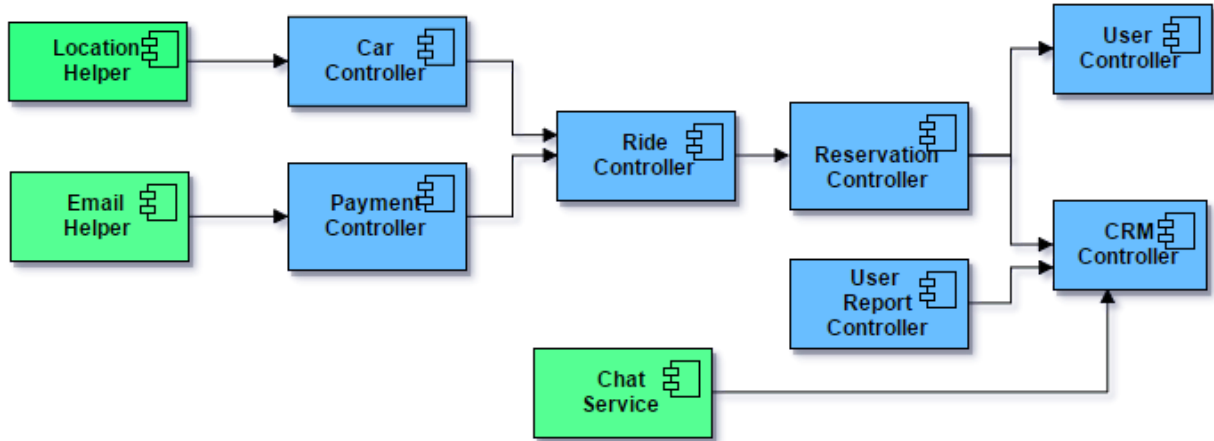


Figure 2: Server Components Integration

**Client Tier:** The Client Tier is based in two main components, User and CRM. Even if they are different they share many common functionalities including Login, Car Localization, Car Detail and Chat Service. They can be deployed simultaneously as they do not depend on each other and to test the logic subsystem from the Client side we can deploy one functionality at a time when all the dependencies have been met.



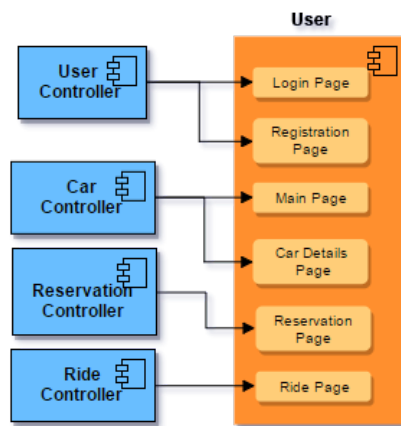


Figure 3: User Component Dependencies

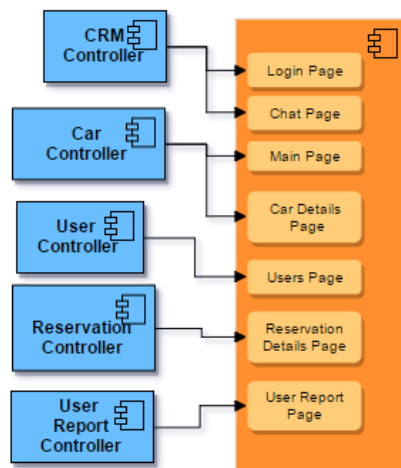


Figure 4: CRM Component Dependencies

### 2.4.2 Subsystem Integration Sequence

As mentioned before our subsystems corresponding to the Data, Logic and Presentation Tier will be integrated in that order. Before integrating a subsystem all the components inside it must be integrated as well.



Figure 5: Subsystem Integration Sequence

### 3 Individual Steps and Test Description

This section will include a detailed description on the sequence and tests to be performed on each component to be integrated. For each component we'll present individual function testing to secure the correctness and robustness of the function with respect to unexpected or invalid input. For integration testing we'll test if each of the component involved works as expected or if not, where does the error occur to determine critical points in the integration. The EIS Tier is considered to be implemented for the individual function testing. To get an overall picture of the Component functions and interfaces look at the Section 2 of the DD.

*Note:* Null Input tests are considered for all applicable functions and these are considered to respond with a `NullPointerException` unless expressed otherwise.

#### 3.1 Location Helper

This component uses Google Maps API which locations use 2 float parameters, as many functions use the class `Location` we remind that, as explained in the DD, the Class consist in two floats, lat (latitude) and lon (longitude). All functions that accept `Location` as parameter will also be implemented to accept 2 floats as parameters.

**Function:** `isSafeParkingArea(Location) : bool`

<i>Input</i>	<i>Response</i>
Invalid or Null Location	false
Location valid inside the Valid parking area. Check with DB.	true

**Function:** `getCloseRechargingStations(Location) : List< Location >`

<i>Input</i>	<i>Response</i>
Invalid or Null Location	Empty List
Location valid inside the Valid parking area.	Returns the list of available Recharging Stations closeby

**Function:** getBestRechargingStation(Location) : Location  
*//Uses getCloseRechargingStations*

<i>Input</i>	<i>Response</i>
Invalid or Null Location	Null Location
Location valid inside the Valid parking area.	Returns the best available Recharging station found by the Standard Deviation Algorithm

**Function:** calculatePath(Location, Location) : List< Location >

<i>Input</i>	<i>Response</i>
Invalid or Null Location	Empty List
Locations valid inside the Valid parking area.	Returns faster path found by the Google Maps API, if path not found returns Empty List

## 3.2 Email Helper

**Function:** sendRegistrationEmail(Email, Password) : void

<i>Input</i>	<i>Response</i>
Invalid Email	Password Delivery failed Exception
Valid Email and Password	Registration Mail sent

**Function:** sendPaymentEmail(Email, Payment) : void

<i>Input</i>	<i>Response</i>
Invalid Email	Payment Delivery failed Exception
Valid Email and Payment	Payment Mail sent

## 3.3 Chat Service

**Function:** requestCRMContact() : Id

<i>Input</i>	<i>Response</i>
None	Returns a valid CRM Id that is available for contact, else returns Null

### 3.4 Car Controller

Our system will not handle adding or deleting Cars in the DB so these operations will not be integrated. Just operations that search or change the state of the Car.

**Function:** reserveCar(CarId) : bool

<i>Input</i>	<i>Response</i>
Invalid or CarID not present	false - DB unchanged
CarID already reserved	false - DB unchanged
Valid CarID	true - Car marked as reserved in the DB

**Function:** enableCar(CarId) : bool

<i>Input</i>	<i>Response</i>
Invalid or CarID not present	false - DB unchanged
Valid CarID	true - Car changed to enabled in the DB

**Function:** disableCar(CarId) : bool

<i>Input</i>	<i>Response</i>
Invalid or CarID not present	false - DB unchanged
Valid CarID	true - Car changed to disabled in the DB

**Function:** getCloseCars(Location) : List< CarId >

*Components:* LocationHelper

<i>Input</i>	<i>Response</i>
Invalid or Null Location	Empty List
Locations valid	Returns List of Cars close in walking range to a given Location

### 3.5 Payment Controller

**Function:** createPayment(Ammount, ExtraFees) : Payment

<i>Input</i>	<i>Response</i>
Invalid or Null Ammount	Null
Valid Ammount	Creates Payment in the DB and returns the created Entity

**Function:** executeTransaction(Payment) : bool

<i>Input</i>	<i>Response</i>
Invalid or Null Payment	false, Payment not executed
Valid Payment	true if Payment successfull

### 3.6 Ride Controller

**Function:** createRide(User, Car) : Ride

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, Ride not created
Valid Parameters	Creates Ride and marks Car as Ready in the DB, returns the created Entity

**Function:** startRide(RideId) : bool

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Ride	false, Ride not started
Already started RideID	false
Valid not started Ride	true, marks the Ride as started and the Car in Use

**Function:** stopRide(RideId) : bool

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Ride	false, Ride not stopped
Already stopped RideID	false
Valid started Ride	true, marks the Ride as stopped and the Car Ready

**Function:** CalculateFee(RideId) : Payment

*Components:* PaymentController

<i>Input</i>	<i>Response</i>
Invalid or Null Ride	Null, Fee not calculated
Not stopped RideID	Null, Fee has to be calculated on a stopped Ride
Valid stopped Ride	Calculates all the Extra Fees applicable in the Ride and creates Payment with the Payment Controller.

### 3.7 Reservation Controller

**Function:** createReservation(UserID, CarID) : Reservation

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, Reservation not created
Valid Parameters	Creates Reservation and marks Car as Reserved in the DB, returns the created Entity

**Function:** cancelReservation(ReservationID) : bool

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null ReservationID	false, Reservation not canceled
Already canceled or confirmed Reservation RideID	false, Reservation has to be pending to be canceled
Valid Reservation	true, marks the Reservation as canceled and the Car as Available

**Function:** confirmReservation(ReservationID) : bool

*Components:* RideController

<i>Input</i>	<i>Response</i>
Invalid or Null ReservationID	false, Ride not stopped
Already canceled or confirmed ReservationID	false, Reservation has to be pending to be confirmed
Valid started Reservation	true, Creates the corresponding Ride for the Reservation, marks the Reservation as confirmed

### 3.8 User Report Controller

**Function:** createUserReport(CRMID, UserID, CarID) : UserReport

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, UserReport not created
Valid Parameters	Creates UserReport, returns the created Entity

### 3.9 User Controller

Functions of the User (and CRM) Controller integrate with functions of other Controllers since they change the status of the User and then relegate the changes of the other Entities to the respective Controllers. For the functions that were presented on the previous Controllers we will reduce repetitiveness by reducing the details of already explained output for functions. Look at the DD for detailed information of the interaction between components.

**Function:** registerUser(User Parameters) : User

*Components:* EmailHelper //Look up the RASD for the User Parameters

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, User not created
Valid Parameters	Creates User in the DB, sends Password mail and returns the created Entity

**Function:** logIn(UserID, Password) : bool

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid User Exception
Already logged in User	false, User already logged in Exception
Valid Parameters on DB	true, Logs in User into the System

**Function:** logOut(UserID) : bool

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid User Exception
Already logged out User	false, User already logged out Exception
Valid Parameters on DB	true, Logs out User from the System



**Function:** reserveCar(UserID, CarID) : ReservationID

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, Reservation not created and status not changed
Already Reserved Car or User	false, Car and User cannot have more than one Reservation at a time
Valid Parameters	true, Creates Reservation binds ReservationID to the User

**Function:** confirmReservation(UserID, ReservationID) : RideID

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, Ride not created
Already confirmed Reservation	false, Ride not created
User with already active Ride	false, Ride not created
Valid User and Reservation	true, Creates Ride and binds RideID to the User

**Function:** cancelReservation(UserID, ReservationID) : bool

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid Parameters Exception
User not binded to Reservation	false, Invalid Reservation Exception
Valid User and Reservation	true, unbinds Reservation form User

**Function:** endRide(UserID, RideID) : bool

*Components:* RideController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid Parameters Exception
User not binded to Ride	false, Invalid Ride Exception
Valid User and Ride	true, stops the ride and calculates and executes the Payment

### 3.10 CRM Controller

**Function:** `logIn(CRMID, Password) : bool`

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid CRM Exception
Already logged in CRM	false, CRM already logged in Exception
Valid Parameters on DB	true, Logs in CRM into the System

**Function:** `logOut(CRMID) : bool`

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid CRMID Exception
Already logged out CRMID	false, CRMID already logged out Exception
Valid Parameters on DB	true, Logs out CRMID from the System

**Function:** `createUserReport(CRMID, UserID, CarID, CarStatus) : User-Report`

*Components:* UserReportController, CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	Null, UserReport not created
Valid Parameters	true, Creates UserReport and changes the CarStatus if necessary

**Function:** `cancelReservation(UserID, ReservationID) : bool`

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid Parameters Exception
Valid User and Reservation	true, cancels Reservation

**Function:** `createReservation(UserID, CarID) : bool`

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid Parameters Exception
Valid User and Reservation	true, creates new Reservation for User

**Function:** endRide(UserID, RideID) : bool

*Components:* RideController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false, Invalid Parameters Exception
Valid User and Reservation	true, cancels Ride

### 3.11 User Component

**Function:** logInUser(Username, Password) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Valid Parameters	true if UserController logs in the User

**Function:** logOutUser(Username) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Valid Parameters	true if UserController logs out the User

**Function:** registerUser(UserParameters) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Valid Parameters	true if UserController registers the User

**Function:** searchNearbyCars(Location) : List< Car >

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid or Null Location	Shows all Cars in the MainPage Map
Valid Parameters	Shows the nearby Cars in the MainPage Map

**Function:** reserveCar(UserID, CarID) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
User has an Active Reservation	false, User can have only one reservation at a time
Car Already Reserved	false, User should not be able to ask for a reserved Car
Valid Parameters	true if UserController was able to reserve the Car

**Function:** cancelReservation(UserID, ReservationID) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Reservation not Active	false, User can only cancel an active reservation
Valid Parameters	true if UserController was able to cancel Reservation

**Function:** confirmReservation(UserID, ReservationID) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Reservation not Active	false, User can only confirm an active reservation
Valid Parameters	true if UserController was able to confirm Reservation

**Function:** endRide(UserID, RideID) : bool

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Ride not Active	false, User can only end an active Ride
Valid Parameters	true if UserController was able to end the Ride

**Function:** findLocation(Location) : List< Location >

*Components:* LocationHelper

<i>Input</i>	<i>Response</i>
Invalid Location	Empty Path
Valid Parameters	shows the desired path in the Ride Map

**Function:** activateMoneySavingOption(Location) : Location

*Components:* LocationHelper

<i>Input</i>	<i>Response</i>
Invalid Location	Null Location
Valid Parameters	shows the best Re-Charging Station in the Ride Map

### 3.12 CRM Component

**Function:** logInCRM(CRMID, Password) : bool

*Components:* CRMController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Valid Parameters	true if CRMController logs in the CRM

**Function:** logOutCRM(CRMName) : bool

*Components:* CRMController

<i>Input</i>	<i>Response</i>
Invalid or Null Parameters	false
Valid Parameters	true if CRMController logs out the User

**Function:** findCars(Location, CarStatus) : List< Car >

*Components:* CarController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired Cars

**Function:** findUsers(UserStatus) : List< *User* >

*Components:* UserController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired Users

**Function:** findReservations(UserID, CarID, ReservationStatus) :

List< *Reservation* >

*Components:* ReservationController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired Reservations

**Function:** findRides(UserID, CarID, RideStatus) : List< *Ride* >

*Components:* RideController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired Rides

**Function:** findPayments(UserID, CarID) : List< *Payments* >

*Components:* PaymentController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired Payments

**Function:** findUserReports(UserID, CarID, CRMID) : List< *UserReports* >

*Components:* UserReportController

<i>Input</i>	<i>Response</i>
Invalid Parameters	Empty List
Valid Parameters	shows the List of desired UserReports

### 3.13 Car Component

**Function:** getLocation() : Location

<i>Input</i>	<i>Response</i>
None	returns Car Location

**Function:** getNumberOfPassengers() : int

<i>Input</i>	<i>Response</i>
None	returns the current Number of Passengers in the Car

**Function:** getBatteryStatus() : float

<i>Input</i>	<i>Response</i>
None	returns the current Battery Status in percentage (0-100)

**Function:** isPluggedIn() : bool

<i>Input</i>	<i>Response</i>
None	returns true if the Car is plugged in a Re-Charging Station, false otherwise

**Function:** lockCar() : bool

<i>Input</i>	<i>Response</i>
None	returns true if Car was Locked

**Function:** unlockCar() : bool

<i>Input</i>	<i>Response</i>
None	returns true if Car was Unlocked

## 4 Performance Analysis

Even though the performance analysis is evaluated within the system as a whole, it was agreed that while testing the components, the isolated performance will be taken into account, as to correct unacceptable behavior, such as too slow response time, as soon as possible.

The aim of the performance analysis is to check the reliability of the application under normal usage conditions, providing benchmarks and identifying the response time, utilization and throughput of the application. So, for this test, the expected workload should be considered as in terms of the biggest city where the application will be implemented, taking into account an average usage for a long period with peaks of heavy traffic.

Both the server side and the client side can affect the performance of the application. For the client side, it is necessary to consider the performance of all the different interfaces. Particularly, the mobile application, the web application and the screen inside the car should all have satisfactory behavior, considering all kinds of users that can operate each of them.

Some important requirements to be evaluated:

- For the mobile application it is considered that the target public of the app can have any kind of Smartphone. So, the test will be made in low-range devices. This includes low ram availability, small internal space allocation and low processing power capacity.
- All the interfaces need to respond properly with slow network situations, and be reliable in situations of unstable network.



## 5 Required Tools and Test Equipment

### 5.1 Tools

In order to guarantee the most reliable system possible, when integrating components all the individual tests will be carried out once again, to make sure the integration did not cause new bugs to occur. For this reason, all the used programs provide tests automation tools, minimizing the rework.

The tools chosen for the Java EE and the EIS tiers were specifically three and each has its own scope of tests.

- First, the **JUnit Framework** will take care of the individual components testing. This is basically a way to certify that results produced by the components matches the theoretical value.
- Secondly, the **Arquillian Framework** helps keeping the integration testing simple. Testing the components of an application is challenging, so this framework focus on the interaction with the system, providing tools to check that the right components are being injected and the interactions with the database are occurring in a normal way.
- Finally, **Jmeter Framework** brings the application closer to the real world by performing load tests and performance tests. This tool provides emulations of loads on the server, network and objects providing solid data to analyze the overall performance of the systems under various conditions.

However, it is still necessary to test components withheld in the Client tier, specifically the mobile applications. In this matter, it will be used tools provided with each platform (IOS and Android have their own performance analysis tool that comes along with the SDK of the platform). Also as stated in the previous session, particularly harsh situations as low battery, bad network coverage and low available memory need to be taken into account.

These tools ensure that every aspect of the application is tested in the proper way and provide all the necessary features to accomplish the proposed points of this document.

## 5.2 Test Equipment

In some previous sections, characteristics of the devices in which the application needs to operate successfully have been discussed. They were always pessimistic, assuming that low-range smartphones, with limited functionalities were being used. However, this is only part of the testing devices, most users own better smartphones than the ones described. And even though the older devices should be supported, the application must be better optimized for the majority of the public.

Therefore, for the Android application, for each available screen size in the market (including smartphones and tablets), it will be necessary to execute the tests for a low-range and a mid-range device.

When using a low-range device, the characteristics to keep in mind are a single core with slow processor clock (preferably less than 1 ghz), and less than 1gb of ram. As for mid-range, it can be a dual core with up to 2ghz of clock, and 2gb of ram.

In the IOS the specifications of the devices only vary within the different models, so at least one smartphone and tablet of the IOS family need to be available for testing.

For the devices above described it will be carried out tests with the native mobile application and the mobile version of the web application. This is to ensure a broader number of devices and ways of accessing the application is covered.

Changing the scope from the mobile applications to the web browser client, a small number of notebooks and computers are also to be used, here the specifications of the devices are not important, but different browsers need to be installed in each of them.

The last category of devices that will be used are in respect to the screen inside the car. The tests will be carried out in android based devices, with different processing power and RAM availability. The results will be used to choose which model is to be deployed to all cars as to minimize the costs while keeping the necessary quality.

Finally, a identical server structure of the one used for the final deployment needs to be available. Although this is not yet completely defined, the test should recreate a realistic environment, using the same cloud infrastructure, Operating System, Java Enterprise Application server, and DBMS.

## 6 Required Program Stubs and Test Data

### 6.1 Program Stubs and Drivers

It was chosen as integration testing strategy the Bottom-up type. Due that it will be necessary the employment of Drivers to act as callers of the methods/components that going to be tested. Moreover it's not excluded the possibility of implementing some stubs as the testing phase is in process. The drivers that are listed below will compose the integration testing.

- **DBMS Driver:** Being the first in need to be integrated, the DBMS Driver will call the methods of the DBMS to test the interaction of the DBMS with the subsystems.
- **Location Helper Driver:** Although the main function of this driver is to test the interaction among Location Helper and the Car Controller it will test also functions such as of the Standard Deviation Algorithm used in the function 'getBestRechargingStation' and the interaction of the functions with the Google Maps API.
- **Email Helper Driver:** This driver will test the interaction of the Email Helper with Payment Controller and will test also the functionality of it by calling the components of the it as example the method that sends the password in the user's e-mail.
- **Chat Service Driver:** This driver will test the interaction of the component of the Chat Service with the CRM Controller by calling the method of the Chat Service.
- **Car Controller Driver:** This driver will test the interaction of the Car Controller with the Location Helper and with the Ride Controller by calling the methods of the Car Controller. In this set one method of the Car Controller will call one previous component the Location Helper.
- **Payment Controller Driver:** This driver will test the interaction of the Payment Controller with the Email Helper and with the Ride Controller by calling the methods of the Payment Controller. In this set one method of the Payment Controller will call one previous component the Email Helper.
- **Ride Controller Driver:** This driver will test the interaction of the Ride Controller with the Car Controller and with the previous components connected with them upon the request of the methods. It will be tested by calling the methods of the Ride Controller.

- **Reservation Controller Driver:** This driver will test the interaction of the Reservation Controller with the User Controller, CRM Controller and with the previous components connected with them upon the request of the methods. It will be tested by calling the methods of the Reservation Controller.
- **User Report Controller Driver:** This driver will test the interaction of the User Report Controller with the CRM Controller by calling the methods of the User Report Controller.
- **User Controller Driver:** This driver will test the interaction of the User Controller with the Reservation Controller by calling the methods of the User Controller.
- **CRM Controller Driver:** This driver will test the interaction of the CRM Controller with the User Report Controller and the Chat Service by calling the methods of the User Controller.
- **Car Component Driver:** The driver will test the functionality of the Car Component by calling their methods.

## 6.2 Test Data

It will be necessary some set of data for the testing phase and they will be:

- A list with valid and invalid locations for the Location Helper. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields
  - Location not in the required format
- A list with valid and invalid Users for the User Component. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields
  - User already registered
  - Invalid E-mail address
  - Format of the driving license is not suitable
- A list with valid and invalid CRM operators for the CRM Component. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields
  - Available status of the CRM operator
  - Unavailable status of the CRM operator
- A list with valid and invalid Reservations for the Reservation Controller. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields
- A list with valid and invalid Ride's for the Ride Controller. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields
- A list with valid and invalid User Report's for the User Report Controller. Also the list must test the following aspects of the system:
  - Null objects
  - Null fields

## 7 Effort Spent

Date	Domenico	Caio	Matheus
27/12/16	2h	2h	2h
28/12/16	-	-	-
29/12/16	1h	-	-
30/12/16	2h	-	-
31/12/16	-	-	-
01/01/17	-	-	-
02/01/17	2h	-	-
03/01/17	2h	-	-
04/01/17	2h	-	-
05/01/17	-	-	-
06/01/17	-	-	-
07/01/17	-	-	-
08/01/17	-	-	5h
09/01/17	-	-	4h
10/01/17	2h	2h	-
11/01/17	2h	5h	-
12/01/17	-	5h	-
13/01/17	-	3h	-
14/01/17	1h	1h	1h

## 8 Changelog

As the project and design decisions may change during the development this document is also prone to change. We'll document every version in this part.

- **Version 1.1:** 15/01/2017
- **Version 1.2:** 17/01/2017 - Minor Fixes on Controller Functions.