



Diplomarbeit

Automated Generation of JIAC AgentBeans from BPMN Diagrams

Fachbereich *Agententechnologien in betrieblichen Anwendungen
und der Telekommunikation (AOT)*

Prof. Dr.-Ing. habil. Sahin Albayrak
Fakultät IV Elektrotechnik und Informatik
Technische Universität Berlin

Vorgelegt von: **Petrus Setiawan Tan**

Betreuer: Dipl.-Inform. Tobias Küster

Petrus Setiawan Tan
Matrikelnummer: 213933
Stettiner Str. 9
10243 Berlin

Die selbstständige und eigenhändige Anfertigung dieser Diplomarbeit versichere ich an Eides statt.

Berlin, 4. November 2011

Petrus Setiawan Tan

Abstract

Models have been used as a solution to bridge the communication gap between the business users and the IT world, a common problem in the software industry. In the domain of multi agent systems, this communication gap is believed to be one of the reason why the agent concept is not very popular in the industry, although it has been a research topic for many years. On the other hand, webservices and service oriented architectures that addresses a similar problem domain are adapted much faster by the business users.

At the moment, some model driven approach has been made in order to simplify the development of multi agent systems providing tools which allows graphical process editing and a mapping of the process into agents. One example is the VSDT which provides a BPMN editor, a transformation framework and a mapping of BPMN into JIAC agents, allowing agents to be designed and created using BPMN. In this work we will extend the VSDT's transformation framework in order to develop a transformation of BPMN into Java code or to be more specific, into JIAC Agent Beans.

Zusammenfassung

Die Kommunikationslücke zwischen Unternehmen und IT stellt ein weitverbreitetes Problem in der Softwareindustrie dar. Als Lösung dieses Problems greift man oft auf Modelle zu. Auf dem Gebiet der Multi-Agenten-Systeme wird diese Lücke für eine Ursache gehalten, weswegen das Agentenkonzept, obwohl es seit mehreren Jahren ein Forschungsthema ist, in der Industrie nicht sehr populär ist. Im Gegensatz dazu kommen bei den Unternehmen Konzepte wie Webservices und serviceorientierte Architekturen, die einen ähnlichen Problembereich ansprechen, viel besser an.

Zur Zeit bestehen bereits einige Ansätze um die Entwicklung von Multi-Agenten-Systeme zu vereinfachen. Diese Ansätze stellen Werkzeuge bereit, die eine graphische Prozessmodellbearbeitung und die Abbildung der Prozesse zu den Agenten ermöglichen. Ein Beispiel dafür ist Visual Service Design Tool (VSDT), das einen BPMN Editor, ein Transformationsframework und eine Abbildung von BPMN auf JIAC Agenten bereitstellt und dadurch die Generierung von Agenten aus BPMN ermöglicht. In dieser Arbeit wird das Transformationsframework des VSDT erweitert, um eine Transformation von BPMN auf Javacode bzw. JIAC Agent Beans zu entwickeln.

Acknowledgement

I would like to thank Tobias Küster for being a very good supervisor, for all the help, suggestions and motivation he gave me during the last 6 months.

I also want to thank my whole family for their constant love and support.

Table of Contents

1	Introduction	1
1.1	Motivation	1
1.1.1	Model Driven Engineering (MDE)	1
1.1.2	MDE in Multi-agent systems	2
1.2	Goals	2
1.3	Outline	3
2	Background	5
2.1	JIAC	5
2.1.1	AgentBeans	6
2.2	BPMN(Business Process Modeling Notation)	9
2.2.1	Levels of Abstraction	9
2.2.2	BPMN Elements	9
2.3	VSDT(Visual Service Design Tool)	13
2.3.1	BPMN Editor	13
2.3.2	Transformation Framework	13
2.4	JET(Java Emitter Templates)	15
2.4.1	JET-Templates	15
2.4.2	2 different JET-Versions	17
2.4.3	New JET2 elements	17
3	State of the art	19
3.1	BPMN to BPEL Transformation	19
3.2	Existing Transformation to JiacV	19
3.3	WADE	20
3.3.1	JADE (Java Agent DEvelopment Framework)	20
3.3.2	WADE (Workflows and Agents Development Environment) . .	20
3.3.3	Workflow Metamodel (graphical view)	21
3.3.4	Workflow implementation (code view)	22

4	Mapping BPMN to Jiac Agent Beans	25
4.1	Pools and Processes	25
4.2	Workflow Structure	26
4.2.1	Sequence Flow	26
4.2.2	Gateways	27
4.2.3	Loop Blocks	30
4.2.4	Event Handler	30
4.3	Activites	31
4.3.1	Tasks	31
4.3.2	Subprocess	34
4.3.3	Activity-Looping	34
4.4	Events	36
4.4.1	Intermediate-Events	36
4.4.2	Start and End Events	37
4.5	Open Issues	39
5	Implementation of the transformation	41
5.1	Transformation Structure	41
5.2	Validation	42
5.3	Normalization and Structure Mapping	42
5.4	Element Mapping	42
5.4.1	Agent Bean Model	43
5.5	JET-Transformation	44
5.5.1	Implementation of the Event Handlers	45
5.6	Merging generated and manually edited code	47
5.6.1	Using JMerge	48
5.6.2	Problem with JMerge	49
5.7	Open Issues	49
6	Examples	51
6.1	The Model	51
6.1.1	The scenario	52
6.2	The generated Agent Beans	54
7	Conclusion	63
7.1	Future Work	63
	Literaturverzeichnis	66

List of Figures

2.1	Jiac Basic concepts and their structural relationships [4]	6
2.2	Agent-Lifecycle [4]	7
2.3	A simple Business Process Diagram	9
2.4	BPMN Event types. From left to right: Start Event, Intermediate Event, End Event	10
2.5	Examples of event subtypes. From left to right: Multiple, Link, Message, Rule, Timer	10
2.6	Task(Left) and Subprocess	11
2.7	Gateways - From left to right: Exclusive, Event Based, Inclusive, Parallel, Complex	11
2.8	Pool with 2 Lanes	12
2.9	VSDT - Editor View	13
2.10	Essential classes of the transformation framework, including the BPEL case.[15]	14
2.11	JET transformation steps.	15
3.1	Elements of Wade Metamodel [3]	21
3.2	Wade example: Account Withdrawal Process (graphical view)	23
4.1	Mapping example : Pool and Process	26
4.2	Mapping Example: Sequence Flow	27
4.3	Mapping example: AND Gateway	27
4.4	Mapping example: OR Gateway	28
4.5	Mapping example: XOR_Data Gateway	28
4.6	Mapping example: XOR_Event Gateway	29
4.7	Mapping example: Loop Blocks	30
4.8	Mapping example: Event Handler	31
4.9	Mapping example: Task	32

4.10	Mapping example: Service-task	32
4.11	Mapping example: Send-task	33
4.12	Mapping example: receive-task	33
4.13	Mapping example : Subprocess	34
4.14	Mapping example : Activity-Looping (Standard Loop)	35
4.15	Mapping example : Timer Intermediate Event	36
4.16	Mapping example : Timer Start Event	37
4.17	Mapping example : Message Start and End Events with Service Implementation	38
4.18	Mapping example : Message End Event with MessageChannel Implementation	38
4.19	Mapping example : Message Start Event with MessageChannel Implementation	39
5.1	Transformation stages	41
5.2	Simple example of normalization and structure mapping. [16]	42
5.3	AgentBean - Metamodel	43
5.4	JET-Transformation Structure	45
6.1	Use case model	51
6.2	Payload data types included in the process diagram	52
6.3	Business Process Diagram - requestTaxi	53

1. Introduction

In this chapter, we will start by introducing the motivation of this work and the problem we want to solve. After that we will present the goals of this work and give a short outline about the following chapters.

1.1 Motivation

A common problem in the software engineering is the communication gaps between the business people as a client and the IT world. Communicating through models, normally consists of graphical sketches, especially using those which are commonly used in the client's domain such as the BPMN, clearly is a solution in bridging these gaps. In the domain of multi agent systems, this communication gap is believed to be one of the reason why the agent concept is not very popular in the business world, although they have been a research topic for many years, while webservice and service oriented architectures that addresses a similar problem domain are adapted much faster by the business users.

At the moment, some model driven approach has been made in order to simplify the development of multi agent systems providing tools which allows graphical process editing and a mapping of the process into agents. However, most of these approaches uses a rather simple process models which sometimes only targeting a single agent.

The main motivation of this work is to present a solution that will simplify the software development process and help bringing the concepts of software agents and multi agent systems to gain more acceptance in the industry by developing a mapping from BPMN to agents that will enable users to create agents simply by modeling business processes.

1.1.1 Model Driven Engineering (MDE)

Over the past few years more and more software developers have been adopting the principle of *Model Driven Engineering*(MDE) where they no longer focus on writing programs but on creating a set of models which define the software. By modeling

the software, the developer creates documents that provides an abstract view of the software system, independently from the platform or a specific programming language, making it understandable for non experts i.e. the stakeholders as well as applicable in different platforms.

A significant number of the so called CASE (Computer Aided Software Engineering) tools have been developed to support this methodology. Beside providing support in creating and editing the models, most of these CASE tools are also equipped with transformation features that allows us to transform the model into text or even executable programs, thus increasing efficiency in the software development process. We can say that the real benefits of MDE lies in the transformation. By providing a mapping between the model and the code, we can create standardized programs, accelerate development time and minimize faults in writing the code.

1.1.2 MDE in Multi-agent systems

Back in 2007, an MDE-approach has been made in order to bridge the gap between the industry and the multi-agent systems. As a result, a CASE-tool called the ***Visual Service Design Tool (VSDT)*** was developed by Tobias Küster in scope of his Diploma Thesis, which provides the transformation of BPMN (Business Process Modeling Notation) to BPEL (*Business Process Execution Language*) and JIAC (Java-based Intelligent Agent Componentware) framework. This tool allows agents to be designed using the very expressive BPMN, which is also a model that has already been manifested in the industry. With this approach, most people from the industry should be able to design software agents.

Another MDE-approach in multi-agent systems are also introduced by WADE by introducing a workflow, which defines an agent's task and can be designed graphically with the developing tool WOLF and generated into a java code. But WADE is an example that uses a rather simple process model which target only a single agent. We will discuss WADE further in section 3.3.

In the scope of this work, we will present a combination of both approaches and develop a plugin to VSDT to enrich it's transformation feature with a code generator that will transform BPMN models into executable Java Code, or JIAC Agent Beans to be more specific.

1.2 Goals

The main goal of this work is to develop an eclipse plugin as an extension to VSDT to enrich its transformation features with a new transformation from BPMN to JIAC Agent Beans.

There will be code...

Having a code generator doesn't mean that developers won't be writing anymore code, although the idea is to generate most of the code from the informations given in the model. Because it is nearly impossible to put all implementation details into the model and to anticipate the possibility that the generated code will be edited

manually, considerations has to be made such that conflicts should not occur when the transformation is called to a code that has been edited manually. So the main challenge of generating executable code is to allow a regeneration of the code (e.g. when the model changes) while protecting the manually added user code.

1.3 Outline

In chapter 2 we will introduce some background topics of this work, starting with JIAC (the target framework), followed by BPMN (the model), VSDT (the framework to be extended) and JET(the technology that is being used).

Chapter 3 will discuss some State of the Art topics related to this work such as the transformation from BPMN to BPEL, the existing transformation from BPMN to JADL which is implemented in the VSDT, and WADE, the similar approach in generating a process into java code.

In Chapter 4, the mapping from BPMN to Jiac Agent Beans will be presented with examples showing the BPMN figure and the associated code mapped from it. We will start with the mapping of pools and processes followed by the mapping of some workflow structures e.g. loops and gateways. Finally we will present the mapping of activities and events.

Chapter 5 contains the details about the transformation's implementation, followed by an example presented in chapter 6.

Finally in chapter 7, the conclusion of this work and some future works related to this topic will be presented.

2. Background

In this chapter, we will discuss the backgrounds of the transformation that should be developed. We will start with JIAC, the agent framework which is the target of the transformation, followed by BPMN, the modeling notation that is being used BPMN. After that we will present the VSDT, the existing modeling and transformation framework to JIAC that should be extended, and finally we will present JET, the technology that will help us to implement the transformation.

2.1 JIAC

JIAC (Java-based Intelligent Agent Componentware) is a Java-based agent architecture and framework that was developed to simplify the development of software agents[9]. The framework supports the entire software development process of a software agent system by providing features such as FIPA compliant communication, Believe-Desire-Intention (BDI) reasoning, strong migration, web-service connectivity and many others. It also provides high security (Common Criteria EAL3, certified by the Federal Office for Information Security of Germany, BSI) and advanced accounting mechanisms, making it suitable for the use in industrial and commercial applications.

JADL

With it's core component JADL(*Jiac Agent Description Language*)[14], Jiac also provide an agent programming language. With JADL, the agents *plan elements*, *rules*, *ontologies* and *services* can be described. JADL is based on three predicate logic which allows the values *true*, *false* and *unknown*, which makes it suitable for open world problems in unknown environments.

In Figure 2.1, we can see the typical structure of a JIAC Application, which consists of AgentNodes, Agents, AgentBeans. An *AgentNode* is a Java VM where the runtime infrastructure for agents, such as discovery services, white and yellow pages services, as well as communication infrastructure, are provided. A JIAC application might consists of multiple AgentNodes (distributed application). With the so-called AgentNodeBeans, one can extend the AgentNode with additional components.

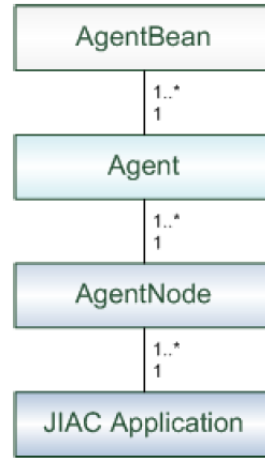


Figure 2.1: Jiac Basic concepts and their structural relationships [4]

Each AgentNode may run several *Agents*. Agents provide services to other agents and comprise life cycle, execution cycle and a memory. An agent can use infrastructure services in order to find other agents, to communicate to them and to use their services. Skills and abilities of the agent can be extended by so-called AgentBeans.

2.1.1 AgentBeans

Beside using JADL, another mean to implement the functionality of an agent by implementing an agent bean attachable to the agent. In most cases one can implement an agent bean simply by extending the class `AbstractAgentBean`. By doing this the new agent bean will have access to some useful fields such as :

- `protected Log log` : a logger Instance that can be used to create log messages.
- `protected IAgent thisAgent` : Reference to the Agent object that can be used to perform operations on the agent
- `protected IMemory memory` : Reference to the Agents memory that can be used to store and retrieve data.

Agent-Lifecycle

An agent bean implements the interface `ILifeCycle` which provides operations to control the bean's state in accordance to the agent's lifecycle(see Figure 2.2) by declaring the methods `init()`, `start()`, `stop()`, and `cleanup()`. These methods are implemented by the class `AbstractLifeCycle`, a super class of `AbstractAgentBean` which also provides the methods `doInit()`, `doStart()`, `doStop()`, and `doCleanup()` where we can hook up code that should be executed when the Lifecycle state changes, for example looking up needed actions, attaching SpaceObserver to the agent's memory, etc.

Execution-Cycle

By implementing the method `execute()`, we can tell the agent bean to do something periodically. This method is called by the agent's execution cycle, given that

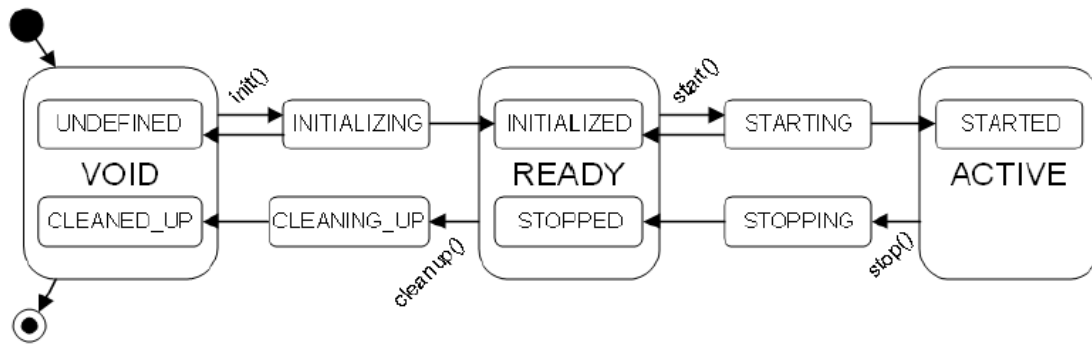


Figure 2.2: Agent-Lifecycle [4]

the execution interval property is specified in the configuration file¹, and while the agent is on the **started** state.

Actions

Agent beans can provide Actions. Actions are public methods that can be invoked by another bean and depending on the action's scope it can even be invoked by another agent. Therefore an action can be seen as a service. Using an Action normally includes two or three steps(the third one is optional):

1. find the Action
2. invoking the Action
3. get the results

The following Listing shows an example on how to use the send action provided by the `ICommunicationBean`:

```

1 Action sendAction = retrieveAction(ICommunicationBean.ACTION_SEND); //find action
2 [...]
3 invoke(sendAction, new Serializable{message, receiver}) //invoke

```

Listing 2.1: Using an Action

The methods `retrieveAction()` and `invoke()` used in the above Listing are provided by the `AbstractAgentBean`.

The simplest way to provide Actions is by extending the class `AbstractMethodExposingBean` (also an extension of `AbstractAgentBean`) and put the `@Expose` java annotation on the method that we want to expose as an action, as shown in the following listing:

```

1 //static variable for the action name
2 public static final String ACTION_DOACTION = packageName.BeanName#doAction;
3 [...]
4 @Expose(name=ACTION_DOACTION, scope = ActionScope.GLOBAL)
5 public void doAction() {
6     [...]
7 }

```

Listing 2.2: Providing an Action

¹Informations about the configuration file can be found in the jiac manual[4]

Memory and SpaceObserver

The default implementation of the agent's memory is a simple tuple space that can hold any Java objects implementing the `IFact` interface (an extension to `java.io.Serializable`). The memory provides the 4 methods to work on the space: *read*, *write*, *remove* and *update*.

Each time a Bean calls an operation that modifies the memory, a `SpaceEvent` is fired. There are currently 4 different `SpaceEvents` that are fired:

- `WriteCallEvent` - fired when a new object is written in the memory.
- `UpdateCallEvent` - fired when an object has been updated in memory.
- `RemoveCallEvent` - fired when an object is removed from the memory.
- `RemoveAllCallEvent` - fired when all objects are removed from the memory.

By using `SpaceObserver`, we can listen to these `SpaceEvents` and gets notification whenever a space event is being fired. For example we can implement a space observer which will start a process when a message is being written in the memory (Listing 2.3).

```

1 SpaceObserver<IFact> observer = new SpaceObserver<IFact>(){
2     public void notify(SpaceEvent<? extends IFact> event){
3         if(event instanceof WriteCallEvent){
4             doProcess(); //start process
5         }
6     }
7 };
8
9 memory.attach(observer);

```

Listing 2.3: A SpaceObserver

To start receiving the `SpaceEvents`, we should attach the observer into the agent's memory (see line 9 of Listing 2.3). To stop receiving notifications on the `SpaceEvents` we can similarly use the `detach()` method.

2.2 BPMN(Business Process Modeling Notation)

BPMN [5] is a standard Notation for modeling business processes, initially published by the BPMI which is later adopted by the OMG(Object Management Group). A business process diagram (as seen in Figure 2.3) can be compared to UML's activity diagram.

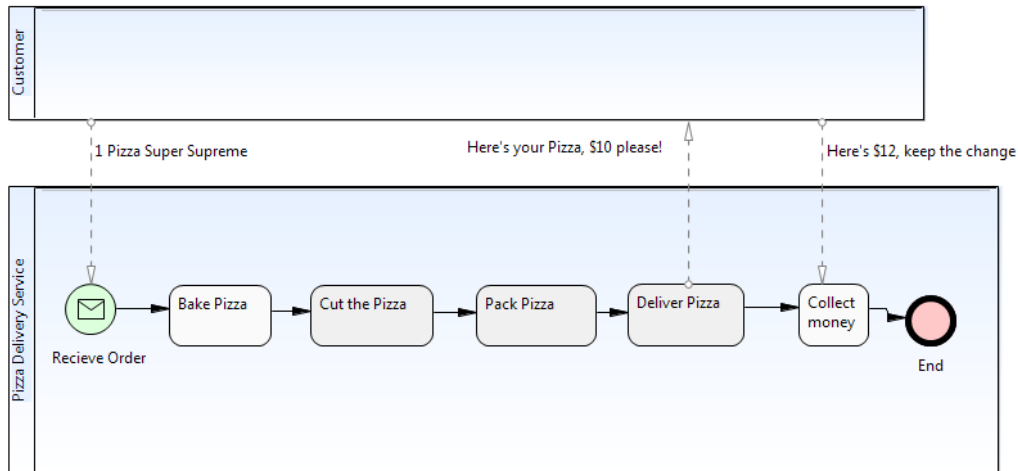


Figure 2.3: A simple Business Process Diagram

BPMN was made to provide a notation that is understandable by all business users, creating a bridge for the gap between the business process design and the process implementation. With the mapping of BPMN to Agents, we hope to be able to increase the spreading of the multi agent systems in the business world.

2.2.1 Levels of Abstraction

Besides providing an easy to read graphical notations, each BPMN elements are also equipped with additional attributes (so called properties), which are hidden from the diagram and provides the informations needed for automated code generation. The BPMN can be seen as having at least three levels of Abstraction:

1. Basic Types - The diagram are made up of easily recognized graphical elements
2. Subtypes - Each basic types can be further distinguished into subtypes with additional graphical elements such as icons that marks the type of an event's trigger.
3. Properties - Each element has additional detailed informations that are hidden from the diagram, but contain informations needed for the transformation.

2.2.2 BPMN Elements

BPMN elements can be categorized in five basic groups of elements[5] :

- Flow Objects

- Data
- Connecting Objects
- Swimlanes
- Artifacts

Flow Objects includes Events, Activities and Gateways. These elements are the most important in BPMN, and they are held in a lane.

An *Event* describes something that happens during the course of a process. It is divided into Start Event, Intermediate Event and End Event (see Figure 2.4).

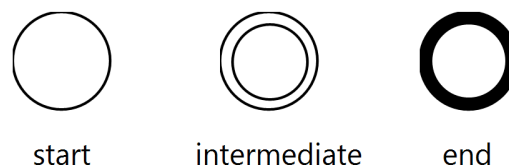


Figure 2.4: BPMN Event types. From left to right: Start Event, Intermediate Event, End Event

BPMN Events are further divided into subtypes according to the type of the event's trigger (for start and intermediate events) or result (for end events). The event figure (see Figure 2.5) are drawn with different icon in the middle, according to the trigger.

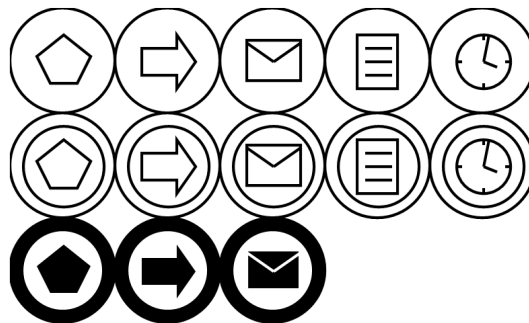


Figure 2.5: Examples of event subtypes. From left to right: Multiple, Link, Message, Rule, Timer

An *Activity* describes something that is done during a process. It is divided into *Tasks* (Atomic Activities) and *Sub Processes* (Composite Activities).

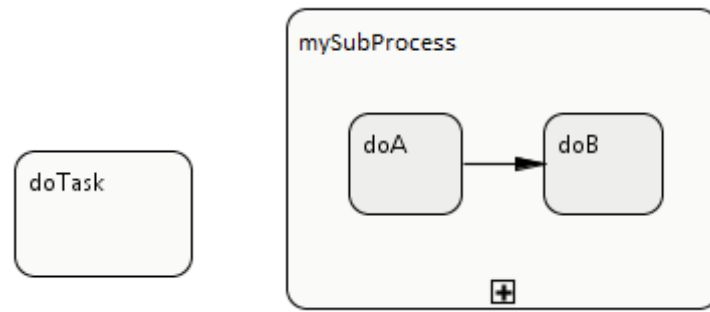


Figure 2.6: Task(Left) and Subprocess

Gateways are used to define all kinds of splitting and merging behavior. It's semantics depends on the dimension of it's incoming and outgoing Sequence Flows. Gateways are divided into the following types (also see Figure 2.7):

1. Exclusive
2. Event Based
3. Inclusive
4. Parallel
5. Complex



Figure 2.7: Gateways - From left to right: Exclusive, Event Based, Inclusive, Parallel, Complex

Data is represented by the four elements:

- Data Objects
- Data Inputs
- Data Outputs
- Data Stores

Data Object describes information that is needed by an activity or what they produce. It can represent a singular object or a collection of objects. *Data Inputs* and *Data Outputs* describe the same information for Processes. *Data Stores* describe the location where information, that persists beyond the scope of a process are stored.

With *ConnectingObjects*, *FlowingObjects* can be connected to each other or with other informations. There are 3 different kinds of Connecting Objects:

- *Sequence Flows* - represent Flow Control, used for connecting FlowObjects within a Pool in the order of execution.
- *Message Flows* - represent Messages being exchanged exclusively between Pools.
- *Associations* - mainly used for documentation, in example between Flow Objects and a Text annotation.

Swimlanes are divided into *Pools* and *Lanes*. Each Pool represents one Participant in the business process, while Lanes are used to partition a Pool, in example to model different Departments of an Institution. Figure 2.8 shows a Pool with 2 Lanes.



Figure 2.8: Pool with 2 Lanes

Artifacts are additional Information about the Process. It is mainly used for documentation purpose. The Current set of Artifacts includes:

- Text Annotation
- Group

To provide a rough overview on how Agent technology can support the implementation of Business Processes let us take a look on this mapping example of BPMN elements to Agents. A Pool in a Business Process Diagram can represent an Agent, which are able to communicate with other agents (another pool) through messages (represented with the BPMN MessageFlows). Agents can react to Events. A detailed mapping needed for implementing the transformation will be discussed in chapter 4

2.3 VSDT(Visual Service Design Tool)

The VSDT is a CASE Tool, developed to support the idea of Process Oriented Agent Engineering [17], where Agents are designed by defining use cases and processes described with the BPMN. It's features include the BPMN editor, process structure view, model validation, import of existing web services, transformations to BPEL, and JIAC and many more.

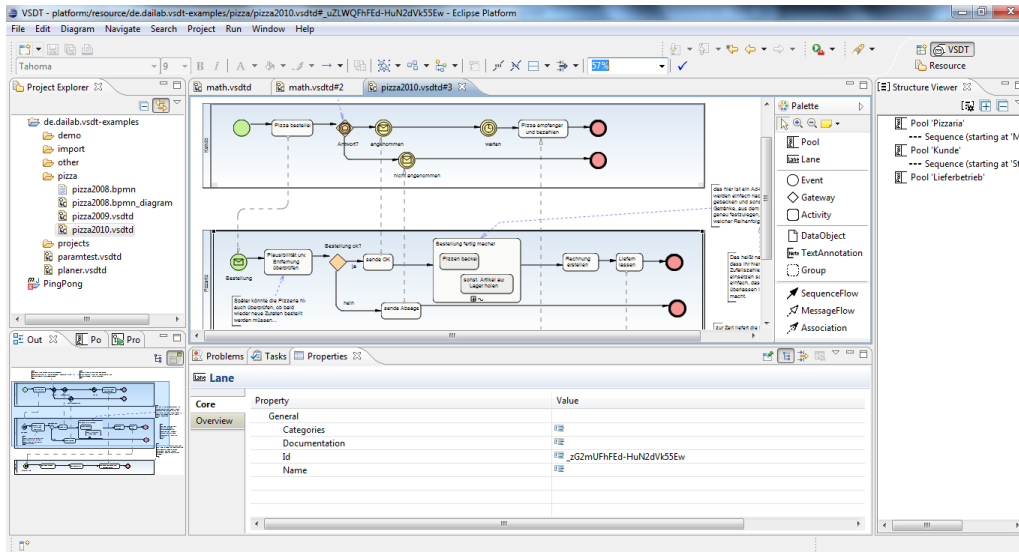


Figure 2.9: VSDT - Editor View

2.3.1 BPMN Editor

The BPMN Editor in VSDT was created using eclipse's GMF (Graphical Modeling Framework). The editor enables us to create and modify business processes graphically. It also provides a properties view, where we can see and edit the additional properties of an element selected in the diagram.

The VSDT was designed to support pure BPMN that is independent from any execution language[16]. This means the standard editor doesn't support language specific features such as the validation of expression to be conform with the syntax of a specific language (such a validation can be implemented in the transformation). However, the editor can be enriched with plugins that for example provides a view with language specific functionality.

2.3.2 Transformation Framework

Since it's initial development, VSDT's transformation framework is designed to be extensible and reusable. This allows the development of a new transformation to be easier. For this purpose the transformation process is subdivided into several stages:

1. *Validation*: Validate the input model.
2. *Normalization*: Prepare the input model for transformation.
3. *Structure Mapping*: Convert the input model to a block-like structure.

4. *Element Mapping*: Perform the actual mapping, create target model.
5. *Clean Up*: Remove redundancies, improve readability, etc.

Due to the fact that the validation, normalization and structure mapping are mostly independent from the target language, the standard mapping provided for these stages are reusable, which makes it possible to implement a new transformation by specifying the element mapping only. Figure 2.10 shows the UML Class Diagram of the transformation framework with the example transformation to BPEL.

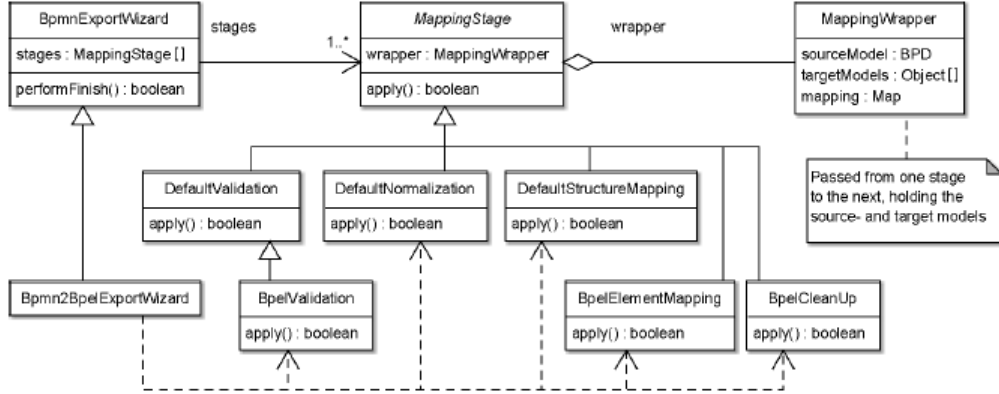


Figure 2.10: Essential classes of the transformation framework, including the BPEL case.[15]

2.4 JET(Java Emitter Templates)

JET[13] is a code generating framework, developed as a part of the Eclipse Modeling Project [7]. Using the so-called templates, one can transform a model into various type of text, from a simple plain text up to text containing html, xml or java code. A naming convention exists for the JET-Template file according to the type of the generated text. For example the name of a template file generating a java code should end with *.javajet*

The transformation process is done in two steps(see figure 2.4). First, the JET-Builder will translate the template file into a Java class holding a generate method. Then we can create an instance of the template class and call it's generate method to get the result String which we can process further for example writing it into a file.

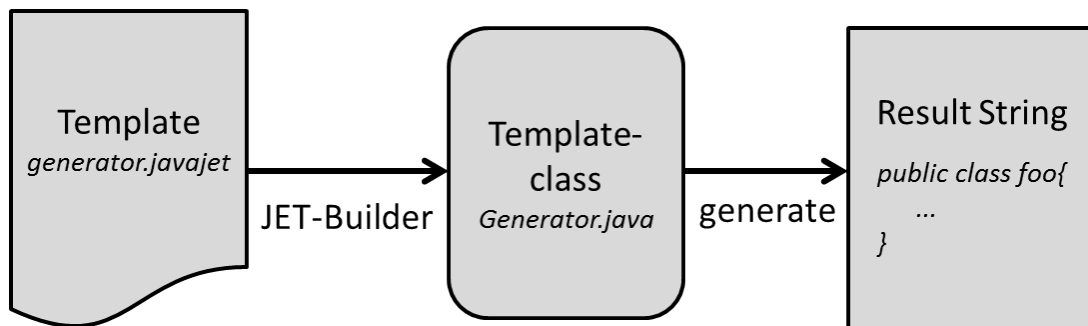


Figure 2.11: JET transformation steps.

2.4.1 JET-Templates

JET-Templates uses a JSP-like syntax which makes it easy to write and understand. There are three types of expression in JET-Syntax:

1. **Directives** `<%@ directive {attribute = "value"} *%>`
Directives contains information for the JET-Engine.
2. **Scriptlets** `<% scriptlet %>`
With Scriptlets we can use any java code fragment in the template. For example we can type cast the argument object into List:
`<% List<String> studentlist = (List<String>)argument; %>`
These code fragments are executed at invocation time of the generate Method.
3. **Expressions** `<%= expression %>`
An expression contains a java expression which will be executed at invocation time, and it's result will be added into the StringBuffer.

A set of JET templates is called transformation. It is possible to build this transformation with a main template which acts as a visitor and runs through the model, and this main template will then use other templates which handle a specific element of the model. For example, in UML to Java transformation you can have special templates that handles the package, class, variables and methods.

The following listing shows a simple example of a JET-Template that generates an XML:

```

1 <% @ jet package="generator" imports="java.util.*" class="StudentListGenerator" %>
2 <?xml version="1.0" encoding="UTF-8"?>
3 <% List<String> elementList = (List<String>) argument; %>
4 <class>
5     <% for (Iterator i = elementList.iterator(); i.hasNext(); ) { %>
6         <student><%=i.next()%></student>
7     <% } %>
8 </class>

```

Listing 2.4: a simple JET-Template

A Jet-Template starts with the so called **jet-directive**. It contains informations for the JET-Builder, for example the name of the translated Java class(also called the template class), the package in which the template class should be placed into and a list of classes that should be imported by the template class.

In the first step, the JET-Builder will then translate this template into the Java Class generator.StudentListGenerator:

```

1 package generator;
2 import java.util.*;
3
4 public class StudentListGenerator
5 {
6     protected static String nl;
7     public static synchronized StudentListGenerator create(String lineSeparator)
8     {
9         nl = lineSeparator;
10        StudentListGenerator result = new StudentListGenerator();
11        nl = null;
12        return result;
13    }
14    public final String NL = nl == null ? (System.getProperties().getProperty("line.
        separator")) : nl;
15    protected final String TEXT_1 = " " + NL + "<?xml version=\"1.0\" encoding=\"UTF
        -8\"?>";
16    protected final String TEXT_2 = NL + "<class>" + NL + "\t ";
17    protected final String TEXT_3 = NL + "    <student>";
18    protected final String TEXT_4 = "</student>";
19    protected final String TEXT_5 = NL + "</class>";
20    public String generate(Object argument)
21    {
22        final StringBuffer stringBuffer = new StringBuffer();
23        stringBuffer.append(TEXT_1);
24        List<String> elementList = (List<String>) argument;
25        stringBuffer.append(TEXT_2);
26        for (Iterator i = elementList.iterator(); i.hasNext(); ) {
27            stringBuffer.append(TEXT_3);
28            stringBuffer.append(i.next());
29            stringBuffer.append(TEXT_4);
30        }
31        stringBuffer.append(TEXT_5);
32        return stringBuffer.toString();
33    }
34 }

```

Listing 2.5: the translated Java-Class

The most interesting part of the java template class is the generate method. To get the text that should be generated, an instance of this class should be created and then we pass a list to the generate method, for example with the following code:

```

1  ...
2  List<String> students = new ArrayList<String>();
3  students.add("Peter");
4  students.add("John");
5  students.add("Caroline");
6
7  StudentListGenerator generator = new StudentListGenerator();
8  generator.generate(students);

```

Listing 2.6: calling the generate method

, where the result of the transformation will be:

```

1  <class>
2  <student>Peter</student>
3  <student>John</student>
4  <student>Caroline</student>
5  </class>

```

Listing 2.7: Result String of the transformation

2.4.2 2 different JET-Versions

There are currently 2 different JET-Versions in the Eclipse Modeling Project. The syntax and examples mentioned above correlate to the older Version of JET, which allows us to generate text with an Object as argument. In the template, the argument variable can be type casted into the class of our model. This JET-Version is effective if the model we want to generate the text from is a Java object. We get a String as a result which we can write into a File using the Java-IO or even Eclipse API.

In the updated version of JET, also called JET2, some workspace and Java related “tag-libraries“ are provided, enabling us to do the transformation without using the Java and Eclipse API. Unfortunately, in this Version the model has to be an xml-File. Implementing the transformation of the BPMN directly from its xml-Representation will be harder and the template will be confusing, therefore a decision has been made to implement the mapping using the existing transformation framework where an intermediate model class of the AgentBean will be created, and then transform this intermediate model into Java code using the older version of the JET Transformation. More details on the implementation will be discussed in chapter 5.

2.4.3 New JET2 elements

The enhanced version of JET comes with some new syntax elements such as:

- Comments `<-- Comment -->`
Comments will be copied to the translated Java class as a line comment, but they will have no influence on the transformation.
- Java Declaration `<%! ... %>`
Within the Java declaration tag, the template may declare some Java methods or variables.

- The @taglib directive `<%@taglib id="..." prefix="..."%>`
With the @taglib directive, we can import an XML Tag Library or rename the tag library's namespace prefix.
- Custom xml tag
JET2 templates may contain custom xml tags. JET2 comes with 4 standard tag libraries, and we can also define our own tag library.

Out of the new elements, the custom XML tag is the most interesting since JET2 comes with 4 helpful standard tag libraries[21]:

1. Control tags
Contains control flow and data management tags. These tags will help us in visiting the input model where we will need to evaluate expression, perform loops, iterate through a certain set of elements and read or write some informations in the input.
2. Workspace tags
Contains a set of library that performs operations against the eclipse workspace (for example for creating a file in an existing eclipse Project).
3. Java tags
Contains tags useful for generating Java codes such as creating Java packages and classes, managing imports etc.
4. Format tags
Standard tags for formatting text.

3. State of the art

3.1 BPMN to BPEL Transformation

In the BPMN Specification, the mapping from BPMN to BPEL has been included since the first version. In fact the development of BPMN was driven by the lack of standard notation for the WS-BPEL[23]. The limitation of the mapping from BPMN to BPEL has also been discussed in various papers, focusing the issues resulting from the incompatibility of the graph structured BPMN and the block structured BPEL, and led to some more sophisticated mapping such as the one introduced by Ouyang et al. ([18],[19]).

At the moment, there are some tools that supports the transformation from BPMN to BPEL. In the VSDT, a mapping from BPMN to BPEL based on the mapping given in the BPMN specification was developed, covering nearly every mapping given in the specification including event handlers, inclusive OR and event based XOR Gateways.

For this Project the mapping from BPMN to BPEL given in the BPMN specification are used to gain a better understanding of the notation's semantics.

3.2 Existing Transformation to JiacV

At the moment, the VSDT is already equipped with a transformation of BPMN to JiacV, which generates the JADL(Jiac Agent Description Language). As mentioned in chapter 2, both JADL and Agent Bean are tools to implement the functionality of an Agent in Jiac. The transformation to Jiac Agent Beans is in no way a replacement to the existing transformation. Instead both transformations shall complement each other as the products of both transformations have their own advantages, some of which we can find in the following table 3.1

Advantages of:	
JADL	Agent Beans
can be deployed to a running Agent	Written fully in Java, therefore developer friendly. Java is more powerful (expressive) than JADL. Better performance because no parser is involved.

Table 3.1: Advantages of JADL and Agent Beans

Because JADL files can be deployed to a running Agent, the mapping to JADL is suitable for creating dynamic behaviors and services that might be changed and deployed at runtime, while the mapping to JIAC Agent Beans (because of its expressiveness and better performance) is a better choice for creating the core components of an agent.

3.3 WADE

A similar approach (designing agents behavior with processes and transforming it into Java Code) has been developed by the Telecom Italia with their JADE-extension called WADE (Workflows and Agents Development Environment). While Jade was developed to simplify the implementation of Software Agents, WADE extended JADE with a workflow engine, making it possible to create Agents that executes tasks defined as workflows.

3.3.1 JADE (Java Agent DEvelopment Framework)

JADE ([1],[2]) is an application framework and a middleware written in Java, which support the development of software agents. The framework provides distributed runtime environments, agent and behavior abstractions as well as communications between agents and discovery mechanisms. We can say that its role is very similar to JIAC.

3.3.2 WADE (Workflows and Agents Development Environment)

WADE is an extension to JADE, which enrich the application framework with a workflow engine. The WorkflowEngineAgent extends the JADE basic Agent class with an ability to execute workflows represented in a WADE specific formalism.

A WADE workflow is actually a Java Class, thus it can be edited and managed as Java classes and can contain pieces of code which is needed to implement the process. With WOLF, a development environment that comes with WADE, developers can edit the Workflow graphically as well as textually. The code view and the graphical view of the workflow are kept in sync.

Despite having all the advantages of a Java code, the WADE workflow is rather simple and not so expressive as the BPMN. Similarity to the agent technology such as event handling and communication flow are also missing in the workflow. Further,

because each workflow model is associated to a single java class, it is targeting a single agent and is not very suitable in designing multi agent systems. In the following we will take a closer look on the workflow concept of Wade.

3.3.3 Workflow Metamodel (graphical view)

For the graphical view of the workflow, WADE adopts a workflow metamodel quite similar to that defined in XPDL standard defined by the Workflow Management Consortium (www.wfmc.org). In figure 3.1 (image taken from [3]), we can see an example process summarizing the main elements of the WADE metamodel.

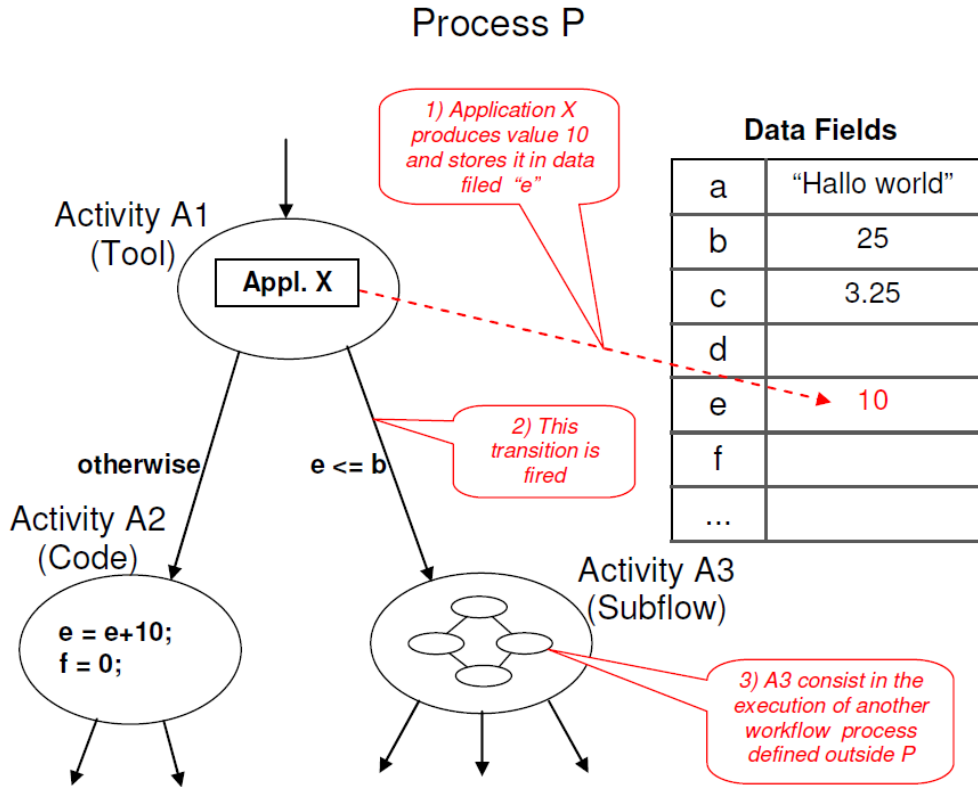


Figure 3.1: Elements of Wade Metamodel [3]

A Process in Wade is made up from a set of Activities, where each activity corresponds to the execution of the given operations. A Process is defined with exactly one **Start Activity**, and one or multiple **End Activities**. A Process may have Formal Parameters, which defines the type of required inputs and expected outputs.

Activities in Wade are divided into different types depending on the operations included in the activity. 6 types are mentioned in [22] as being the most relevant:

- **Tool Activities**

Contains the invocation of one or more **Applications**, computational entities defined outside of the workflow process and wrapped by a uniform interface.

- **Subflow Activities**

Contains the invocation of another workflow process. The execution of the

subflow takes place in a different computational place and it may be carried out by another agent. Further, we can set whether the subflow should be executed synchronously or asynchronously.

- **Webservice Activities**

Contains the invocation of a webservice.

- **Code Activities**

Included operations are specified directly by a set of Java code.

- **Subflow Join**

Included operations consist of blocking the main workflow process and wait until the previously launched asynchronous subflow completes, and getting the results.

- **Route Activities**

Route activities are empty. No operations is included. It can be used to simplify complex flows.

Each non ending activity has one or more outgoing **Transitions** leading to another activity. A transition may be associated with a condition. Once an activity completes, the conditions of all outgoing transitions will be checked. If the condition holds, the transition will be fired and the workflow continues with the execution of the destination activity.

A Process has a set of **DataFields** which can be referenced anywhere in the process e.g. in the condition of a transaction or in the operations included in an activity.

3.3.4 Workflow implementation (code view)

As mentioned before, workflow in wade is actually a (well structured) Java class. A workflow process is implemented by a Java class extending the `WorkflowBehaviour` class, which provides the methods `registerActivity()` and `registerTransition()` for adding activities and transitions into the process.

The `registerActivity()` method takes a behavior object as argument. There are different behavior classes corresponding to the different activity types discussed in the previous subsection. The actual operations included for the registered activity are wrapped in a void method of the workflow class. The method's name is derived from the activity's name added with the "execute" prefix e.g `executecheckBalance()` for the activity "checkBalance".

The `registerTransition()` method takes a Transition object as an argument. If the transition is associated with a condition, then a boolean method (with the prefix "check" added to the condition name) will be created.

In Figure 3.2 we can see an example process in its graphical view and Listing 3.1 shows the equivalent code view to the example.

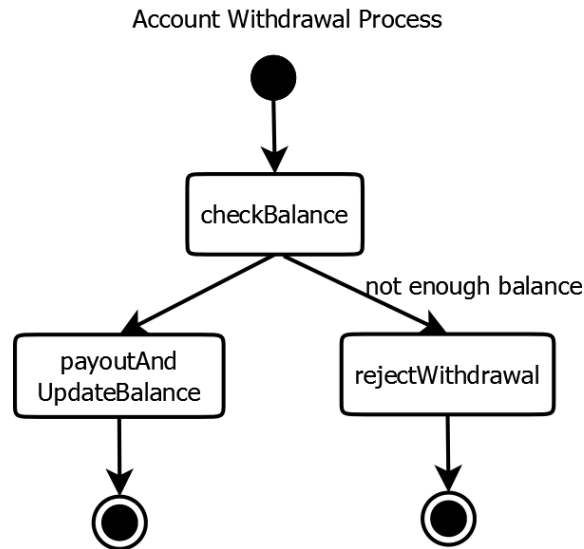


Figure 3.2: Wade example: Account Withdrawal Process (graphical view)

```

1 //the layout information of the graphical view
2 @WorkflowLayout(entryPoint = @MarkerLayout(position = "(260,31)", activityName = "
  checkBalance"), exitPoints = { }, transitions = {@TransitionLayout(to = "
  rejectWithdrawal", from = "checkBalance"), @TransitionLayout(to = "
  payoutAndUpdateBalance", from = "checkBalance") }, activities = {
  @ActivityLayout(position = "(357,175)", name = "rejectWithdrawal"),
  @ActivityLayout(position = "(116,171)", name = "payoutAndUpdateBalance"),
  @ActivityLayout(position = "(222,78)", name = "checkBalance") })
3
4 public class AccountWithdrawal extends Workflowbehavior {
5   //Data fields
6   public static final String NOTENOUGHBALANCECONDITION = "notEnoughBalance";
7   public static final String REJECTWITHDRAWALACTIVITY = "rejectWithdrawal";
8   public static final String PAYOUTANDUPDATEBALANCEACTIVITY = "
  payoutAndUpdateBalance";
9   public static final String CHECKBALANCEACTIVITY = "checkBalance";
10  private double balance;
11
12  //formal Parameter
13  @FormalParameter(mode=FormalParameter.INPUT)
14  public double amountToBeWithdrawn;
15
16  // All activities should be registered in this method
17  private void defineActivities() {
18    CodeExecutionbehavior checkBalanceActivity = new CodeExecutionbehavior(
19      CHECKBALANCEACTIVITY, this);
20    registerActivity(checkBalanceActivity, INITIAL);
21    CodeExecutionbehavior payoutAndUpdateBalanceActivity = new
22      CodeExecutionbehavior(
23        PAYOUTANDUPDATEBALANCEACTIVITY, this);
24    registerActivity(payoutAndUpdateBalanceActivity, FINAL);
25    CodeExecutionbehavior rejectWithdrawalActivity = new CodeExecutionbehavior(
26      REJECTWITHDRAWALACTIVITY, this);
27    registerActivity(rejectWithdrawalActivity, FINAL);
28  }
29
30  // All transitions should be registered here
31  private void defineTransitions() {
32    registerTransition(new Transition(), CHECKBALANCEACTIVITY,
33      PAYOUTANDUPDATEBALANCEACTIVITY);
34    registerTransition(new Transition(NOTENOUGHBALANCECONDITION, this),
35      CHECKBALANCEACTIVITY, REJECTWITHDRAWALACTIVITY);
36  }
37
38  //activity methods
39  protected void executecheckBalance() throws Exception {
    [code for checking the account's balance]
  }

```

```
40 }
41
42 protected void executepayoutAndUpdateBalance() throws Exception {
43     [...]
44 }
45
46 protected void executerejectWithdrawal() throws Exception {
47     [...]
48 }
49
50 //check method for the condition of a transition
51 protected boolean checknotEnoughBalance() throws Exception {
52     return true;
53 }
54
55 }
```

Listing 3.1: Wade example: Account Withdrawal Process (code view)

From the above listing, we can see the structure of a workflow implementation class in Wade. At line 3, we can see how the layout information for the graphical view is coded with the Java annotation mechanism. Data fields are implemented as a class variable (line 6-10) so that it can be referenced everywhere in the workflow process.

Although it is not strictly necessary, all activities and transitions should be registered in the methods `defineActivities()` and `defineTransitions()` because the graphical editor will search these methods to detect the activities and transitions to show.

In line 38 to 47 we can see the activity methods that wraps the operations included in an activity. And finally we can see the boolean method `checknotEnoughBalance()` that checks for the condition of the transition from `checkBalance` to `rejectWithdrawal`. These methods are per default empty, leaving the operations to be added directly into the code by the developer.

Wade's approach in implementing the workflow as Java code has inspired us for this project. Some of the concepts e.g wrapping the activity in a Java method can also be found in our BPMN to Agent Bean transformation.

4. Mapping BPMN to Jiac Agent Beans

The element mapping from BPMN to Jiac Agent Beans is created based on the existing mapping to JiacV - JADL script. Compared to a JADL script, an AgentBean that is written completely in Java enables more possibilities in mapping concepts such as intermediate Event handling. Some concepts found in Wade's workflow implementation inspired us for the development of the mapping. This chapter will provide a detailed overview of the mapping.

4.1 Pools and Processes

Every pool in a process diagram will be mapped into an Agent Bean. The name of the Agent Bean will be derived from the Pool name, and the name of the process diagram it is contained in. If a Pool with the same name (e.g Mathematican) is contained in the business process diagrams ExtractRoot and Faculty, then the two agent beans `Mathematican_ExtractRoot` and `Mathematican_Faculty` will be created. Further, they are grouped in the package `mathematican`.

The process contained in a pool is mapped into a **workflow method**. Depending on the start event's type, this workflow method may be called in the execute method of the bean (for timer start event), it may be exposed as an action (for message start event with service implementation), or if the start event is a message start event with MessageChannel implementation, a SpaceObserver will be created and attached to the agent's memory, which will call the workflow method when a message with the payload and address as specified in the implementing message channel are written into the agent's memory.

The mapping of a task contained in a process flow will be wrapped in the so called **activity method** which will be called by the workflow method. Special cases for tasks with event handler and subprocesses will be discussed in a later section.

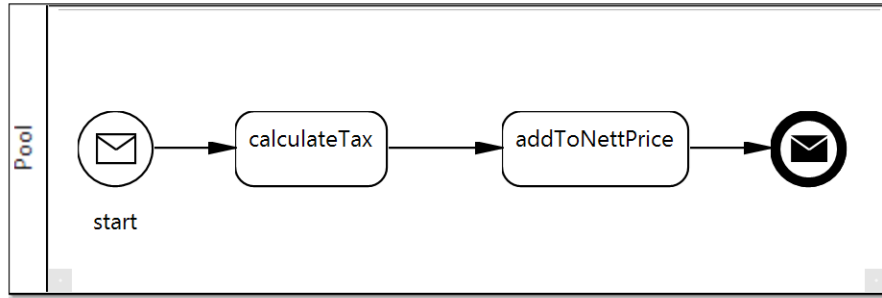


Figure 4.1: Mapping example : Pool and Process

Lanes are currently ignored. A process of a lane will be handled as a process of the containing pool.

The Figure4.1 shows a simple example of a pool called Pool with the process do-Process. For the Pool, a Java class called Pool_DoProcess will be created and it will have the workflow method called doProcess. In this example the message start event is implemented as a service, thus the workflow method is exposed as an Action as we can see in the following Listing 4.1.

```

1 package pool; //derived from the pool name
2
3 //some imports...
4
5 public class Accounting_CalculatePrice extends AbstractMethodExposingBean{
6
7     public final static String ACTION_DOPROCESS = "pool.Pool_DoProcess#doProcess";
8
9     // process attribute would be declared here
10    [...]
11    @Expose(name = ACTION_DOPROCESS, scope = ActionScope.GLOBAL)
12    public double doProcess(double nettPrice, double taxRateInPercent) {
13        calculateTax();
14        addToNettPrice();
15        return totalPrice;
16    }
17
18    private void calculateTax(){
19        [...]
20    }
21
22    private void addToNettPrice(){
23        [...]
24    }
25 }

```

Listing 4.1: Mapped element: Pool and Process (Figure 4.1)

4.2 Workflow Structure

Workflow structure is mapped as the content of the workflow method. It defines the invocation structure of the flow objects contained in a process.

4.2.1 Sequence Flow

The mapping of a sequence flow is trivial. The mapped elements connected with a sequence flow will be invoked sequentially in the workflow method (see Figure 4.2).

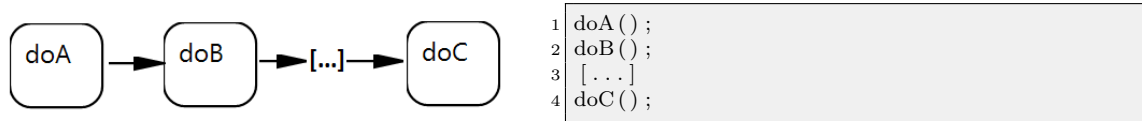


Figure 4.2: Mapping Example: Sequence Flow

4.2.2 Gateways

Branches of a gateway are wrapped according to the gateway's type. There are 5 different types of gateways:

1. AND (Parallel)
2. OR (Inclusive)
3. XOR_Data (Exclusive)
4. XOR_Event (Event Based)
5. Complex

AND-Gateway (Parallel)

In an AND-Gateway, all branch will be wrapped in parallel to one another. At run-time all branches are executed within a thread. Figure 4.3 shows an example of the mapping.

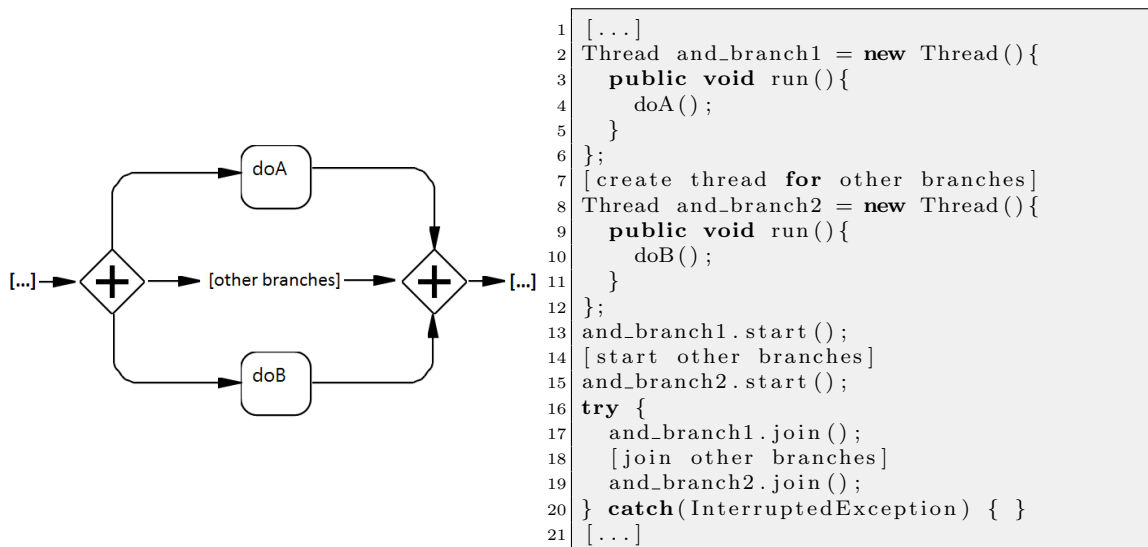


Figure 4.3: Mapping example: AND Gateway

OR-Gateway (Inclusive)

Branches of an OR-Gateway will also be executed in parallel to one another, but the

content of a branch is additionally wrapped in an if-then block as shown in Figure 4.4. At runtime, the condition of each branches will be checked and the branch will be skipped if the condition does not hold. However, if the or-gateway has a branch with default condition, the default branch will only be executed if none of the other branches are executed.

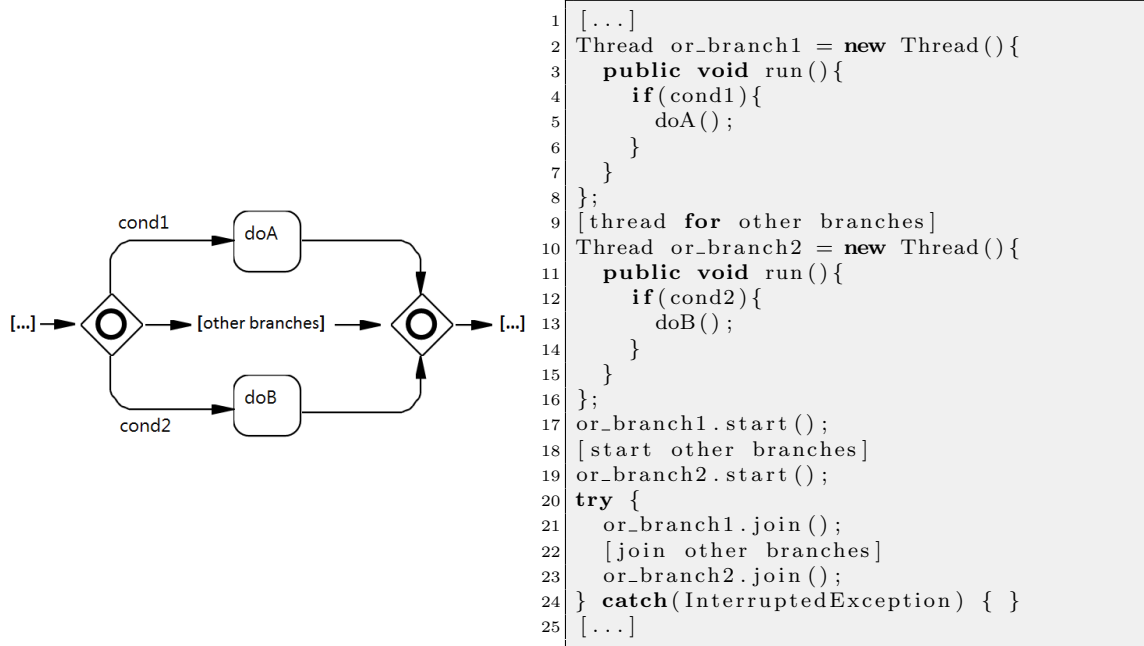


Figure 4.4: Mapping example: OR Gateway

XOR_Data-Gateway (Exclusive)

Branches of an XOR_Data are wrapped in an if-then-else block (see Figure 4.5). Only one branch will actually be executed at runtime.

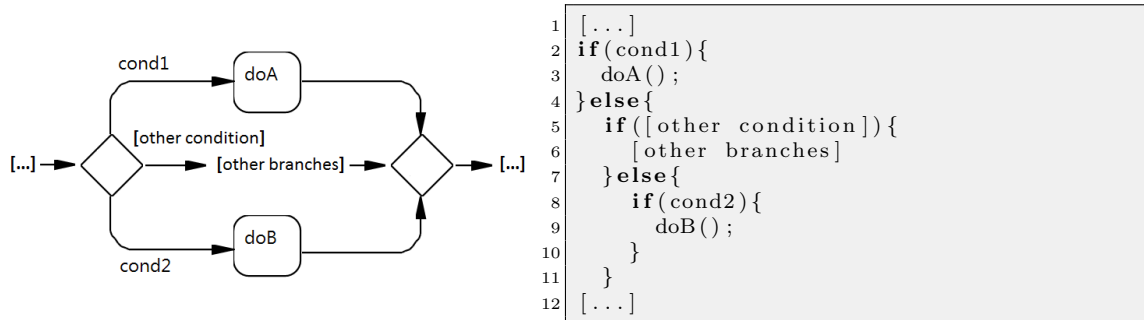


Figure 4.5: Mapping example: XOR_Data Gateway

XOR_Event-Gateway (Event Based)

For XOR_Event, a waiting loop will be started in a Thread, and an EventHandler (an extension to java.lang.Thread) instance for each branch will be created and started, according to the event's trigger of each branch. If an event handler receive an event, the waiting thread will be stopped, and the process continues with the elements of the branch, and other branches will be skipped. Figure 4.6 shows an example of the mapping.

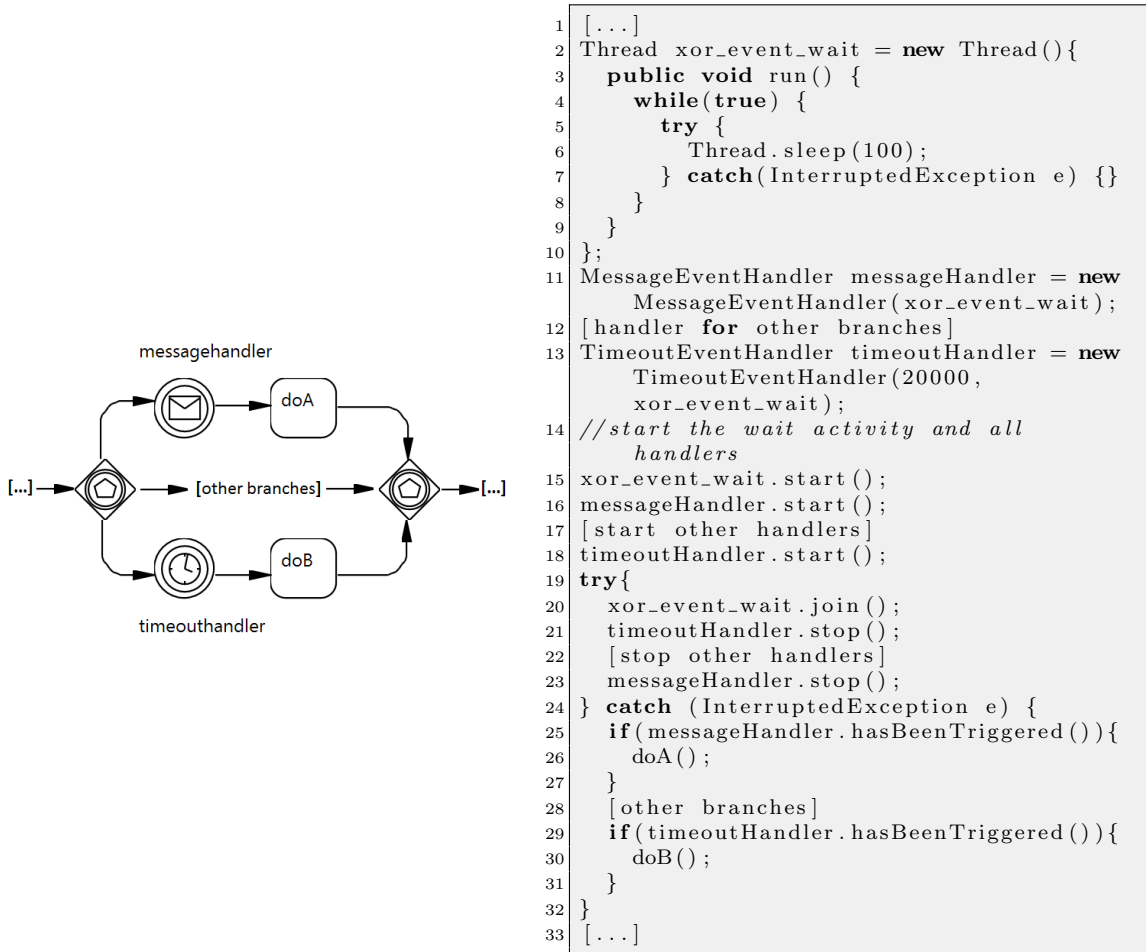


Figure 4.6: Mapping example: XOR_Event Gateway

The event handler class will be included as an inner class of the bean, and they will have a constructor with a `Thread toStop` argument (among other arguments) and a boolean method `hasBeenTriggered()` to check whether the event handler has been activated by the expected event. The following Listing 4.2 shows an implementation of the `TimeoutEventHandler`. This inner class will be included in every agent bean class that uses a `TimeoutEventHandler`.

```

1  class TimeoutEventHandler extends Thread{
2
3      long timeout;
4      Thread toStop;
5      boolean triggered = false;
6
7      public TimeoutEventHandler(long timeout, Thread toStop){
8          this.timeout = timeout;
9          this.toStop = toStop;
10     }
11
12     public void run(){
13         try {
14             Thread.sleep(timeout);
15             triggered = true;
16             toStop.stop();
17         } catch (InterruptedException e) {}
18     }
19 }

```

```

20 public boolean hasBeenTriggered() {
21     return triggered;
22 }
23
24 }

```

Listing 4.2: TimeoutEventHandler implementation as an inner class

Complex-Gateway

A mapping concept for Complex Gateways has not been developed in the current Version.

4.2.3 Loop Blocks

Structured loop blocks are mapped as shown in Figure 4.7.

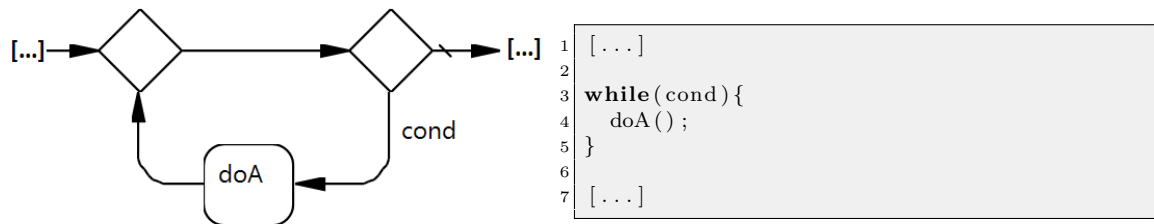


Figure 4.7: Mapping example: Loop Blocks

While the condition applies, the content branch will be repeated.

4.2.4 Event Handler

As we can see in Figure 4.8, the mapping of an Event Handler attached to an activity is somewhat similar to the mapping of gateway event. Instead of the waiting thread, a thread calling the activity method will be created, and it will be stopped if the event handler is triggered.

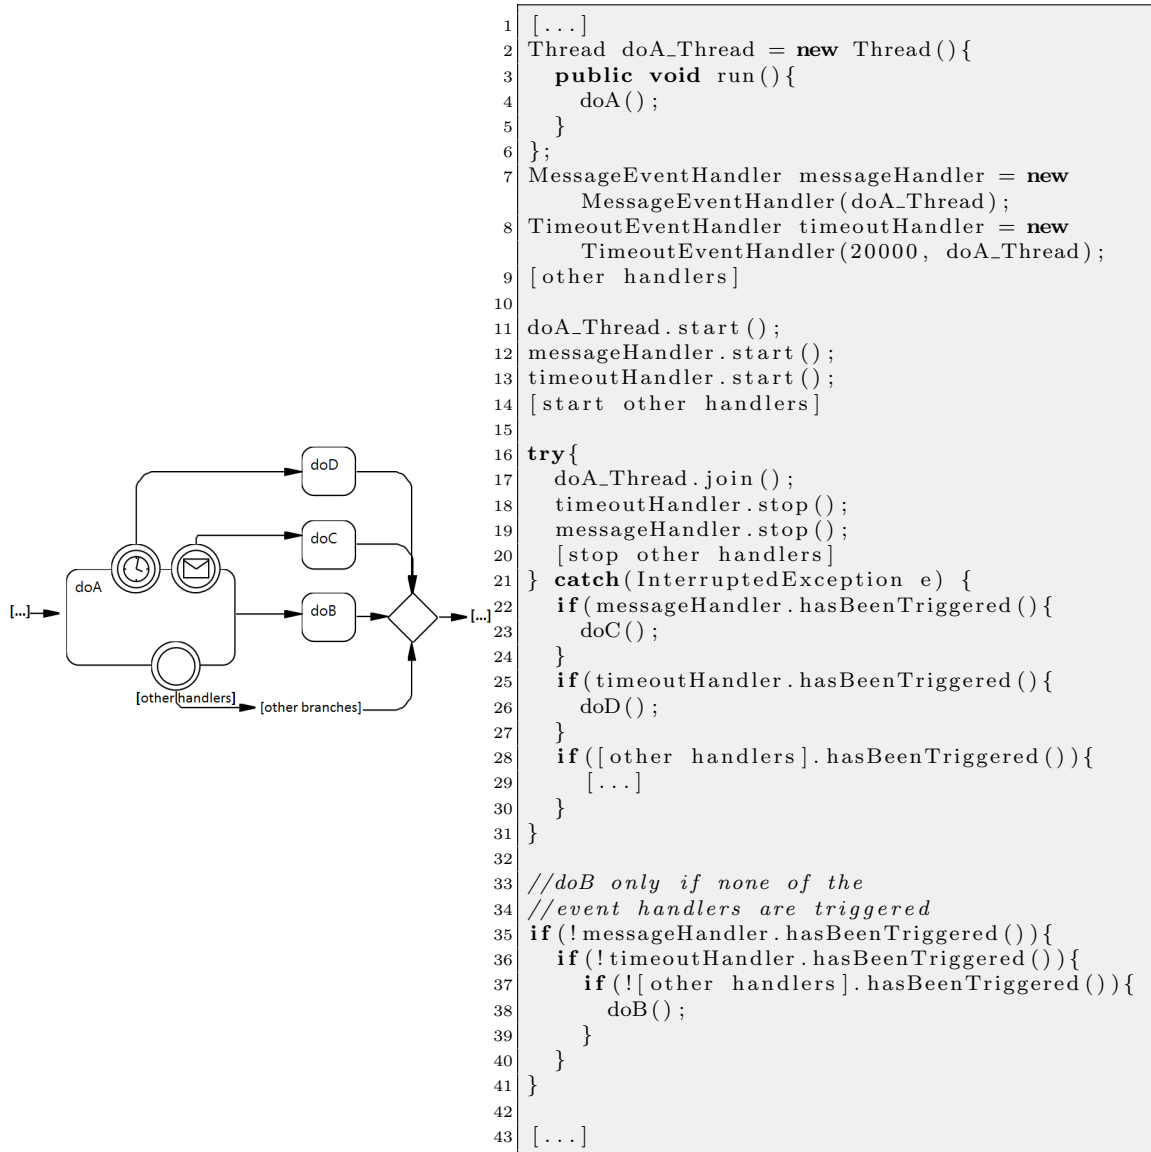


Figure 4.8: Mapping example: Event Handler

4.3 Activites

Now we will discuss the activities in details. Activities are divided into tasks and subprocess. As mentioned before, a task will be wrapped in an activity method. This enables each task to have their own scope of properties. The properties of subprocesses however, should be shared with all activities contained in it. Therefore wrapping subprocesses in a method is not enough. Instead a subprocess will be wrapped in an inner class.

4.3.1 Tasks

Basically, the activity method generated from a task will look like what we can see in Figure 4.9:

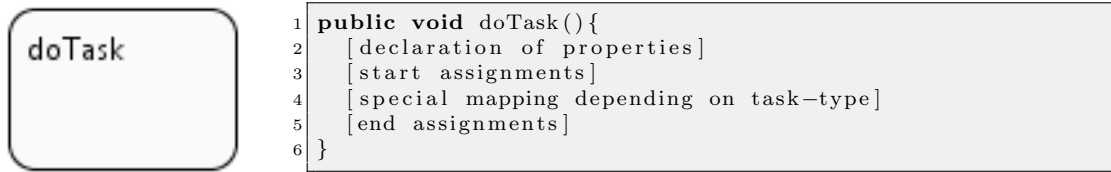


Figure 4.9: Mapping example: Task

The method will start by declaring java variables, derived from the task's properties (if any exists). After the declaration, start assignments will take place, followed by the task's actual mapping (if any, depending on the task type). Finally, the code will be closed with the end assignments. The BPMN allows us to specify properties and assignments (including when the assignment should take place) in the task's property sheet. Thus, other than the workflow model in Wade, it is possible to generate the operations needed to execute the activity completely from the model. Now let's take a closer look on how specific task types are being mapped.

Script-task

For Script-tasks, the script defined in the task's property will be directly added into the activity-method. This type of task is comparable to Wade's *Code Activity*, but just like the properties and assignments, with BPMN the script can be specified in the property sheet of the task. For the transformation to agent beans, the given script should be a valid Java expression.

Service-task

A service task is mapped into an invocation of an Action defined by other Bean.

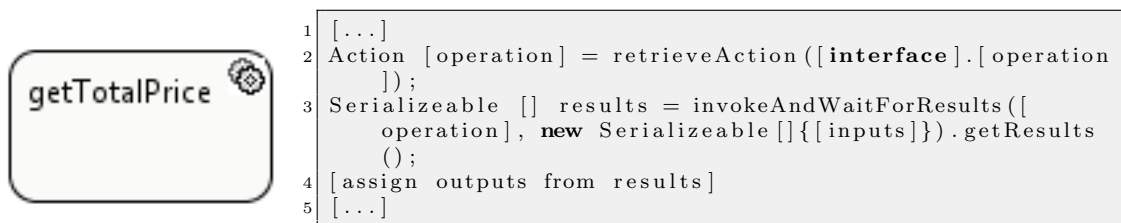


Figure 4.10: Mapping example: Service-task

Figure 4.10 shows how a service task would be mapped. First, the action has to be found. Then the service will be invoked and the result will be assign to the outputs defined in the task's implementing Service.

Send-task

A Send task will be mapped into an invocation of the ICommunicationBean's send

action (see Figure 4.11). The group address, to which the message should be sent, and the message itself will be derived from the given MessageChannel in the task's properties.

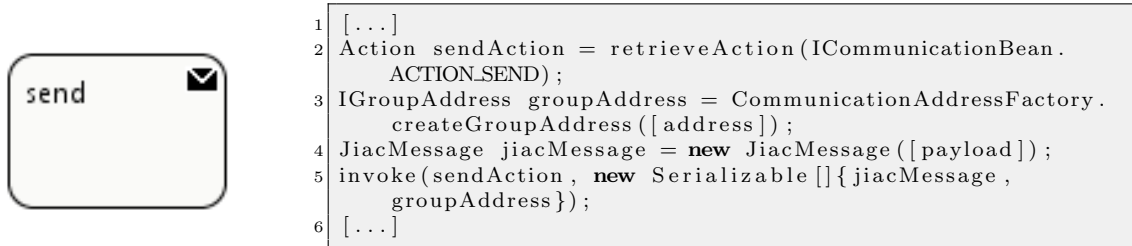


Figure 4.11: Mapping example: Send-task

receive-task

A receive-task will be mapped into a Java-Code that reads the memory and wait until the specified message defined by the given MessageChannel is found in the memory.

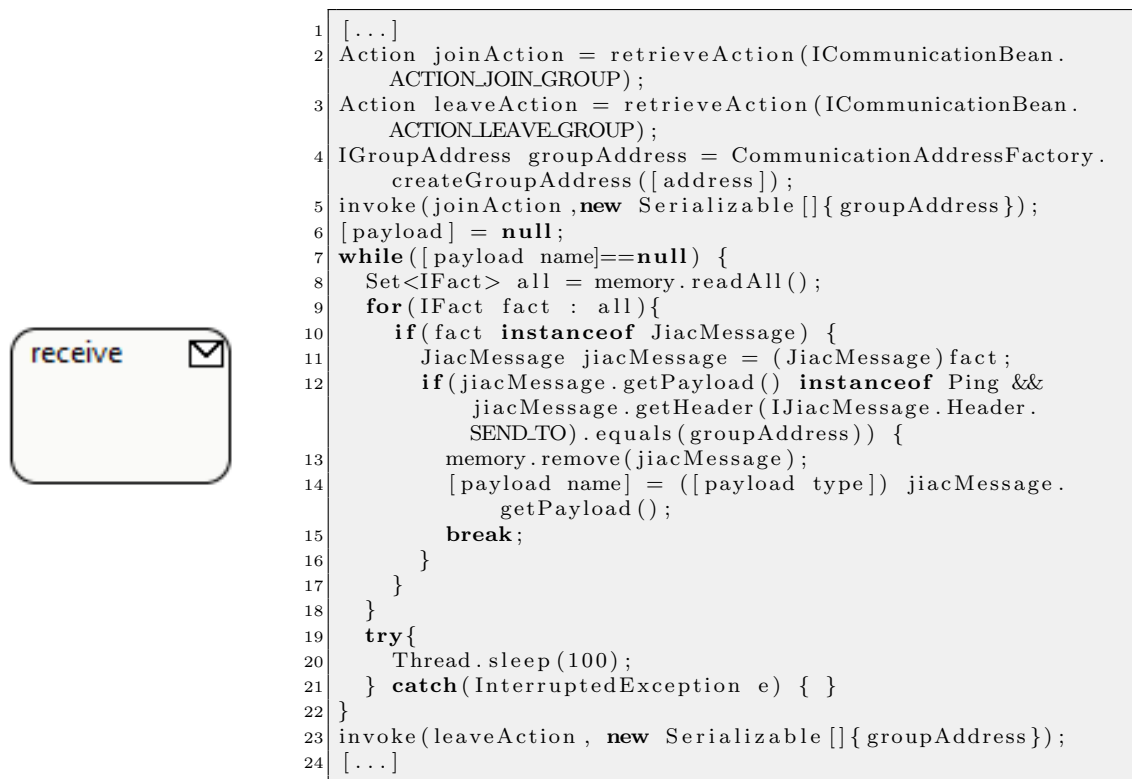


Figure 4.12: Mapping example: receive-task

Call-task

A call task will be mapped to an invocation of the called element. If the called element is an activity, then the activity method will be called. If the called element is a Pool, then the call task will be mapped into a service invocation.

User task

The mapping of user tasks has not been completely developed yet. User tasks requires a User Interface module to get inputs from the user. To make it simple we can put a TODO flag in the code, and the developer should implement the UI manually.

Manual task

Manual tasks won't be executed manually, therefore a mapping won't be needed.

BusinessRule-tasks

The mapping of business rule tasks doesn't exist in this Version.

4.3.2 Subprocess

A subprocess will be mapped into an inner class of the containing Process or Subprocess. This way it's properties can be shared among all tasks contained in it. The inner subprocess will have the method `public void run()` containing the workflow (similar to the bean's workflow method). The following example shows the mapping of a subprocess:

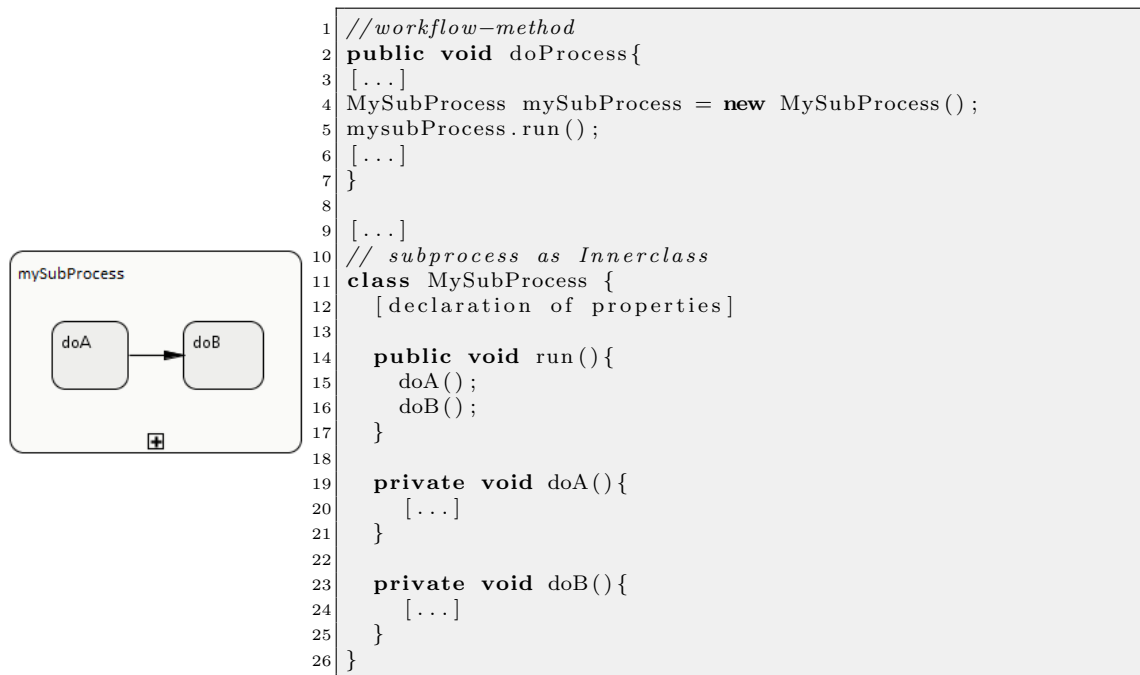


Figure 4.13: Mapping example : Subprocess

4.3.3 Activity-Looping

An activity can have a looping property. This will result in the wrapping of the task-specific mapping in a while-block. There are two types of activity-looping in BPMN:

1. Standard-Loop
2. Multi Instance Loop

While the mapping of a standard-loop is trivial, the semantics of the multi instance loop is not very clear. Thus, a mapping of multi instance loop is not yet included in this version.

Standard-Loop In a standard loop, the task specific mapping will be wrapped in a while block. The other elements of the activity method (variable declarations and assignments) will not be wrapped. In Figure 4.14 we can see an example of a script task with a standard loop.

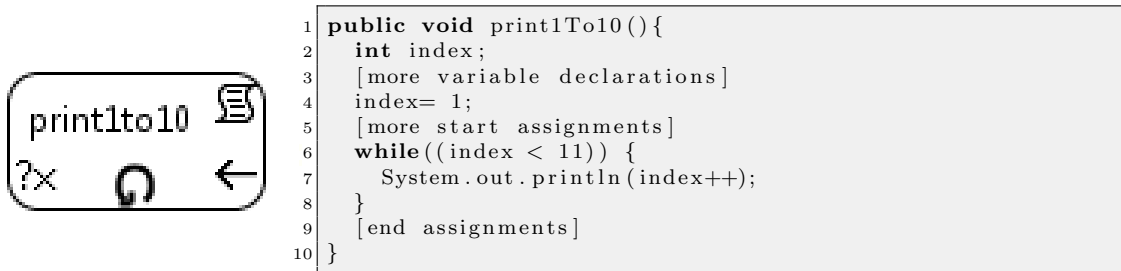


Figure 4.14: Mapping example : Activity-Looping (Standard Loop)

4.4 Events

Finally, we will now discuss the mapping of BPMN Events to Jiac Agent Beans. We will first discuss the Intermediate events and then we will handle Start and End Events. We need to group start and end events because the mapping will have influence on how the process will be started, and they will also determine the signature (input and output parameters) of the workflow method.

4.4.1 Intermediate-Events

Intermediate Events are something that happens during the process. It's mapping will be added into the workflow method. To keep the workflow method readable, we decided to wrap intermediate events in a method (similar to activities). The name will be derived from the events name (if specified) or id, added with an event-type specific postfix.

In this version only the mapping of Timer and Message intermediate events are included.

Timer


A timer intermediate event will turn the process to sleep until the given time expression. If the given time expression is a duration (option as duration in the property sheet is selected), then the expression will be handled as a long integer that defines how long (in milliseconds) the process should be paused.

If the expression is a duration:

```

1 [...]
2 try {
3     Thread.sleep([time expression]);
4 } catch (InterruptedException e) {
5 }
6 [...]
```

If the expression is an exact time:



```

1 [...]
2 try {
3     Date then = new SimpleDateFormat("yyyy-MM-dd'T'HH:mm:ss.SSSZ")
4         .parse([time expression]);
5     long toSleep = then.getTime() - System.currentTimeMillis();
6     if (toSleep > 0) {
7         try {
8             Thread.sleep(toSleep);
9         } catch (InterruptedException e) {
10        }
11    }
12    } catch (ParseException e) {
13        System.out.println("ParseException: Time has to be in yyyy-MM-dd'T'HH:mm:ss.SSSZ form");
14        e.printStackTrace();
15    }
16    [...]
```

Figure 4.15: Mapping example : Timer Intermediate Event

If the given time is an exact time (e.g. Friday, November 4th 2011 10:00:00), then the expression should be parsed into a Java Date object and the process should be paused until the given date. However, it is not clear yet on how to handle incomplete date expressions (e.g. when we need to start a process every day at

midnight). At the moment, the given date expression has to be in the form "yyyy-MM-dd'T'HH:mm:ss.SSSZ" (e.g. 2011-11-04T10:00:00.000+0100 for Friday, November 4th 2011 10:00:00). Figure 4.15 shows an example of the mapping for both variants.

Message

Message intermediate events will be mapped similarly to a receive task. The process read the memory and wait until the expected message is found in the memory.

4.4.2 Start and End Events

Timer

If a process starts with a timer event, then the workflow method will be called in the execute method. If the given time expression is a duration, the process will be started periodically. If the given time is an exact date, then the date will be parsed, and the process will be started when the date is passed. Figure 4.16 shows an example of the mapping for both variants.


If the expression is a duration:

```

1 public void execute() {
2     while(true) {
3         [start process]
4         try {
5             Thread.sleep([time expression]);
6         } catch (InterruptedException e) {
7             }
8         }
9     }

```

If the expression is an exact time:



```

1 public void execute() {
2     try {
3         Date then = new SimpleDateFormat("yyyy-MM-dd'T'HH:mm:ss.SSSZ").parse("2011-11-04T10:00:00.000+0100");
4         long toSleep = then.getTime() - System.currentTimeMillis();
5         if(toSleep >= 0) {
6             try {
7                 Thread.sleep(toSleep);
8             } catch (InterruptedException e) {
9                 }
10            [start process]
11        }
12    } catch (ParseException e) {
13        System.out.println("ParseException: Time has to be in yyyy-MM-dd'T'HH:mm:ss.SSSZ form");
14        e.printStackTrace();
15    }
16 }

```

Figure 4.16: Mapping example : Timer Start Event

Message

Message Start and End events will influence the signature of the workflow method. The start event defines the parameters and the end event defines its return type. We can divide message start and end events according to the event's implementation (Service or MessageChannel).

Message with Service implementation If the implementation is a Service, the workflow method will be exposed as an action(service). The process will be started

by other Agent Bean as a service by invoking the exposed action. The signature of the workflow method will be derived from the signature of the implementing service. Multiple return type are wrapped in a Serializable array.

In Figure 4.17 we can see an example mapping of message start and end events with service implementation. The generated workflow method are exposed as an Action with the @Expose code in Line 5.

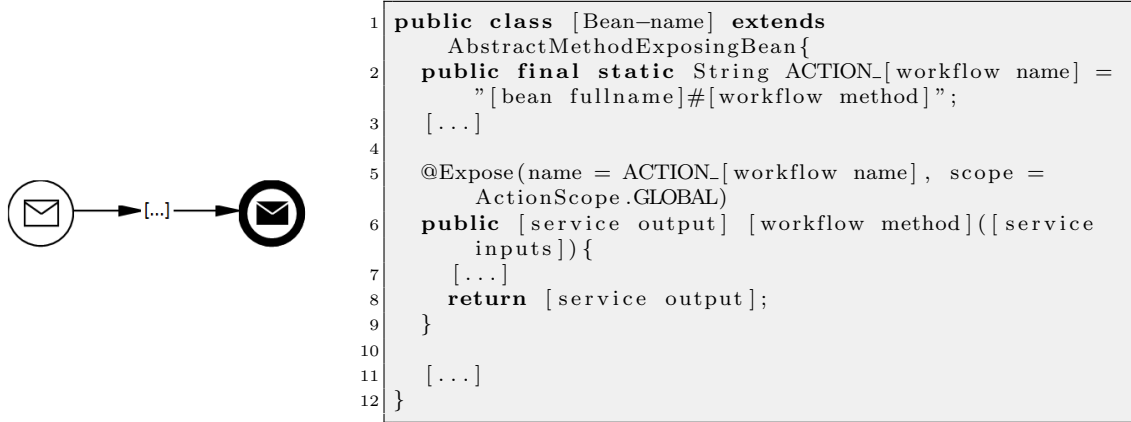


Figure 4.17: Mapping example : Message Start and End Events with Service Implementation

Message with MessageChannel implementation

If the implementation is a MessageChannel, an observer will be created and attached to the agent's memory in the `doStart()` method. The workflow method will get the MessageChannel's payload as a parameter, and it will have no return type (void) and the result will be sent as a message to the specified MessageChannel of the end event. Figure 4.19 shows a mapping example of a message start event, and in Figure 4.18, we can see a mapping example of how a message end event will be mapped.

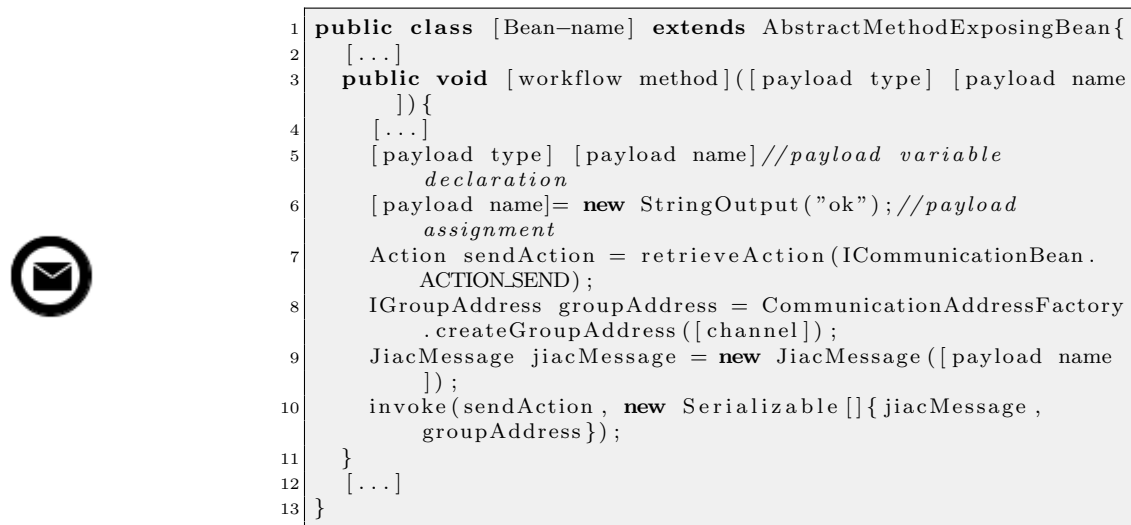


Figure 4.18: Mapping example : Message End Event with MessageChannel Implementation



```

1 public class [Bean-name] extends AbstractMethodExposingBean{
2     [...]
3     public void doStart(){
4         Action joinAction = retrieveAction(ICommunicationBean.
5             ACTION_JOIN_GROUP);
6         IGroupAddress groupAddress = CommunicationAddressFactory
7             .createGroupAddress([channel]);
8         invoke(joinAction,new Serializable[]{groupAddress});
9         SpaceObserver<IFact> [event name or id]_observer = new
10             SpaceObserver<IFact>(){
11             public void notify(SpaceEvent<? extends IFact> event)
12             {
13                 if(event instanceof WriteCallEvent<?>){
14                     Object obj = ((WriteCallEvent)event).getObject();
15                     if(obj instanceof IIJiacMessage){
16                         IIJiacMessage message = (IIJiacMessage)obj;
17                         IFact payload = message.getPayload();
18                         if(payload!=null && [payload name] instanceof [
19                             payload type] && message.getHeader(
20                                 IIJiacMessage.Header.SEND_TO).
21                                 equalsIgnoreCase([channel]){
22                             memory.remove(message);
23                             [workflow method](([payload type])payload);
24                         }
25                     }
26                 }
27             }
28         };
29         memory.attach(_nO3bwPwdEeCOWB3dJOsUA_observer);
30     }
31     public void [workflow method]([payload type] [payload name]
32         []){
33         [...]
34     }
35     [...]
36 }

```

Figure 4.19: Mapping example : Message Start Event with MessageChannel Implementation

4.5 Open Issues

In this chapter, we presented the details of the mapping from BPMN to Jiac Agent Beans. As we can see in some sections, there are some elements that has not been mapped yet. In the future, we will need to study the semantics of the unmapped elements (e.g. multi instance loop, rule events etc.) further and develop their mapping.

5. Implementation of the transformation

In this chapter, we will present the details of the transformation's implementation. We will start with the slightly modified overall transformation structure and then continue with the details of each transformation stages.

5.1 Transformation Structure

As mentioned before in section 2.3, the transformation process in the VSDT is divided into 5 stages. We also mentioned that the default validation and structure mapping provided by the transformation framework are reusable. For the implementation of the transformation to Agent Beans, the framework's `DefaultBpmnValidator` and `BPMN2StrucBPMNTransformation` are being reused.

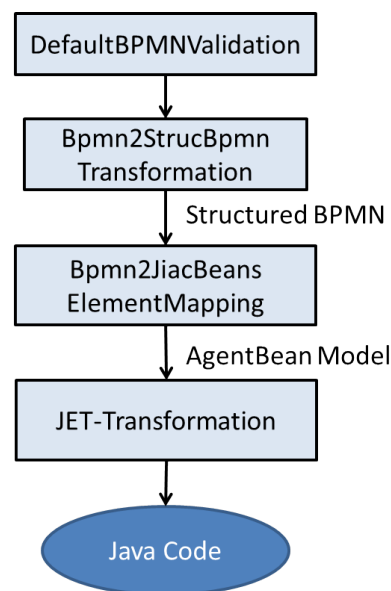


Figure 5.1: Transformation stages

Figure 5.1 shows the structure of the transformations. Both normalization stage and structure mapping stage are implemented by the BPMN2StrucBPMN-Transformation. There are no clean-up stage in this transformation. In the element mapping stage an intermediate agent bean model will be created. After the element mapping, the generated agent bean model will be passed into the JET-Transformation where it will be transformed into a java file.

In the following sections we will take a closer look into the details of each transformation stage.

5.2 Validation

The DefaultBPMNValidation is currently used for the validation stage. However, it might be useful that a new validation, that checks whether the expressions given in the model are conform with the Java syntax, to be implemented in the future. At the moment some expressions are handled in the ElementMapping stage e.g. changing types to have java conformance, while some other, e.g. content of a script task, are expected to be written in Java syntax.

5.3 Normalization and Structure Mapping

Similar to the validation stage, nothing new was implemented for the structure mapping stage. The default BPMN2StrucBPMN transformation of the VSDT responsible for performing these two stages is being reused.

In the Normalization stage the process will be transformed into a semantically equivalent *normal form*. To achieve this, the transformation uses some rules e.g. the insert gateway rule that will insert a gateway for each activity with multiple incoming or outgoing sequence flows (see example in Figure 5.2). The structure mapping stage is responsible for transforming the graph structured BPMN into an equivalent block structured representation. Both of the mentioned transformation stages are language independent, thus there is no need to implement a new Transformation for these stages.




Figure 5.2: Simple example of normalization and structure mapping. [16]

5.4 Element Mapping

The element mapping is implemented with a visitor that will go through the elements of the process diagram with a top down traversal. In this stage, an Agent Bean Model representing a Java file holding an Agent Bean class will be generated for each pool visited in the diagram. Then the visitor will visit each element of the pool and populate the agent bean model with attributes and methods according to the mapping of each visited element.

For the implementation, the Agent Bean Model was developed as an intermediate product. Let's take a closer look into the model.

5.4.1 Agent Bean Model

An AgentBean model has a list of attributes, methods, actions and it may also have a list of subprocesses (because a subprocess is mapped into an inner class of the generated AgentBean).

For the content of a Method, a Script-Model was also developed. A script is basically a java code element, which can be a single CodeElement(a single line java code), a sequence which contains a list of scripts, or even a block construct such as the while loop, or a try-catch block.

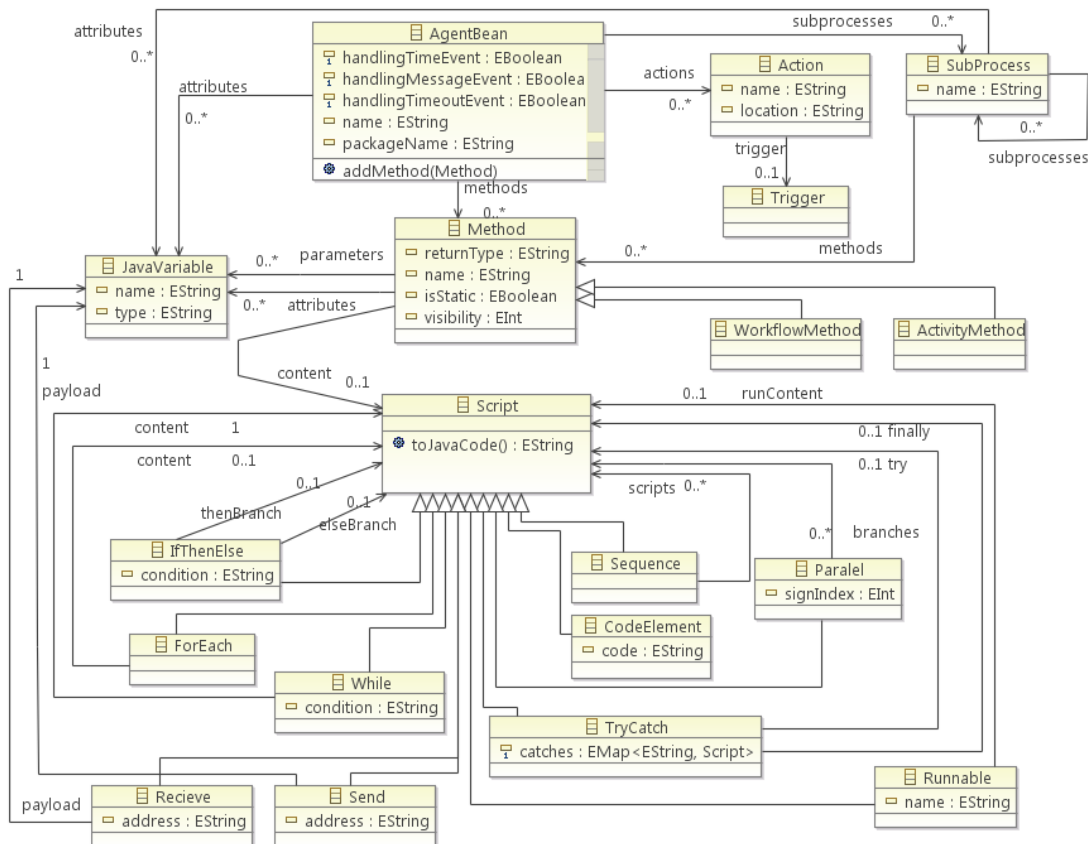


Figure 5.3: AgentBean - Metamodel

Each script implements the method `public String toJavaCode()` which returns the java code representation of the script. In the following listing we can see the implementation of the method in the `IfThenElse` class:

```

1  public String toJavaCode() {
2      String code = "";
3      code += "if (" + condition + ") {\n";
4      if (thenBranch != null) {
5          BufferedReader reader = new BufferedReader(new StringReader(thenBranch.
6              toJavaCode()));
7          try {
8              String line = reader.readLine();
9              while (line != null) {
10                 if (!line.equals("")) code += "\t" + line + "\n";
11                 line = reader.readLine();
12             }
13         } catch (IOException e) {
14             code += "\t//Error occured while reading if branch\n";
15         }
16     }
17 }

```

```

14     }
15   }
16   code+="}";
17   if (elseBranch!=null){
18     code+=" else{\n";
19     BufferedReader reader = new BufferedReader(new StringReader(elseBranch.
20       toJavaCode()));
21     try{
22       String line = reader.readLine();
23       while(line!=null){
24         if(!line.equals("")) code += "\t"+line+"\n";
25         line = reader.readLine();
26       }
27     }catch(IOException e){
28       code += "\t//Error occured while reading else branch\n";
29     }
30     code+="}";
31   }
32   return code;
33 }

```

Listing 5.1: toJavaCode() implementation in the IfThenElse class

You might notice, that this method is also responsible for the text formatting because this method will be used by the JET-Transformation and the result will then be written into a *.java File. For this purpose a tab are added in front of each line in the then and else branch, as you can see in line 7-11 and 21-25.

The role of MDE in the Implementation

The benefits of Model Driven Engineering are also found during the implementation of the AgentBean model. As we can see in Figure 5.3, the model is created graphically using eclipse's Ecore Tools - Ecore Diagramm. With the help of the EMF Generator each element of the model can be easily generated into JavaCode including a Factory class that can be used to instantiate an object of each generated class. This way, we only have to implement the method toJavaCode() for each newly added script, everything else are generated automatically.

5.5 JET-Transformation

The JET-Transformation consists of 5 JET-Templates(see also Figure 5.4):

1. agentbeantemplate.javajet
2. subprocessstemplate.javajet
3. timeouteventhandler.javajet
4. timeeventhandler.javajet
5. messageeventhandler.javajet

The agentbeantemplate is the main template of the implemented JET-Transformation. An instance of it's Java template class are created by the JiacBeansResultSaver and the generate method will be invoked for each AgentBean model generated in the element mapping stage.

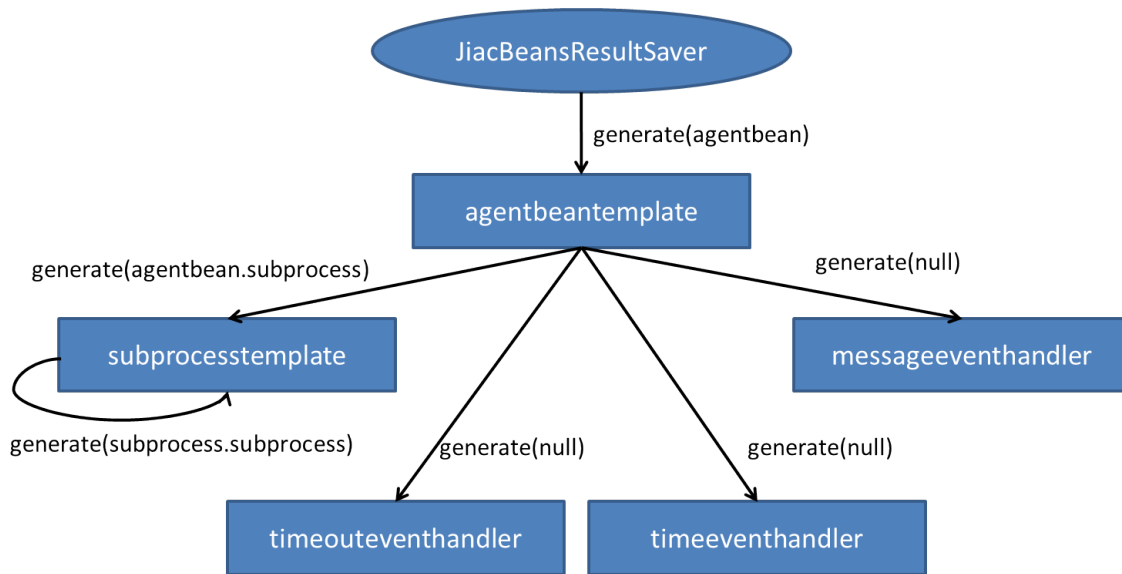


Figure 5.4: JET-Transformation Structure

The subprocesstemplate is invoked by the agentbeantemplate and recursively by the subprocesstemplate itself for each subprocess contained in their argument (an agentbean model or a subprocess model).

The three handler templates timeouteventhandler, timeeventhandler and messageeventhandler are static templates, which means the result of the generate method does not depend on the argument object. They simply add an inner class TimeoutEventHandler, TimeEventHandler or MessageEventHandler to the AgentBean. They are invoked by the agentbeantemplate if the value of the flag handlingTimeoutEvent or handlingMessageEvent of the agent bean model is true.

5.5.1 Implementation of the Event Handlers

The Event handlers generated by the above mentioned templates are implemented as an inner class of the generated bean. They all have a thread as an argument that will be stopped as soon as the expected event is received. The following code listings shows the generated code of the event handlers:

```

1 class MessageEventHandler extends Thread{
2     Thread toStop;
3     boolean triggered = false;
4     String address;
5     Class payloadClass;
6     SpaceObserver<IFact> observer;
7     Action joinAction;
8     Action leaveAction;
9     IGroupAddress groupAddress;
10
11     public MessageEventHandler(String channel, String payloadType, Thread toStop){
12         address = channel;
13         this.toStop = toStop;
14         joinAction = retrieveAction(ICommunicationBean.ACTION_JOIN_GROUP);
15         leaveAction = retrieveAction(ICommunicationBean.ACTION_LEAVE_GROUP);
16         groupAddress = CommunicationAddressFactory.createGroupAddress(address);
17         try {
18             payloadClass = ClassLoader.getSystemClassLoader().loadClass(payloadType);
19         } catch (ClassNotFoundException e) {
20             log.error("Class "+payloadType+" not Found!");
  
```

```

21     e.printStackTrace();
22 }
23 observer = new SpaceObserver<IFact>(){
24     public void notify(SpaceEvent<? extends IFact> event) {
25         if(event instanceof WriteCallEvent<?>){
26             Object obj = ((WriteCallEvent) event).getObject();
27             if(obj instanceof IJiacMessage){
28                 IJiacMessage msg = (IJiacMessage)obj;
29                 if(msg.getHeader(IJiacMessage.Header.SEND_TO).equals(address) &&
30                     payloadClass.isInstance(msg.getPayload())){
31                     memory.remove(msg);
32                     compensate();
33                 }
34             }
35         }
36     }
37 };
38 }
39
40 public void run(){
41     invoke(joinAction, new Serializable[]{groupAddress});
42     memory.attach(observer);
43 }
44
45 public void compensate(){
46     triggered = true;
47     detach();
48 }
49
50 public void detach(){
51     memory.detach(observer);
52     invoke(leaveAction, new Serializable[]{groupAddress});
53 }
54
55 public boolean hasBeenTriggered(){
56     return triggered;
57 }
58 }

```

Listing 5.2: MessageEventHandler implementation

```

1 class TimeoutEventHandler extends Thread{
2     long timeout;
3     Thread toStop;
4     boolean triggered = false;
5
6     public TimeoutEventHandler(long timeout, Thread toStop){
7         this.timeout = timeout;
8         this.toStop = toStop;
9     }
10
11     public void run(){
12         try {
13             Thread.sleep(timeout);
14             triggered = true;
15             toStop.stop();
16         }catch(InterruptedException e) { }
17     }
18
19     public boolean hasBeenTriggered(){
20         return triggered;
21     }
22 }

```

Listing 5.3: TimeoutEventHandler implementation

```

1 class TimeEventHandler extends Thread{
2     Date whenToStop;
3     Thread toStop;
4     boolean triggered = false;
5
6     public TimeEventHandler(String timeExpression , Thread toStop){
7         try {
8             whenToStop = new SimpleDateFormat("yyyy-MM-dd'T'HH:mm:ss.SSSZ").parse(
9                 timeExpression);
10        } catch (ParseException e) {
11            System.out.println("ParseException: Time Expression has to be in yyyy-MM-dd
12                'T'HH:mm:ss.SSSZ format!");
13            e.printStackTrace();
14        }
15        this.toStop = toStop;
16    }
17
18    public void run(){
19        long time = whenToStop.getTime();
20        while(time>System.currentTimeMillis()){
21            try {
22                Thread.sleep(100);
23            }catch(InterruptedException e ) { }
24        }
25        toStop.stop();
26        triggered = true;
27    }
28
29    public boolean hasBeenTriggered(){
30        return triggered;
31    }
32 }

```

Listing 5.4: TimeEventHandler implementation

Both TimeEventHandler and TimeoutEventHandler are used to handle time events attached to an activity. If the given time expression is a duration, then TimeoutEventHandler will be used. If the given time expression is an exact time, TimeEventHandler will be used. TimeEventHandler parses the given expression into java Date Object using the method `SimpleDateFormat.parse()`, while the TimeoutEventHandler will get a long integer parsed from the time expression.

5.6 Merging generated and manually edited code

The main challenge in generating Java code is how to handle code that has been manually edited. Fortunately, the EMF comes with a solution to this problem : **JMerge**[12]. With JMerge we can allow a regeneration of a model and protect user code manually added into the previously generated code.

We can specify some rules in an xml-file that will be loaded by JMerge. The following Listing 5.5 shows a very simple xml that can be used to differentiate generated elements from the manually edited elements of a java code.

```

1 <merge:dictionaryPattern
2     name="generatedMember"
3     select="Member/getComment"
4     match="\s*@\s*(generated)\s*\n"/>
5
6 <merge:pull
7     targetMarkup="gen$"
8     sourceGet="Method/getBody"
9     targetPut="Method/setBody"/>

```

Listing 5.5: Example JMerge Rule

In this case, the dictionary pattern will match elements that has the @generated annotations somewhere in it's comment. The string between the parentheses in the match attribute defines the identifier which will be used in the pull element. The pull element in the example defines that the generator will replace the content of every method that has @generated in it's comment.

The next thing to do is to add the comment with the @generated tags in our template for each generated elements (class, fields, methods). If a user edit the content of a method or the default value of a field, the @generated annotation should be deleted from the comment. Without the @generated annotation, the edited element will be let alone by JMerge and will not be lost after the regeneration of the code.

As seen in [20], there is a possibility to allow fine grained customization for methods and javadoc comments by using the pull elements shown in listing ??

```

1 <merge:pull
2   sourceMarkup=" ^gen$"
3   sourceGet="Member/getComment"
4   sourceTransfer="(\s*!-\s*begin-user-doc.*?end-user-doc\s*-->\s*)\n"
5   targetMarkup=" ^gen$"
6   targetPut="Member/setComment"/>
7
8 <merge:pull
9   targetMarkup=" ^gen$"
10  sourceGet="Method/getBody"
11  sourceTransfer="(\s*//\s*begin-user-code.*?//\s*end-user-code\s*)\n"
12  targetPut="Method/setBody"/>

```

Listing 5.6: JMerge example: fine grained customization for javadoc comments and methods

The first pull element will allow the user to put any comments between the `<!-- begin-user-doc -->` and the `<!-- end-user-doc -->` tags. The second one will allow the user to customize a method by adding code between the `// begin-user-code` and `// end-user-code` comments. Unfortunately, this does not seem to work if the above mentioned boundary tags and comments does not exist in the generated code. This means the position where the code may be customized should be identified in the template. For the javadoc there is no problem because the position does not matter, but for the content of a method the position cannot be predefined.

5.6.1 Using JMerge

In JET2 JMerge is included and can be included by using the `<java:merge/>` tag somewhere in the template. However, because we are using the older version of JET we have to include JMerge in the `JiacBeansResultSaver` class. At the moment, JMerge can only be used in an eclipse plugin. Listing shows us the code needed to use JMerge.

```

1 ASTFacadeHelper astFacadeHelper = new ASTFacadeHelper();
2 JControlModel model = new JControlModel();
3 model.setLeadingTabReplacement("\t");// optional
4 //load the rules
5 model.initialize(astFacadeHelper, getClass().getResource("mergerules.xml").toString());
6 JMerger jMerger = new JMerger(model);
7 // set the source (new generated code)
8 jMerger.setSourceCompilationUnit(jMerger.createCompilationUnitForContents(content));
9 // set the target (code from the existing file)

```



```

10 jMerger.setTargetCompilationUnit(jMerger.createCompilationUnitForInputStream(new
    FileInputStream(f));
11 // call the merge
12 jMerger.merge();
13 // extract the merged text
14 String mergedContents = jMerger.getTargetCompilationUnit().getContents();

```

5.6.2 Problem with JMerge

If the generated code contains invalid imports e.g. if the imported target is not in the classpath an exception will be thrown. To avoid this, when calling the transformation to Jiac Agent Beans the destination folder should be a source folder in a JIAC Project¹ so that all JIAC core elements needed by the Agent Bean is in the classpath. Otherwise, the code will not be merged and the existing file will be overwritten.

5.7 Open Issues

In this chapter we presented some details of the implementation. At the moment there are still some work that has to be done regarding the implementation of the Transformations such as:

Complete the implementation of Element Mapping

The implementation of the element mapping is not yet complete. Some concepts such as the mapping of event based gateway still has to be implemented.

Mixing manually edited and generated code within a method

What we want is to let the user to edit only parts of the method's content by adding code within `// begin-user-code` and `// end-user-code`. For this purpose, either we should try to find a better mergerule or try to predefine the customizable position and use the rules shown in Figure ??.

Find a better solution for JMerge exception

At the moment, the implementation will overwrite the existing code if JMerge fails to merge the code. To avoid losing manually edited code, this should be changed. One solution could be displaying a Dialog where the user can choose to whether to overwrite the code or ask the user to give another location for the new generated file.

Identify modifiable and unmodifiable elements

At the moment, every generated member are only marked with `@generated`. While some elements should be modifiable by the users, some others such as the workflow method should not. We can use `@unmodifiable` and `@modifiable` to differentiate whether an element may be edited.

Sort generated imports

Although it does not affect the validity of the generated code, the generated imports should be alphabetically sorted in order to improve the readability.

¹Please refer to the JIAC Manual[4] on how to create a JIAC Project

6. Examples

In this chapter we will introduce an example scenario of a process and how the resulting Code of the transformation look like.

6.1 The Model

The example is based on a scenario taken from the actual topic *electromobility*. The scenario includes a choreography between a MobileApplication, that will be used by a user to reserve a taxi and a number of ETaxi-applications installed in electronic taxis. Figure 6.1 shows the usecase model of the **requestTaxi** process.

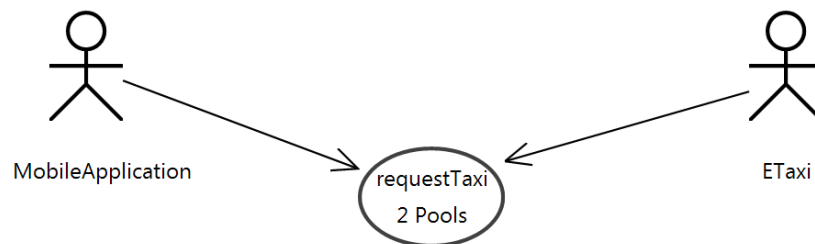


Figure 6.1: Use case model

In Figure 6.1 we can see some data types included in the process which represents the information exchanged in the communication between both Pools (the payload of the implementing MessageChannel). At the moment Data types can not be defined in the model. They can only be included, the transformation will assume that the classes exists and they will be imported by the generated agent bean. Because they will be wrapped in a JiacMessage, the payloads has to implement the IFact interface.

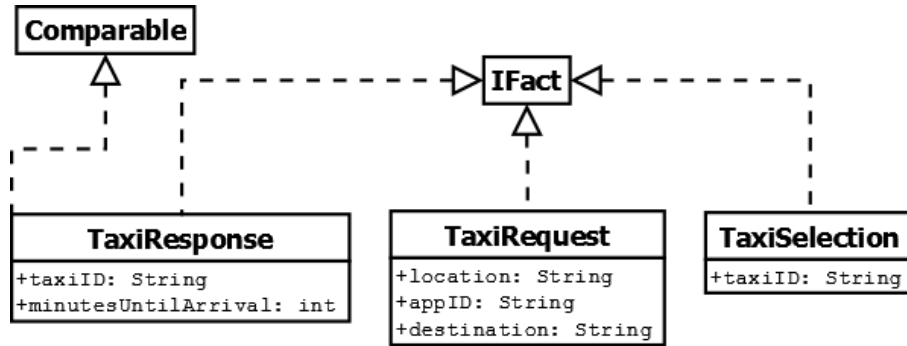


Figure 6.2: Payload data types included in the process diagram

6.1.1 The scenario

Before we start with the transformation, we will describe the scenario that lies behind the process model shown in Figure 6.1.1 from the perspective of each pool.

Mobile Application

The process starts with a user requesting a taxi with the service provided by the mobile application. The service will then send a request to all ETaxis by sending informations about the user's location, application ID and the destination. Within 30 seconds after sending the request, the mobile application will collect responses from available ETaxis containing informations about the taxi ID and the estimated time needed by the taxi to arrive at the guest's current location. While receiving these responses, the mobile application will save the best response according to the minimum estimated time. After 30 seconds it will check whether a taxi is available, in which case it will send a notification to all taxis about which taxi is selected and then the process will end, passing the selected taxi's ID to the user. If no responses are received, it will notify the user that no taxi is currently available.

ETaxi

From the ETaxi perspective, the process starts when a request from a mobile application is received. It will then evaluate the request and decide whether or not the request is interesting e.g according to the distance between the taxis location and the guest's location. If the request is interesting, it will then send a response back to the sending mobile application. After that it will wait for a notification from the mobile application and check the taxiID from the message's payload. If the taxiID belongs to the ETaxi, it will then tell the driver and navigate to the guest's location.

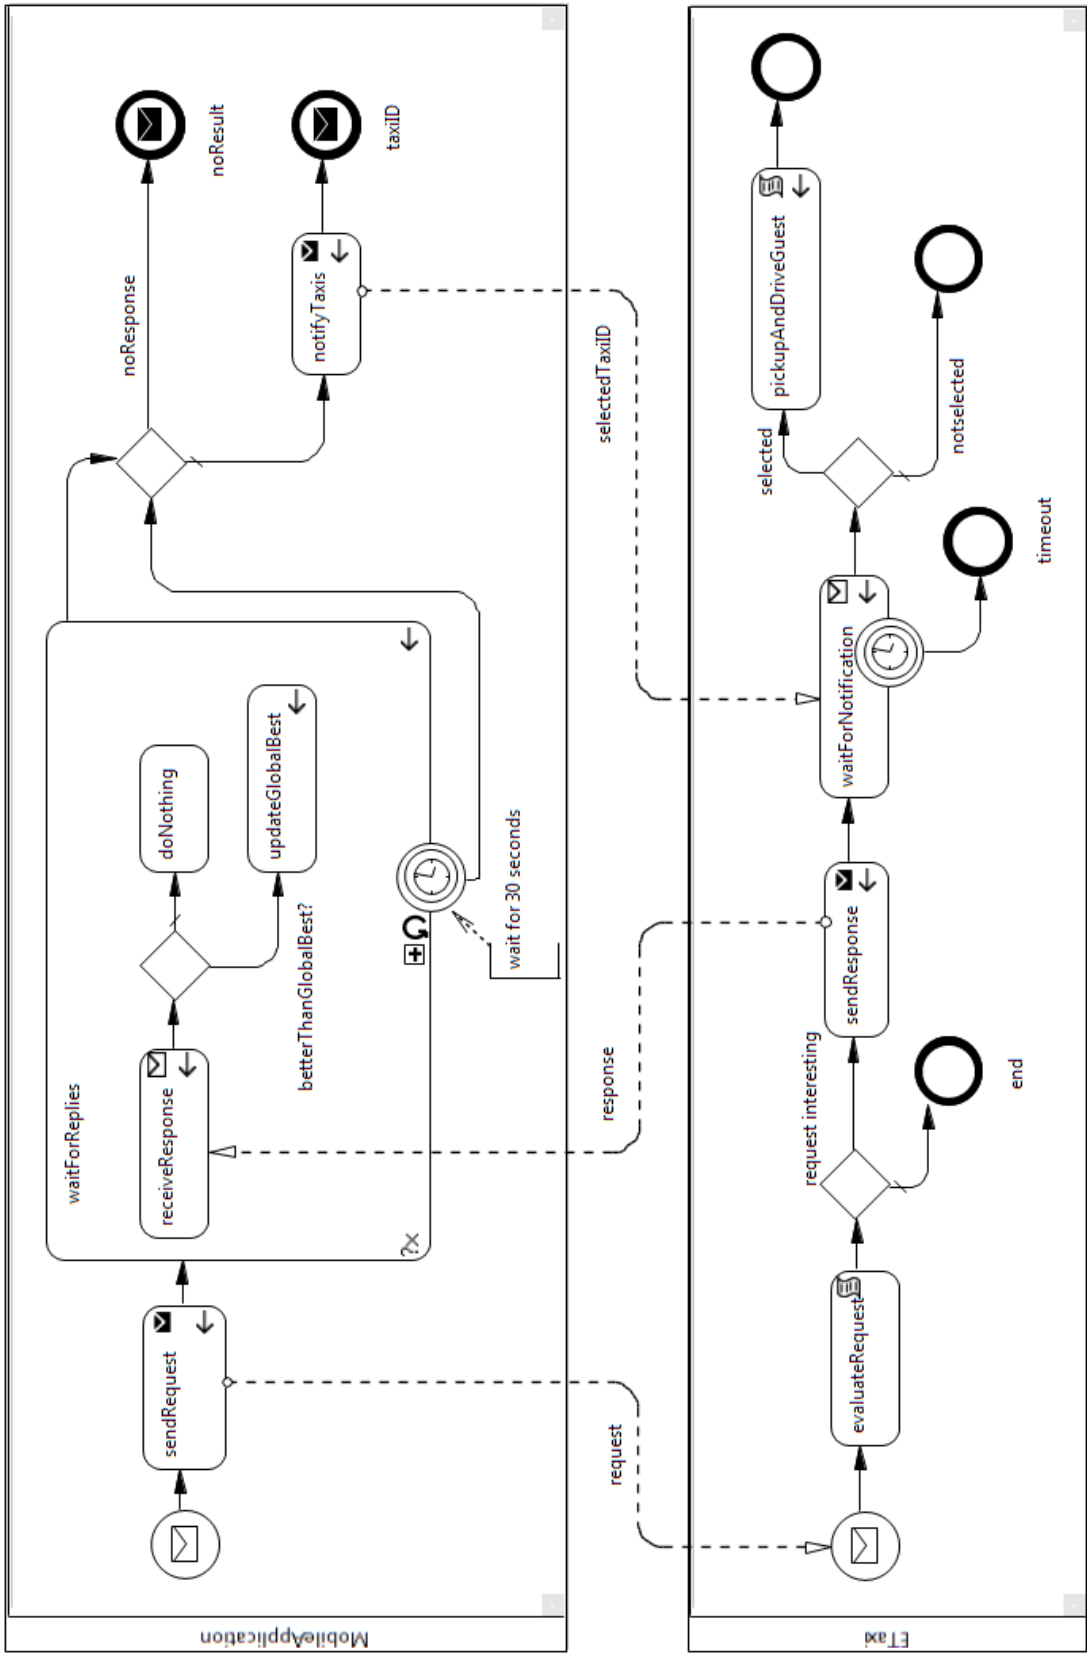


Figure 6.3: Business Process Diagram - requestTaxi

6.2 The generated Agent Beans

1. MobileApplication_requestTaxi

```

1 package mobileapplication;
2
3 import de.dailab.jiactng.agentcore.action.AbstractMethodExposingBean;
4 import de.dailab.jiactng.agentcore.action.scope.ActionScope;
5 import input.TaxiResponse;
6 import input.TaxiRequest;
7 import input.SelectedTaxi;
8 import de.dailab.jiactng.agentcore.action.Action;
9 import de.dailab.jiactng.agentcore.comm.ICommunicationBean;
10 import de.dailab.jiactng.agentcore.comm.IGroupAddress;
11 import de.dailab.jiactng.agentcore.comm.CommunicationAddressFactory;
12 import java.io.Serializable;
13 import de.dailab.jiactng.agentcore.comm.message.JiacMessage;
14 import de.dailab.jiactng.agentcore.knowledge.IFact;
15 import java.util.Set;
16 import de.dailab.jiactng.agentcore.comm.message.IJiacMessage;
17
18 public class MobileApplication_requestTaxi extends AbstractMethodExposingBean{
19     public final static String ACTION_REQUESTTAXI = "mobileapplication.
        MobileApplication_requestTaxi#requestTaxi";
20
21     /**
22      * <!-- begin-user-doc -->
23      * <!-- end-user-doc -->
24      * delete the generated tag after you edited this method
25      * @generated
26      */
27     TaxiResponse globalBest;
28     /**
29      * <!-- begin-user-doc -->
30      * <!-- end-user-doc -->
31      * delete the generated tag after you edited this method
32      * @generated
33      */
34     boolean noResponse;
35     /**
36      * <!-- begin-user-doc -->
37      * <!-- end-user-doc -->
38      * delete the generated tag after you edited this method
39      * @generated
40      */
41     String appID;
42     /**
43      * <!-- begin-user-doc -->
44      * <!-- end-user-doc -->
45      * delete the generated tag after you edited this method
46      * @generated
47      */
48     String location;
49     /**
50      * <!-- begin-user-doc -->
51      * <!-- end-user-doc -->
52      * delete the generated tag after you edited this method
53      * @generated
54      */
55     String destination;
56
57     /**
58      * <!-- begin-user-doc -->
59      * <!-- end-user-doc -->
60      * delete the generated tag after you edited this method
61      * @generated
62      */
63
64     @Expose(name = ACTION_REQUESTTAXI, scope = ActionScope.GLOBAL)
65
66
67     public String requestTaxi(String currentLocation, String currentDestination) {

```

```

68     location= location;
69     destination= destination;
70     location= currentLocation;
71     destination= currentDestination;
72     sendRequest();
73     Thread waitForReplies = new Thread(new Runnable(){
74         public void run(){
75             WaitForRepliesSubProcess waitForReplies = new WaitForRepliesSubProcess();
76             waitForReplies.run();
77         }
78     });
79     TimeoutEventHandler wait30Seconds_TimeoutHandler = new TimeoutEventHandler
80         (30000,waitForReplies);
81     waitForReplies.start();
82     wait30Seconds_TimeoutHandler.start();
83     try {
84         waitForReplies.join();
85         wait30Seconds_TimeoutHandler.stop();
86     } catch (InterruptedException e) {
87     }
88     //TODO implement visitGateway
89     if(noResponse){
90         String taxiID;
91         taxiID= "none available";
92         return taxiID;
93     } else {
94         notifyTaxis();
95         String taxiID;
96         taxiID= globalBest.getTaxiID();
97         return taxiID;
98     }
99 }
100
101 /**
102  * <!-- begin-user-doc -->
103  * <!-- end-user-doc -->
104  * delete the generated tag after you edited this method
105  * @generated
106  */
107
108
109 private void sendRequest() {
110     TaxiRequest request;
111     request= new TaxiRequest(location,appId,destination);
112     Action sendAction = retrieveAction (ICommunicationBean.ACTION.SEND);
113     IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
114         TaxiRequest");
115     JiacMessage jiacMessage = new JiacMessage(request);
116     invoke(sendAction, new Serializable[] { jiacMessage, groupAddress });
117 }
118
119 /**
120  * <!-- begin-user-doc -->
121  * <!-- end-user-doc -->
122  * delete the generated tag after you edited this method
123  * @generated
124  */
125
126
127 private void notifyTaxis() {
128     SelectedTaxi selectedTaxi;
129     selectedTaxi= new SelectedTaxi(globalBest.getTaxiID());
130     Action sendAction = retrieveAction (ICommunicationBean.ACTION.SEND);
131     IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
132         notification");
133     JiacMessage jiacMessage = new JiacMessage(selectedTaxi);
134     invoke(sendAction, new Serializable[] { jiacMessage, groupAddress });
135 }
136
137
138 /**

```

```

139  * <!-- begin-user-doc -->
140  * <!-- end-user-doc -->
141  * delete the generated tag after you edited this method
142  * @generated
143  */
144  class WaitForRepliesSubProcess{
145  /**
146  * <!-- begin-user-doc -->
147  * <!-- end-user-doc -->
148  * delete the generated tag after you edited this method
149  * @generated
150  */
151  TaxiResponse currentResponse;
152  /**
153  * delete the generated tag after you edited this method
154  * @generated
155  */
156
157  public void run() {
158      noResponse= true;
159      while(true) {
160          receiveResponse();
161          if(currentResponse.compareTo(globalBest)>0){
162              updateGlobalBest();
163          } else {
164              doNothing();
165          }
166      }
167  }
168
169  /**
170  * delete the generated tag after you edited this method
171  * @generated
172  */
173
174  private void receiveResponse() {
175      Action joinAction = retrieveAction(ICommunicationBean.ACTION_JOIN_GROUP);
176      Action leaveAction = retrieveAction(ICommunicationBean.ACTION_LEAVE_GROUP);
177      IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
178          TaxiResponseTo"+appID+"");
179      invoke(joinAction,new Serializable[] { groupAddress});
180      TaxiResponse response = null;
181      while(response==null) {
182          Set<IFact> all = memory.readAll();
183          for(IFact fact : all){
184              if(fact instanceof JiaccMessage) {
185                  JiaccMessage jiaccMessage = (JiaccMessage)fact;
186                  if(jiaccMessage.getPayload() instanceof TaxiResponse && jiaccMessage.
187                      getHeader(IJiaccMessage.Header.SEND_TO).equals("TaxiResponseTo"+
188                          appID+"")) {
189                      memory.remove(jiaccMessage);
190                      response = (TaxiResponse) jiaccMessage.getPayload();
191                      break;
192                  }
193              }
194          }
195          try{
196              Thread.sleep(100);
197          } catch(InterruptedException e) { }
198      }
199      invoke(leaveAction , new Serializable[] { groupAddress});
200      noResponse= false;
201      currentResponse= response;
202  }
203
204  /**
205  * delete the generated tag after you edited this method
206  * @generated
207  */
208
209  private void doNothing() {
210  }
211
212  /**

```



```

210     * delete the generated tag after you edited this method
211     * @generated
212     */
213
214     private void updateGlobalBest() {
215         globalBest= currentResponse;
216     }
217
218 }
219
220
221
222 /**
223  * Inner class that handles timeout events
224  * @generated
225  */
226 class TimeoutEventHandler extends Thread{
227     long timeout;
228     Thread toStop;
229     boolean triggered = false;
230
231     /**
232     * delete the generated tag after you edited this method
233     * @generated
234     */
235     public TimeoutEventHandler(long timeout, Thread toStop){
236         this.timeout = timeout;
237         this.toStop = toStop;
238     }
239
240     /**
241     * delete the generated tag after you edited this method
242     * @generated
243     */
244     public void run(){
245         try {
246             Thread.sleep(timeout);
247             triggered = true;
248             toStop.stop();
249         }catch(InterruptedException e ) { }
250     }
251
252     /**
253     * returns the triggered flag
254     * delete the generated tag after you edited this method
255     * @generated
256     */
257     public boolean hasBeenTriggered(){
258         return triggered;
259     }
260 }
261 }

```

Listing 6.1: Generated Agent Bean - MobileApplication_requestTaxi

2. ETaxi_requestTaxi

```

1 package etaxi;
2
3 import de.dailab.jiactng.agentcore.action.AbstractMethodExposingBean;
4 import de.dailab.jiactng.agentcore.action.scope.ActionScope;
5 import input.TaxiResponse;
6 import input.TaxiRequest;
7 import input.SelectedTaxi;
8 import de.dailab.jiactng.agentcore.action.Action;
9 import java.io.Serializable;
10 import de.dailab.jiactng.agentcore.comm.CommunicationAddressFactory;
11 import de.dailab.jiactng.agentcore.comm.IGroupAddress;
12 import de.dailab.jiactng.agentcore.comm.ICommunicationBean;
13 import de.dailab.jiactng.agentcore.comm.message.IJiacMessage;
14 import de.dailab.jiactng.agentcore.knowledge.IFact;
15 import org.sercho.masp.space.event.SpaceEvent;

```

```

16 import org.sercho.masp.space.event.SpaceObserver;
17 import org.sercho.masp.space.event.WriteCallEvent;
18 import de.dailab.jiactng.agentcore.comm.message.JiacMessage;
19 import java.util.Set;
20
21 public class ETaxi_requestTaxi extends AbstractMethodExposingBean{
22     public final static String ACTION_REQUESTTAXI = "etaxi.ETaxi_requestTaxi#
        requestTaxi";
23
24     /**
25      * <!-- begin-user-doc -->
26      * <!-- end-user-doc -->
27      * delete the generated tag after you edited this method
28      * @generated
29      */
30     boolean requestInteresting;
31     /**
32      * <!-- begin-user-doc -->
33      * <!-- end-user-doc -->
34      * delete the generated tag after you edited this method
35      * @generated
36      */
37     String taxiID;
38     /**
39      * <!-- begin-user-doc -->
40      * <!-- end-user-doc -->
41      * delete the generated tag after you edited this method
42      * @generated
43      */
44     String globalLocation;
45     /**
46      * <!-- begin-user-doc -->
47      * <!-- end-user-doc -->
48      * delete the generated tag after you edited this method
49      * @generated
50      */
51     int estimatedTime;
52     /**
53      * <!-- begin-user-doc -->
54      * <!-- end-user-doc -->
55      * delete the generated tag after you edited this method
56      * @generated
57      */
58     String appID;
59     /**
60      * <!-- begin-user-doc -->
61      * <!-- end-user-doc -->
62      * delete the generated tag after you edited this method
63      * @generated
64      */
65     TaxiRequest currentRequest;
66     /**
67      * <!-- begin-user-doc -->
68      * <!-- end-user-doc -->
69      * delete the generated tag after you edited this method
70      * @generated
71      */
72     SelectedTaxi selection;
73     /**
74      * <!-- begin-user-doc -->
75      * <!-- end-user-doc -->
76      * delete the generated tag after you edited this method
77      * @generated
78      */
79     boolean available;
80
81     /**
82      * <!-- begin-user-doc -->
83      * <!-- end-user-doc -->
84      * delete the generated tag after you edited this method
85      * @generated
86      */
87
88     @Expose(name = ACTION_REQUESTTAXI, scope = ActionScope.GLOBAL)

```

```

89
90
91 public void requestTaxi(TaxiRequest request) {
92     currentRequest= request;
93     evaluateRequest();
94     if(requestInteresting){
95         sendResponse();
96         Thread waitForNotification = new Thread(new Runnable(){
97             public void run(){
98                 waitForNotification();
99             }
100         });
101         TimeoutEventHandler _x5RCUAGWEeGC8PuSIWxlmQ_TimeoutHandler = new
            TimeoutEventHandler(60000,waitForNotification);
102         waitForNotification.start();
103         _x5RCUAGWEeGC8PuSIWxlmQ_TimeoutHandler.start();
104         try {
105             waitForNotification.join();
106             _x5RCUAGWEeGC8PuSIWxlmQ_TimeoutHandler.stop();
107         } catch(InterruptedException e) {
108         }
109         if(!_x5RCUAGWEeGC8PuSIWxlmQ_TimeoutHandler.hasBeenTriggered()){
110             if(selection.getTaxiID().equals(taxiID)){
111                 pickupAndDriveGuest();
112             } else {
113             }
114         }
115     } else {
116     }
117 }
118
119
120 /**
121  * <!-- begin-user-doc -->
122  * <!-- end-user-doc -->
123  * delete the generated tag after you edited this method
124  * @generated
125  */
126
127
128 public void doStart() {
129     Action joinAction = retrieveAction(ICommunicationBean.ACTION_JOIN_GROUP);
130     IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
        TaxiRequest");
131     invoke(joinAction,new Serializable[] {groupAddress});
132     SpaceObserver<IFact> _B8QyYAF3EeGC8PuSIWxlmQ_observer = new SpaceObserver<IFact
        >(){
133         public void notify(SpaceEvent<? extends IFact> event) {
134             if(event instanceof WriteCallEvent){
135                 Object obj = ((WriteCallEvent) event).getObject();
136                 if (obj instanceof IJiacMessage){
137                     IJiacMessage message = (IJiacMessage)obj;
138                     IFact payload = message.getPayload();
139                     if(payload!=null && payload instanceof TaxiRequest&& message.getHeader(
                        IJiacMessage.Header.SEND_TO).equalsIgnoreCase("TaxiRequest")){
140                         memory.remove(message);
141                         requestTaxi((TaxiRequest)payload);
142                     }
143                 }
144             }
145         }
146     };
147     memory.attach(_B8QyYAF3EeGC8PuSIWxlmQ_observer);
148 }
149
150
151 /**
152  * <!-- begin-user-doc -->
153  * <!-- end-user-doc -->
154  * delete the generated tag after you edited this method
155  * @generated
156  */
157
158

```

```

159 private void evaluateRequest() {
160     //script activity
161     //TODO implement code
162     requestInteresting = true; //every request is interesting
163 }
164
165
166 /**
167  * <!-- begin-user-doc -->
168  * <!-- end-user-doc -->
169  * delete the generated tag after you edited this method
170  * @generated
171  */
172
173
174 private void sendResponse() {
175     TaxiResponse response;
176     response= new TaxiResponse(taxiID , estimatedTime);
177     Action sendAction = retrieveAction(ICommunicationBean.ACTION.SEND);
178     IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
        TaxiResponseTo"+appID+"");
179     JiacMessage jiacMessage = new JiacMessage(response);
180     invoke(sendAction , new Serializable [] { jiacMessage , groupAddress });
181 }
182
183
184 /**
185  * <!-- begin-user-doc -->
186  * <!-- end-user-doc -->
187  * delete the generated tag after you edited this method
188  * @generated
189  */
190
191
192 private void waitForNotification() {
193     Action joinAction = retrieveAction(ICommunicationBean.ACTION_JOIN_GROUP);
194     Action leaveAction = retrieveAction(ICommunicationBean.ACTION_LEAVE_GROUP);
195     IGroupAddress groupAddress = CommunicationAddressFactory.createGroupAddress("
        notification");
196     invoke(joinAction,new Serializable [] { groupAddress });
197     SelectedTaxi selectedTaxi = null;
198     while(selectedTaxi==null) {
199         Set<IFact> all = memory.readAll();
200         for(IFact fact : all){
201             if(fact instanceof JiacMessage) {
202                 JiacMessage jiacMessage = (JiacMessage)fact;
203                 if(jiacMessage.getPayload() instanceof SelectedTaxi && jiacMessage.
                    getHeader(IJiacMessage.Header.SEND_TO).equals("notification")) {
204                     memory.remove(jiacMessage);
205                     selectedTaxi = (SelectedTaxi) jiacMessage.getPayload();
206                     break;
207                 }
208             }
209         }
210         try{
211             Thread.sleep(100);
212         } catch(InterruptedException e) { }
213     }
214     invoke(leaveAction , new Serializable [] { groupAddress });
215     selection= selectedTaxi;
216 }
217
218
219 /**
220  * <!-- begin-user-doc -->
221  * <!-- end-user-doc -->
222  * delete the generated tag after you edited this method
223  * @generated
224  */
225
226
227 private void pickupAndDriveGuest() {
228     available= false;
229     // TODO add code to navigate to guest's location

```

```

230     available= true;
231 }
232
233
234
235
236 /**
237  * Inner class that handles timeout events
238  * @generated
239  */
240 class TimeoutEventHandler extends Thread{
241     long timeout;
242     Thread toStop;
243     boolean triggered = false;
244
245     /**
246      * delete the generated tag after you edited this method
247      * @generated
248      */
249     public TimeoutEventHandler(long timeout, Thread toStop){
250         this.timeout = timeout;
251         this.toStop = toStop;
252     }
253
254     /**
255      * delete the generated tag after you edited this method
256      * @generated
257      */
258     public void run(){
259         try {
260             Thread.sleep(timeout);
261             triggered = true;
262             toStop.stop();
263         } catch (InterruptedException e ) { }
264     }
265
266     /**
267      * returns the triggered flag
268      * delete the generated tag after you edited this method
269      * @generated
270      */
271     public boolean hasBeenTriggered(){
272         return triggered;
273     }
274 }
275 }

```

Listing 6.2: Generated Agent Bean - ETaxi_requestTaxi

7. Conclusion

In this work, we combined to MDE approaches in the domain of multi-agent-systems and brought the benefits of the expressive model BPMN and the developer friendly java programming language together. As a result, a plugin to VSDT was developed that adds a transformation from BPMN to Jiac Agent Beans.

First, we presented some informations about the target framework JIAC, the used model BPMN, the existing model driven tool VSDT and about the code generating framework JET. Further we presented the result of our research about the related state of the art approaches and existing transformation of BPMN to BPEL and JiacV.

Inspired by the BPMN to JiacV transformation and Wade, we then developed the mapping from BPMN to Jiac Agent Beans. Similar to the presentation of the mapping from BPMN to BPEL that we found in the BPMN specification, we used examples that contains a figure of the process diagram and the associated code mapped from it to present the mapping from BPMN to Agent Beans.

The transformation was developed with benefits of the extensible transformation framework of the VSDT, where we could reuse the built in transformations for the validation, normalization and structure mapping stages. We have shown that VSDT's transformation framework can be extended easily by implementing a transformation for the element mapping stage. To simplify the transformation, an agent bean model was also developed as an intermediate product. During the development process of the agent bean model we have gained the benefits of MDE provided by eclipse's EMF where most of the Java code for the agent bean model was generated automatically.

7.1 Future Work

Complete the missing Mapping concepts

The mapping discussed in chapter 4 is not complete.

Solve the open issues in the implementation

As mentioned in section 5.7, there are some open issues in the implementation that

needs to be solved. Most of these issues can be solved easily and should be done in a near future.

JET2

We have successfully implement the transformation using the older Version of JET. For the future, considerations have to be made whether it is possible and beneficial to migrate into JET2.

Roundtripping

It would be very nice if the model and the generated Java code are kept in sync like the Wade-workflow. To achieve this on

Data type definition

As mentioned in chapter 6 and in [17], currently data types cannot be defined in the BPMN model. They can only be included and must exist prior to the transformation.

Literaturverzeichnis

- [1] Fabio Bellifemine, Giovanni Caire, Agostino Poggi, and Giovanni Rimassa. Jade: A software framework for developing multi-agent applications. lessons learned. *Inf. Softw. Technol.*, 50:10–21, January 2008.
- [2] Fabio Bellifemine, Agostino Poggi, and Giovanni Rimassa. JADE - a FIPA-compliant agent framework. In *Proceedings of the Practical Applications of Intelligent Agents*, 1999.
- [3] Giovanni Caire, Danilo Gotta, and Massimo Banzi. Wade: a software platform to develop mission critical applications exploiting agents and workflows. In *Proceedings of the 7th international joint conference on Autonomous agents and multiagent systems: industrial track*, AAMAS '08, pages 29–36, Richland, SC, 2008. International Foundation for Autonomous Agents and Multiagent Systems.
- [4] CC ACT, DAI-Labor, TU-Berlin. *JIAC - Java Intelligent Agent Component-ware*, 06 2010. Version 5.1.0 Manual.
- [5] Object Management Group. Bpmn specification v2.0. <http://www.omg.org/spec/BPMN/2.0/>.
- [6] Benjamin Hirsch, Thomas Konnerth, and Axel Heßler. Merging agents and services - the jiac agent platform. In Amal El Fallah Seghrouchni, Jürgen Dix, Mehdi Dastani, and Rafael H. Bordini, editors, *Multi-Agent Programming:*, pages 159–185. Springer US, 2009. 10.1007/978-0-387-89299-3_5.
- [7] Eclipse Modelling Project Homepage. <http://www.eclipse.org/modeling/>.
- [8] JADE Homepage. <http://jade.tilab.com/index.html>.
- [9] JIAC Homepage. <http://jiac.de/?id=35>.
- [10] VSDT Homepage. <http://jiac.de/?id=30>.
- [11] WADE Homepage. <http://jade.tilab.com/wade/index.html>.
- [12] What is JMerge. http://wiki.eclipse.org/JET_FAQ_What_is_JMerge%3F.
- [13] JET. <http://www.eclipse.org/modeling/m2t/?project=jet#jet>.
- [14] Thomas Konnerth, Benjamin Hirsch, and Sahin Albayrak. JADL — an agent description language for smart agents. In Mateo Baldoni and Ulle Endriss, editors, *Declarative Agent Languages and Technologies IV*, volume 4327 of *LNCs*, pages 141–155. Springer Verlag, 2006.

- [15] Tobias Küster. Development of a visual service design tool providing a mapping from BPMN to JIAC. Master's thesis, Technical University of Berlin, Faculty of Electrical Engineering and Computer Science, 2007.
- [16] Tobias Küster and Axel Heßler. Towards transformations from BPMN to heterogeneous systems. In Massima Mecella and Jian Yang, editors, *BPM2008 Workshop Proceedings*, 2008.
- [17] Tobias Küster, Marco Lützenberger, Axel Heßler, and Benjamin Hirsch. Integrating process modelling into multi-agent system engineering. In Michael Huhns, Ryszard Kowalczyk, Zakaria Maamar, Rainer Unland, and Bao Vo, editors, *Proceedings of the 5th Workshop of Service-Oriented Computing: Agents, Semantics, and Engineering (SOCASE) 2010*, 2010.
- [18] Chun Ouyang, Marlon Dumas, Arthur Ter Hofstede, and Wil M. P. Van Der Aalst. From BPMN Process Models to BPEL Web Services. pages 285–292, September 2006.
- [19] Chun Ouyang, Wil M. P. van der Aalst, Marlon Dumas, and Arthur H.M. ter Hofstede. Translating BPMN to BPEL. Technical Report BPM-06-02, BPM Center, 2006.
- [20] Adrian Powell. Customize generated models and editors with eclipse's jmerge. <http://www.ibm.com/developerworks/library/os-ecemf3/>. *Model with the Eclipse Modeling Framework, Part 3*, 2004.
- [21] Eclipse Help Page Tag Library Reference. <http://help.eclipse.org/galileo/index.jsp?topic=/org.eclipse.jet.doc/references/taglibs/index.xhtml>.
- [22] Giovanni Caire (Telecom Italia S.p.A). *WADE User Guide*. Copyright ©2010, Telecom Italia, July 2010.
- [23] Matthias Weidlich, Gero Decker, Alexander Grosskopf, and Mathias Weske. BPEL to BPMN: The Myth of a Straight-Forward Mapping. In *Proceedings of the OTM 2008 Confederated International Conferences, CoopIS, DOA, GADA, IS, and ODBASE 2008. Part I on On the Move to Meaningful Internet Systems*., OTM '08, pages 265–282. Springer-Verlag, 2008.