

FORMAN CHRISTIAN COLLEGE

(A CHARTERED UNIVERSITY)



CSCS 495 A
FA24

OWASP Broken Web Applications

Assignment 3 Report

Daim Bin Khalid - 251686775

Hafsah Shahbaz – 251684784

Syeda Manal Ammad - 251606966


24th November 2024

Introduction

This report explores the setup and usage of the OWASP Broken Web Applications (OWASP BWA) virtual machine. It details the process of downloading, extracting, and configuring the virtual machine for secure web application testing. Additionally, the report demonstrates how to access and communicate with the OWASP BWA environment effectively.

Download & Extract OWASP

1. Download OWASP VM zip file from sourceforge.
Link: <https://sourceforge.net/projects/owaspbwa/>

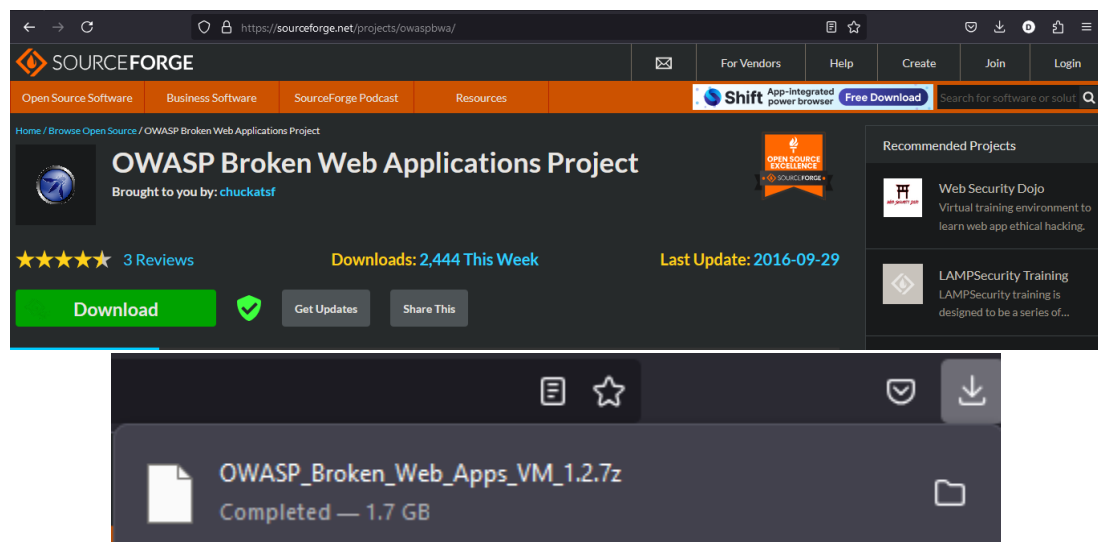


2. Extract the .zip file

▼ Today			
OWASP Broken Web Apps-cl1.vmdk	11/18/2024 6:22 PM	Virtual Machine Di...	1 KB
OWASP Broken Web Apps-cl1-s001.v...	11/18/2024 6:22 PM	Virtual Machine Di...	1,733,184 KB
OWASP Broken Web Apps-cl1-s002.v...	11/18/2024 6:22 PM	Virtual Machine Di...	1,566,016 KB
OWASP Broken Web Apps-cl1-s003.v...	11/18/2024 6:22 PM	Virtual Machine Di...	1,764,352 KB
OWASP Broken Web Apps-cl1-s004.v...	11/18/2024 6:22 PM	Virtual Machine Di...	1,108,544 KB
OWASP Broken Web Apps-cl1-s005.v...	11/18/2024 6:22 PM	Virtual Machine Di...	64 KB


Setup Virtual Machine

Using the following configuration to setup the VM.:

1.


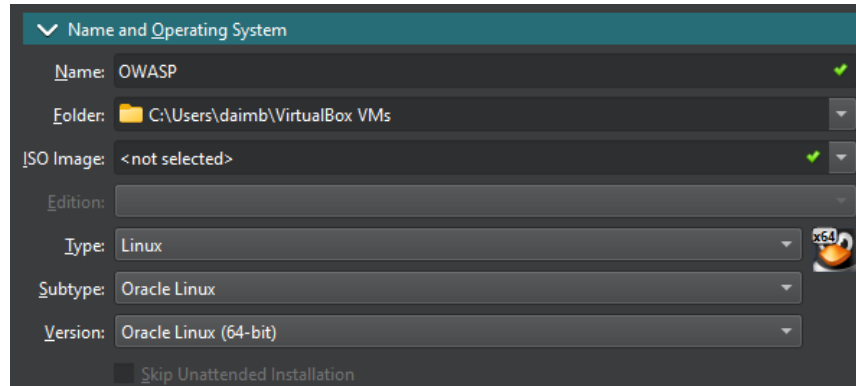


2.

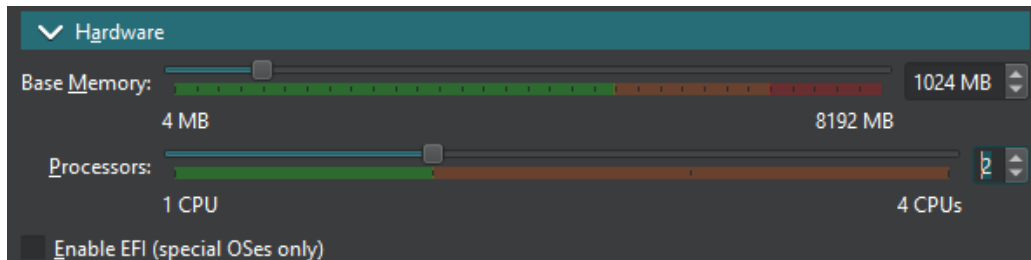


3.

Select extracted vmdk file.

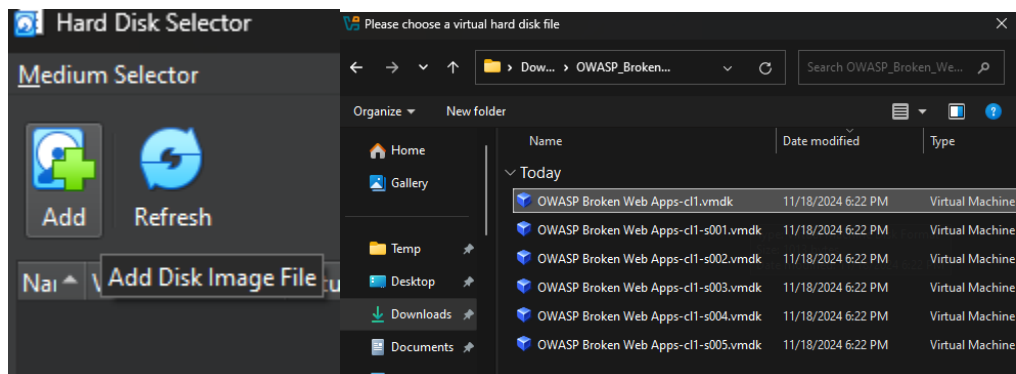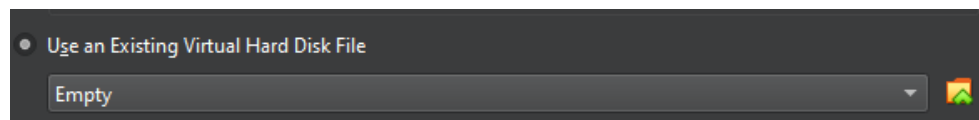


4.

VM is mounted and ready.

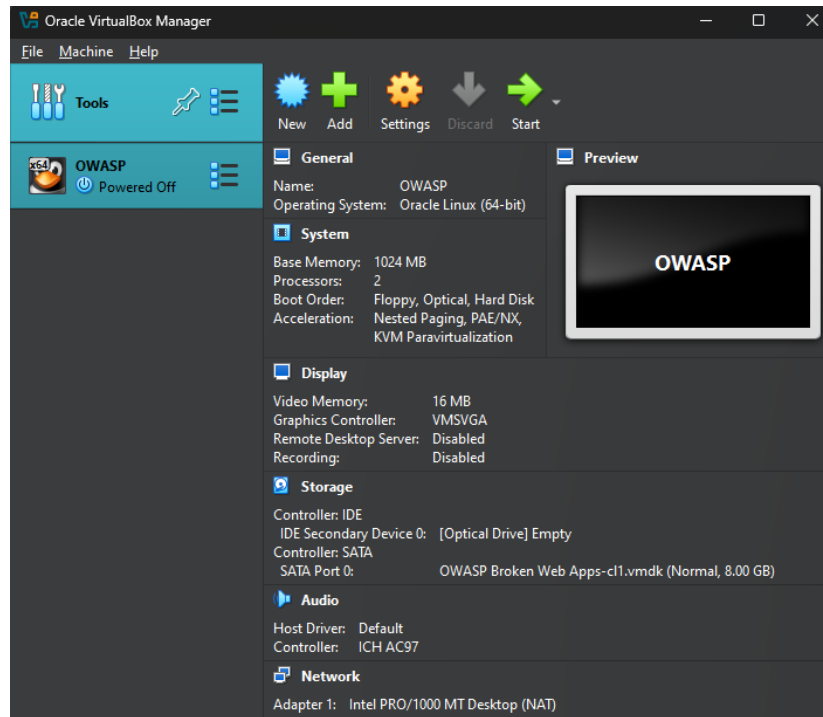


5.

Select **Bridge Adapter** as network setting.

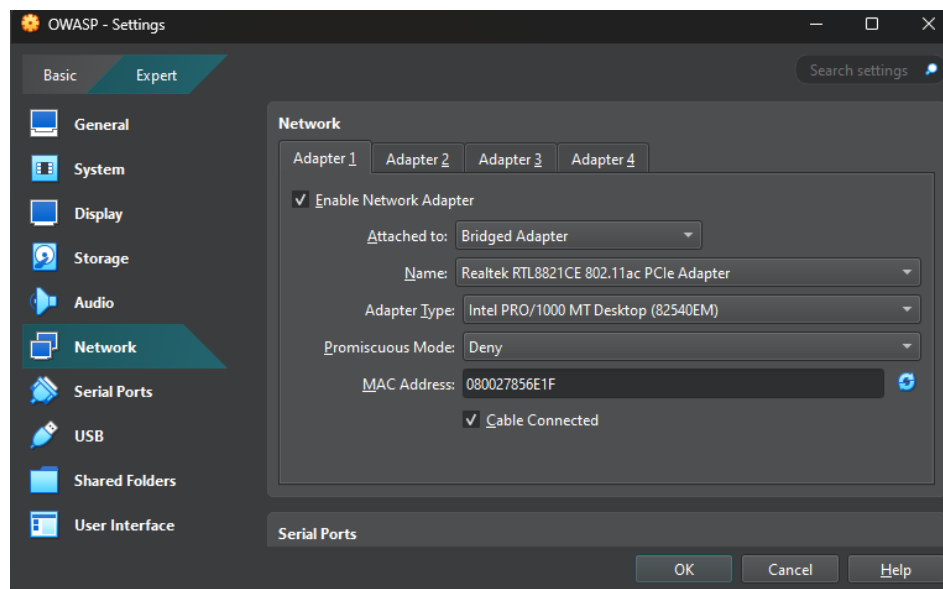

OWASP & Website Communication

1. Start OWASP and login as root:owaspbwa

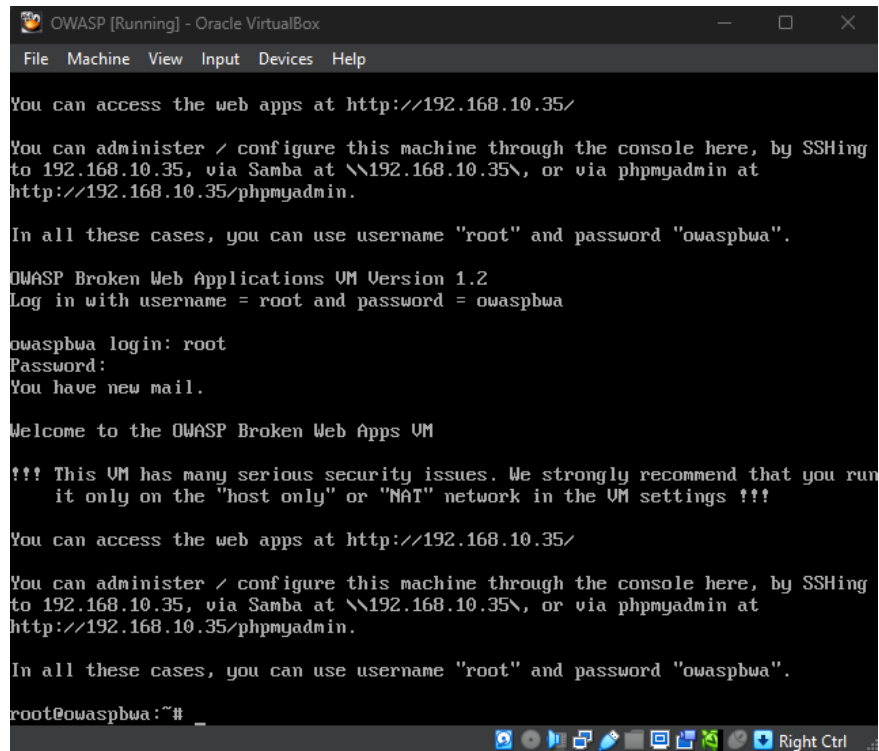

```
OWASP [Running] - Oracle VirtualBox
File Machine View Input Devices Help

You can access the web apps at http://192.168.10.35/

You can administer / configure this machine through the console here, by SSHing
to 192.168.10.35, via Samba at \\192.168.10.35\, or via phpmyadmin at
http://192.168.10.35/phpmyadmin.

In all these cases, you can use username "root" and password "owaspbwa".

OWASP Broken Web Applications VM Version 1.2
Log in with username = root and password = owaspbwa

owaspbwa login: root
Password:
You have new mail.

Welcome to the OWASP Broken Web Apps VM

!!! This VM has many serious security issues. We strongly recommend that you run
it only on the "host only" or "NAT" network in the VM settings !!!

You can access the web apps at http://192.168.10.35/

You can administer / configure this machine through the console here, by SSHing
to 192.168.10.35, via Samba at \\192.168.10.35\, or via phpmyadmin at
http://192.168.10.35/phpmyadmin.

In all these cases, you can use username "root" and password "owaspbwa".

root@owaspbwa:~#
```

2. Get IP address using **ifconfig** command:


IP: 192.168.10.35

```
root@owaspbwa:~# ifconfig
eth0      Link encap:Ethernet  HWaddr 08:00:27:85:6e:1f
          inet addr:192.168.10.35  Bcast:192.168.10.255  Mask:255.255.255.0
          inet6 addr: fe80::a00:27ff:fe85:6e1f/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:135 errors:0 dropped:0 overruns:0 frame:0
          TX packets:72 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:20973 (20.9 KB)  TX bytes:8733 (8.7 KB)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:53 errors:0 dropped:0 overruns:0 frame:0
          TX packets:53 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:16273 (16.2 KB)  TX bytes:16273 (16.2 KB)

root@owaspbwa:~#
```

3. Accessing OWASP webpage using IP address.

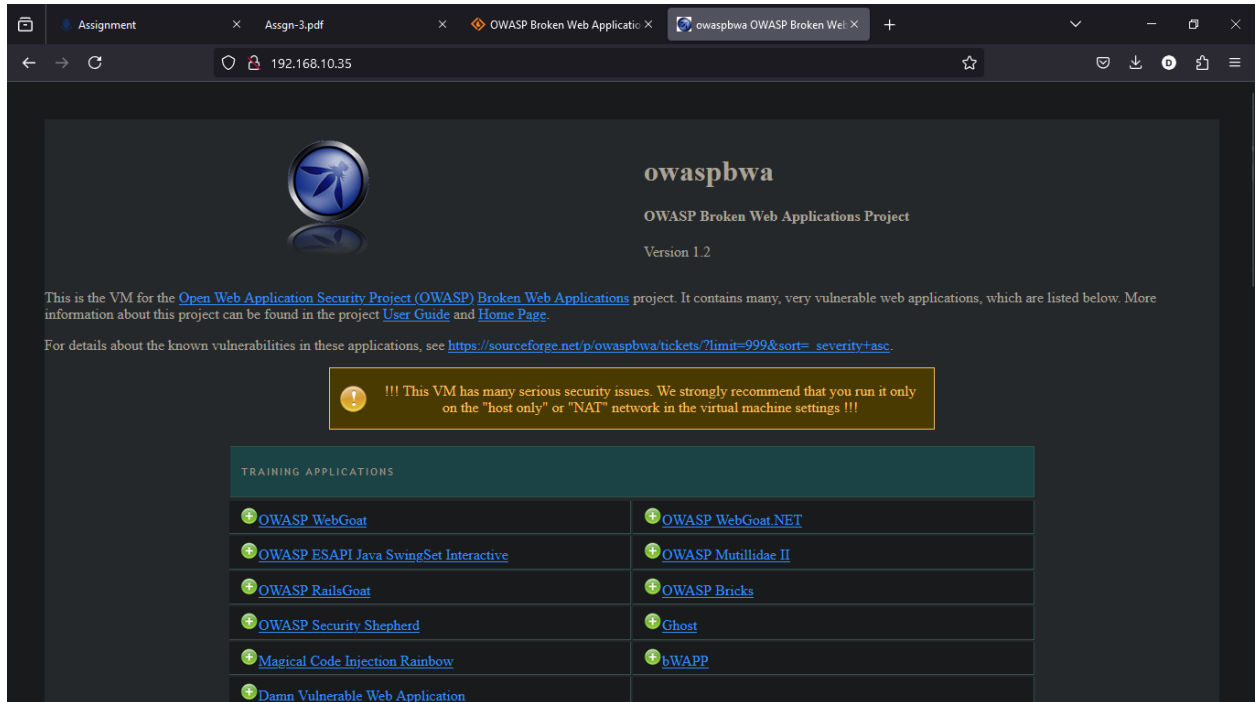

4. Check communication with OWASP BWP using terminal.

```
daimb ~  
$ ping 192.168.10.35  
  
Pinging 192.168.10.35 with 32 bytes of data:  
Reply from 192.168.10.35: bytes=32 time<1ms TTL=64  
Reply from 192.168.10.35: bytes=32 time<1ms TTL=64  
Reply from 192.168.10.35: bytes=32 time<1ms TTL=64  
Reply from 192.168.10.35: bytes=32 time<1ms TTL=64  
  
Ping statistics for 192.168.10.35:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Conclusion

By successfully setting up and interacting with the OWASP Broken Web Applications virtual machine, the report highlights the importance of practical learning in understanding web security vulnerabilities. The hands-on experience provided insights into network configurations and secure communications. This foundational work prepares users for further exploration of web application security practices.