9/24/24, 10:09 AM about:blank

Hands-on Lab: Create a DAG for Apache Airflow with PythonOperator



Estimated time needed: 40 minutes

Introduction

In this lab, you will explore the Apache Airflow web user interface (UI). You will then create a Direct Acyclic Graph (DAG) using PythonOperator and finally run it through the Airflow web UI.

Objectives

After completing this lab, you will be able to:

- · Explore the Airflow Web UI
- Create a DAG with PythonOperator
- Submit a DAG and run it through the Web UI

Prerequisite

Please ensure that you have completed the reading on the <u>Airflow DAG Operators</u> before proceeding with this lab. You should be familiar with Python input and output (I/O) operations and request packages to complete this lab.

About Skills Network Cloud IDE

Skills Network Cloud IDE (based on Theia and Docker) provides an environment for hands-on labs for course and project-related labs. Theia is an open-source IDE (Integrated Development Environment) that can be run on a desktop or on the cloud. To complete this lab, you will be using the Cloud IDE based on Theia, running in a Docker container.

Important notice about this lab environment


Please be aware that sessions for this lab environment are not persistent. A new environment is created for you every time you connect to this lab. Any data you may have saved in an earlier session will get lost. To avoid losing your data, please plan to complete these labs in a single session.

Exercise 1: Start Apache Airflow

- 1. Click on Skills Network Toolbox.
- 2. From the BIG DATA section, click Apache Airflow.
- 3. Click **Start** to start the Apache Airflow.

about:blank 1/7

9/24/24, 10:09 AM about:blank

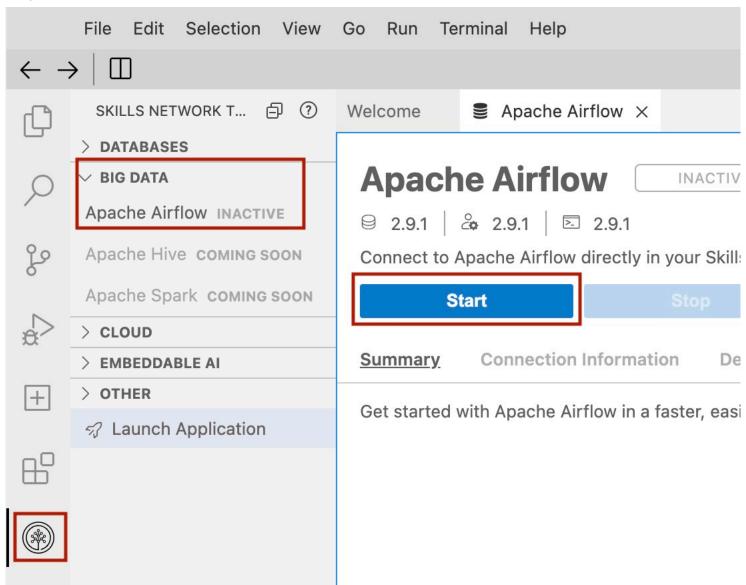


Note: Please be patient, it will take a few minutes for Airflow to start. If there is an error starting Airflow, please restart it.

Exercise 2: Open the Airflow Web UI


1. When Airflow starts successfully, you should see an output similar to the one below. Once **Apache Airflow** has started, click on the highlighted icon to open **Apache Airflow Web UI** in the new window.

about:blank 2/7

9/24/24, 10:09 AM about:blank

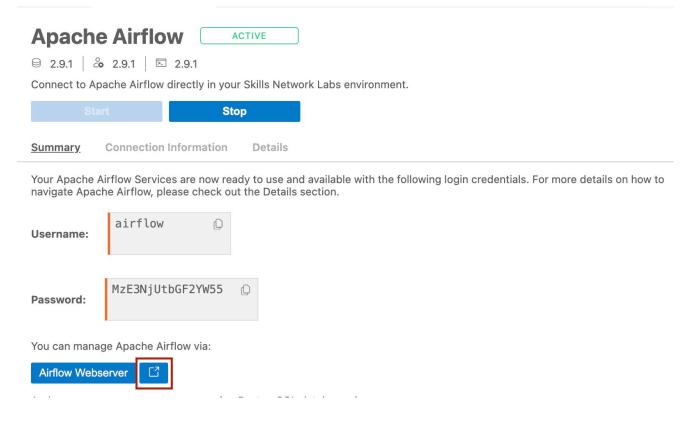

You should land on a page that looks like this.

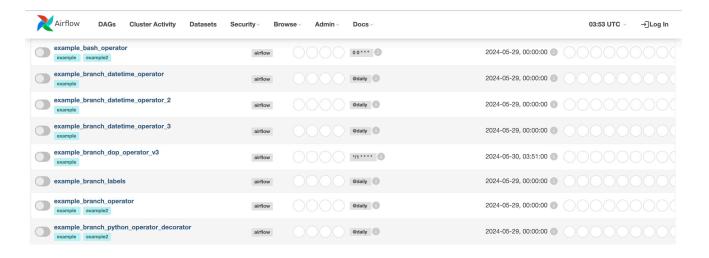

Exercise 3: Create a DAG with PythonOperator

Next, you will create a DAG, which will define a pipeline of tasks, such as extract, transform, load, and check with PythonOperator.

1. Create a DAG file, my_first_dag.py, which will run daily. To Create a new file choose File->New File and name it as my_first_dag.py. The my_first_dag.py file defines tasks execute_extract, execute_transform, execute_load, and execute_check to call the respective Python functions.

1. 1

2. 2

3. 3

4. 4 5. 5 6. 6 7. 7

8.8

9.9 10. 10

11. 11

12. 12 13. 13

14. 14

15. 15

16. 16

3/7 about:blank

17. 17
18. 18
19. 19
20. 20
21. 21
22. 22
23. 23
24. 24
25. 25
26. 26
27. 27
28. 28
29. 29
30. 30
31. 31
32. 32
33. 33
34. 34. 34
35. 35
36. 36
37. 37
38. 38
39. 39
40. 40
41. 41
42. 42
43. 43
44. 44
45. 45
46. 46
47. 47
48. 48
49. 49
50. 50
51. 51
52. 52
53. 53
54. 54
55. 56
66. 66
67. 67
68. 68
69. 70
71. 71
72. 72
73. 73
74. 74
75. 75
76. 76
77. 77
78. 78
78. 78
79. 90
81. 81
82. 82
83. 83
84. 84
85. 85
86. 86
87. 87
77. 77
78. 78
79. 90
91. 91
92. 92
93. 93
94. 94
95. 95
96. 96
97. 97
98. 98
99. 99 100. 100 101. 101 102. 102 103. 103 104. 104 105. 105 106. 106 107. 107 108. 108

1. # Import the libraries

1. # Import the libraries
2. from datetime import timedelta
3. # The DAG object; we'll need this to instantiate a DAG
4. from airflow.models import DAG
5. # Operators; you need this to write tasks!

```
6. from airflow.operators.pvthon import PvthonOperator
  8. # This makes scheduling easy
  9. from airflow.utils.dates import days_ago
10.
11. # Define the path for the input and output files
12. input file = '/etc/passwd'
13. extracted file = 'extracted-data.txt'
14. transformed_file = 'transformed.txt'
15. output_file = 'data_for_analytics.csv'
16.
17.
18. def extract():
19.
         global input file
          print("Inside Extract")
 20.
         # Read the contents of the file into a string with open(input_file, 'r') as infile, \
open(extracted_file, 'w') as outfile:
21.
22.
 23.
              for line in infile:
24.
                  fields = line.split(':')
 25.
                  if len(fields) >= 6:
 26.
27.
                       field_1 = fields[0]
                       field_3 = fields[2]
28.
29.
                       field 6 = fields[5]
                       outfile.write(field 1 + ":" + field 3 + ":" + field 6 + "\n")
30.
31.
32.
33. def transform():
34.
         global extracted_file, transformed_file
         35.
36.
37.
38.
              for line in infile:
                  processed_line = line.replace(':', ',')
outfile.write(processed_line + '\n')
40.
41.
42.
43. def load():
44.
          global transformed file, output file
          print("Inside Load")
46.
          # Save the array to a CSV file
         with open(transformed_file, 'r') as infile, \
open(output_file, 'w') as outfile:
47.
48.
              for line in infile:
49.
                  outfile.write(line + '\n')
50.
 51.
 52.
53. def check():
54.
          global output_file
55.
          print("Inside Check")
         # Save the array to a CSV file with open(output_file, 'r') as infile:
56.
57.
             for line in infile:
59.
                  print(line)
60.
61.
62. # You can override them on a per-task basis during operator initialization
63. default_args = {
64. 'owner': 'Your name',
65.
          'start_date': days_ago(0),
66.
          'email': ['your email'],
'retries': 1,
67.
          'retry_delay': timedelta(minutes=5),
68.
69. }
 70.
 71. # Define the DAG
72. dag = DAG(
73. 'my-first-python-etl-dag',
74.
         default_args=default_args,
         description='My first DAG'
75.
76.
         schedule_interval=timedelta(days=1),
77.)
78.
79. # Define the task named execute_extract to call the `extract` function
80. execute_extract = PythonOperator(
         task id='extract',
81.
82.
          python callable=extract,
          dag=dag,
84.)
85.
86. # Define the task named execute_transform to call the `transform` function
87. execute_transform = PythonOperator(
         task id='transform',
88.
         python_callable=transform,
90.
          dag=dag,
91.)
92.
93. # Define the task named execute_load to call the `load` function \,
94. execute_load = PythonOperator(
         task_id='load',
95.
96.
          python_callable=load,
          dag=dag,
97.
98.)
99.
100. # Define the task named execute load to call the `load` function
101. execute check = PythonOperator(
          task_id='check',
103.
          python_callable=check
```

about:blank

```
104. dag=dag,
105. )
106.
107. # Task pipeline
108. execute_extract >> execute_transform >> execute_load >> execute_check
Copied!
```

Exercise 4: Submit a DAG

Submitting a DAG is as simple as copying the DAG Python file into the dags folder in the AIRFLOW_HOME directory.

- 1. Open a terminal and run the command below to set the AIRFLOW_HOME.
 - 1. 1
 2. 2
 1. export AIRFLOW_HOME=/home/project/airflow
 2. echo \$AIRFLOW_HOME
 Copied!

theia@theiadocker-lavanyas: /home/project \times

theia@theiadocker-lavanyas:/home/project\$ echo \$AIRFLOW_HOME /home/project/airflow

2. Run the command below to submit the DAG that was created in the previous exercise.

```
1. 1
    1. cp my_first_dag.py $AIRFLOW_HOME/dags
Copied!
```

- 3. Verify that your DAG actually got submitted.
- 4. Run the command below to list out all the existing DAGs.

```
1. 1
1. airflow dags list
Copied!
```


5. Verify that my-first-python-etl-dag is a part of the output.

```
    1. 1
    1. airflow dags list|grep "my-first-python-etl-dag"
    Copied!
```

- 6. You should see your DAG name in the output.
- 7. Run the command below to list out all the tasks in my-first-python-etl-dag.

```
1. 1
1. airflow tasks list my-first-python-etl-dag
Copied!
```

- 8. You should see all the four tasks in the output.
- 9. You can run the task from the Web UI. You can check the logs of the tasks by clicking the individual task in the Graph view.

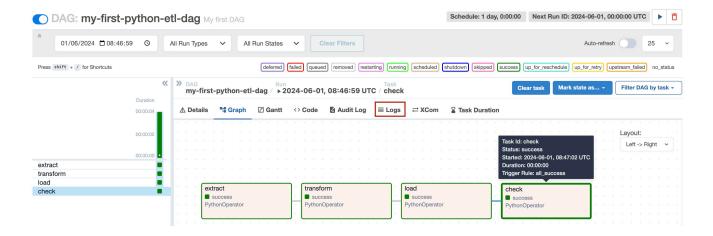

9/24/24. 10:09 AM about:blank

Practice exercise

Write a DAG named ETL_Server_Access_Log_Processing that will extract a file from a remote server and then transform the content and load it into a file.

The file URL is given below:

https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DB0250EN-SkillsNetwork/labs/Apache%20Airflow/Build%20a%20DAG%20using%20Airflow/web-server-access-log.txt

The server access log file contains these fields.

a. timestamp - TIMESTAMP b. latitude - float c. longitude - float d. visitorid - char(37) e. accessed from mobile - boolean $f.\ browser_code - int$

Tasks

- 1. Add tasks in the DAG file to download the file, read the file, and extract the fields timestamp and visitoria from the web-server-access-log.txt.
- 2. Capitalize the visitorid for all the records and store it in a local variable.
- 3. Load the data into a new file capitalized.txt.
- 4. Create the imports block.
- 5. Create the DAG Arguments block. You can use the default settings.
- 6. Create the DAG definition block. The DAG should run daily.
- 7. Create the tasks extract, transform, and load to call the Python script.
- 8. Create the task pipeline block.
- 9. Submit the DAG.
- 10. Verify if the DAG is submitted.
- ► Click here for hint.
- ► Click here for the **solution**.

Authors

Lavanya T S

Other Contributors

Rav Ahuja

© IBM Corporation. All rights reserved.

7/7 about:blank