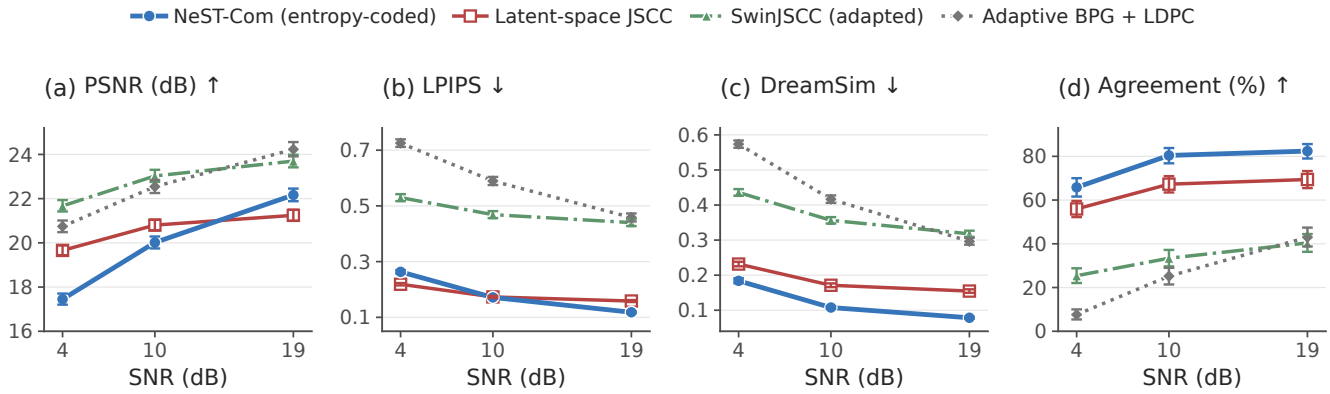


Fig. 2. Reconstruction performance at $N = 1024$ on 500 images. Markers show source-averaged means and error bars indicate pointwise 95% source-level bootstrap intervals after averaging three channel realizations per source. Latent-space JSCC and adapted SwinJSCC use their final 100k and 200k checkpoints, respectively. Agreement is the fraction of images whose ConvNeXt top-1 prediction matches that of the source image.

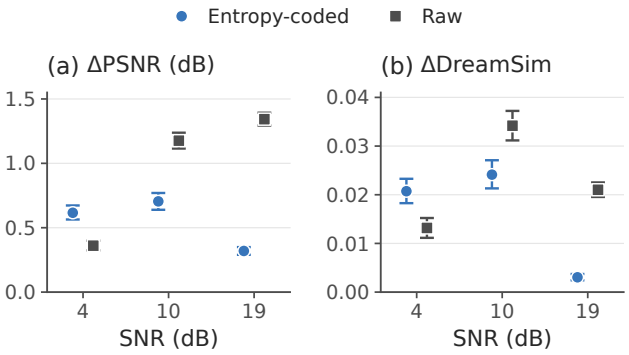


Fig. 3. Paired effects of within-scale truncation on 500 images at $N = 1024$, evaluated separately for raw and entropy-coded representations. ΔPSNR = PSNR(partial) $-$ PSNR(whole); ΔDreamSim = DreamSim(whole) $-$ DreamSim(partial), so positive values indicate improvement. Markers show mean paired differences; error bars indicate pointwise 95% source-paired bootstrap intervals after averaging three channel realizations per source.

Review only: original manuscript widths; figures included without further scaling. Figure 2: 181.3533×55 mm. Figure 3: 88.5679×50 mm. Print this PDF at 100% (disable fit-to-page). No new experiments, scoring, or bootstrap. Full captions and provenance accompany the figures.