


In [1]:

```
import warnings
warnings.filterwarnings('ignore')
```

In [2]:

```
import numpy as np
%matplotlib inline
import matplotlib.pyplot as plt
from scipy.stats import norm
```

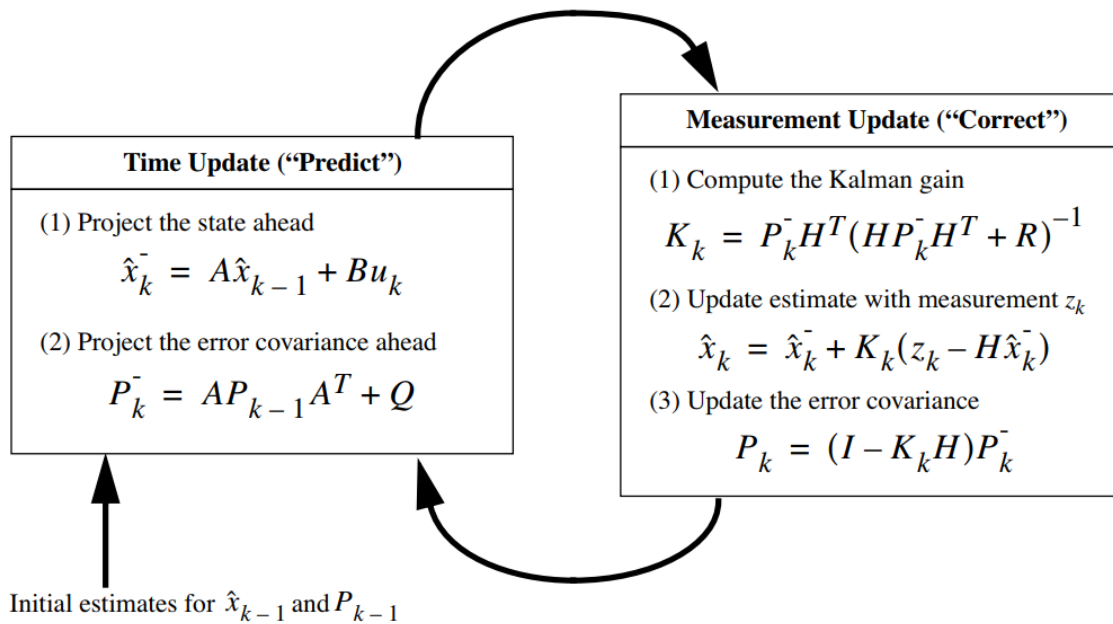

**Figure 4.2:** A complete picture of the operation of the Kalman filter, combining the high-level diagram of Figure 4.1 with the equations from table 4.1 and table 4.2.

## State Vector

Constant Velocity Model for Ego Motion

$$x_k = \begin{bmatrix} x \\ y \\ \dot{x} \\ \dot{y} \end{bmatrix} = \begin{matrix} \text{Position X} \\ \text{Position Y} \\ \text{Velocity in X} \\ \text{Velocity in Y} \end{matrix}$$

**Initial State**  $x_0$

$$x_0 = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

In [3]:

```
x = np.matrix([[0.0, 0.0, 0.0, 0.0]]).T
print(x, x.shape)
#plt.scatter(float(x[0]),float(x[1]), s=100)
#plt.title('Initial Location')
```

```
(matrix([[ 0.],
          [ 0.],
          [ 0.],
          [ 0.]]), (4, 1))
```

Formal Definition (Motion of Law):

$$x_{k+1} = \mathbf{A} \cdot x_k$$

which is

$$x_{k+1} = \begin{bmatrix} 1 & 0 & \Delta t & 0 \\ 0 & 1 & 0 & \Delta t \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot \begin{bmatrix} x \\ y \\ \dot{x} \\ \dot{y} \end{bmatrix}_k$$

Observation Model:

$$y = \mathbf{H} \cdot x$$

which is

$$y = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \cdot x$$

means: You observe the velocity directly in the correct unit

**Initial Uncertainty  $P_0$**

$$P_0 = \begin{bmatrix} \sigma_x^2 & 0 & 0 & 0 \\ 0 & \sigma_y^2 & 0 & 0 \\ 0 & 0 & \sigma_{\dot{x}}^2 & 0 \\ 0 & 0 & 0 & \sigma_{\dot{y}}^2 \end{bmatrix}$$

with  $\sigma$  as the standard deviation

In [4]:

```
P = np.diag([1000.0, 1000.0, 1000.0, 1000.0])
print(P, P.shape)
```

```
(array([[ 1000.,    0.,    0.,    0.],
        [    0.,  1000.,    0.,    0.],
        [    0.,    0.,  1000.,    0.],
        [    0.,    0.,    0.,  1000.]]), (4, 4))
```


In [44]:

```
fig = plt.figure(figsize=(6, 6))
im = plt.imshow(P, interpolation="none", cmap=plt.get_cmap('binary'))
plt.title('Initial Covariance Matrix $P$')
ylocs, ylabels = plt.yticks()
# set the locations of the yticks
plt.yticks(np.arange(7))
# set the locations and labels of the yticks
plt.yticks(np.arange(6),('$x$', '$y$', '$\dot{x}$', '$\dot{y}$'), fontsize=22)

xlocs, xlabels = plt.xticks()
# set the locations of the yticks
plt.xticks(np.arange(7))
# set the locations and labels of the yticks
plt.xticks(np.arange(6),('$x$', '$y$', '$\dot{x}$', '$\dot{y}$'), fontsize=22)

plt.xlim([-0.5,3.5])
plt.ylim([3.5, -0.5])

from mpl_toolkits.axes_grid1 import make_axes_locatable
divider = make_axes_locatable(plt.gca())
cax = divider.append_axes("right", "5%", pad="3%")
plt.colorbar(im, cax=cax);
```

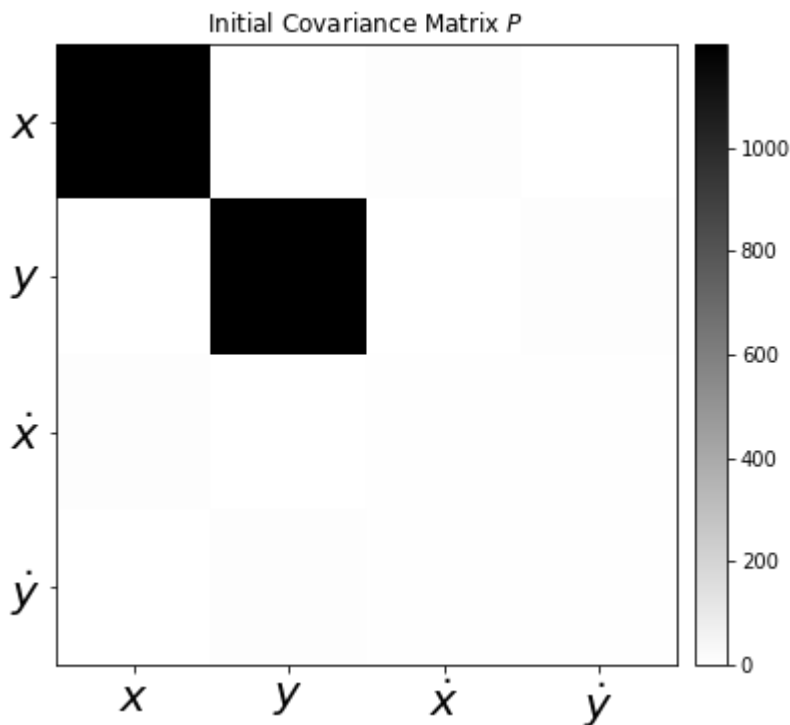

## Dynamic Matrix $A$

It is calculated from the dynamics of the Egomotion.

$$\begin{aligned}x_{k+1} &= x_k + \dot{x}_k \cdot \Delta t \\y_{k+1} &= y_k + \dot{y}_k \cdot \Delta t \\ \dot{x}_{k+1} &= \dot{x}_k \\ \dot{y}_{k+1} &= \dot{y}_k\end{aligned}$$

In [5]:

```
dt = 0.1 # Time Step between Filter Steps

A = np.matrix([[1.0, 0.0, dt, 0.0],
               [0.0, 1.0, 0.0, dt],
               [0.0, 0.0, 1.0, 0.0],
               [0.0, 0.0, 0.0, 1.0]])
print(A, A.shape)

(matrix([[ 1. ,  0. ,  0.1,  0. ],
         [ 0. ,  1. ,  0. ,  0.1],
         [ 0. ,  0. ,  1. ,  0. ],
         [ 0. ,  0. ,  0. ,  1. ]]), (4, 4))
```

## Measurement Matrix $H$

We directly measure the Velocity  $\dot{x}$  and  $\dot{y}$

$$H = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

This matrix influences the Kalman Gain.

In [6]:

```
H = np.matrix([[0.0, 0.0, 1.0, 0.0],
               [0.0, 0.0, 0.0, 1.0]])
print(H, H.shape)

(matrix([[ 0.,  0.,  1.,  0.],
         [ 0.,  0.,  0.,  1.]]), (2, 4))
```

## Measurement Noise Covariance $R$

Tells the Kalman Filter how 'bad' the sensor readings are.

That is,  $R$  is the sensor noise matrix. This matrix implies the measurement error covariance, based on the amount of sensor noise.

$$R = \begin{bmatrix} \sigma_x^2 & 0 \\ 0 & \sigma_y^2 \end{bmatrix}$$

In [7]:

```
ra = 10.0**2


R = np.matrix([[ra, 0.0],
               [0.0, ra]])
print(R, R.shape)

(matrix([[ 100.,   0.],
         [   0., 100.]]), (2, 2))
```

In [8]:

```
# Plot between -10 and 10 with .001 steps.
xpdf = np.arange(-10, 10, 0.001)
plt.subplot(121)
plt.plot(xpdf, norm.pdf(xpdf,0,R[0,0]))
plt.title('$\dot{x}$')

plt.subplot(122)
plt.plot(xpdf, norm.pdf(xpdf,0,R[1,1]))
plt.title('$\dot{y}$')
plt.tight_layout()
```

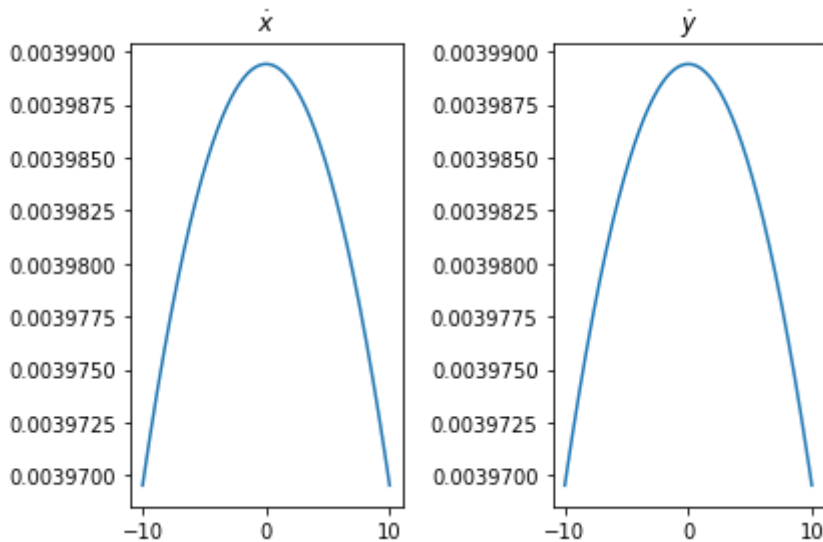

## Process Noise Covariance $Q$

$Q$  is the action uncertainty matrix. This matrix implies the process noise covariance.

The position of the car can be influenced by a force (e.g. wind), which leads to an acceleration disturbance (noise). This process noise has to be modeled with the process noise covariance matrix  $Q$ .

$$Q = \begin{bmatrix} \sigma_{\dot{x}}^2 & \sigma_{xy} & \sigma_{x\dot{x}} & \sigma_{x\dot{y}} \\ \sigma_{yx} & \sigma_{\dot{y}}^2 & \sigma_{y\dot{x}} & \sigma_{y\dot{y}} \\ \sigma_{\dot{x}x} & \sigma_{\dot{x}y} & \sigma_{\dot{x}}^2 & \sigma_{\dot{x}\dot{y}} \\ \sigma_{\dot{y}x} & \sigma_{\dot{y}y} & \sigma_{\dot{y}\dot{x}} & \sigma_{\dot{y}}^2 \end{bmatrix}$$

One can calculate  $Q$  as

$$Q = G \cdot G^T \cdot \sigma_v^2$$

with  $G = \begin{bmatrix} 0.5dt^2 & 0.5dt^2 & dt & dt \end{bmatrix}^T$  and  $\sigma_v$  as the acceleration process noise, which can be assumed for a vehicle to be  $8.8m/s^2$ , according to: Schubert, R., Adam, C., Obst, M., Mattern, N., Leonhardt, V., & Wanielik, G. (2011). [Empirical evaluation of vehicular models for ego motion estimation](http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=5940526) (<http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=5940526>). 2011 IEEE Intelligent Vehicles Symposium (IV), 534–539. doi:10.1109/IVS.2011.5940526

In [9]:

```
sv = 8.8

G = np.matrix([[0.5*dt**2],
               [0.5*dt**2],
               [dt],
               [dt]])

Q = G*G.T*sv**2
```

In [10]:

```
m = 200 # Measurements
vx= 20 # in X
vy= 10 # in Y

mx = np.array(vx+np.random.randn(m))
my = np.array(vy+np.random.randn(m))

measurements = np.vstack((mx,my))

print(measurements.shape)

print('Standard Deviation of Acceleration Measurements=%.2f' % np.std(mx))
print('You assumed %.2f in R.' % R[0,0])
```

(2, 200)  
Standard Deviation of Acceleration Measurements=1.01  
You assumed 100.00 in R.

In [11]:

```
from sympy import Symbol, Matrix
from sympy.interactive import printing
printing.init_printing()
dts = Symbol('dt')
Qs = Matrix([[0.5*dts**2],[0.5*dts**2],[dts],[dts]])
Qs*Qs.T
```

Out[11]:

$$\begin{bmatrix} 0.25dt^4 & 0.25dt^4 & 0.5dt^3 & 0.5dt^3 \\ 0.25dt^4 & 0.25dt^4 & 0.5dt^3 & 0.5dt^3 \\ 0.5dt^3 & 0.5dt^3 & dt^2 & dt^2 \\ 0.5dt^3 & 0.5dt^3 & dt^2 & dt^2 \end{bmatrix}$$


In [13]:

```
fig = plt.figure(figsize=(6, 6))
im = plt.imshow(Q, interpolation="none", cmap=plt.get_cmap('binary'))
plt.title('Process Noise Covariance Matrix  $P$ ')
ylocs, ylabels = plt.yticks()
# set the locations of the yticks
plt.yticks(np.arange(7))
# set the locations and labels of the yticks
plt.yticks(np.arange(6), ('$x$', '$y$', '$\dot{x}$', '$\dot{y}$'), fontsize=22)

xlocs, xlabels = plt.xticks()
# set the locations of the yticks
plt.xticks(np.arange(7))
# set the locations and labels of the yticks
plt.xticks(np.arange(6), ('$x$', '$y$', '$\dot{x}$', '$\dot{y}$'), fontsize=22)

plt.xlim([-0.5, 3.5])
plt.ylim([3.5, -0.5])

from mpl_toolkits.axes_grid1 import make_axes_locatable
divider = make_axes_locatable(plt.gca())
cax = divider.append_axes("right", "5%", pad="3%")
plt.colorbar(im, cax=cax);
```

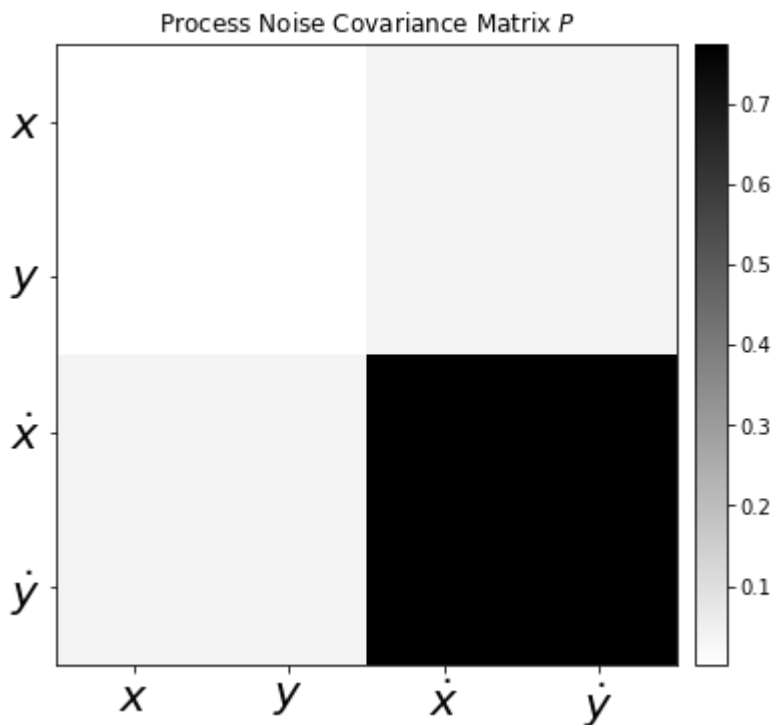

## Identity Matrix $I$

In [14]:

```
I = np.eye(4)
print(I, I.shape)
```

```
(array([[ 1.,  0.,  0.,  0.],
        [ 0.,  1.,  0.,  0.],
        [ 0.,  0.,  1.,  0.],
        [ 0.,  0.,  0.,  1.]]), (4, 4))
```

## Measurements

For example, we are using some random generated measurement values

In [21]:

```
m = 200 # Measurements
vx= 20 # in X
vy= 10 # in Y
```

```
mx = np.array(vx+np.random.randn(m))
my = np.array(vy+np.random.randn(m))
```

```
measurements = np.vstack((mx,my))
```

```
print('measurements.shape = {}'.format(measurements.shape))
```

```
print('Standard Deviation of Acceleration Measurements=%.2f' % np.std(mx))
```

```
print('You assumed %.2f in R. <-- R[0,0]' % R[0,0])
```

```
print('R = Measurement Noise Covariance = tells how bad the sensor readings are.')
```

```
measurements.shape = (2, 200)
```

```
Standard Deviation of Acceleration Measurements=0.96
```

```
You assumed 100.00 in R. <-- R[0,0]
```

```
R = Measurement Noise Covariance = tells how bad the sensor readings are.
```




In [17]:

```
fig = plt.figure(figsize=(16,5))

plt.step(range(m),mx, label='$\dot{x}$')
plt.step(range(m),my, label='$\dot{y}$')
plt.ylabel(r'Velocity $m/s$')
plt.title('Measurements')
plt.legend(loc='best',prop={'size':18})
```

Out[17]:

<matplotlib.legend.Legend at 0x7efc08830510>

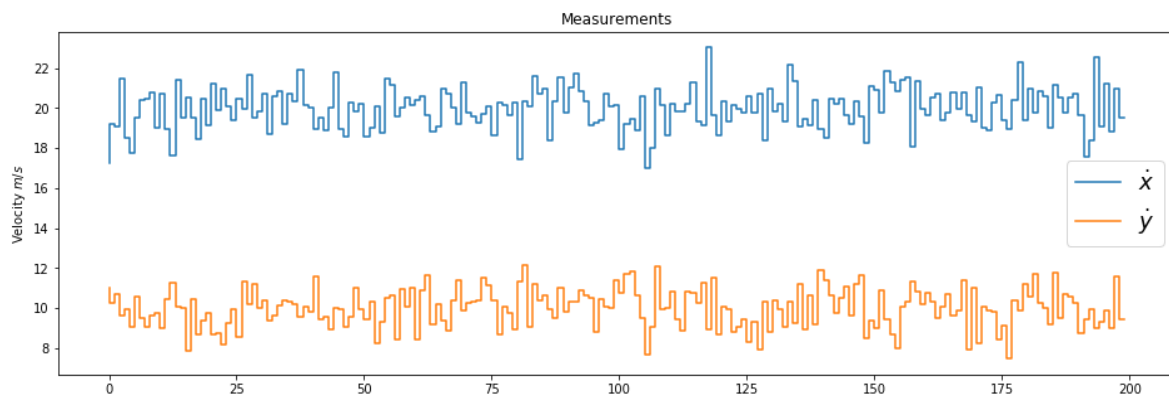

In [22]:

```
# Preallocation for Plotting
xt = []
yt = []
dxt= []
dyt= []
Zx = []
Zy = []
Px = []
Py = []
Pdx= []
Pdy= []
Rdx= []
Rdy= []
Kx = []
Ky = []
Kdx= []
Kdy= []
```

In [23]:


```
def savestates(x, Z, P, R, K):
    xt.append(float(x[0]))
    yt.append(float(x[1]))
    dxt.append(float(x[2]))
    dyt.append(float(x[3]))

    Zx.append(float(Z[0]))
    Zy.append(float(Z[1]))
    Px.append(float(P[0,0]))
    Py.append(float(P[1,1]))
    Pdx.append(float(P[2,2]))
    Pdy.append(float(P[3,3]))
    Rdx.append(float(R[0,0]))
    Rdy.append(float(R[1,1]))
    Kx.append(float(K[0,0]))
    Ky.append(float(K[1,0]))
    Kdx.append(float(K[2,0]))
    Kdy.append(float(K[3,0]))
```

In [25]:

```
def plot_K():
    fig = plt.figure(figsize=(16,9))
    plt.plot(range(len(measurements[0])),Kx, label='Kalman Gain for $x$')
    plt.plot(range(len(measurements[0])),Ky, label='Kalman Gain for $y$')
    plt.plot(range(len(measurements[0])),Kdx, label='Kalman Gain for $\dot{x}$')
    plt.plot(range(len(measurements[0])),Kdy, label='Kalman Gain for $\dot{y}$')

    plt.xlabel('Filter Step')
    plt.ylabel('')
    plt.title('Kalman Gain (the lower, the more the measurement fullfill the prediction)')
    plt.legend(loc='best',prop={'size':22})
```

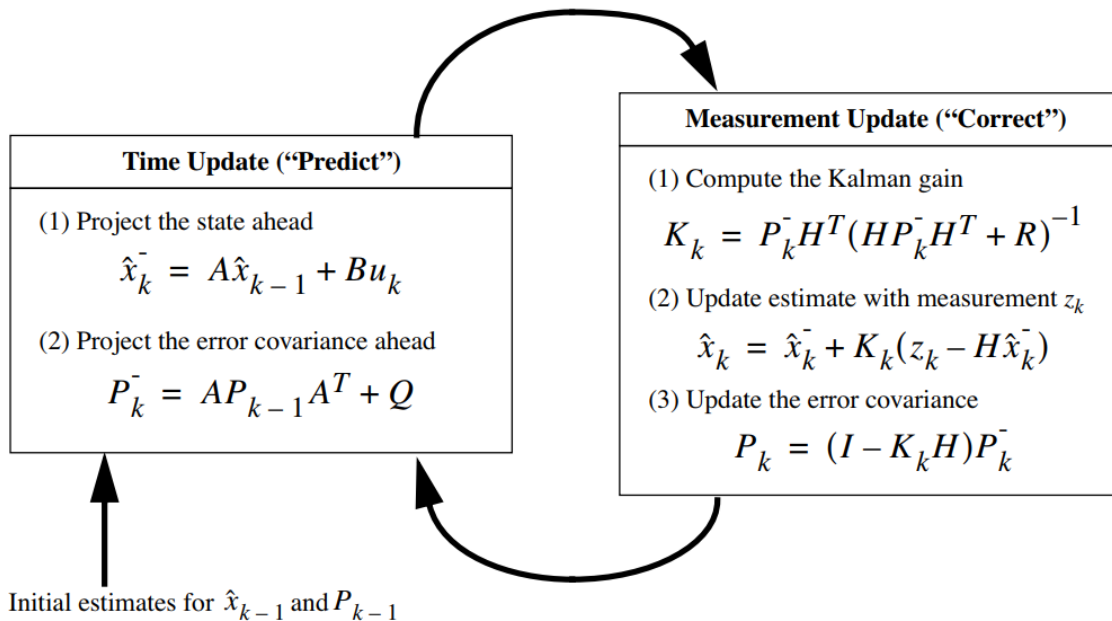

**Figure 4.2:** A complete picture of the operation of the Kalman filter, combining the high-level diagram of Figure 4.1 with the equations from table 4.1 and table 4.2.

$$\hat{x}_k^- = A\hat{x}_{k-1} + Bu_k$$

- $\hat{x}_k^-$  (note the “super minus”) = a priori state estimate at step k given knowledge of the process prior to step k
- $\hat{x}_k$  = a posteriori state estimate at step k given measurement  $z_k$  = a linear combination of an a priori estimate  $\hat{x}_k^-$  and a weighted difference between an actual measurement  $z_k$  and a measurement prediction  $\hat{x}_k^-$
- $z_k - H\hat{x}_k^-$  = measurement innovation, or the residual.

In [24]:

```
for n in range(len(measurements[0])):

    # Time Update (Prediction)
    # =====
    # Project the state ahead
    x = A*x

    # Project the error covariance ahead
    P = A*P*A.T + Q

    # Measurement Update (Correction)
    # =====
    # Compute the Kalman Gain
    S = H*P*H.T + R
    K = (P*H.T) * np.linalg.pinv(S)

    # Update the estimate via z
    Z = measurements[:,n].reshape(2,1)
    y = Z - (H*x)                                # Innovation or Residual
    x = x + (K*y)

    # Update the error covariance
    P = (I - (K*H))*P

    # Save states (for Plotting)
    savestates(x, Z, P, R, K)
```

Job Done !

## Visualization

### Kalman Gains $K$

In [29]:

```
print(np.shape(measurements[0]))
```

(200,)


In [30]:

```
def plot_K():
    fig = plt.figure(figsize=(16,9))
    plt.plot(range(len(measurements[0])),Kx, label='Kalman Gain for $x$')
    plt.plot(range(len(measurements[0])),Ky, label='Kalman Gain for $y$')
    plt.plot(range(len(measurements[0])),Kdx, label='Kalman Gain for $\dot{x}$')
    plt.plot(range(len(measurements[0])),Kdy, label='Kalman Gain for $\dot{y}$')

    plt.xlabel('Filter Step')
    plt.ylabel('')
    plt.title('Kalman Gain (the lower, the more the measurement fullfill the prediction)')
    plt.legend(loc='best',prop={'size':22})
```

In [31]:

plot\_K()

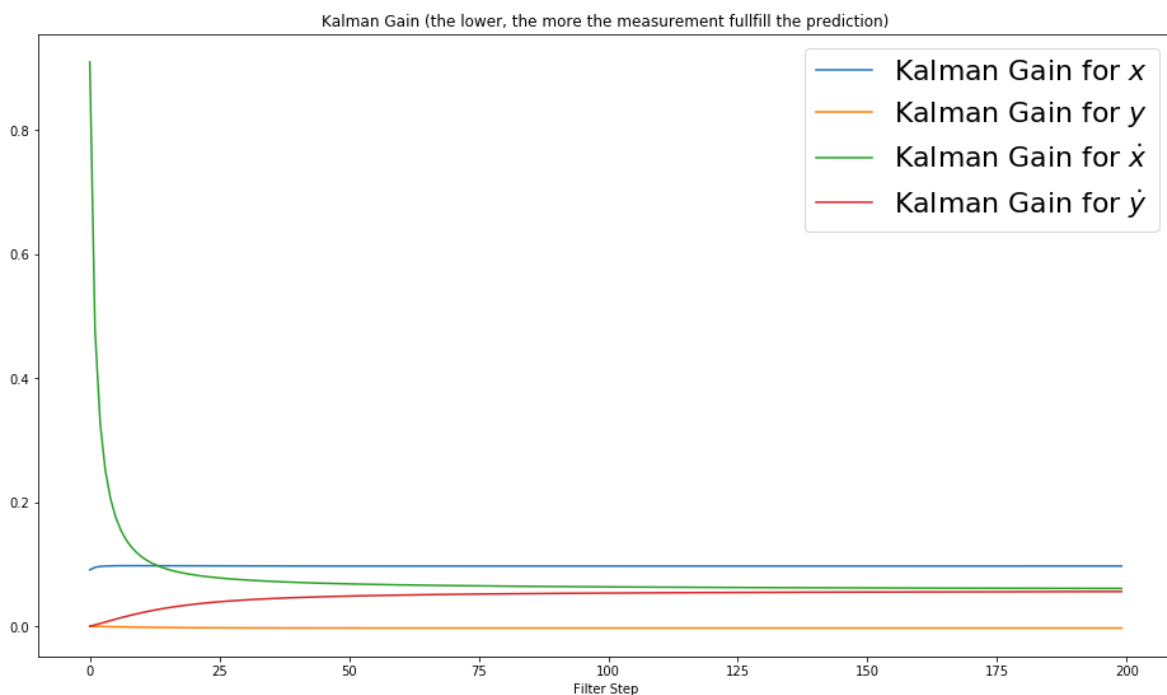

낮을수록?

## Uncertainty Matrix $P$


In [38]:

```
def plot_P():
    fig = plt.figure(figsize=(16,9))
    plt.plot(range(len(measurements[0])),Px, label='$x$')
    plt.plot(range(len(measurements[0])),Py, ':', label='$y$')
    plt.plot(range(len(measurements[0])),Pdx, label='$\dot{x}$')
    plt.plot(range(len(measurements[0])),Pdy, ':', label='$\dot{y}$')

    plt.xlabel('Filter Step')
    plt.ylabel('')
    plt.title('Uncertainty (Elements from Matrix $P$)')
    plt.legend(loc='best',prop={'size':22})
```

In [39]:

```
plot_P()
```

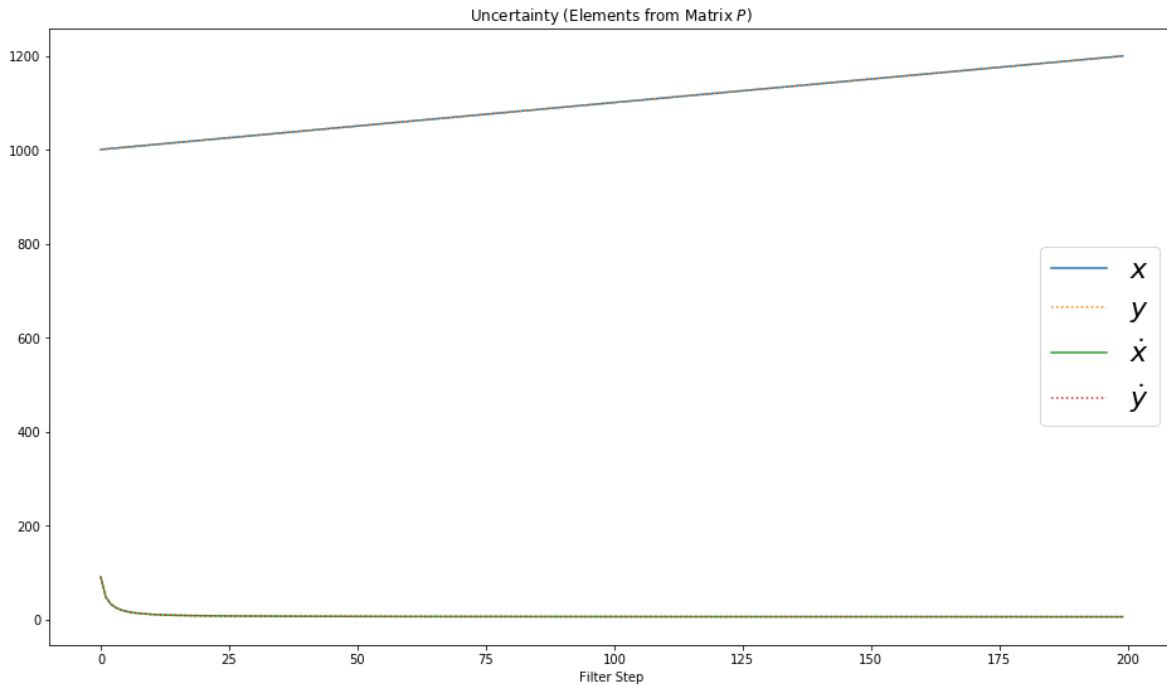

속도는 측정을 하니까.? position은 점점 더 불확실.

## State Estimate $x$

In [40]:


```
def plot_x():
    fig = plt.figure(figsize=(16,9))
    plt.step(range(len(measurements[0])),dxt, label='$\dot{x}$')
    plt.step(range(len(measurements[0])),dyt, label='$\dot{y}$')

    plt.axhline(vx, color='#999999', label='$\dot{x}_{real}$')
    plt.axhline(vy, color='#999999', label='$\dot{y}_{real}$')

    plt.xlabel('Filter Step')
    plt.title('Estimate (Elements from State Vector $x$)')
    plt.legend(loc='best',prop={'size':22})
    plt.ylim([0, 30])
    plt.ylabel('Velocity')
```

In [41]:

```
plot_x()
```

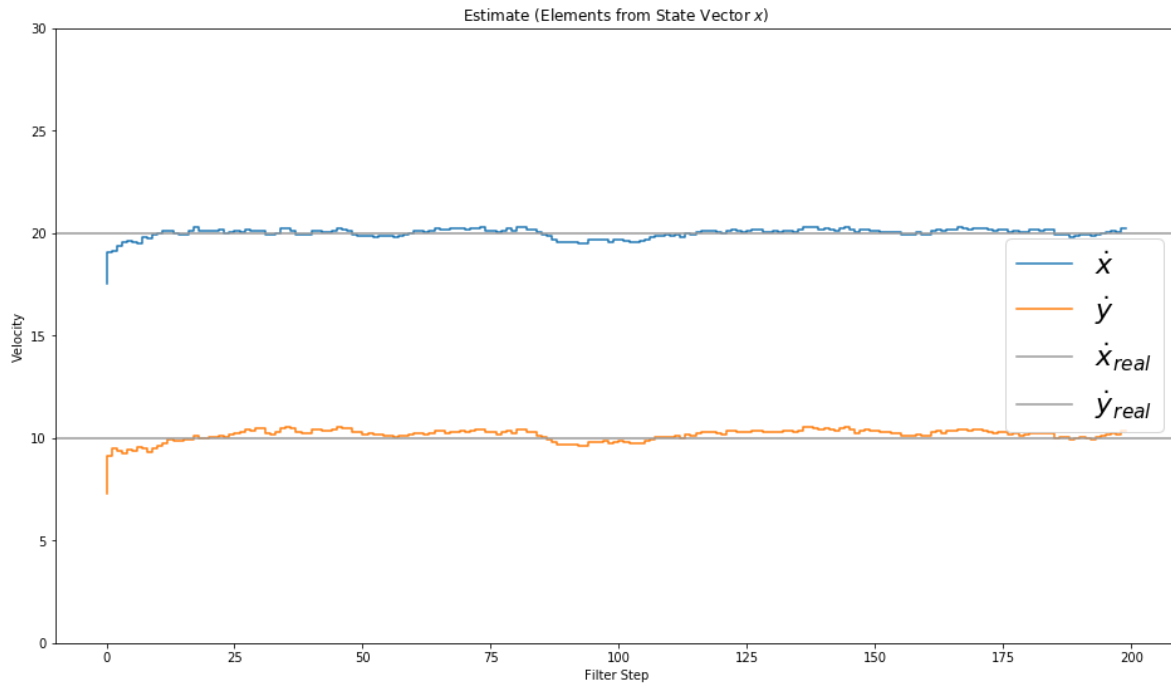

## Position x/y

In [49]:


```
def plot_xy():
    fig = plt.figure(figsize=(16,16))
    plt.scatter(xt,yt, s=20, label='State', c='k')
    plt.scatter(xt[0],yt[0], s=100, label='Start', c='g')
    plt.scatter(xt[-1],yt[-1], s=100, label='Goal', c='r')

    xfin = 0+ vx*m * dt
    yfin = 0+ vy*m * dt
    print(xfin, yfin)
    plt.scatter(xfin, yfin, s=100, label='Calc', c='m')

    plt.xlabel('X')
    plt.ylabel('Y')
    plt.title('Position')
    plt.legend(loc='best')
    plt.axis('equal')
```

In [51]:

```
plot_xy()
```

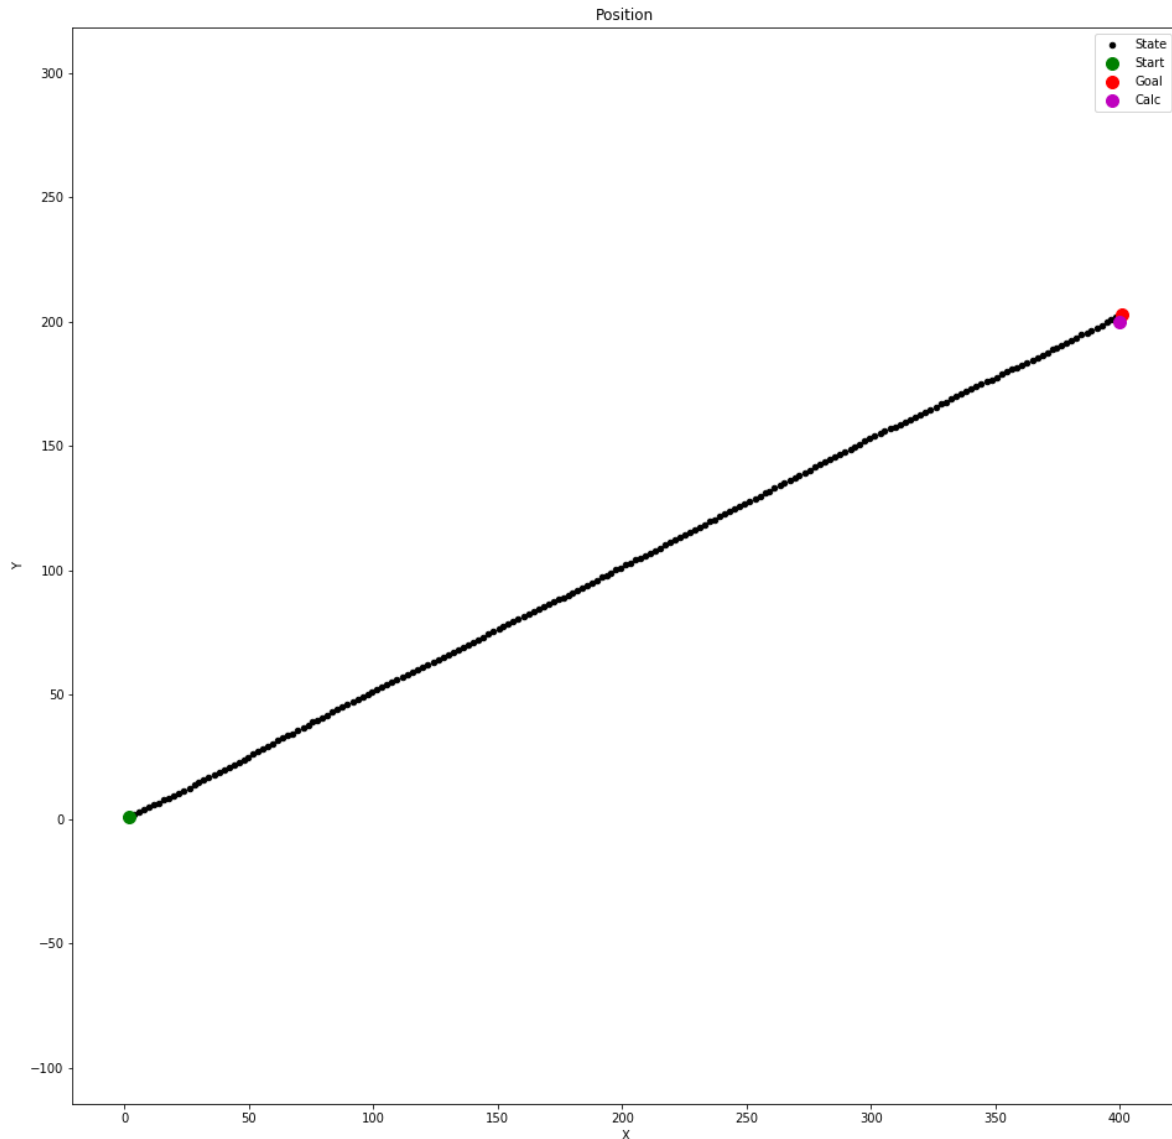

It works pretty well. That was basically just dead reckoning, because no position measurement came in.

- <https://github.com/balzer82/Kalman> (<https://github.com/balzer82/Kalman>).
- <https://github.com/balzer82/Kalman/blob/master/Kalman-Filter-CV.ipynb> (<https://github.com/balzer82/Kalman/blob/master/Kalman-Filter-CV.ipynb>).
- <https://tex.stackexchange.com/a/218550> (<https://tex.stackexchange.com/a/218550>).
- Bishop, Gary, and Greg Welch. "An introduction to the Kalman filter." Proc of SIGGRAPH, Course 8.27599-3175 (2001): 59.
- Kalman Filter Simulation, [https://www.cs.utexas.edu/~teammco/misc/kalman\\_filter/](https://www.cs.utexas.edu/~teammco/misc/kalman_filter/) ([https://www.cs.utexas.edu/~teammco/misc/kalman\\_filter/](https://www.cs.utexas.edu/~teammco/misc/kalman_filter/)).