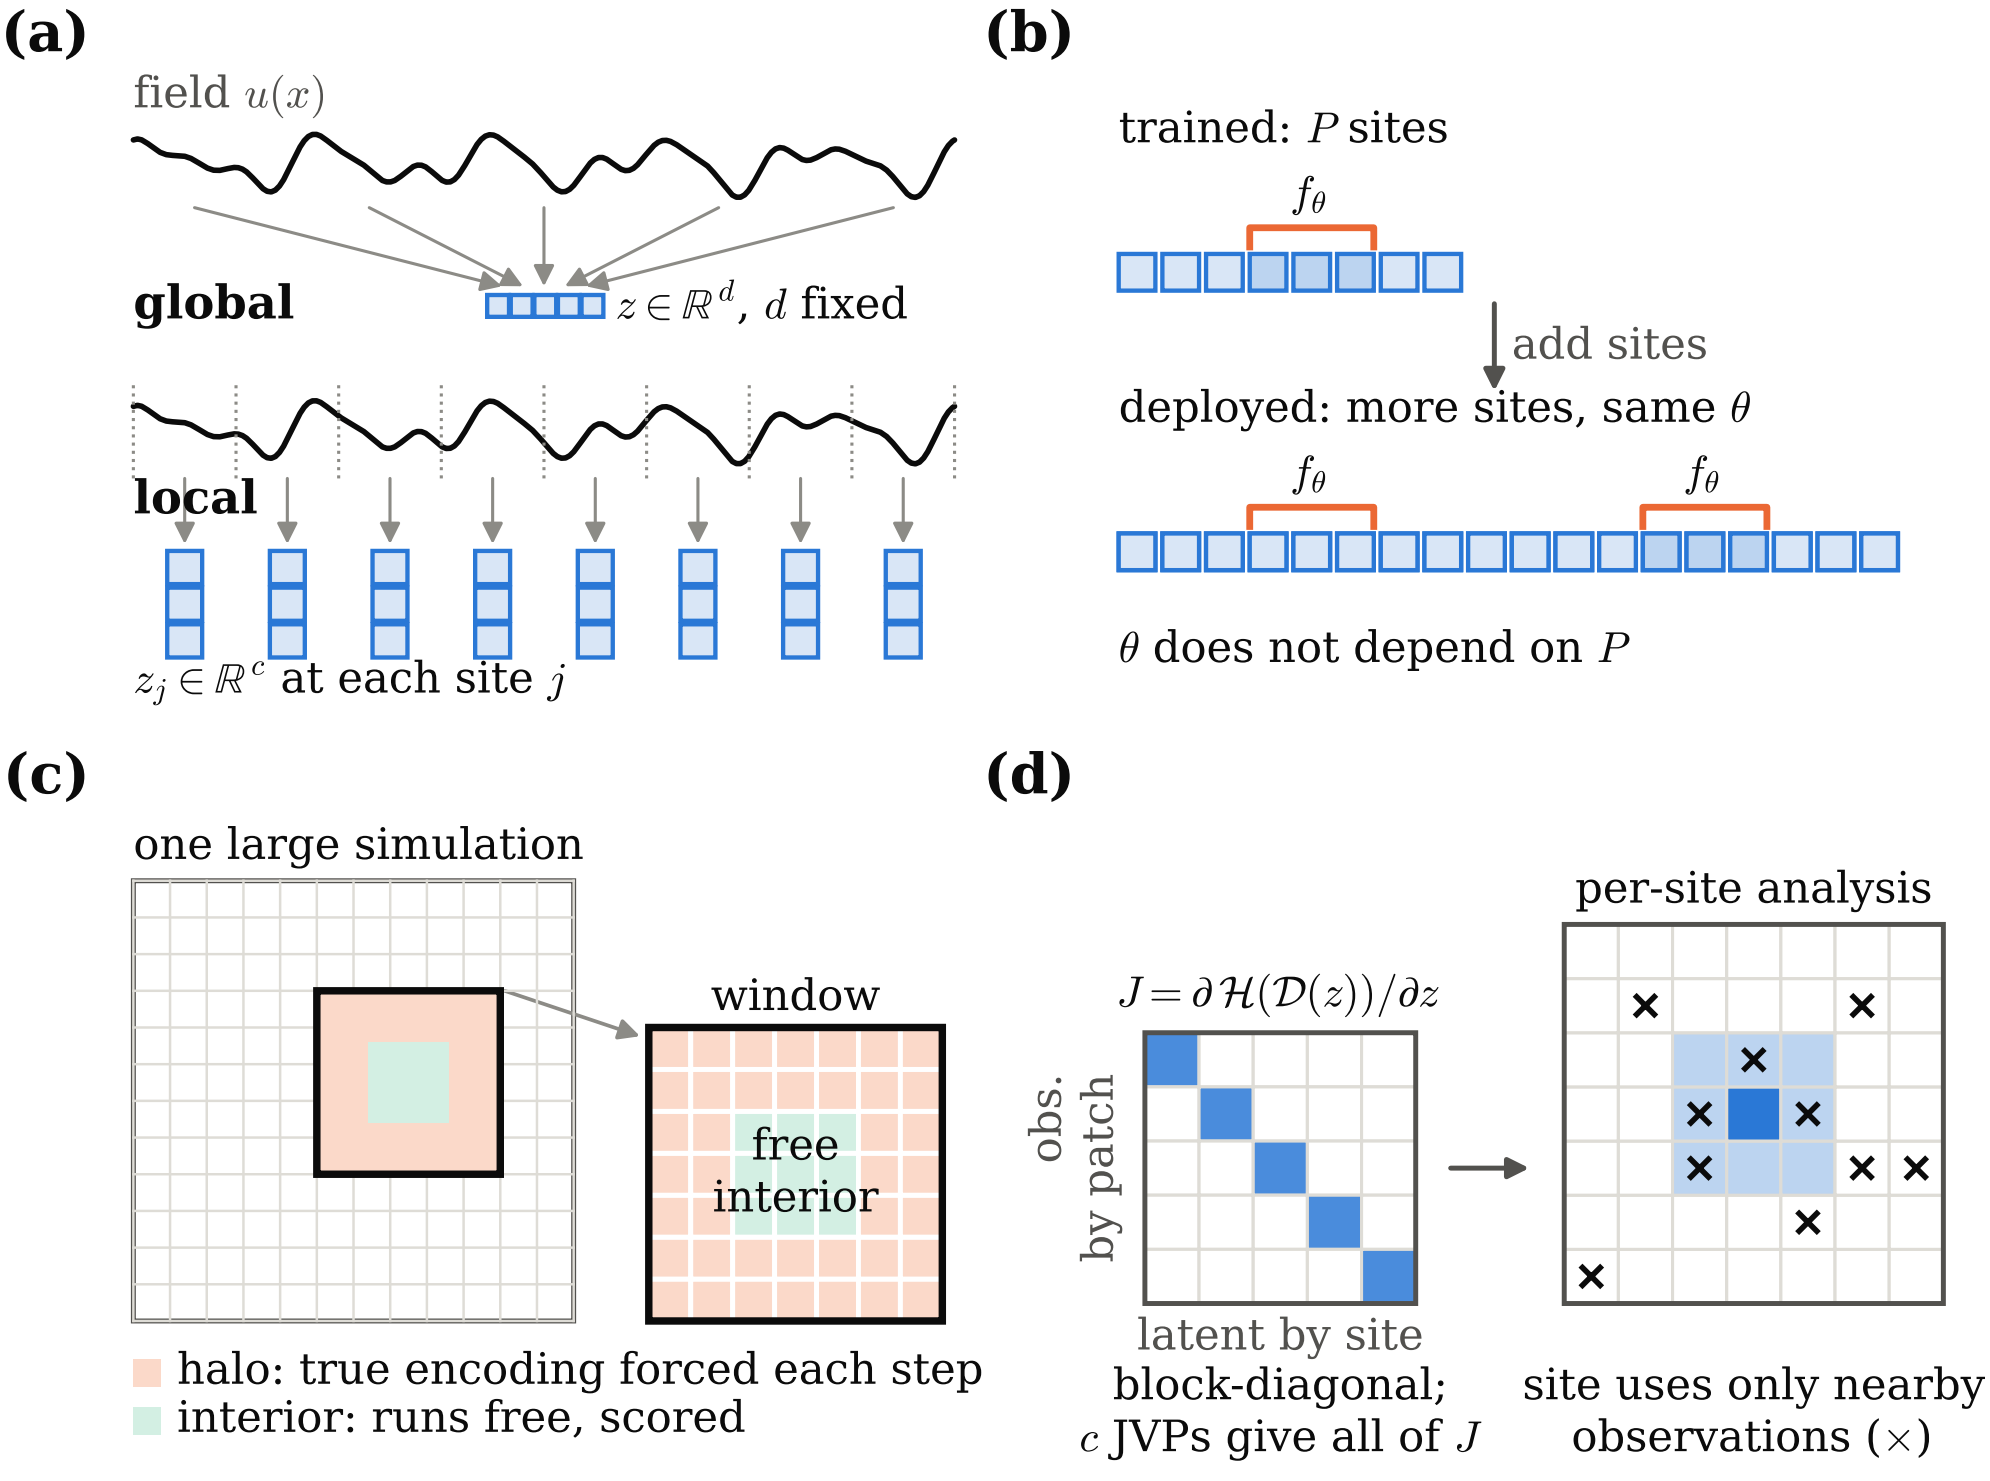
(a)
field $u(x)$
global
$z \in \mathbb{R}^d$, d fixed
local
$z_j \in \mathbb{R}^c$ at each site j
(b)
trained: P sites
f_θ
add sites
deployed: more sites, same θ
f_θ
f_θ
θ does not depend on P
(c)
one large simulation
window
free
interior
halo: true encoding forced each step
interior: runs free, scored
(d)
$J = \partial\,\mathcal{H}(\mathcal{D}(z))/\partial z$
obs.
by patch
latent by site
block-diagonal;
c JVPs give all of J
per-site analysis
site uses only nearby
observations (×)