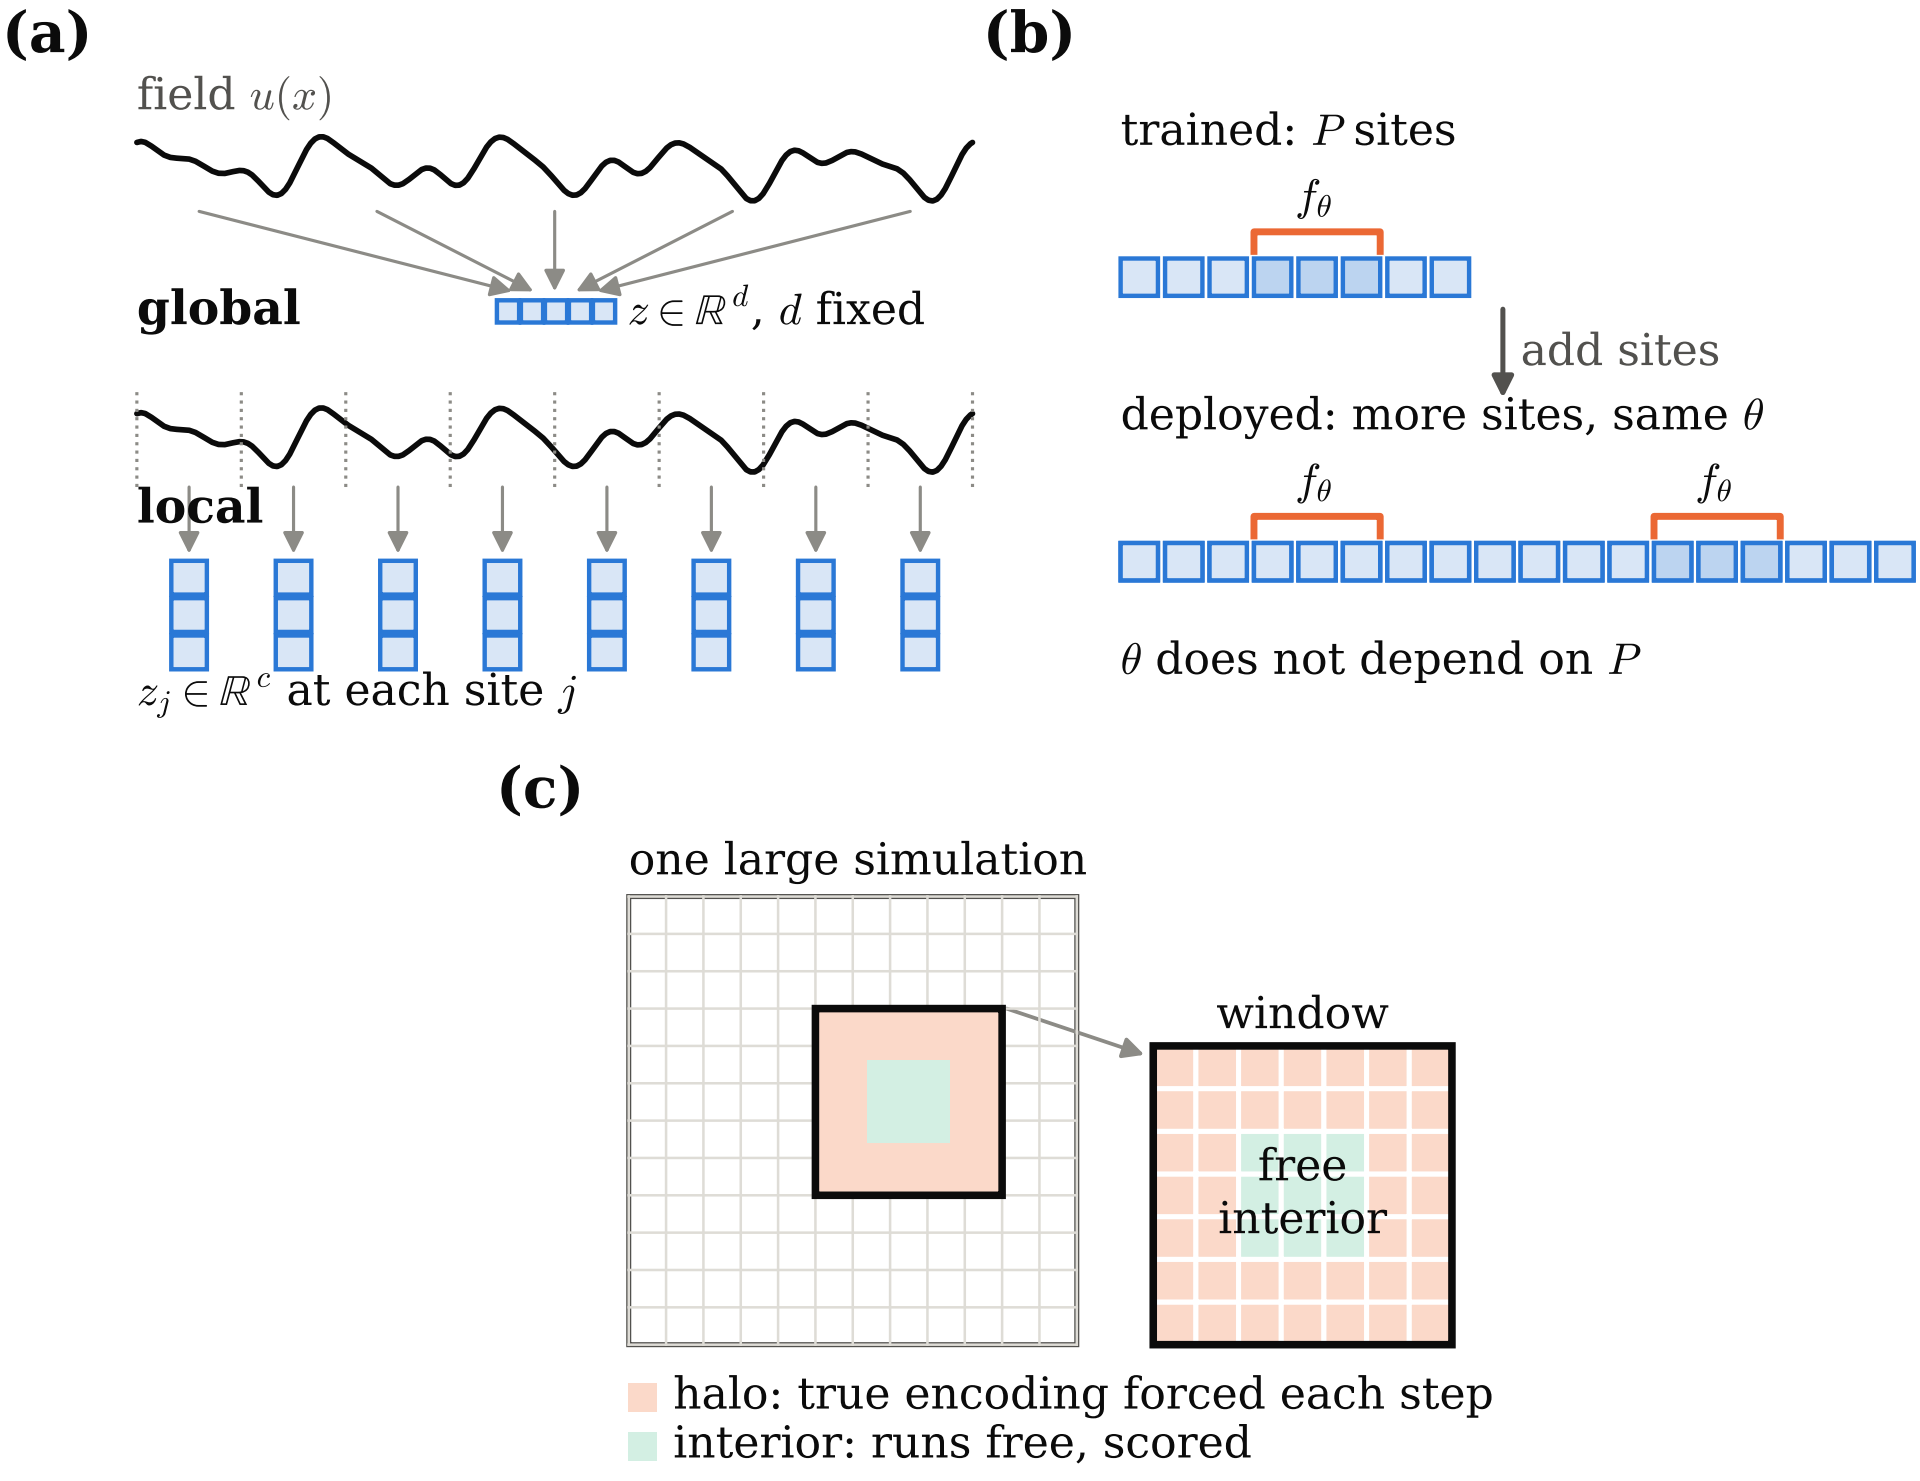
(a)
field $u(x)$
global
$z \in \mathbb{R}^d$, d fixed
local
$z_j \in \mathbb{R}^c$ at each site j
(b)
trained: P sites
f_θ
add sites
deployed: more sites, same θ
f_θ
f_θ
θ does not depend on P
(c)
one large simulation
window
free
interior
halo: true encoding forced each step
interior: runs free, scored