ARAMARK Campus Services POS Interface

XML interfaces

ARAMARK Confidential

Prepared by
Campus Services IT

April 1, 2026

Overview

Campus Services IT has developed an open interface standard for interaction between third party POS devices and POS systems. This open interface uses Web Services and XML to transfer POS transactions between the POS application/device and the Campus Services Relay Transaction Server. The Relay Transaction Server then redirects the transmission to the appropriate POS system for processing and responds back to the application/device with the POS response. The benefit of using this open interface is that communication to multiple POS systems can be made using this one interface specification. This document outlines the interfaces that are available and the security settings.

Security Overview

Security is a major concern for ARAMARK Campus Services. For this reason, we have implemented Triple DES encryption between the POS application and our Relay Transaction Server. Triple DES is a symmetric encryption algorithm and works using two pieces of data, a key and an initialization vector. These two items are combined and used with the data to be encrypted to create the cipher text. This cipher text can only be decrypted using the key and initialization vector used to encrypt the original data.

The Relay Transaction Server will use the appropriate encryption method for the POS System. A unique Triple DES encryption algorithm will be setup for each POS application/device accessing the Relay Transaction Server.

For security considerations, future releases of this transaction specification will result in the expiration of the Triple DES encryption key. These keys will then need to be resynchronized between the POS application/device and the Relay Transaction Server.

Transaction Specification

The transactions currently supported by our Relay Transaction Server are detailed below. These Transaction specifications are designed to interact between multiple POS system but use a standard XML schema for delivery of the information. Some information may not be available depending on the POS solution the Relay Transaction Server is processing the data though.

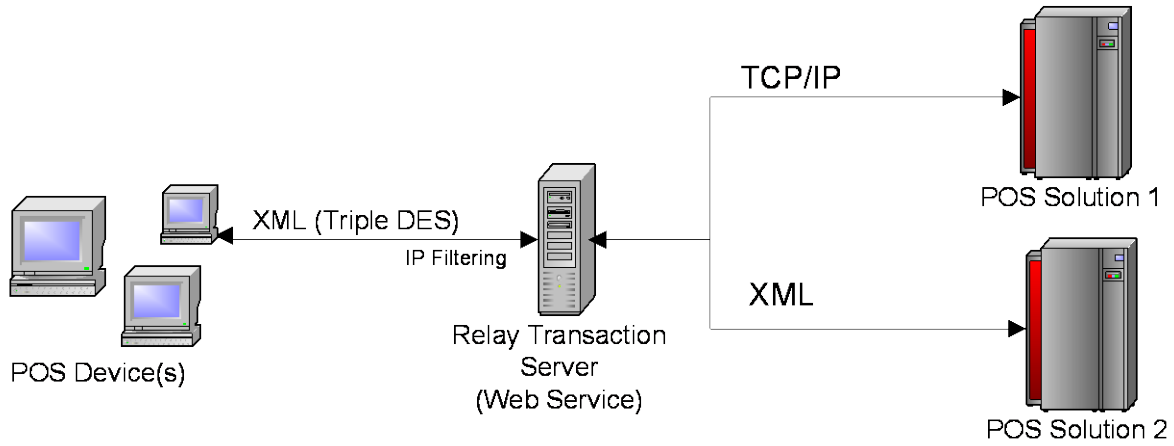

Inquiry Transaction Specification

The Inquiry method allows for inquires to be requested to the POS system. These requests will use ARAMARK's standard XML schema to deliver the data to the Relay Transaction Server. An XML response will be sent back with the detailed information below. Please see the XML schema definitions at the end of this document for more information. Inquiry transactions are always online, so the Offline tag must be set to FALSE.

Request/ Response	Tag	Name	Description	Encrypted	Required
Request	POSLOG	Account	Account Name ** Must be same name as setup on Relay Transaction Server & relates to a POS device.		*
Request	Transaction	BeginDatetimeStamp	Beginning Date and Time that the Transaction was Started.		*
Request	Transaction	EndDateTimeStamp	Ending Date and Time that the Transaction was Started, USE BeginDatetimeStamp if not available.		*
Request	Transaction	OperatorID	Operation Number from system sending over request.	Y	*
Request	Transaction	TransactionTypeCode	"INQUIRY"	Y	*
Request	Transaction	TransactionID	TransactionID for the inquiry statement.	Y	
Request	Transaction	RevenueCenterID	Optional Field to record transactions to a Revenue Center	Y	
Request	Transaction	OffLine	"FALSE"	Y	*
Request	Inquiry	CustomerID	Customer Account Number	Y	*
Response	Transaction	DateTimeStamp	Date & Time of the Transaction		*
Response	Transaction	TransactionTypeCode	"INQUIRY"	Y	*
Response	Transaction	Status	Status of transaction.	Y	*
Response	Transaction	StatusCode	Transaction success	Y	*
Response	Transaction	ResponseMessage	Response message from POS System	Y	
Response	Transaction	ResponseText	Response Text from POS system	Y	
Response	Customer	CustomerID	Customer Card Number	Y	*
Response	Customer	CustomerIssueID	Customer Card Number Issue Number	Y	
Response	Customer	FirstName	FirstName of Customer	Y	
Response	Customer	LastName	LastName of Customer	Y	

Response	Customer	Amount	Amount on Customer Account.	Y	*
Response	TaxLines	TaxAuthority	Number of Tax	Y	*
Response	TaxLines	UseTax	TRUE or FALSE	Y	*

Inquiry Transaction Specification Request

Below is an example of a inquiry transaction to a ScanPlus POS system.
** Encryption is not enabled for this example.

```
<POSLOG>
  <Account>DEVICE_1</Account>
   <Transaction>
        <BeginDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</BeginDateTimeStamp>
        <EndDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</EndDateTimeStamp>
        <OperatorID>1</OperatorID>
        <TransactionTypeCode>INQUIRY</TransactionTypeCode>
        <TransactionID>00001</TransactionID>
        <RevenueCenterID>9999</RevenueCenterID>
        <OffLine>False</OffLine>
      <Inquiry>
            <CustomerID>000000001</CustomerID>
      </Inquiry>
   </Transaction>
</POSLOG>
```

Below is an example of an inquiry response from a ScanPlus POS System.
** Encryption is not enabled for this example.

```
 <POSResponse>
    <Transaction>
        <DateTimeStamp>2004-04-14T10:13:45.0000000-04:00</DateTimeStamp>
        <TransactionTypeCode>INQUIRY</TransactionTypeCode>
        <Status>Valid</Status>
        <StatusCode>0</StatusCode>
        <ResponseMessage>Customer Balance is 500.00</ResponseMessage>
        <ResponseText />
       <Customer>
            <CustomerID>11111111</CustomerID>
            <CustomerIssueID>01</CustomerIssueID>
            <FirstName>First</FirstName>
            <LastName>Name</LastName>
            <Amount>500.00</Amount>
            <Tax>
                <Tax>
                    <TaxAuthority>1</TaxAuthority>
                    <UseTax>TRUE</UseTax>
                </Tax>
            </Tax>
        </Customer>
      </Transaction>
  </POSResponse>
```

Declining Balance Transaction Specifications

The Declining Balance transaction method allows for debits to be deducted from a customers account. These requests will use ARAMARK's standard XML schema to deliver the data to the Relay Transaction Server. An XML response will be sent back with the detailed information below. Please see the XML schema definitions at the end of this document for more information.

Request/ Response	Tag	Name	Description	Encrypted	Required
Request	POSLOG	Account	Account Name ** Must be same name as setup on Relay Transaction Server. Relates to a POS device.		*
Request	Transaction	BeginDatetimeStamp	Beginning Date and Time that the Transaction was Started.		*
Request	Transaction	EndDateTimeStamp	Ending Date and Time that the Transaction was Started, USE BeginDatetimeStamp if not available.		*
Request	Transaction	OperatorID	Operator ID for this transaction.	Y	*
Request	Transaction	TransactionTypeCode	"DECLININGBALANCE"	Y	*
Request	Transaction	TransactionID	TransactionID for the declining balance request.	Y	
Request	Transaction	RevenueCenterID	Optional Field to record transactions to a Revenue Center	Y	
Request	Transaction	OffLine	Offline = "FALSE" Online = "TRUE"	Y	*
Request	DecliningBalance	CustomerID	Customer Card Number	Y	*
Request	DecliningBalance	Amount	Amount to be deducted from the customers Account	Y	*
Response	Transaction	DateTimeStamp	Date & Time of the Transaction		*
Response	Transaction	TransactionTypeCode	"DECLININGBALANCE"	Y	*
Response	Transaction	Status	Status of transaction.	Y	*
Response	Transaction	StatusCode	Transaction success	Y	*
Response	Transaction	ResponseMessage	Response message from POS System	Y	
Response	Transaction	ResponseText	Response Text from POS system	Y	
Response	Customer	CustomerID	Customer Card Number	Y	*
Response	Customer	CustomerIssueID	Customer Card Number Issue Number	Y	
Response	Customer	FirstName	FirstName of Customer	Y	
Response	Customer	LastName	LastName of Customer	Y	
Response	Customer	Amount	New Balance on Student Acount.	Y	*

Recommend Practices:

These practices are recommended so that you can verify the transactions have been successfully completed in your application.

Campus Services IT recommends that prior to a declining balance transaction, you first perform a Inquiry Transaction to verify the student's balance. This will initially verify that your connection to ScanPlus is online.

Below is an example of a Declining Balance request to a ScanPlus POS System.
** Encryption is not enabled for this example.

```
<POSLOG>
  <Account>DEVICE_1</Account>
  <Transaction>
    <BeginDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</BeginDateTimeStamp>
    <EndDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</EndDateTimeStamp>
    <OperatorID>1</OperatorID>
    <TransactionTypeCode>DECLININGBALANCE</TransactionTypeCode>
    <TransactionID>00001</TransactionID>
    <RevenueCenterID>9999</RevenueCenterID>
    <OffLine>False</OffLine>
```

```
      <DecliningBalance>
          <CustomerID>000000001</CustomerID>
          <Amount>5.60</Amount >
        </DecliningBalance>
    </Transaction>
  </POSLOG>
```


Below is an example of a Declining Balance response from a ScanPlus POS System.
** Encryption is not enabled for this example.


```
<POSResponse>
  <Transaction>
      <DateTimeStamp>2004-04-14T10:13:45.0000000-04:00</DateTimeStamp>
      <TransactionTypeCode>DECLININGBALANCE</TransactionTypeCode>
      <Status>Valid</Status>
      <StatusCode>0</StatusCode>
      <ResponseMessage>Customer Balance is 500.00</ResponseMessage>
      <ResponseText />
     <Customer>
        <CustomerID>11111111</CustomerID>
        <CustomerIssueID>01</CustomerIssueID>
        <FirstName>First</FirstName>
        <LastName>Name</LastName>
        <Amount>500.00</Amount>
      </Customer>
    </Transaction>
  </POSResponse>
```

Credit Transaction Specifications

The Credit transaction method allows for credits/refunds to be placed onto a customers account.. An XML response will be send back with the detailed information below. In validating the data, a check should first be made to the Status field to verify that the transaction was successful.

Request/ Response	Tag	Name	Description	Encrypted	Required
Request	POSLOG	Account	Account Name ** Must be same name as setup on Relay Transaction Server. Relates to a POS device.		*
Request	Transaction	BeginDatetimeStamp	Beginning Date and Time that the Transaction was Started.		*
Request	Transaction	EndDateTimeStamp	Ending Date and Time that the Transaction was Started, USE BeginDatetimeStamp if not available.		*
Request	Transaction	OperatorID	Operator ID for this transaction.	Y	*
Request	Transaction	TransactionTypeCode	"CREDIT"	Y	*
Request	Transaction	TransactionID	TransactionID for the credit transaction.	Y	
Request	Transaction	RevenueCenterID	Optional Field to record transactions to a Revenue Center	Y	
Request	Transaction	OffLine	Offline = "FALSE" Online = "TRUE"	Y	*
Request	Credit	CustomerID	Customer Card Number	Y	*
Request	Credit	Amount	Amount to be Credited to the customers account.	Y	*
Response	Transaction	DateTimeStamp	Date & Time of the Transaction		*
Response	Transaction	TransactionTypeCode	"CREDIT"	Y	*
Response	Transaction	Status	Status of transaction.	Y	*
Response	Transaction	StatusCode	Transaction success	Y	*
Response	Transaction	ResponseMessage	Response message from POS System	Y	
Response	Transaction	ResponseText	Response Text from POS system	Y	
Response	Customer	CustomerID	Customer Card Number	Y	
Response	Customer	CustomerIssueID	Customer Card Number Issue Number	Y	*
Response	Customer	FirstName	FirstName of Customer	Y	
Response	Customer	LastName	LastName of Customer	Y	
Response	Customer	Amount	New Balance on Student Acount.	Y	

Recommend Practices:

These practices are recommended so that you can verify the transactions have been successfully completed in your application.

Campus Services IT recommends that prior to a credit transaction, you first perform a inquiry transaction to verify the student's balance.

Below is an example of a Credit request to a ScanPlus POS System.
** Encryption is not enabled for this example.

```
<POSLOG>
   <Account>DEVICE_1</Account>
  <Transaction>
      <BeginDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</BeginDateTimeStamp>
      <EndDateTimeStamp>2004-04-14T10:13:45.0000000-04:00</EndDateTimeStamp>
      <OperatorID>1</OperatorID>
      <TransactionTypeCode>CREDIT</TransactionTypeCode>
      <TransactionID>00001</TransactionID>
      <RevenueCenterID>9999</RevenueCenterID>
      <OffLine>False</OffLine>
     <Credit>
```

```
        <CustomerID>000000001</CustomerID>
        <Amount>5.00</Amount>
      </Credit>
    </Transaction>
  </POSLOG>
```


Below is an example of a Credit response from a ScanPlus POS System.
** Encryption is not enabled for this example.


```
<POSResponse>
  <Transaction>
      <DateTimeStamp>2004-04-14T10:13:45.0000000-04:00</DateTimeStamp>
      <TransactionTypeCode>CREDIT</TransactionTypeCode>
      <Status>Valid</Status>
      <StatusCode>0</StatusCode>
      <ResponseMessage>Customer Balance is 500.00</ResponseMessage>
      <ResponseText />
     <Customer>
        <CustomerID>11111111</CustomerID>
        <CustomerIssueID>01</CustomerIssueID>
        <FirstName>First</FirstName>
        <LastName>Name</LastName>
        <Amount>500.00</Amount>
      </Customer>
    </Transaction>
  </POSResponse>
```

ARAMARK – POS Interfaces

The following Schema is defined to assist third party venders in the development of transacting between the ARAMARK Campus Services Relay Transaction Server and the POS system.

Element	Definition
POSLog	The record of all activity that is performed at a POS by an operator.

POSLog

Tag	Type	Definition
POSLog	struct	Root element of POSLog.
Account	string	ARAMARK Relay Transaction server code to determine which POS Solution to relay the transaction to.
Transaction	struct	A single Transaction that's arrived from a POS.

Transaction

Tag	Type	Definition
Transaction	struct	A single Transaction that's arrived from a POS.
BeginDateTimestamp	string	The time and date a transaction is initiated.
EndDateTimestamp	string	The time and date a transaction is completed.
* OperatorID	string	A unique, automatically assigned number used to identify a workstation OPERATOR.
* TransactionTypeCode	string	A code to denote the type of TRANSACTION, eg RETAIL, BOARD, INQUIRY, DECLININGBALANCE, CASHEQUIVALENCY, CREDIT
* TransactionID	string	A Unique Identifier for a transaction. * Restrictions apply for each POS System.
* RevenueCenterID	string	Identifier for the RevenueCenter to which this transaction is to be credited.
Retail Transaction	struct	A subtype of transaction that records the sale & return of merchandise & services with customers.
Board	struct	A subtype of transaction that records the use of a Board transaction with customers. (non-monetary)
Inquiry	struct	A subtype of transaction that requests an Inquiry of a customer.
Declining Balance	struct	A subtype of transaction that records the use of a Declining Balance amount with a customer.
Cash Equivalency	struct	A subtype of transaction that requests the Cash Equivalency for a customer.
Credit	struct	A subtype of transaction that requests a Credit to put onto a customers account.
Offline	String	Value to determine if the Tender is Offline on a transaction TRUE, FALSE

Declining Balance

Tag	Type	Definition
BecliningBalance	struct	A subtype of transaction that deducts a value from an account for a customer in a value stored account.
* CustomerID	string	A unique identifier for the customer that conducted the Declining Balance.
* Amount	string	The total amount to be deducted from the store valued customer account.

Credit

Tag	Type	Definition
Credit	struct	A subtype of transaction that records a Credit to a customers account.
* CustomerID	string	A unique identifier for the customer.

* Amount	string	The total amount to be credited to the customers account.

Inquiry

Tag	Type	Definition
Inquiry	struct	A subtype of transaction that records the request of an inquiry for a particular customer.
* CustomerID	string	A unique identifier for the customer that conducted the Inquiry.

POS Responses

The following Schema RootElements are defined in the XML Dictionary to assist in navigation.

Element	Definition
POSResponse	POS Responses

POSResponse

Tag	Type	Definition
POSresponse	struct	Root element of POSResponse.
Transaction	struct	A single Transaction that's been responded to from a POS.

Transaction

Tag	Type	Definition
Transaction	struct	Subtype of POSResponse
DateTimeStamp	String	A single Transaction that's been responded to from a POS.
TransactionTypeCode	string	INQUIRY, DECLININGBALANCE, CASHEQUIVALENCY, BOARD
* Status	string	Transaction success code (Valid, InValid, UnKnown, NotRegistered)
* StatusCode	string	POS Transaction response code
* ResponseMessage	string	POS message, Potentially for Customer.
* ResponseText	string	POS Text / Error Messages
* Customer	string	Subtype of Transaction that this transaction relates to

Customer

Tag	Type	Definition
Customer	struct	Subtype of Transaction
* CustomerID	String	Customer Card Number
* CustomerIssueID	String	Customer Card Number Issue Number
* FirstName	String	Customer First name
* LastName	String	Customer Last name
* Amount	String	Customer Account Balance
*TaxLines	struct	Structure of TaxLines

TaxLines

Tag	Type	Definition
TaxAuthorityID	String	TaxNumber
UseTax	String	TRUE or FALSE value if tax is used.