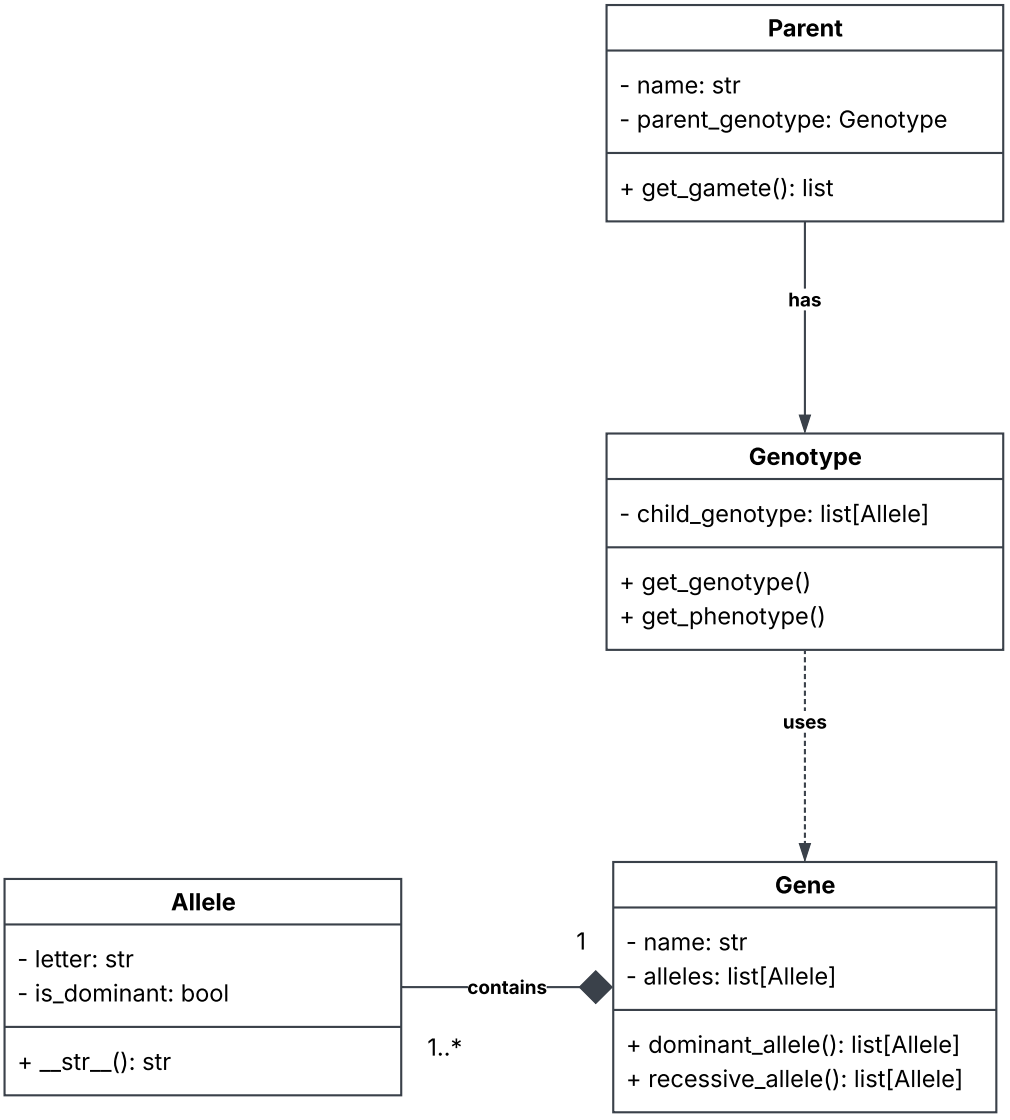
Parent
- name: str
- parent_genotype: Genotype
+ get_gamete(): list
has
Genotype
- child_genotype: list[Allele]
+ get_genotype()
+ get_phenotype()
uses
Gene
- name: str
- alleles: list[Allele]
+ dominant_allele(): list[Allele]
+ recessive_allele(): list[Allele]
1
contains
1..*
Allele
- letter: str
- is_dominant: bool
+ __str__(): str