PriceRadar — project summary

What it is, what was built in the 10 days, how to test it yourself, and what is left. 4 November 2026.


1. The idea


You are at a flea market and a seller wants 600 dinars for *Prokleta avlija*. Is that cheap, fair or expensive? The answer exists, but it is scattered across hundreds of marketplace listings written in a dozen ways ("PROKLETA AVLIJA - Ivo Andric, kao nova", "Проклета авлија"), with no ISBN, and the sites never say what sold.


PriceRadar collects those listings into a small **data warehouse**, works out which listings are the **same book**, keeps the **price history**, and answers the question from your phone in about 20 ms. It is a portfolio project, so the real goal is to show professional backend work with evidence: a written spec, a clean architecture, measured SQL optimisation, honest matching quality numbers, tests against a real database, CI and documented debugging.


2. What it does

Part	What happens
Ingestion pipeline (Hangfire)	`POST /api/ingestion/runs` queues a run. Four jobs follow: **Scrape** (read listings into a staging table with `SqlBulkCopy`), **Match** (attach each listing to a book), **Resolve** (ask Claude about the unclear ones), **Load** (MERGE into the warehouse, one price snapshot per listing per run). Every step can be retried or repeated without creating duplicates.
Matching	Normalises text (Cyrillic → Latin, diacritics, noise words like "kao nova", years, roman volume numbers), finds candidate books, scores `0.7·title + 0.3·author`. ≥ 0.90 → automatic match; < 0.65 → new book; in between → Claude API, cached so each distinct string is asked at most once, with a budget cap.
Sold proxy	A listing missing from two runs in a row is marked *Disappeared*. Probably sold, but not certain, and the app says so.
Verdict	`GET /api/lookup` compares your price with the 25th–75th percentile of the last 30 days: **cheap / fair / expensive**, or *not enough data* below 3 listings.
Phone page	`http://localhost:5080/`: three fields, a big coloured verdict, the stats behind it, a "which book?" step when the match is unclear.
REST API	Books, stats, price history, ingestion runs; RFC 9457 error responses, API key for writes, rate limits, health checks, OpenAPI/Scalar.

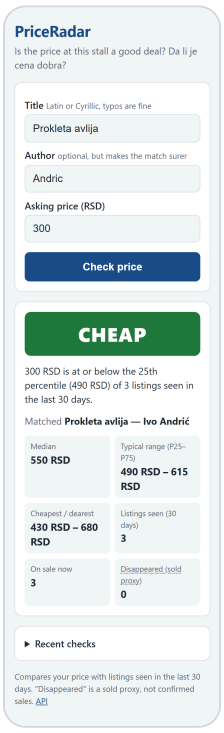

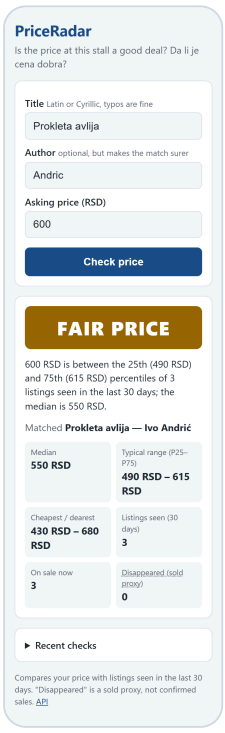

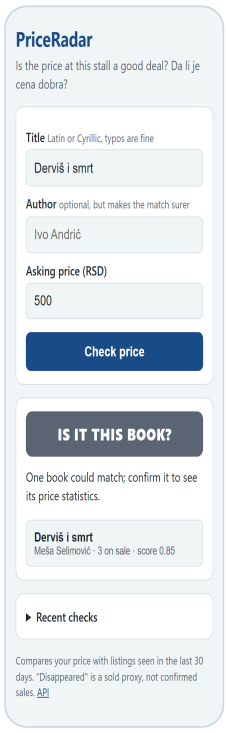

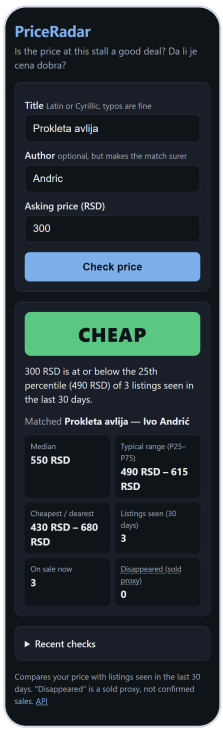

3. What was done, day by day

Day	Delivered	Key evidence
1	Solution skeleton (Core / Infrastructure / Api / Worker), EF Core schema with 4 schemas, SQL Server in Docker	Migrations apply; health check
2	Fixture sources (incl. KP-style fixtures), bulk staging writer, synthetic seeder	500k snapshots in ~15 s, reproducible with `--seed 42`
3	Hangfire pipeline, normaliser, warehouse load, sold heuristic	Re-running a run inserts nothing
4	Stats stored procedures, Dapper queries, Testcontainers tests, baseline benchmark	Integration tests on real SQL Server 2022
5	REST API: books, stats, lookup verdict, API key, rate limits, ProblemDetails	`.http` file, OpenAPI document
6	SQL optimisation with measured before/after	Stats 6,809 → 49 reads; lookup p95 145.9 → 18.5 ms
7	Fuzzy matching, 169-row golden set, Claude resolver with cache and budget	100 % precision, 88.7 % recall
8	Architecture tests, full CI (gitleaks, format, tests + coverage, Docker), correlation ids, debugging log	221 tests, 94.7 % line coverage
9	Phone lookup page, full README, AI-usage log, MIT licence	Lighthouse accessibility 100
10	Clean-clone rehearsal, CV bullets with real numbers, final polish	Fresh clone running in ~2.5 min

Final numbers: 186 unit + 35 integration tests, all green · line coverage 94.7 % (Core 87.3 %) · hot-book stats 5 ms / 49 reads on 500k rows · lookup p95 18.5 ms at 838 req/s · matching precision 100 %, recall 88.7 % · 0 build warnings, `dotnet format` clean.

4. How to test it yourself

You need **Docker Desktop** (running) and the **.NET 9 SDK**. Open PowerShell in the repository folder.

Step 1: start the stack (first time ~2 minutes):

```
Copy-Item .env.example .env          # only the first time; your existing .env is fine too
docker compose up -d --build
curl.exe -s http://localhost:5080/health/ready      # "Healthy" once the Worker is up
```

Step 2: run the pipeline on fixture data, then watch it at http://localhost:5080/hangfire:

```
curl.exe -s -X POST http://localhost:5080/api/ingestion/runs -H "X-Api-Key: dev-key" -H "Content-Type:
application/json" -d '{\"source\":\"fixture\",\"fixtureSet\":\"run-001\"}'
curl.exe -s http://localhost:5080/api/ingestion/runs      # wait for "succeeded", then repeat with run-002 and run-003
```

(Your existing database already contains these runs and the 500k-row synthetic data, so you can skip this step. A new run with the same fixture set is refused while another run of that source is active.)

Step 3: use the phone page. Open http://localhost:5080/ and try:

Title	Author	Price	Expected
Prokleta avlija	Andric	300	**Cheap**
Prokleta avlija	Andric	600	**Fair price**
Prokleta avlija	Andric	1500	**Expensive**
Проклета авлија	Андрић	450	Cheap (Cyrillic works)
Derviš i smrt	*(empty)*	500	"Is it this book?" → tap the candidate → Fair price

From your phone on the same Wi-Fi: `ipconfig` shows your PC's IPv4 address; open `http://<that-ip>:5080/` (Windows may ask to allow port 5080 through the firewall).

Step 4: run the tests (Docker must be running for the integration tests):

```
dotnet test -c Release          # expect 186 + 35 passed
```

Step 5: look at the evidence. `README.md` (overview and numbers), `docs/benchmarks/BENCHMARKS.md` (SQL before/after with plans), `docs/debugging.md` (six real incidents), `docs/ai-usage.md` (nine AI mistakes and how they were caught), `docs/spec/PriceRadar-Spec.pdf` (the full specification).

Step 6: stop it. `docker compose stop` (keeps the data) or `docker compose down -v` (deletes the database).

5. What is left

These need you, because they publish things or depend on your accounts:

1. **Push to GitHub.** Days 8–10 and this summary are committed locally only (`git status` shows how far `main` is ahead of `origin/main`). Pushing runs the new three-job CI for the first time: check that the `lint`, `build-test` and `docker` jobs go green, and that the README's CI badge shows *passing*. CI on GitHub has not been verified yet.
2. **Tag `v1.0.0` and publish a release** after CI is green; pin the repository and add topics.
3. **Try it on a real phone** over Wi-Fi (only tested at 360 px in a phone-sized browser so far).
4. **Enable Claude resolution** if you want it: put an Anthropic API key in `.env` as `ANTHROPIC_API_KEY` (never commit it). No real Claude call has been made yet; the resolver is covered by tests with a stub, so the live cost per run is still unmeasured.
5. **The CV entry and application**: the bullets with real numbers are in spec Appendix B.

Not built, by choice or cut for time:

- **Live Kupindo scraping.** The source is registered but disabled and not implemented (it was the first cut item). All data comes from fixtures and the synthetic generator. KupujemProdajem stays a fixture because its terms forbid copying.
- **Stretch list** (spec §2.4): Azure hosting, a manual match-review endpoint, outlier exclusion, PWA shell, images on GHCR, OpenTelemetry. A demo GIF and a Seq log profile were also left out.

Known quirk: `docker compose stop` ends SQL Server with exit code 137 (it ignores SIGTERM). This is harmless, but identity values may jump by 10,000 after it (see `docs/debugging.md`).