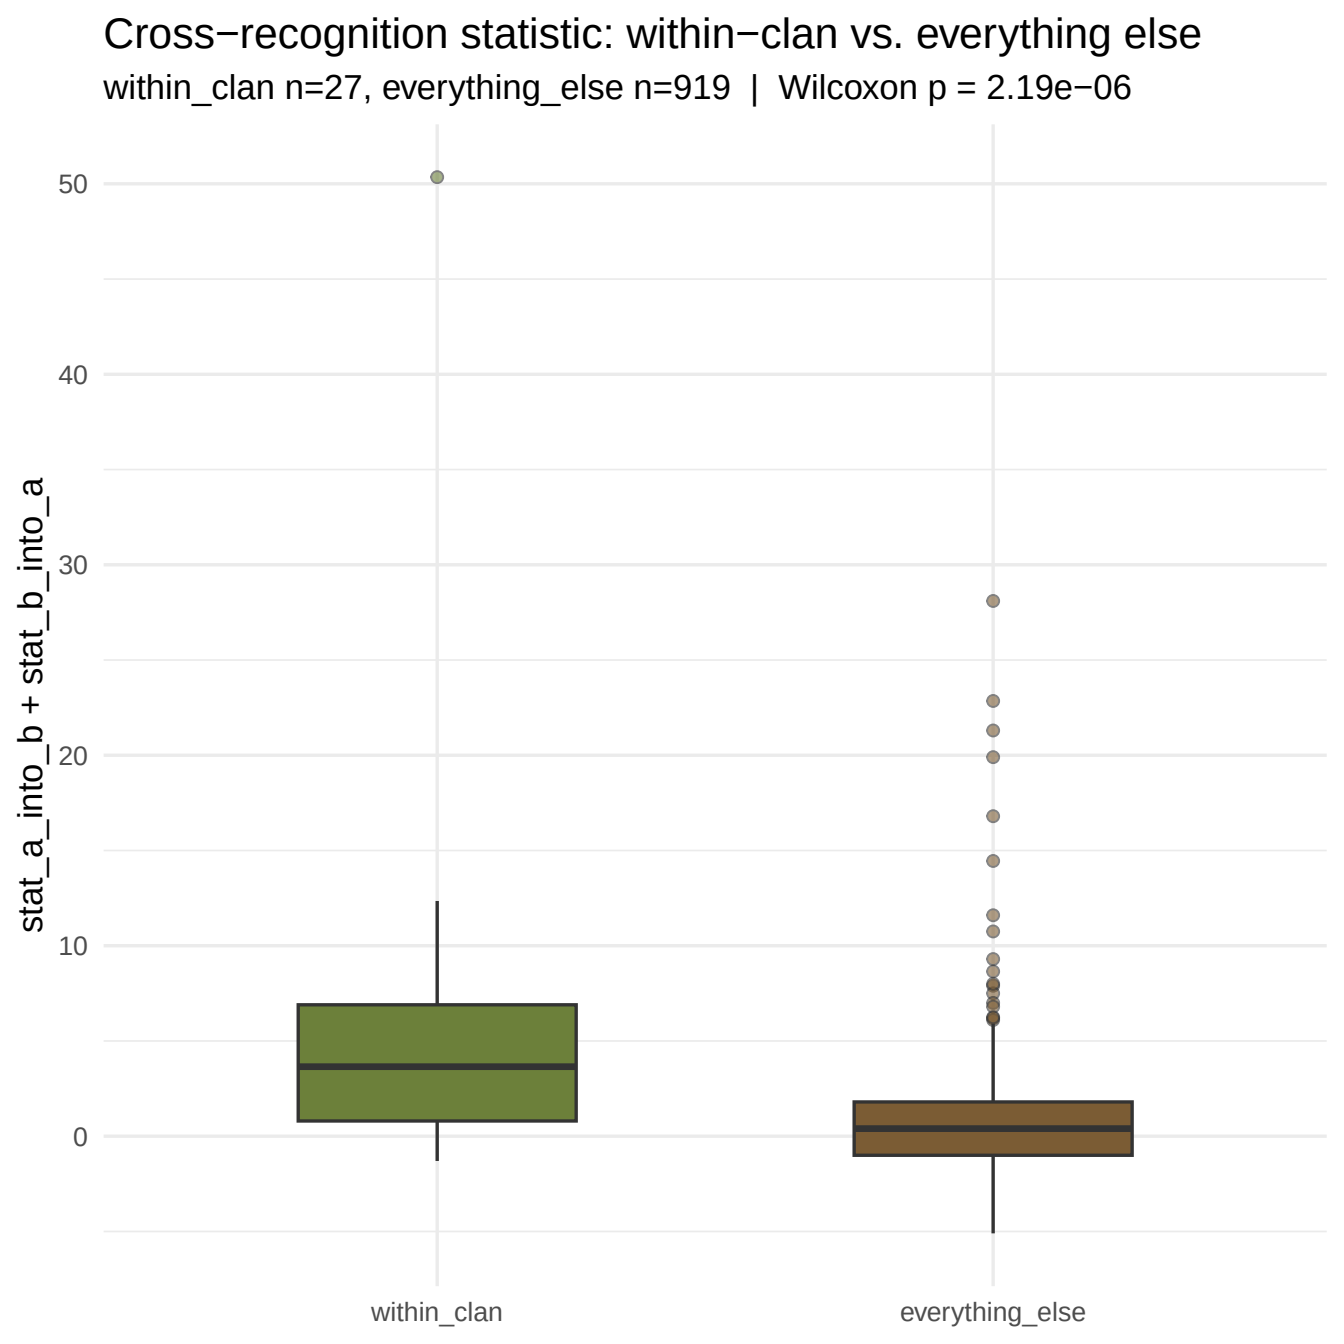
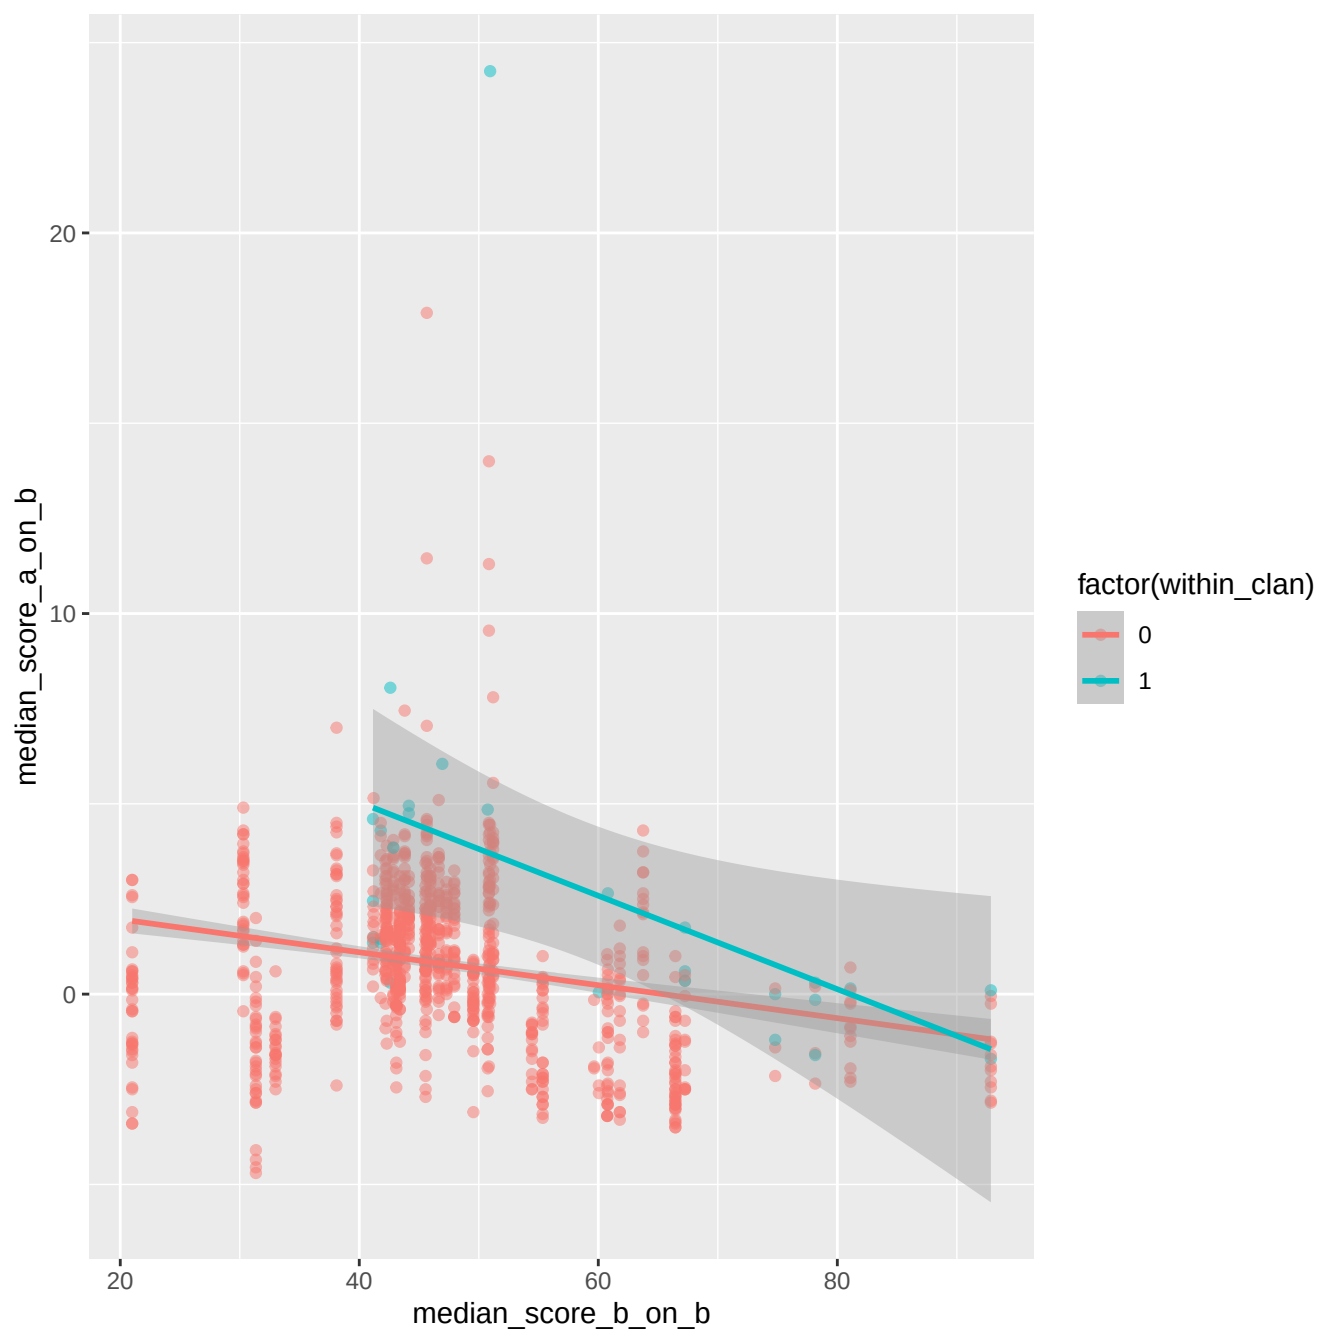

Cross−recognition statistic: within−clan vs. everything else
within_clan n=27, everything_else n=919 | Wilcoxon p = 2.19e−06
stat_a_into_b + stat_b_into_a
50
40
30
20
10
0
within_clan
everything_else


median_score_a_on_b
20
10
0
20
40
60
80
median_score_b_on_b
factor(within_clan)
0
1