


Dr. Forouraghi

CSC 351 D01

Dan Shapovalov

Homework #2

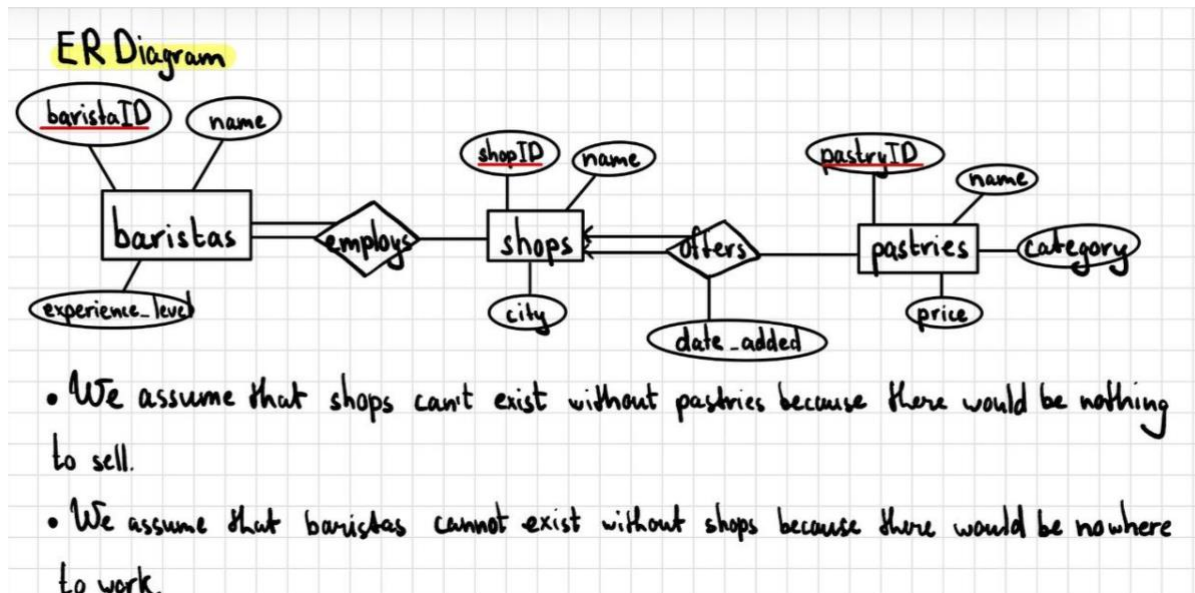

baristas (baristaID (PK), name, experience_level)

shops (shopID (PK), name, city)

employs (baristaID (FK), shopID (FK))

pastries (pastryID (PK), name, category, price)

offers (shopID (FK), pastryID (FK), date_added)

```
5 -- 1) Find the average price of pastries for each category from the pastries table.
6 • select * from pastries;
7
8 • select
9     category,
10     avg(price) as avg_price
11 from pastries
12 group by category
13 order by avg_price desc;
14
```

100% 14:11 2 errors found

Result Grid Filter Rows: Search Export:

category	avg_price
Breakfast	8
Pastry	4.666666666666667
Bakery	4.25
Cake	3.875
Scone	3.85
Muffin	3.625

```

14
15 -- 2) Find the total number of baristas at each experience level from the baristas table.
16 • select * from baristas;
17
18 • select
19     experience_level,
20     count(*) as baristas_count
21 from baristas
22 group by experience_level
23 order by baristas_count desc;

```

100% 30:23 2 errors found

Result Grid Filter Rows: Search Export:

experience_level	baristas_count
Junior	2
Senior	2
Mid-Level	2

```

25 -- 3) Count the total number of shops located in each city from the shops table.
26 • select * from shops;
27
28 • select
29     city,
30     count(*) as shops_count
31 from shops
32 group by city
33 order by shops_count desc;
34

```

100% 27:33 2 errors found

Result Grid Filter Rows: Search Export:

city	shops_count
Seattle	1
Portland	1
Austin	1
Chicago	1
Denver	1
Boston	1

```

35 -- 4) Find the maximum price among pastries for each category from the pastries table.
36 • select * from pastries;
37
38 • select
39     category,
40     max(price) as max_price
41 from pastries
42 group by category
43 order by max_price desc;
44

```

100% 27:33 2 errors found

Result Grid Filter Rows: Search Export:

category	max_price
Breakfast	8.5
Pastry	5.5
Bakery	4.25
Cake	4
Scone	3.85
Muffin	3.75

```

45 -- 5) Count how many pastries have been added by each shop using the shopID column from the offers table.
46 • select * from offers;
47
48 • select
49     shopID,
50     count(pastryID) as pastry_count
51 from offers
52 group by shopID
53 order by pastry_count desc;
54

```

100% 1:54 2 errors found

Result Grid Filter Rows: Search Export:

shopID	pastry_count
1	2
2	2
3	2
4	2
5	2
6	2

```

55 -- 6) Find the name, category, and price of any pastry whose price matches the maximum price within its category.
56 • select
57     name,
58     category,
59     price
60 from pastries p1
61 where price = (
62     select
63         max(price)
64     from pastries p2
65     where p1.category = p2.category
66 )
67 order by price desc;

```

100% 21:67 2 errors found

Result Grid Filter Rows: Search Export:

name	category	price
Breakfast Burrito	Breakfast	8.5
Almond Croissant	Pastry	5.5
Cinnamon Roll	Bakery	4.25
Lemon Loaf	Cake	4
Chocolate Scone	Scone	3.85
Blueberry Scone	Scone	3.85
Blueberry Muffin	Muffin	3.75

Result Grid
Form Editor

```

69 -- 7) Find the unique shop IDs from the offers table that have offered at least one pastry
70 -- whose price is strictly greater than the overall average price of all pastries.
71 • select * from offers;
72 • select * from pastries;
73
74 • select
75     distinct shopID
76 from offers
77 where pastryID in (
78     select
79         pastryID
80     from pastries
81     where price > (select avg(price) from pastries)
82 )

```

100% 6:82 2 errors found

Result Grid Filter Rows: Search Export:

shopID
1
5

Result Grid

```

84 -- 8) Find the shop ID and pastry ID for the records in the offers table that have
85 -- the earliest date_added (minimum date).
86 select * from offers;
87
88 • select
89     shopID,
90     pastryID,
91     date_added
92 from offers
93 where date_added = (
94     select
95         min(date_added)
96     from offers
97 )

```

100% 3:97 2 errors found

Result Grid Filter Rows: Search Export:

shopID	pastryID	date_added
1	1	2026-01-10

Result Grid

```

99 -- 9) Find the shop ID(s) that offer the highest number of pastries, utilizing
100 -- a subquery to evaluate the maximum count per shop.
101 select * from offers;
102
103 • select
104     shopID,
105     count(pastryID) as pastry_count
106 from offers
107 group by shopID
108 having count(pastryID) >= all (
109     select
110         count(pastryID)
111     from offers
112     group by shopID
113 );

```

100% 7:113 2 errors found

Result Grid Filter Rows: Search Export:

shopID	pastry_count
1	2
2	2
3	2
4	2
5	2
6	2

Result Grid

Form Editor

```

115 -- 10) Find the names of baristas who work at shops located in 'Seattle' using nested subqueries.
116 • select * from baristas;
117 • select * from shops;
118 • select * from employs;
119
120 • select
121     name
122 from baristas
123 where baristaID in (
124     select
125         baristaID
126     from employs
127     where shopID in (
128         select
129             shopID
130         from shops
131         where city = 'Seattle')
132 );

```

100% 6:132 2 errors found

Result Grid Filter Rows: Search Export:

name
Emma Watson
Liam Chen

Result Grid