

Frame of Life

Daniel Rosel

October 27, 2021

Contents

1	Introduction	1
2	Mechanics	1
2.1	Periodic Events in Life	2
2.1.1	Determining temporal proximity relative to certain event	2
2.2	Computing the Parameters	2
2.2.1	zero-range events	2
2.2.2	lasting events	3

1 Introduction

Life perceived simply by ones eyes, can be very chaotic, but when carefully analyzed, there are many patterns which depend on each other. To be able to predict behavior and stack patterns, a ground level of behavioral prediction must be established. Our core day-to-day behavior is highly periodic and can be modeled using simple trigonometric functions.

2 Mechanics

Life can be represented as a single line $y = 2$ and events in life as intersections with that line. Each day, can be mapped out by a function such as:

$$d = \cos(\Xi x + \pi) + 1, (10^{-5} \leq \Xi \leq 10^5) \quad (1)$$

In this case Ξ is making the system more or less precise. The noon of each day is where $d \cap y$ and each day ends at $\Xi 2\pi(c)$.

2.1 Periodic Events in Life

Most events in life work on a periodic basis, this can be represented by:

$$s = 1 + \cos\left(\frac{1}{n}x + (\sigma)\pi\right) \quad (2)$$

The above equation can model nearly every even in life.

- n is the frequency (in days) of the event.
- σ is the shift which changes the occurrence of the event in the day n .

2.1.1 Determining temporal proximity relative to certain event

For the implementation of this system in algorithms and neural networks, knowing the proximity of events relative to a certain day (n), a simple optimization algorithm must be used. For zero-range events, the target is finding an x for which $\dot{f}(x)$ is 0 and $f(x) = 2$.

2.2 Computing the Parameters

2.2.1 zero-range events

A 0 range event is an event which simply occurs, but does not last any long period of time. To create a function such that it follows our criteria, we must compute sigma.

$$\sigma = -\frac{\frac{1}{n}x}{\pi} \quad (3)$$

In the above equation, it's variables represent the following:

- n is the frequency of occurrence (in days)
- x is as follows:


$$x = \frac{h}{24} * 2\pi \quad (4)$$

where h is the hour at which the event occurs.

1. **Example** Alice wakes up at 0600 every day. The function for this behavior would look as the following:

$$b = \cos\left(x + \left(\frac{-(\frac{6}{24} * 2\pi)}{\pi}\right)\pi\right) + 1 = \cos\left(x - \frac{1}{4}2\pi\right) + 1 \quad (5)$$

2. **Visualization** Using a Java algorithm, the following is the output of functions compiled given life parameters.

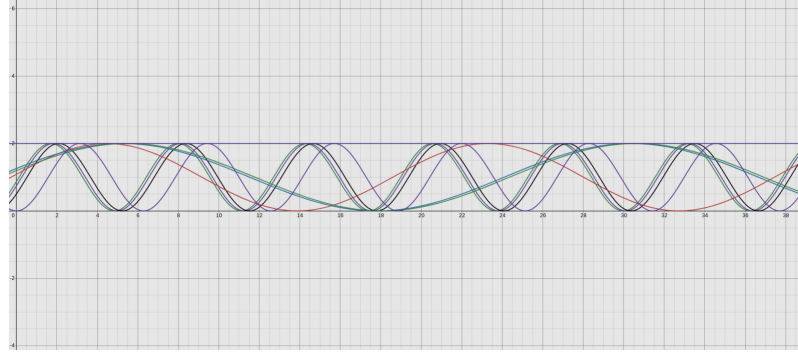

2.2.2 lasting events

Events that have a start and an end, can be represented by a set of 2 zero-range events, one as a marker for the start and the other marking the end. Another potential approach would be to scale the function on the y-axis, creating 2 intercepts with $y = 2$, marking the start and end with just one function.