CARNEGIE MELLON UNIVERSITY APPLIED STOCHASTIC PROCESSES (COURSE 18-751) HOMEWORK 3

Daniel Marew

September 15, 2017

I collaborated with : $\,$

Nebyou Yismaw Daniel Nkemelu Agatha Niwomugizi $\mathbf{Q}\mathbf{1}$

- (a)
- (b)
- (c)

 $\mathbf{Q2}$

- (a)
- (b)
- (c)

Average Number of packets in Buffer	3.36
Fraction of time the buffer is empty	0.33
The fraction of packet Arrivals that are blocked	0.0040

Table 1: Question 3b Answer

Q3 Buffers

(a) for $\lambda=0.1,\,\mu=0.12,\,BufferSize=10$ and NumberOfSteps=1000 we get table?? and figure 1

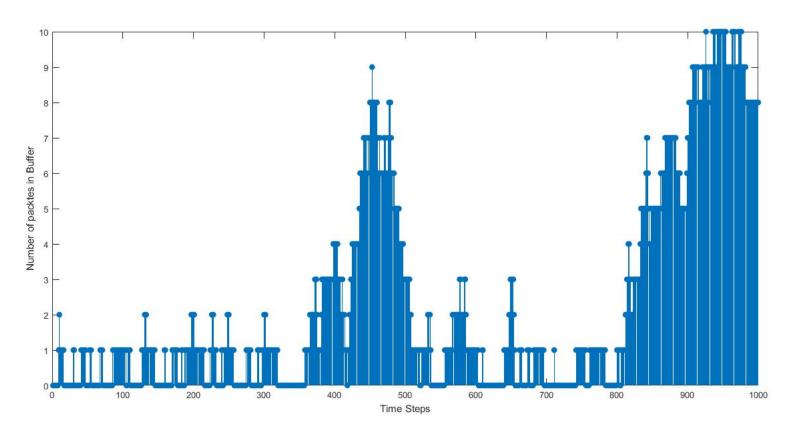


Figure 1: Number of packets in the buffer Vs Time steps

Average Number of packets in Buffer	6.87
Fraction of time the buffer is empty	0.03
The fraction of packet Arrivals that are blocked	0.2100

Table 2: Question 3 Answer

(b) for $\lambda=0.1,\,\mu=0.01,\,BufferSize=10$ and NumberOfSteps=100 we get table2 and figure 2

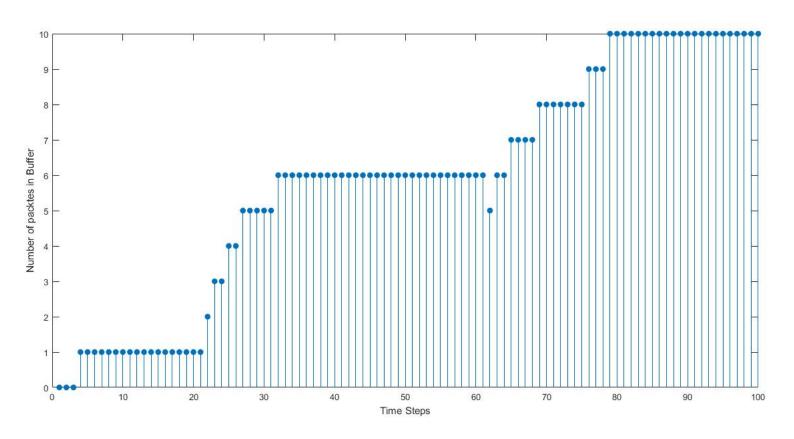


Figure 2: Number of packets in the buffer Vs Time steps

(c) Littel Law

Little Law is given by the following formula [1]

$$L = \lambda T \tag{1}$$

Where L is the average backlog (the average number of packets in the buffer) , T the delay in the system and λ is the average arrival rate.

hence to get the average delay in the system,

$$T = \frac{L}{\lambda} \tag{2}$$

for (a)

$$T = \frac{L}{\lambda} = \frac{3.36}{0.1} = 33.6$$

for (b)

$$T = \frac{L}{\lambda} = \frac{6.87}{0.1} = 68.7$$

Code Appendix

3. a

29 if MU_FOUND

```
function P = get_stochastic_matrix (buffer_size, lamda, mu)
      P = zeros(buffer_size + 2, buffer_size + 2);
       a = lamda*(1-mu);
       b = mu*(1-lamda);
       c = 1 - (a+b);
      P(1,1) = 1-a;
6
       P(1,2) = a;
       P(buffer_size + 2, buffer_size + 2) = 1-mu;
       P(buffer_size+2, buffer_size+1) = lamda*mu;
9
       P(buffer_size + 2, buffer_size) = b;
10
11
       for i=2:buffer_size+1
           P(i, i) = c;
13
           P(i, i+1) = a;
14
           P(i, i-1) = b;
15
       end
16
  end
_{1} DEBUG = 0;
_{2} N = 100;%time steps
s State0 = 1;
4 \text{ lamda} = 0.1;
5 \text{ mu} = 0.001:0.001:0.01; \% 10\% \text{ mu}
6 \% \text{mu} = 0.02:0.01:0.2;
                              % 1% mu
7 low_load_mu = 0;
8 \text{ BUFFER\_SIZE} = 10;
9 percentage = 10;
10 MUFOUND = 0;
  for i=1:length (mu)
       P = get_stochastic_matrix (BUFFER_SIZE, lamda, mu(i));
       StateTrans = simMC(N, State0, P);
13
       lost_packets = mean(StateTrans==(BUFFER_SIZE+2))*100;%loss
14
      of packets
       if DEBUG
15
       fprintf('mu %0.4f buffer size %i lost packets %4.4f percent\
16
      n', mu(i), BUFFER_SIZE, lost_packets);
17
       if lost_packets>percentage
18
      %if lost_packets<percentage
19
20
           low_load_mu = mu(i);
           MUFOUND = 1;
21
           if DEBUG
22
                fprintf('mu %0.3f satisfies loss value of %i percent
23
        with packet loss of %4.4f\n',...
               mu(i), percentage, lost_packets);
24
           end
25
26
27
       end
  end
28
```

```
% Some stat before modifying StateTrans
30
31
32
      StateTrans(find(StateTrans==(BUFFER_SIZE+2)))=BUFFER_SIZE+1;
      % dropped == full
       Avg_Number_Of_Packets
                               = mean(StateTrans);
       Fraction_Of_Time_BEmpty = mean(StateTrans==1);
       Fraction_Of_Time_BBlocked = lost_packets/100;
35
       result = fopen('result_b.txt', 'w');
36
       fprintf(result, 'Average Number of packets in Buffer: %2.2f
37
      \n Fraction of time the buffer is empty: \%2.2 \, f \setminus n',...
          Avg_Number_Of_Packets , Fraction_Of_Time_BEmpty );
38
       fprintf(result,' The fraction of packet Arrivals that are
39
      blocked %2.4f\n', Fraction_Of_Time_BBlocked);
      fprintf(result, '\n MU: %2.2 f\n Buffer Size: %i\n Lamda: %1.2 f\
40
      n Number of Steps:%i\n Packet Loss:%2.2f percent\n',...
           low_load_mu ,BUFFER_SIZE, lamda ,N, lost_packets );
41
           StateTrans = StateTrans-1;% get rid of the bias so that
42
      it starts at state 0
      fclose(result);
43
      stem(1:N, StateTrans, 'filled');
44
       xlabel('Time Steps');
45
       ylim([0 10]);
46
       ylabel('Number of packtes in Buffer');
47
48
       fprintf('appropriate mu not found try again!!\n')
49
50 end
1 \text{ function } X = simMC(M, A, P)
_{2} X = zeros(1,M);
3X(1) = A;
4 for m=1:M-1
        X(m+1) = discrete(P(X(m),:));
5
6 end
7 end
function T = discrete(P)
Pnorm = [0 P]/sum(P);
_{3} Pcum = _{cumsum}(Pnorm);
_{4} R = rand(1);
[,T] = histc(R,Pcum);
6 end
```

References

[1] Jean Walrand. Probability in Electrical Engineering and Computer science. Jean Walrand, 2014.